TABLE OF CONTENTS

BOARD OF SUPERVISORS OF

LASSEN AND MODOC COUNTIES

Acting as the Big Valley Groundwater Sustainability Agencies December 15, 2021

Public hearing to consider adoption of the Big Valley Groundwater Sustainability Plan (GSP), per requirements of the Sustainable Groundwater Management Act (SGMA)

Memo to the Lassen County Board of Supervisors and the Modoc County Board of Supervisors	12
Resolution No. BVAC-2021-1 of the Big Valley Groundwater Basin Advisory Committee making recommendation regarding the Big Valley Groundwater Sustainability Plan)4
Proposed Resolution of the Lassen County Board of Supervisors, acting as Groundwater Sustainability Agency, to adopt the Big Valley Groundwater Sustainability Plan (GSP) and direct staff to submit the GSP to the California Department of Water Resources0	
Proposed Resolution of the Modoc County Board of Supervisors, acting as Groundwater Sustainability Agency, to adopt the Big Valley Groundwater Sustainability Plan (GSP) and direct staff to submit the GSP to the California Department of Water Resources0	
Big Valley Groundwater Sustainability Plan Regulations Checklist (Elements Guide)1	0
Big Valley Groundwater Sustainability Plan (GSP)	80

Maurice L. Anderson, Director

Surveyor

707 Nevada Street, Suite 5 Susanville, CA 96130-3912

> Fax: 530 251-8373 email: landuse@co.lassen.ca.us website: www.co.lassen.ca.us

· Surface Mining

Zoning & Building Inspection Requests Phone: 530 257-5263

Phone: 530 251-8269

Environmental Health Messages: 530 251-8528 email: EHE@co.lassen.ca.us

December 3, 2021

TO:

Lassen Board of Supervisors

Modoc Board of Supervisors

(Acting as Groundwater Sustainability Agencies

for the Big Valley Groundwater Basin) Agenda Date: December 15, 2021

FROM:

Maurice L. Anderson, Lassen County Director of Planning and Building Services

Chester Robertson, Modoc County Administrative Officer

Tiffany Martinez, Modoc Assistant County Administrative Officer

SUBJECT:

Public hearing to consider adoption of the Big Valley Groundwater Sustainability

Plan (GSP) per requirements of the Sustainable Groundwater Management Act

(SGMA).

ACTION REQUESTED:

- 1. Receive report; and
- 2. Conduct a public hearing; and
- 3. Adopt a resolution approving the Big Valley Groundwater Sustainability Plan and authorizing Planning staff to submit said GSP to the California Department of Water Resources by the January 31, 2022, deadline.
- 4. Direct staff regarding implementation of the GSP and possible amendment of the Memorandum of Understanding forming the Big Valley Groundwater Basin Advisory Committee.

<u>DISCUSSION</u>: In September 2014, the Governor signed into law a legislative package (three bills), collectively known as the Sustainable Groundwater Management Act (SGMA), which requires local agencies with land use and/or water management or water supply authority to do certain things to reach sustainability of medium and high priority groundwater basins, as designated by the State of California Department of Water Resources (DWR). SGMA became effective on January 1, 2015.

The Big Valley Groundwater Basin (BVGB) was designated a medium priority basin by DWR and the Lassen and Modoc County Board of Supervisors adopted resolutions (17-013 and 2017-09 respectively) declaring themselves to be the Groundwater Sustainability Agency (GSA) for the portion of the BVGB within their respective jurisdictions. The GSAs are required to develop a Groundwater Sustainability Plan (GSP) for all medium and high priority basins, and the GSP for the BVGB is to be submitted to DWR by January 31, 2022.

Lassen and Modoc GSAs December 15, 2021 Page 2 of 2

The Big Valley Groundwater Basin Advisory Committee (BVAC) was formed through a memorandum of understanding (MOU) to advise both the Lassen and Modoc County GSAs on the preparation of a GSP for the basin. The BVAC held approximately fifteen public meetings to review and propose draft text for a GSP and to receive and consider public comment from local stakeholders. Additionally, multiple ad hoc committee meetings and staff meetings were conducted. A Draft GSP was assembled by staff and consultants with BVAC guidance. The BVAC adopted Resolution No. BVAC-2021-1 (attached) on October 20, 2021, recommending that the GSAs receive the Draft GSP; conduct at least one public hearing to consider adoption of said GSP, as is required by SGMA; provide direction to staff, consultants or others to make any edits or corrections the GSAs may identify; and adopt and submit the final GSP to DWR by January 31, 2022.

The proposed GSP can be found on the project's website (https://bigvalleygsp.org/) and on the Clerk of the Board website for both jurisdictions.

<u>IMPLEMENTATION</u>: If the GSP is adopted, staff is seeking direction from both counties regarding implementation, and asks that each Board designate one Supervisor to work with staff from each jurisdiction on the development of a MOU to be considered by both jurisdictions at a future date.

Chapter 10 of the proposed GSP provides information regarding implementation of the GSP, once it is adopted. Neither SGMA nor the proposed GSP require a coordination agreement between the counties, since both jurisdictions are adopting the same GSP. Nonetheless, staff recommends that a coordination agreement or MOU be adopted to more precisely define the role each county will take in implementation of the GSP. Staff recommends that the Big Valley Groundwater Basin MOU be amended (or another MOU drafted) to provide specific detail regarding implementation of the GSP. Potential topics of a MOU include (but are not limited to):

- Establishing a permanent advisory body to make recommendations and provide information to the GSAs.
- Defining the process by which Annual Reports and 5-year Updates are prepared and submitted to the GSAs for consideration.
- Provide additional information regarding the public participation process (to augment the process described in the GSP).
- Provide detail regarding County staff that will be assigned responsibility.
- Provide information regarding the preparation and approval of grants and other potential funding.
- Provide detail regarding the involvement of the University of California Farm Advisors.

MLA:gfn/njm

Enclosures: Resolution No. BVAC-2021-1

Draft Resolutions for adoption of GSP by GSAs

Groundwater Sustainability Plan (GSP)

RESOLUTION NO. BVAC-2021-1

RESOLUTION OF THE BIG VALLEY GROUNDWATER BASIN ADVISORY COMMITTEE MAKING RECOMMENDATION TO THE LASSEN AND MODOC COUNTY GROUNDWATER SUSTAINABILITY AGENCIES REGARDING A GROUNDWATER SUSTAINABILITY PLAN.

WHEREAS, in September 2014, the Governor signed into law a legislative package (three bills), collectively known as the Sustainable Groundwater Management Act (SGMA), which requires local agencies with land use and/or water management or water supply authority to do certain things to reach sustainability of medium and high priority groundwater basins as designated by the State of California Department of Water Resources (DWR). SGMA became effective on January 1, 2015; and

WHEREAS, the Big Valley Groundwater Basin (BVGB) has been erroneously designated a medium priority basin by the DWR; and

WHEREAS, the Lassen and Modoc County Board of Supervisors adopted resolutions (17-013 and 2017-09 respectively) declaring themselves to be the Groundwater Sustainability Agency (GSA) for the portion of the BVGB within their respective jurisdictions; and

WHEREAS, GSAs are required to develop Groundwater Sustainability Plans (GSP) for all medium and high priority basins, and said GSP for the BVGB is to be submitted to the DWR by January 31, 2022; and

WHEREAS, the Big Valley Groundwater Basin Advisory Committee (BVAC) was formed through a memorandum of understanding (MOU) to advise both the Lassen and Modoc County GSAs on the preparation of a GSP for the basin; and

WHEREAS, the BVAC has held approximately fifteen public meetings, devoted countless hours, and conducted multiple outreach meetings to review and propose draft text for a GSP and to receive and consider public comment from local stakeholders; and

WHEREAS, the BVAC has welcomed and encouraged public comment as early as possible during the process to have the most meaningful impact; and

WHEREAS, a revised draft GSP has been assembled with BVAC guidance.

NOW, THEREFORE, BE IT RESOLVED AS FOLLOWS:

1. The BVAC hereby recommends that the GSAs receive the Draft Groundwater Sustainability Plan, including incorporation of all edits and corrections identified at the October 20, 2021, meeting of the BVAC, including grammatical corrections or corrections approved by the chair and vice chair.

RESOLUTION NO. <u>BVAC-2021-1</u> Page 2 of 2

- 2. The BVAC hereby recommends that the GSAs (or GSA staff) initiate a 30-day public comment period for the Draft Groundwater Sustainability Plan.
- 3. The BVAC hereby recommends that each GSA conduct at least one public hearing jointly in the Basin to consider adoption of said Groundwater Sustainability Plan, as is required by the Sustainable Groundwater Management Act.
- 4. The BVAC hereby recommends that the GSAs provide direction to staff, consultants or others to make any edits or corrections the GSAs may identify and adopt and submit the final Groundwater Sustainability Plan to the Department of Water Resources by January 31, 2022.

PASSED AND ADOPTED at a regular meeting of the Big Valley Groundwater Basin Advisory Committee, on the 20th day of October 2021, by the following vote:

AYES:	Committee Members Albaugh, Byrne, Conner, Mitchell, Nunn, Ohm
NOES:	None.
ABSTAIN:	None.
ABSENT:	None.
	Chairman Big Valley Groundwater Basin Advisory Committee

Maurice L. Anderson, Secretary

Big Valley Groundwater Basin Advisory Committee

RESOLUTION NO.

RESOLUTION OF THE BOARD OF SUPERVISORS, COUNTY OF LASSEN, ACTING AS THE GROUNDWATER SUSTAINABILITY AGENCY FOR ALL THOSE PORTIONS OF THE BIG VALLEY GROUNDWATER BASIN LOCATED WITHIN LASSEN COUNTY, TO ADOPT THE BIG VALLEY GROUNDWATER SUSTAINABILITY PLAN (GSP), IN COORDINATION WITH THE MODOC COUNTY GROUNDWATER SUSTAINABILITY AGENCY, AND TO DIRECT STAFF TO SUBMIT THE GSP TO THE CALIFORNIA DEPARTMENT OF WATER RESOURCES.

WHEREAS, in September of 2014, the Governor signed into law a legislative package, consisting of three bills, collectively known as the Sustainable Groundwater Management Act (SGMA), which requires local agencies with land use and/or water management or water supply authority to do certain things in order for medium and high priority groundwater basins, as designated by the State of California Department of Water Resources (DWR), to reach sustainability; and

WHEREAS, SGMA became effective on January 1, 2015; and

WHEREAS, the Big Valley 5-004 Groundwater Basin (BVGB) has been erroneously designated a medium priority basin by the DWR; and

WHEREAS, the Lassen County Board of Supervisors and the Modoc County Board of Supervisors adopted resolutions (17-013 and 2017-09 respectively) declaring themselves to be the Groundwater Sustainability Agency (GSA) for the portion of the BVGB within their respective jurisdictions; and

WHEREAS, GSAs are required to develop Groundwater Sustainability Plans (GSP) for all medium and high priority basins, and said GSP for the BVGB is to be submitted to the DWR by January 31, 2022; and

WHEREAS, The Big Valley Groundwater Basin Advisory Committee (BVAC) was formed to advise both the Lassen and Modoc County GSAs on the preparation of a GSP for the basin and held approximately fifteen public meetings to review and propose draft text for a GSP and to receive and consider public comment from local stakeholders; and

WHEREAS, A Draft GSP was assembled by staff and consultants with BVAC guidance and the BVAC adopted Resolution No. BVAC-2021-1 on October 20, 2021, recommending that the GSAs receive the Draft GSP, conduct at least one public hearing to consider adoption of said GSP, provide direction to staff to make any edits or corrections the GSAs may identify, and adopt and submit the final GSP to the DWR by January 31, 2022; and

WHEREAS, the Draft GSP was released for a 30-day public comment period, starting October 28, 2021, and ending November 28, 2021, and all comments were considered and incorporated as appropriate.

RESOLUTION NO Page 2 of 2									
NOW, THEREFORE, BE IT RESOLVED, the Board of Supervisors, acting as the Lassen County Groundwater Sustainability Agency, hereby adopts the Big Valley Groundwater Sustainability Plan with any edits or corrections identified by the GSAs during the December 15, 2021, public hearing; and									
BE IT FURTHER RESOLVED, that the Board of Supervisors of the County of Lassen directs staff to make said edits or corrections and submit the final GSP to the DWR by January 31, 2022.									
PASSED AND ADOPTED at a regular meeting of the Board of Supervisors of the County of Lassen, State of California, on the 15 th day of December, 2021, by the following vote:									
AYES:									
NOES:									
ABSTAIN:									
ABSENT:									
Chairman of the Board of Supervisors County of Lassen, State of California									
Attest: JULIE BUSTAMANTE Clerk of the Board									
By:MICHELE YDERRAGA, Deputy Clerk of the Board									
I, MICHELE YDERRAGA, Deputy Clerk of the Board of Supervisors, County of Lassen, do hereby certify that the foregoing resolution was adopted by the said									

County of Lassen, do hereby certify that the foregoing resolution was adopted by the said Board of Supervisors at a regular meeting thereof held on the 15th day of December, 2021.

Deputy Clerk of the County of Lassen Board of Supervisors

A RESOLUTION OF THE BOARD OF SUPERVISORS OF THE COUNTY OF MODOC

ACTING AS THE GROUNDWATER SUSTAINABILITY AGENCY, FOR ALL THOSE PORTIONS OF THE BIG VALLEY GROUNDWATER BASIN LOCATED WITHIN MODOC COUNTY, TO ADOPT THE BIG VALLEY GROUNDWATER SUSTAINABILITY PLAN IN COORDINATION WITH THE LASSEN COUNTY GROUNDWATER SUSTAINABILITY AGENCY AND DIRECT STAFF TO SUBMIT THE GSP TO THE CALIFORNIA DEPARTMENT OF WATER RESOURCES

WHEREAS, in September of 2014, the Governor signed into law a legislative package consisting of three bills, collectively known as the Sustainable Groundwater Management Act (SGMA), which requires local agencies with land use and/or water management or water supply authority to do certain things in order for medium and high priority groundwater basins, as designated by the State of California Department of Water Resources (DWR), to reach sustainability; and

WHEREAS, SGMA became effective on January 1, 2015; and

WHEREAS, the Big Valley 5-004 Groundwater Basin (BVGB) has been designated a medium priority basin by the DWR; and

WHEREAS, the Lassen County Board of Supervisors and the Modoc County Board of Supervisors adopted resolutions (17-013 and 2017-09 respectively) declaring themselves to be the Groundwater Sustainability Agency (GSA) for the portion of the BVGB within their respective jurisdictions; and

WHEREAS, GSAs are required to develop Groundwater Sustainability Plans (GSP) for all medium and high priority basins, and said GSP for the BVGB is to be submitted to the DWR by January 31, 2022; and

WHEREAS, The Big Valley Groundwater Basin Advisory Committee (BVAC) was formed to advise both the Lassen and Modoc County GSAs on the preparation of a GSP for the basin and held approximately fifteen public meetings to review and propose draft text for a GSP and to receive and consider public comment from local stakeholders; and

WHEREAS, A Draft GSP was assembled by staff and consultants with BVAC guidance and the BVAC adopted Resolution No. BVAC-2021-1 on October 20, 2021, recommending that the GSAs receive the Draft GSP, conduct at least one public hearing to consider adoption of said GSP, provide direction to staff to make any edits or corrections the GSAs may identify, and adopt and submit the final GSP to the Department of Water Resources by January 31, 2022; and

WHEREAS, the Draft GSP was released for a 30-day public comment period, starting October 28, 2021, and ending November 28, 2021, and all comments were considered and incorporated as appropriate.

NOW, THEREFORE, BE IT RESOLVED, the Board of Supervisors, acting as the Modoc County Groundwater Sustainability Agency, hereby adopts the Big Valley Groundwater Sustainability Plan with any edits or corrections identified by the GSAs during the December 15, 2021, public hearing; and

BE IT FURTHER RESOLVED, that the Board of Supervisors of the County of Modoc directs staff to make said edits or corrections and submit the final GSP to DWR by January 31, 2022.

PASSED AND ADOPTED at a regular meeting of the Board of Supervisors of the County of Modoc, State of California, on the 15th day of December, 2021, by the following vote:

AYES:	
NOES:	
ABSTAIN:	
ABSENT:	
	Chairman of the Board of Supervisors
	County of Modoc, State of California
ATTEST	
By:	
Tiffany A. Martinez Clerk of the Board	

Big Valley Groundwater Sustainability Plan GSP Regulations Checklist (Elements Guide) for Public Draft GSP: August 26, 2021

This checklist of the GSP Elements and indicates where in the GSP each element of the regulations is addressed.

Article 5.	Plan Contents for Big Valley Groundwater Basin	GS	P Docume	nt Referer	nces	1
		Page Numbers of Plan	Or Section Numbers	Or Figure Numbers	Or Table Numbers	Notes
§ 354.	Introduction to Plan Contents					
	This Article describes the required contents of Plans submitted to the Department for evaluation, including administrative information, a description of the basin setting, sustainable management criteria, description of the monitoring network, and projects and management actions.					
	Note: Authority cited: Section 10733.2, Water Code.					
	Reference: Section 10733.2, Water Code.					
SubArticle 1.	Administrative Information					
§ 354.2.	Introduction to Administrative Information					
	This Subarticle describes information in the Plan relating to administrative and other general information about the Agency that has adopted the Plan and the area covered by the Plan.					
	Note: Authority cited: Section 10733.2, Water Code.					
	Reference: Section 10733.2, Water Code.					
§ 354.4.	General Information					
	Each Plan shall include the following general information:					
(a)	An executive summary written in plain language that provides an overview of the Plan		FC			
	and description of groundwater conditions in the basin. A list of references and technical studies relied upon by the Agency in developing the	-	ES			
(b)	Plan. Each Agency shall provide to the Department electronic copies of reports and other documents and materials cited as references that are not generally available to the					
	public.		12			
	Note: Authority cited: Section 10733.2, Water Code.					
	Reference: Sections 10733.2 and 10733.4, Water Code.					
§ 354.6.	Agency Information					
	When submitting an adopted Plan to the Department, the Agency shall include a copy of the information provided pursuant to Water Code Section 10723.8, with any updates, if necessary, along with the following information:					
(a)	The name and mailing address of the Agency.		2.1			
(b)	The organization and management structure of the Agency, identifying persons with management authority for implementation of the Plan.		2.2, 2.3			
(c)	The name and contact information, including the phone number, mailing address and electronic mail address, of the plan manager.		2.3			
(d)	The legal authority of the Agency, with specific reference to citations setting forth the duties, powers, and responsibilities of the Agency, demonstrating that the Agency has the legal authority to implement the Plan.		2.4			
(e)	An estimate of the cost of implementing the Plan and a general description of how the Agency plans to meet those costs.		10.6,10.7		10-4, 10-5	
	Note: Authority cited: Section 10733.2, Water Code.					
	Reference: Sections 10723.8, 10727.2, and 10733.2, Water Code.					
§ 354.8.	Description of Plan Area					

Article 5.		Plan Contents for Big Valley Groundwater Basin	GS	P Docume	nt Refere	nces	1
			Page Numbers of Plan	Or Section Numbers	Or Figure Numbers	Or Table Numbers	Notes
		Each Plan shall include a description of the geographic areas covered, including the following information:					
(a)		One or more maps of the basin that depict the following, as applicable:					
	(1)	The area covered by the Plan, delineating areas managed by the Agency as an exclusive Agency and any areas for which the Agency is not an exclusive Agency, and the name and location of any adjacent basins.		3.1	3-1		
	(2)	Adjudicated areas, other Agencies within the basin, and areas covered by an Alternative.	N/A	3.1			There are no no adjudicated areas or areas covered by an Alternative.
	(3)	Jurisdictional boundaries of federal or state land (including the identity of the agency with jurisdiction over that land), tribal land, cities, counties, agencies with water management responsibilities, and areas covered by relevant general plans.		3.2	3-2		
	(4)	Existing land use designations and the identification of water use sector and water source type.		3.3	3-3, 3-4	3-1, 3-2	
	(5)	The density of wells per square mile, by dasymetric or similar mapping techniques, showing the general distribution of agricultural, industrial, and domestic water supply wells in the basin, including de minimis extractors, and the location and extent of communities dependent upon groundwater, utilizing data provided by the Department, as specified in Section 353.2, or the best available information.		3.4	3-5, 3-6, 3-7	3-3	
(b)		A written description of the Plan area, including a summary of the jurisdictional areas and other features depicted on the map.		3.1, 3.2	3-1,3-2		
(c)		Identification of existing water resource monitoring and management programs, and description of any such programs the Agency plans to incorporate in its monitoring network or in development of its Plan. The Agency may coordinate with existing water resource monitoring and management programs to incorporate and adopt that program as part of the Plan.		3.5	3-8, 3-9, 3- 10, 3-11	3-4,3-5	
(d)		A description of how existing water resource monitoring or management programs may limit operational flexibility in the basin, and how the Plan has been developed to adapt to those limits.		3.5.5			
(e)		A description of conjunctive use programs in the basin.		3.6			No formally established conjunctive use programs are operating in the Basin
(f)		A plain language description of the land use elements or topic categories of applicable general plans that includes the following:					
	(1)	A summary of general plans and other land use plans governing the basin.		3.7	3-12		
	(2)	A general description of how implementation of existing land use plans may change water demands within the basin or affect the ability of the Agency to achieve sustainable groundwater management over the planning and implementation horizon, and how the Plan addresses those potential effects		3.7.4, 3.7.5			
	(3)	A general description of how implementation of the Plan may affect the water supply assumptions of relevant land use plans over the planning and implementation horizon.		3.7.5			
	(4)	A summary of the process for permitting new or replacement wells in the basin, including adopted standards in local well ordinances, zoning codes, and policies contained in adopted land use plans.		3.7.6			

Article 5.		Plan Contents for Big Valley Groundwater Basin	(SP Docume	nt Refere	nces	
			Page Numbers Plan	of Or Section	Or Figure Numbers	Or Table Numbers	Notes
	(5)	To the extent known, the Agency may include information regarding the implemen of land use plans outside the basin that could affect the ability of the Agency to ach sustainable groundwater management.	I	3.7.7			
(g)		A description of any of the additional Plan elements included in Water Code Sectio 10727.4 that the Agency determines to be appropriate. Note: Authority cited: Section 10733.2, Water Code.	1	3.9		3-6	
		Reference: Sections 10720.3, 10727.2, 10727.4, 10733, and 10733.2, Water Code.					
§ 354.10.		Notice and Communication					
		Each Plan shall include a summary of information relating to notification and communication by the Agency with other agencies and interested parties including following:					
(a)		A description of the beneficial uses and users of groundwater in the basin, includin land uses and property interests potentially affected by the use of groundwater in basin, the types of parties representing those interests, and the nature of consultativith those parties.	he	11.4			
(b)		A list of public meetings at which the Plan was discussed or considered by the Ager	су.	11.5		11-1	Also Appendix 11A
(c)		Comments regarding the Plan received by the Agency and a summary of any respo by the Agency.	nses	11.7			Also Appendix 11C
(d)		A communication section of the Plan that includes the following:					
	(1)	An explanation of the Agency's decision-making process.		11.6	11-1		
	(2)	Identification of opportunities for public engagement and a discussion of how publ input and response will be used.		11.5, 11.7			
	(3)	A description of how the Agency encourages the active involvement of diverse soci cultural, and economic elements of the population within the basin.	al,	11.4			
	(4)	The method the Agency shall follow to inform the public about progress implemen the Plan, including the status of projects and actions. Note: Authority cited: Section 10733.2, Water Code.	ing	11.8			
		Reference: Sections 10723.2, 10727.8, 10728.4, and 10733.2, Water Code					
SubArticle 2.		Basin Setting					
§ 354.12.		Introduction to Basin Setting					
		This Subarticle describes the information about the physical setting and characteris the basin and current conditions of the basin that shall be part of each Plan, includ identification of data gaps and levels of uncertainty, which comprise the basin setti that serves as the basis for defining and assessing reasonable sustainable managen criteria and projects and management actions. Information provided pursuant to t Subarticle shall be prepared by or under the direction of a professional geologist or professional engineer.	ng the ng nent his				
	H	Note: Authority cited: Section 10733.2, Water Code. Reference: Section 10733.2, Water Code.					
§ 354.14.		Hydrogeologic Conceptual Model					
(a)		Each Plan shall include a descriptive hydrogeologic conceptual model of the basin to not technical studies and qualified maps that characterizes the physical component interaction of the surface water and groundwater systems in the basin.		4			

Article 5.			Plan Contents for Big Valley Groundwater Basin	GS	P Docume	nt Referei	nces]
				Page Numbers of Plan	Or Section Numbers	Or Figure Numbers	Or Table Numbers	Notes
(b)			The hydrogeologic conceptual model shall be summarized in a written description that includes the following:					
			The regional geologic and structural setting of the basin including the immediate					
	(1)		surrounding area, as necessary for geologic consistency.		4.2	4-2		
	(2)		Lateral basin boundaries, including major geologic features that significantly affect					
	(2)		groundwater flow.		4.2.1	4-2		
	(3)		The definable bottom of the basin.		4.4.3			
	(4)		Principal aquifers and aquitards, including the following information:					
		(A)	Formation names, if defined.		4.4.1	4-3,4-4		
			Physical properties of aquifers and aquitards, including the vertical and lateral extent,					
		(B)	hydraulic conductivity, and storativity, which may be based on existing technical studies					
			or other best available information.		4.4.5		4-2	
			Structural properties of the basin that restrict groundwater flow within the principal					
		(C)	aquifers, including information regarding stratigraphic changes, truncation of units, or					
			other features.		4.4.4	4-8		
		(D)	General water quality of the principal aquifers, which may be based on information					
		(0)	derived from existing technical studies or regulatory programs.	<u> </u>	4.7	4-13		
		(E)	Identification of the primary use or uses of each aquifer, such as domestic, irrigation, or					
		(-)	municipal water supply.		4.6			
	(5)		Identification of data gaps and uncertainty within the hydrogeologic conceptual model		4.11			
			The hydrogeologic conceptual model shall be represented graphically by at least two					
(c)			scaled cross-sections that display the information required by this section and are					
			sufficient to depict major stratigraphic and structural features in the basin.		4.4.2	4-6,4-7		
(d)			Physical characteristics of the basin shall be represented on one or more maps that depict the following:					
	(1)		Topographic information derived from the U.S. Geological Survey or another reliable source.		4.1	4-1		
	(2)		Surficial geology derived from a qualified map including the locations of cross-sections required by this Section.		4.2,4.3	4-2,4-3,4-4		
	/->		Soil characteristics as described by the appropriate Natural Resources Conservation			4-9,4-10,4-		
	(3)		Service soil survey or other applicable studies.		4.5	11		
			Delineation of existing recharge areas that substantially contribute to the replenishment					
	(4)		of the basin, potential recharge areas, and discharge areas, including significant active					
			springs, seeps, and wetlands within or adjacent to the basin.		4.8	4-14		
	(5)		Surface water bodies that are significant to the management of the basin.		4.9	4-14		
	(6)		The source and point of delivery for imported water supplies.	N/A				No water is imported to the BVGB
			Note: Authority cited: Section 10733.2, Water Code.					
			Reference: Sections 10727.2, 10733, and 10733.2, Water Code.					
§ 354.16.			Groundwater Conditions					
			Each Plan shall provide a description of current and historical groundwater conditions in					
			the basin, including data from January 1, 2015, to current conditions, based on the best					
			available information that includes the following:					
(a)			Groundwater elevation data demonstrating flow directions, lateral and vertical gradients,					
(4)			and regional pumping patterns, including:					

Article 5.			Plan Contents for Big Valley Groundwater Basin	GS	P Docume	nt Refere	nces]	
				Page Numbers of Plan	Or Section Numbers	Or Figure Numbers	Or Table Numbers	Notes	
	(1)		Groundwater elevation contour maps depicting the groundwater table or potentiometric surface associated with the current seasonal high and seasonal low for each principal aquifer within the basin.		5.1.3	5-5,5-6		Also Appendix 5B	
	(2)		Hydrographs depicting long-term groundwater elevations, historical highs and lows, and hydraulic gradients between principal aquifers.		5.1.1,5.1.2	5-2,5-3,5-4		Also Appendix 5A	
(b)			A graph depicting estimates of the change in groundwater in storage, based on data, demonstrating the annual and cumulative change in the volume of groundwater in storage between seasonal high groundwater conditions, including the annual groundwater use and water year type.		5.2	5-7	5-2		
(c)			Seawater intrusion conditions in the basin, including maps and cross-sections of the seawater intrusion front for each principal aquifer.	N/A	5.3			Not applicable due to inland location.	
(d)			Groundwater quality issues that may affect the supply and beneficial uses of groundwater, including a description and map of the location of known groundwater contamination sites and plumes.		5.4	5-8:5-15	5-3,5-4		
(e)			The extent, cumulative total, and annual rate of land subsidence, including maps depicting total subsidence, utilizing data available from the Department, as specified in Section 353.2, or the best available information.		5.5	5-16,5-17			
(f)			Identification of interconnected surface water systems within the basin and an estimate of the quantity and timing of depletions of those systems, utilizing data available from the Department, as specified in Section 353.2, or the best available information.		5.6	5-18			
(g)			Identification of groundwater dependent ecosystems within the basin, utilizing data available from the Department, as specified in Section 353.2, or the best available information.		5.7	5-19:5-22	5-5		
			Note: Authority cited: Section 10733.2, Water Code.						
§ 354.18.	-		Reference: Sections 10723.2, 10727.2, 10727.4, and 10733.2, Water Code.						
9 354.18.			Water Budget Each Plan shall include a water budget for the basin that provides an accounting and assessment of the total annual volume of groundwater and surface water entering and						
(a)			leaving the basin, including historical, current and projected water budget conditions, and the change in the volume of water stored. Water budget information shall be reported in tabular and graphical form.		6				
(b)			The water budget shall quantify the following, either through direct measurements or estimates based on data:						
	(1)		Total surface water entering and leaving a basin by water source type.		6.2	6-7		Also Appendix 6B and 6C	
	(2)		Inflow to the groundwater system by water source type, including subsurface groundwater inflow and infiltration of precipitation, applied water, and surface water systems, such as lakes, streams, rivers, canals, springs and conveyance systems.		6.2	6-8		Also Appendix 6B and 6C	
	(3)		Outflows from the groundwater system by water use sector, including evapotranspiration, groundwater extraction, groundwater discharge to surface water sources, and subsurface groundwater outflow.		6.2	6-8		Also Appendix 6B and 6C	
	(4)		The change in the annual volume of groundwater in storage between seasonal high conditions.		6.2	6-8		Also Appendix 6B and 6C	

Article 5.	rticle 5. Plan Contents for Big Valley Groundwater Basin				P Docume	nt Referen	ices	1
				Page Numbers of Plan	Or Section Numbers	Or Figure Numbers	Or Table Numbers	Notes
	(5)		If overdraft conditions occur, as defined in Bulletin 118, the water budget shall include a quantification of overdraft over a period of years during which water year and water supply conditions approximate average conditions.		6.2	6-8		Also Appendix 6B and 6C
	(6)		The water year type associated with the annual supply, demand, and change in groundwater stored.		6.2	6-3		Also Appendix ob una de
	(7)		An estimate of sustainable yield for the basin.		6.2	6-8		
(c)			Each Plan shall quantify the current, historical, and projected water budget for the basin as follows:					
	(1)		Current water budget information shall quantify current inflows and outflows for the basin using the most recent hydrology, water supply, water demand, and land use information.		6.2, 6.3	6-4, 6-6:6-8		Also Appendix 6B and 6C
	(2)		Historical water budget information shall be used to evaluate availability or reliability of past surface water supply deliveries and aquifer response to water supply and demand trends relative to water year type. The historical water budget shall include the following:					
		(A)	A quantitative evaluation of the availability or reliability of historical surface water supply		6.2			
		(B)	A quantitative assessment of the historical water budget, starting with the most recently available information and extending back a minimum of 10 years, or as is sufficient to calibrate and reduce the uncertainty of the tools and methods used to estimate and project future water budget information and future aquifer response to proposed sustainable groundwater management practices over the planning and implementation horizon.			6-4:6-7		Also Appendix 6B and 6C
		(C)	A description of how historical conditions concerning hydrology, water demand, and surface water supply availability or reliability have impacted the ability of the Agency to operate the basin within sustainable yield. Basin hydrology may be characterized and evaluated using water year type.		6.2	0-4.0-7		дізо дрренціх ов ана ос
	(3)		Projected water budgets shall be used to estimate future baseline conditions of supply, demand, and aquifer response to Plan implementation, and to identify the uncertainties of these projected water budget components. The projected water budget shall utilize the following methodologies and assumptions to estimate future baseline conditions concerning hydrology, water demand and surface water supply availability or reliability over the planning and implementation horizon:					
		(A)	Projected hydrology shall utilize 50 years of historical precipitation, evapotranspiration, and streamflow information as the baseline condition for estimating future hydrology. The projected hydrology information shall also be applied as the baseline condition used to evaluate future scenarios of hydrologic uncertainty associated with projections of climate change and sea level rise.		6.4	6-10, 6-11		

Article 5.			Plan Contents for Big Valley Groundwater Basin	GS	P Docume	nt Referer	nces]
				Page Numbers of Plan	Or Section Numbers	Or Figure Numbers	Or Table Numbers	Notes
		(B)	Projected water demand shall utilize the most recent land use, evapotranspiration, and crop coefficient information as the baseline condition for estimating future water demand. The projected water demand information shall also be applied as the baseline condition used to evaluate future scenarios of water demand uncertainty associated with projected changes in local land use planning, population growth, and climate.		6.4	6-10, 6-11		
		(C)	Projected surface water supply shall utilize the most recent water supply information as the baseline condition for estimating future surface water supply. The projected surface water supply shall also be applied as the baseline condition used to evaluate future scenarios of surface water supply availability and reliability as a function of the historical surface water supply identified in Section 354.18(c)(2)(A), and the projected changes in					
(d)			local land use planning, population growth, and climate. The Agency shall utilize the following information provided, as available, by the Department pursuant to Section 353.2, or other data of comparable quality, to develop the water budget:		6.4	6-10, 6-11		
	(1)		Historical water budget information for mean annual temperature, mean annual					
	(2)		precipitation, water year type, and land use. Current water budget information for temperature, water year type, evapotranspiration, and land use.		6.2	6-3		
	(3)		Projected water budget information for population, population growth, climate change, and sea level rise.		6.4			
(e)			Each Plan shall rely on the best available information and best available science to quantify the water budget for the basin in order to provide an understanding of historical and projected hydrology, water demand, water supply, land use, population, climate change, sea level rise, groundwater and surface water interaction, and subsurface groundwater flow. If a numerical groundwater and surface water model is not used to quantify and evaluate the projected water budget conditions and the potential impacts to beneficial uses and users of groundwater, the Plan shall identify and describe an equally effective method, tool, or analytical model to evaluate projected water budget conditions.		6			
(f)			The Department shall provide the California Central Valley Groundwater-Surface Water Simulation Model (C2VSIM) and the Integrated Water Flow Model (IWFM) for use by Agencies in developing the water budget. Each Agency may choose to use a different groundwater and surface water model, pursuant to Section 352.4. Note: Authority cited: Section 10733.2, Water Code.	N/A				C2VSIM does not apply to this Basin
			Reference: Sections 10721, 10723.2, 10727.2, 10727.6, 10729, and 10733.2, Water Code.					
§ 354.20.			Management Areas					
(a)			Each Agency may define one or more management areas within a basin if the Agency has determined that creation of management areas will facilitate implementation of the Plan Management areas may define different minimum thresholds and be operated to different measurable objectives than the basin at large, provided that undesirable results are defined consistently throughout the basin.		7.4			No management areas were created for this GSP.
(b)			A basin that includes one or more management areas shall describe the following in the Plan:					

Article 5.		Plan Contents for Big Valley Groundwater Basin	GS	P Docume	nt Referer	nces	
			Page Numbers of Plan	Or Section Numbers	Or Figure Numbers	Or Table Numbers	Notes
	(1)	The reason for the creation of each management area.		7.4			No management areas were created for this GSP.
	(2)	The minimum thresholds and measurable objectives established for each management area, and an explanation of the rationale for selecting those values, if different from the basin at large.		7.4			No management areas were created for this GSP.
	(3)	The level of monitoring and analysis appropriate for each management area.		7.4			No management areas were created for this GSP.
	(4)	An explanation of how the management area can operate under different minimum thresholds and measurable objectives without causing undesirable results outside the management area, if applicable.		7.4			No management areas were created for this GSP.
(c)		If a Plan includes one or more management areas, the Plan shall include descriptions, maps, and other information required by this Subarticle sufficient to describe conditions in those areas. Note: Authority cited: Section 10733.2, Water Code.		7.4			No management areas were created for this GSP.
		Reference: Sections 10733.2 and 10733.4, Water Code.					
SubArticle 3.		Sustainable Management Criteria					
§ 354.22.		Introduction to Sustainable Management Criteria					
		This Subarticle describes criteria by which an Agency defines conditions in its Plan that constitute sustainable groundwater management for the basin, including the process by which the Agency shall characterize undesirable results, and establish minimum thresholds and measurable objectives for each applicable sustainability indicator.					
		Note: Authority cited: Section 10733.2, Water Code.					
		Reference: Section 10733.2, Water Code.					
§ 354.24.		Each Agency shall establish in its Plan a sustainability goal for the basin that culminates in the absence of undesirable results within 20 years of the applicable statutory deadline. The Plan shall include a description of the sustainability goal, including information from the basin setting used to establish the sustainability goal, a discussion of the measures that will be implemented to ensure that the basin will be operated within its sustainable yield, and an explanation of how the sustainability goal is likely to be achieved within 20 years of Plan implementation and is likely to be maintained through the planning and implementation horizon.		1.4			
		Note: Authority cited: Section 10733.2, Water Code.					
5 254 26		Reference: Sections 10721, 10727, 10727.2, 10733.2, and 10733.8, Water Code.					
§ 354.26. (a)		Undesirable Results Each Agency shall describe in its Plan the processes and criteria relied upon to define undesirable results applicable to the basin. Undesirable results occur when significant and unreasonable effects for any of the sustainability indicators are caused by groundwater conditions occurring throughout the basin.		7.3			
(b)	(1)	The description of undesirable results shall include the following: The cause of groundwater conditions occurring throughout the basin that would lead to or has led to undesirable results based on information described in the basin setting, and					
		other data or models as appropriate.		7.3			

Article 5.		Plan Contents for Big Valley Groundwater Basin	GS	P Docume	nt Referer	nces	
			Page Numbers of Plan	Or Section Numbers	Or Figure Numbers	Or Table Numbers	Notes
	(2)	The criteria used to define when and where the effects of the groundwater conditions cause undesirable results for each applicable sustainability indicator. The criteria shall be based on a quantitative description of the combination of minimum threshold exceedances that cause significant and unreasonable effects in the basin.		7.3			
	(3)	Potential effects on the beneficial uses and users of groundwater, on land uses and property interests, and other potential effects that may occur or are occurring from undesirable results.		7.3			
(c)		The Agency may need to evaluate multiple minimum thresholds to determine whether an undesirable result is occurring in the basin. The determination that undesirable results are occurring may depend upon measurements from multiple monitoring sites, rather than a single monitoring site.		7.3			
(d)		An Agency that is able to demonstrate that undesirable results related to one or more sustainability indicators are not present and are not likely to occur in a basin shall not be required to establish criteria for undesirable results related to those sustainability indicators. Note: Authority cited: Section 10733.2, Water Code.		7.3			
	\perp	Reference: Sections 10721, 10723.2, 10727.2, 10733.2, and 10733.8, Water Code.					
§ 354.28.		Minimum Thresholds					
(a)		Each Agency in its Plan shall establish minimum thresholds that quantify groundwater conditions for each applicable sustainability indicator at each monitoring site or representative monitoring site established pursuant to Section 354.36. The numeric value used to define minimum thresholds shall represent a point in the basin that, if exceeded, may cause undesirable results as described in Section 354.26.		7.3			
(b)		The description of minimum thresholds shall include the following:					
	(1)	The information and criteria relied upon to establish and justify the minimum thresholds for each sustainability indicator. The justification for the minimum threshold shall be supported by information provided in the basin setting, and other data or models as appropriate, and qualified by uncertainty in the understanding of the basin setting.		7.3			
	(2)	The relationship between the minimum thresholds for each sustainability indicator, including an explanation of how the Agency has determined that basin conditions at each minimum threshold will avoid undesirable results for each of the sustainability indicators.		7.3			
	(3)	How minimum thresholds have been selected to avoid causing undesirable results in adjacent basins or affecting the ability of adjacent basins to achieve sustainability goals.		7.3			
	(4)	How minimum thresholds may affect the interests of beneficial uses and users of groundwater or land uses and property interests.		7.3			
	(5)	How state, federal, or local standards relate to the relevant sustainability indicator. If the minimum threshold differs from other regulatory standards, the Agency shall explain the nature of and basis for the difference.		7.3			
	(6)	How each minimum threshold will be quantitatively measured, consistent with the monitoring network requirements described in Subarticle 4.		7.3			
(c)		Minimum thresholds for each sustainability indicator shall be defined as follows:					

Article 5. Pl			Plan Contents for Big Valley Groundwater Basin		P Docume	nt Referer	ices		
				Page Numbers of Plan	Or Section Numbers	Or Figure Numbers	Or Table Numbers	Notes	
	(1)		Chronic Lowering of Groundwater Levels. The minimum threshold for chronic lowering of groundwater levels shall be the groundwater elevation indicating a depletion of supply at a given location that may lead to undesirable results. Minimum thresholds for chronic lowering of groundwater levels shall be supported by the following:						
		(A)	The rate of groundwater elevation decline based on historical trends, water year type, and projected water use in the basin.		7.3.1, 5.1.1			Also Appendix 5A	
	(2)	(B)	Potential effects on other sustainability indicators. Reduction of Groundwater Storage. The minimum threshold for reduction of groundwater storage shall be a total volume of groundwater that can be withdrawn from the basin without causing conditions that may lead to undesirable results. Minimum thresholds for reduction of groundwater storage shall be supported by the sustainable yield of the basin, calculated based on historical trends, water year type, and projected		7.3.1				
	(3)		water use in the basin. Seawater Intrusion. The minimum threshold for seawater intrusion shall be defined by a chloride concentration isocontour for each principal aquifer where seawater intrusion may lead to undesirable results. Minimum thresholds for seawater intrusion shall be supported by the following:		7.3.2				
		(A)	Maps and cross-sections of the chloride concentration isocontour that defines the minimum threshold and measurable objective for each principal aquifer.	N/A	7.3.3			Seawater Intrusion is not applicable to the Basin and this section states that it does not and will not occur in the future.	
		(B)	A description of how the seawater intrusion minimum threshold considers the effects of current and projected sea levels.	N/A	7.3.3			Seawater Intrusion is not applicable to the Basin and this section states that it does not and will not occur in the future.	
	(4)		Degraded Water Quality. The minimum threshold for degraded water quality shall be the degradation of water quality, including the migration of contaminant plumes that impair water supplies or other indicator of water quality as determined by the Agency that may lead to undesirable results. The minimum threshold shall be based on the number of supply wells, a volume of water, or a location of an isocontour that exceeds concentrations of constituents determined by the Agency to be of concern for the basin. In setting minimum thresholds for degraded water quality, the Agency shall consider local, state, and federal water quality standards applicable to the basin.	N/A	7.3.4			No MT or MO established	
	(5)		Land Subsidence. The minimum threshold for land subsidence shall be the rate and extent of subsidence that substantially interferes with surface land uses and may lead to undesirable results. Minimum thresholds for land subsidence shall be supported by the following:	,					
		(A)	Identification of land uses and property interests that have been affected or are likely to be affected by land subsidence in the basin, including an explanation of how the Agency has determined and considered those uses and interests, and the Agency's rationale for establishing minimum thresholds in light of those effects.	N/A	7.3.5			No MT or MO established	
		(B)	Maps and graphs showing the extent and rate of land subsidence in the basin that defines the minimum threshold and measurable objectives.	N/A	7.3.5			No MT or MO established	

Article 5.			Plan Contents for Big Valley Groundwater Basin	GSI	P Docume	nt Referer	nces]
				Page Numbers of Plan	Or Section Numbers	Or Figure Numbers	Or Table Numbers	Notes
	(6)		Depletions of Interconnected Surface Water. The minimum threshold for depletions of interconnected surface water shall be the rate or volume of surface water depletions caused by groundwater use that has adverse impacts on beneficial uses of the surface water and may lead to undesirable results. The minimum threshold established for depletions of interconnected surface water shall be supported by the following:					
		(A)	The location, quantity, and timing of depletions of interconnected surface water.	N/A	7.3.6			Not enough information available
		(B)	A description of the groundwater and surface water model used to quantify surface water depletion. If a numerical groundwater and surface water model is not used to quantify surface water depletion, the Plan shall identify and describe an equally effective method, tool, or analytical model to accomplish the requirements of this Paragraph.	N/A	7.3.6			Not enough information available
(d)			An Agency may establish a representative minimum threshold for groundwater elevation to serve as the value for multiple sustainability indicators, where the Agency can demonstrate that the representative value is a reasonable proxy for multiple individual minimum thresholds as supported by adequate evidence.	N/A	7.3.6			No MT or MO established
(e)			An Agency that has demonstrated that undesirable results related to one or more sustainability indicators are not present and are not likely to occur in a basin, as described in Section 354.26, shall not be required to establish minimum thresholds related to those sustainability indicators.	,	7.3			Seawater Intrusion is not applicable to the Basin and this section states that it does not and will not occur in the future.
			Note: Authority cited: Section 10733.2, Water Code.					
			Reference: Sections 10723.2, 10727.2, 10733, 10733.2, and 10733.8, Water Code.					
§ 354.30.			Measurable Objectives					
(a)			Each Agency shall establish measurable objectives, including interim milestones in increments of five years, to achieve the sustainability goal for the basin within 20 years of Plan implementation and to continue to sustainably manage the groundwater basin over the planning and implementation horizon.		7.3			
(b)			Measurable objectives shall be established for each sustainability indicator, based on quantitative values using the same metrics and monitoring sites as are used to define the minimum thresholds.		7.3			
(c)			Measurable objectives shall provide a reasonable margin of operational flexibility under adverse conditions which shall take into consideration components such as historical water budgets, seasonal and long-term trends, and periods of drought, and be commensurate with levels of uncertainty.		7.3			
(d)			An Agency may establish a representative measurable objective for groundwater elevation to serve as the value for multiple sustainability indicators where the Agency can demonstrate that the representative value is a reasonable proxy for multiple individual measurable objectives as supported by adequate evidence.		7.3			
(e)			Each Plan shall describe a reasonable path to achieve the sustainability goal for the basin within 20 years of Plan implementation, including a description of interim milestones for each relevant sustainability indicator, using the same metric as the measurable objective, in increments of five years. The description shall explain how the Plan is likely to maintain sustainable groundwater management over the planning and implementation horizon.		7.3			

Article 5.		Plan Contents for Big Valley Groundwater Basin	GS	P Docume	nt Referer	ices	
			Page Numbers of Plan	Or Section Numbers	Or Figure Numbers	Or Table Numbers	Notes
(f)		Each Plan may include measurable objectives and interim milestones for additional Plan elements described in Water Code Section 10727.4 where the Agency determines such measures are appropriate for sustainable groundwater management in the basin.		7.3			
(g)		An Agency may establish measurable objectives that exceed the reasonable margin of operational flexibility for the purpose of improving overall conditions in the basin, but failure to achieve those objectives shall not be grounds for a finding of inadequacy of the Plan.		7.3			
		Note: Authority cited: Section 10733.2, Water Code. Reference: Sections 10727.2, 10727.4, and 10733.2, Water Code.					
SubArticle 4.		Monitoring Networks					
§ 354.32. § 354.34.		Introduction to Monitoring Networks This Subarticle describes the monitoring network that shall be developed for each basin, including monitoring objectives, monitoring protocols, and data reporting requirements. The monitoring network shall promote the collection of data of sufficient quality, frequency, and distribution to characterize groundwater and related surface water conditions in the basin and evaluate changing conditions that occur through implementation of the Plan. Note: Authority cited: Section 10733.2, Water Code. Reference: Section 10733.2, Water Code. Monitoring Network Each Agency shall develop a monitoring network capable of collecting sufficient data to demonstrate short-term, seasonal, and long-term trends in groundwater and related surface conditions, and yield representative information about groundwater conditions as necessary to evaluate Plan implementation. Each Plan shall include a description of the monitoring network objectives for the basin, including an explanation of how the network will be developed and implemented to		8.2			
(b)		monitor groundwater and related surface conditions, and the interconnection of surface water and groundwater, with sufficient temporal frequency and spatial density to evaluate the affects and effectiveness of Plan implementation. The monitoring network objectives shall be implemented to accomplish the following:					
	(1)	Demonstrate progress toward achieving measurable objectives described in the Plan. Monitor impacts to the beneficial uses or users of groundwater.		8.1 8.1,8.2			
	(3)	Monitor changes in groundwater conditions relative to measurable objectives and minimum thresholds.		8.1,8.2			
	(4)	Quantify annual changes in water budget components.		8.1,8.2			
(c)		Each monitoring network shall be designed to accomplish the following for each sustainability indicator:					
	(1)	Chronic Lowering of Groundwater Levels. Demonstrate groundwater occurrence, flow directions, and hydraulic gradients between principal aquifers and surface water features by the following methods:					

Article 5.			Plan Contents for Big Valley Groundwater Basin	GS	P Docume	nt Referer	ices	1
				Page Numbers of Plan	Or Section Numbers	Or Figure Numbers	Or Table Numbers	Notes
		(A)	A sufficient density of monitoring wells to collect representative measurements through depth-discrete perforated intervals to characterize the groundwater table or potentiometric surface for each principal aquifer.		8.2.1			
		(B)	Static groundwater elevation measurements shall be collected at least two times per year, to represent seasonal low and seasonal high groundwater conditions.		8.2.1			
	(2)		Reduction of Groundwater Storage. Provide an estimate of the change in annual groundwater in storage.		8.2.1, 8.2.4			
	(3)		Seawater Intrusion. Monitor seawater intrusion using chloride concentrations, or other measurements convertible to chloride concentrations, so that the current and projected rate and extent of seawater intrusion for each applicable principal aquifer may be calculated.	N/A				Seawater intrusion not applicable to the BVGB
	(4)		Degraded Water Quality. Collect sufficient spatial and temporal data from each applicable principal aquifer to determine groundwater quality trends for water quality indicators, as determined by the Agency, to address known water quality issues.		8.2.2			
	(5)		Land Subsidence. Identify the rate and extent of land subsidence, which may be measured by extensometers, surveying, remote sensing technology, or other appropriate method.		8.2.3			
	(6)		Depletions of Interconnected Surface Water. Monitor surface water and groundwater, where interconnected surface water conditions exist, to characterize the spatial and temporal exchanges between surface water and groundwater, and to calibrate and apply the tools and methods necessary to calculate depletions of surface water caused by groundwater extractions. The monitoring network shall be able to characterize the following:					
		(A)	Flow conditions including surface water discharge, surface water head, and baseflow contribution.	N/A				No SMCs established for interconnected surface water.
		(B)	Identifying the approximate date and location where ephemeral or intermittent flowing streams and rivers cease to flow, if applicable.	N/A				No SMCs established for interconnected surface water.
		(C)	Temporal change in conditions due to variations in stream discharge and regional groundwater extraction.	N/A				No SMCs established for interconnected surface water.
		(D)	Other factors that may be necessary to identify adverse impacts on beneficial uses of the surface water.	N/A				No SMCs established for interconnected surface water.
(d)			The monitoring network shall be designed to ensure adequate coverage of sustainability indicators. If management areas are established, the quantity and density of monitoring sites in those areas shall be sufficient to evaluate conditions of the basin setting and sustainable management criteria specific to that area.		8.2			
(e)			sustainable management criteria specific to that area. A Plan may utilize site information and monitoring data from existing sources as part of the monitoring network.		8.2			
(f)			The Agency shall determine the density of monitoring sites and frequency of measurements required to demonstrate short-term, seasonal, and long-term trends based upon the following factors:					
	(1)		Amount of current and projected groundwater use.		6.2, 6.4			
	(2)		Aquifer characteristics, including confined or unconfined aquifer conditions, or other physical characteristics that affect groundwater flow.		4.4			

Article 5.		Plan Contents for Big Valley Groundwater Basin	GS	P Docume	nt Referer	nces	
			Page Numbers of Plan	Or Section Numbers	Or Figure Numbers	Or Table Numbers	Notes
	(3)	Impacts to beneficial uses and users of groundwater and land uses and property interests affected by groundwater production, and adjacent basins that could affect the ability of that basin to meet the sustainability goal.		8.2			
(-)	(4)	Whether the Agency has adequate long-term existing monitoring results or other technical information to demonstrate an understanding of aquifer response.		8.2			
(g)	(1)	Each Plan shall describe the following information about the monitoring network: Scientific rationale for the monitoring site selection process.		8.2			
	(2)	Consistency with data and reporting standards described in Section 352.4. If a site is not consistent with those standards, the Plan shall explain the necessity of the site to the monitoring network, and how any variation from the standards will not affect the		0.2			
		usefulness of the results obtained.		8.2			
	(3)	For each sustainability indicator, the quantitative values for the minimum threshold, measurable objective, and interim milestones that will be measured at each monitoring site or representative monitoring sites established pursuant to Section 354.36.		8.2			
(h)		The location and type of each monitoring site within the basin displayed on a map, and reported in tabular format, including information regarding the monitoring site type, frequency of measurement, and the purposes for which the monitoring site is being used.		8.2	8-1:8-3	8-1, 8-3	
(i)		The monitoring protocols developed by each Agency shall include a description of technical standards, data collection methods, and other procedures or protocols pursuant to Water Code Section 10727.2(f) for monitoring sites or other data collection facilities to ensure that the monitoring network utilizes comparable data and methodologies.		8.2.1.4, 8.2.2.1, 8.2.3.1			
(j)		An Agency that has demonstrated that undesirable results related to one or more sustainability indicators are not present and are not likely to occur in a basin, as described in Section 354.26, shall not be required to establish a monitoring network related to those sustainability indicators.		8.2			
		Note: Authority cited: Section 10733.2, Water Code. Reference: Sections 10723.2, 10727.2, 10727.4, 10728, 10733, 10733.2, and 10733.8, Water Code					
§ 354.36.		Representative Monitoring					
		Each Agency may designate a subset of monitoring sites as representative of conditions in the basin or an area of the basin, as follows:					
(a)		Representative monitoring sites may be designated by the Agency as the point at which sustainability indicators are monitored, and for which quantitative values for minimum thresholds, measurable objectives, and interim milestones are defined.		8.2.1			
(b)		(b) Groundwater elevations may be used as a proxy for monitoring other sustainability indicators if the Agency demonstrates the following:					
	(1)	Significant correlation exists between groundwater elevations and the sustainability indicators for which groundwater elevation measurements serve as a proxy.		8.2.1			
	(2)	Measurable objectives established for groundwater elevation shall include a reasonable margin of operational flexibility taking into consideration the basin setting to avoid undesirable results for the sustainability indicators for which groundwater elevation measurements serve as a proxy.		8.2.1			

Article 5.		Plan Contents for Big Valley Groundwater Basin	GS	P Docume	nt Referei	nces	
			Page Numbers of Plan	Or Section Numbers	Or Figure Numbers	Or Table Numbers	Notes
(c)		The designation of a representative monitoring site shall be supported by adequate					
(c)		evidence demonstrating that the site reflects general conditions in the area.		8.2.1			
		Note: Authority cited: Section 10733.2, Water Code.					
		Reference: Sections 10727.2 and 10733.2, Water Code					
§ 354.38.		Assessment and Improvement of Monitoring Network					
		Each Agency shall review the monitoring network and include an evaluation in the Plan					
		and each five-year assessment, including a determination of uncertainty and whether		8.2.1.5,			
		there are data gaps that could affect the ability of the Plan to achieve the sustainability		8.2.2.2,			
(a)		goal for the basin.		8.2.3.2		8-2	
, ,		Each Agency shall identify data gaps wherever the basin does not contain a sufficient					
		number of monitoring sites, does not monitor sites at a sufficient frequency, or utilizes		8.2.1.5,			
		monitoring sites that are unreliable, including those that do not satisfy minimum		8.2.2.2,			
(b)		standards of the monitoring network adopted by the Agency.		8.2.3.2		8-2	
(~)		If the monitoring network contains data gaps, the Plan shall include a description of the		0.2.0.2		0.2	
(c)		following:					
		Tollowing.		8.2.1.5,			
	(1)	The location and reason for data gaps in the monitoring network.		8.2.2.2,			
	(-/	The location and reason for data gaps in the monitoring network.		8.2.3.2		8-2	
				8.2.1.5,		-	
	(2)	Local issues and circumstances that limit or prevent monitoring.		8.2.2.2,			
	(-/	Local issues and circumstances that innit of prevent monitoring.		8.2.3.2		8-2	
		Each Agency shall describe steps that will be taken to fill data gaps before the next five-		8.2.1.5,			
(d)		year assessment, including the location and purpose of newly added or installed		8.2.2.2,			
(=)		monitoring sites.		8.2.3.2		8-2, 8-4	
		Each Agency shall adjust the monitoring frequency and density of monitoring sites to		0.2.0.2		-,-	
		provide an adequate level of detail about site-specific surface water and groundwater					
(e)		conditions and to assess the effectiveness of management actions under circumstances					
		that include the following:					
	(1)	Minimum threshold exceedances.		8.2		8-1	
	(2)	Highly variable spatial or temporal conditions.		8.2		8-1	
	(3)		<u> </u>	8.2		0-1	
	(3)	Adverse impacts to beneficial uses and users of groundwater.		0.2			
	(4)	The potential to adversely affect the ability of an adjacent basin to implement its Plan or	I				No hasing adiagraph to Dis Valley
	+	impede achievement of sustainability goals in an adjacent basin.	N/A				No basins adjacent to Big Valley
	+	Note: Authority cited: Section 10733.2, Water Code.					
		Reference: Sections 10723.2, 10727.2, 10728.2, 10733, 10733.2, and 10733.8, Water Code	:				
§ 354.40.		Reporting Monitoring Data to the Department					
		Monitoring data shall be stored in the data management system developed pursuant to					
		Section 352.6. A copy of the monitoring data shall be included in the Annual Report and					
		submitted electronically on forms provided by the Department.					
		Note: Authority cited: Section 10733.2, Water Code.					
		Reference: Sections 10728, 10728.2, 10733.2, and 10733.8, Water Code.					
SubArticle 5.		Projects and Management Actions					
§ 354.42.		Introduction to Projects and Management Actions					
3 337.42.		introduction to Projects and Management Actions					

Article 5.			Plan Contents for Big Valley Groundwater Basin	GSP Document References				
				Page Numbers of Plan	Or Section Numbers	Or Figure Numbers	Or Table Numbers	Notes
			This Subarticle describes the criteria for projects and management actions to be included in a Plan to meet the sustainability goal for the basin in a manner that can be maintained over the planning and implementation horizon. Note: Authority cited: Section 10733.2, Water Code.					
			Reference: Section 10733.2, Water Code.					
§ 354.44.			Projects and Management Actions					
(a)			Each Plan shall include a description of the projects and management actions the Agency has determined will achieve the sustainability goal for the basin, including projects and management actions to respond to changing conditions in the basin.		9		9-3	
(b)			Each Plan shall include a description of the projects and management actions that include the following:					
	(1)		A list of projects and management actions proposed in the Plan with a description of the measurable objective that is expected to benefit from the project or management action. The list shall include projects and management actions that may be utilized to meet interim milestones, the exceedance of minimum thresholds, or where undesirable results have occurred or are imminent. The Plan shall include the following:					
		(A)	A description of the circumstances under which projects or management actions shall be implemented, the criteria that would trigger implementation and termination of projects or management actions, and the process by which the Agency shall determine that conditions requiring the implementation of particular projects or management actions have occurred.		9		9-3	
		(B)	The process by which the Agency shall provide notice to the public and other agencies that the implementation of projects or management actions is being considered or has been implemented, including a description of the actions to be taken.		9		9-3	
	(2)		If overdraft conditions are identified through the analysis required by Section 354.18, the Plan shall describe projects or management actions, including a quantification of demand reduction or other methods, for the mitigation of overdraft.				9-3	
	(3)		A summary of the permitting and regulatory process required for each project and management action.		9		9-3	
	(4)		The status of each project and management action, including a time-table for expected initiation and completion, and the accrual of expected benefits.				9-3	
	(5)		An explanation of the benefits that are expected to be realized from the project or management action, and how those benefits will be evaluated.		9		9-3	
	(6)		An explanation of how the project or management action will be accomplished. If the projects or management actions rely on water from outside the jurisdiction of the Agency, an explanation of the source and reliability of that water shall be included.		9		9-3	
	(7)		A description of the legal authority required for each project and management action, and the basis for that authority within the Agency.		9		9-3	
	(8)		A description of the estimated cost for each project and management action and a description of how the Agency plans to meet those costs.		9		9-3	
	(9)		A description of the management of groundwater extractions and recharge to ensure that chronic lowering of groundwater levels or depletion of supply during periods of drought is offset by increases in groundwater levels or storage during other periods.		9			

Article 5.	Plan Contents for Big Valley Groundwater Basin		P Docume	nt Referen	ces	
		Page Numbers of Plan	Or Section Numbers	Or Figure Numbers	Or Table Numbers	Notes
(c)	Projects and management actions shall be supported by best available information and best available science.		9			
(d)	An Agency shall take into account the level of uncertainty associated with the basin setting when developing projects or management actions.		9			
	Note: Authority cited: Section 10733.2, Water Code.					
·	Reference: Sections 10727.2, 10727.4, and 10733.2, Water Code.					



Big Valley Groundwater Sustainability Plan

Final Draft December 2021

No. 5-004 Big Valley Groundwater Basin













Big Valley Groundwater Sustainability Plan

Final Draft December 8, 2021

Prepared by:



Lassen County
Groundwater Sustainability Agency

Board Members

Aaron Albaugh (District 4), Chair Chris Gallagher (District 1), Vice-Chair Gary Bridges (District 2) Jeff Hemphill (District 3) Tom Hammond (District 5)

County Staff

Department of Planning and Building Services
Maurice Anderson, Director
Gaylon Norwood, Assistant Director
Nancy McAllister, Senior Planner
Brooke Suarez, Fiscal Officer
Dana Hopkins, Administrative Assistant

Big Valley Groundwater Basin Advisory Committee

Aaron Albaugh, Board Representative, Vice-Chair Gary Bridges, Alt. Board Representative Kevin Mitchell, Public Representative Duane Conner, Public Representative



Modoc County
Groundwater Sustainability Agency

Ned Coe (District I), Chair Geri Byrne (District V), Vice-Chair Kathie Rhoads (District III) Elizabeth Cavasso (District IV) Vacant (District II)

Office of Administration

Tiffany Martinez, Assistant County Administrative Officer

Geri Byrne, Board Representative, Chair Ned Coe, Alt. Board Representative Jimmy Nunn, Public Representative John Ohm, Public Representative

Technical Team

Laura K. Snell, University of California Cooperative Extension, Modoc County David F. Lile, University of California Cooperative Extension, Lassen County Claire K. Bjork, University of California Cooperative Extension, Modoc County David Fairman, GEI Consultants Rodney Fricke, GEI Consultants Chris Petersen, GEI Consultants

Other Acknowledgements

Stacey Hafen, Executive Director North Cal-Neva Resource Conservation and Development Council Jason Housel, Lassen County Information Technology

The Basin Setting (Chapters 4-6) was developed under the direction of Professional Geologists:

{STAMP} {STAMP}

David Fairman Rodney Fricke

Professional Geologist 9025 Professional Geologist 4089

Cover photo credits: Pivot: Laura Snell; Deer in Alfalfa: Kim Steed Photography

<< Insert GSA Resolutions Adopting the Plan Here >>

Table of Contents

Tal	ble of Co	ontents	
Lis	t of Fig	ures	ii
l is	t of Tab	ıles	,
	• •	pendices	
Ac	ronyms	and Abbreviations	i
Ex		Summary	
	ES.1.	Introduction & Plan Area (Chapters 1 – 3)	
	ES.2.	Basin Setting (Chapters 4 – 6)	
	ES.3.	Sustainable Management (Chapters 7 – 9)	
	ES.4.	Plan Implementation (Chapters 10 – 11)	10
1.		uction § 354.2-4	
	1.1	Introduction	
	1.2	Sustainability Goal	
	1.3	Background of Basin Prioritization	
	1.4	Description of Big Valley Groundwater Basin	1-8
2.	Agenc	y Information § 354.6	
	2.1	Agency Names and Mailing Addresses	
	2.2	Agency Organization and Management Structure	2-1
	2.3	Contact Information for Plan Manager	
	2.4	Authority of Agencies	2-2
3.	Plan A	rea § 354.8	3-′
	3.1	Area of the Plan	3-1
	3.2	Jurisdictional Areas	3-3
	3.3	Land and Water Use	3-8
	3.4	Inventory and Density of Wells	3-13
	3.5	Existing Monitoring, Management and Regulatory Programs	3-18
	3.6	Conjunctive Use Programs	3-29
	3.7	Land Use Plans	3-29
	3.8	Management Areas	3-34
	3.9	Additional GSP Elements, if Applicable	3-35
4.	Hydro	geologic Conceptual Model §354.14	4-′
	4.1	Basin Setting	4-^
	4.2	Regional Geology and Structure	4-2
	4.3	Local Geology	4-5
	4.4	Principal Aquifer	
	4.5	Soils.	
	4.6	Beneficial Uses of Principal Aquifer	
	4.7	General Water Quality	
	4.8	Groundwater Recharge and Discharge Areas	4-24
	4.9	Surface-Water Bodies	
	4.10	Imported Water Supplies	
	4.11	Data Gaps in the Hydrogeologic Conceptual Model	4-26

i

5.	Groundwater Conditions §354.16	5-1
	5.1 Groundwater Elevations	
	5.2 Change in Storage	
	5.3 Seawater Intrusion	
	5.4 Groundwater Quality Conditions	
	5.5 Subsidence	
	5.6 Interconnected Surface Water	
	5.7 Groundwater-Dependent Ecosystems	
_	,	
6.		
	6.1 Water Budget Data Sources	
	6.2 Historical Water Budget	
	6.3 Current Water Budget	
	6.4 Projected Water Budget	6-7
7.	Sustainable Management Criteria § 354.20	7-1
	7.1 Process for Establishing SMCs	7-2
	7.2 Sustainability Goal	7-2
	7.3 Undesirable Results	7-3
	7.4 Management Areas	
8.	Monitoring Networks § 354.34	8-1
٠.	8.1 Monitoring Objectives	
	8.2 Monitoring Network	
	•	
9.		
	9.1 Basin Recharge Projects	
	9.2 Research and Data Development	
	9.3 Increased Surface-water Storage Capacity	
	9.4 Improved Hydrologic Function and Upland Recharge	
	9.5 Water Conservation	
	9.6 Public Education and Outreach	9-21
10.). Implementation Plan	10-1
	10.1 GSA Administration and Public Outreach	
	10.2 GSP Annual Reporting	10-2
	10.3 Data Management System	10-4
	10.4 Periodic Evaluations of GSP (Five-Year Updates)	10-9
	10.5 Implementation Schedule	10-9
	10.6 Cost of Implementation	10-9
	10.7 Funding Alternatives	
11.	. Notice and Communications §354.10	11-1
	11.1 Background	
	11.2 Challenges of Developing GSP in a Rural Area and During the COVID	
	11.3 Goals of Communication and Engagement	
	11.4 Stakeholder Identification	
	11.5 Venues and Tools	
	11.6 Decision-Making Process	
	11.7 Comments and Incorporation of Feedback	
	11.8 Communication and Engagement During Plan Implementation	
12	Poforoncos	12.1

List of Figures

Figure ES-1	Groundwater Sustainability Agencies in Big Valley Groundwater Basin	
Figure ES-2	DWR 1963 Local Geologic Map.	
Figure ES-3	Cumulative Change in Groundwater Storage and Precipitation	
Figure ES-4	Average Total Basin Water Budget 1984-2018	
Figure ES-5	Groundwater Level Monitoring Networks	
Figure 1-1	Big Valley Groundwater Basin, Surrounding Basins and GSAs	
Figure 3-1	Area Covered by the GSP	
Figure 3-2	Jurisdictional Areas	
Figure 3-3	Upper Pit IRWMP, Watershed, and LMFCWCD Boundaries	
Figure 3-4	LMFCWCD Zones and Watermaster Service Areas	
Figure 3-5	Land Use by Water Use Sector	
Figure 3-6	Water Sources	
Figure 3-7	Density of Domestic Wells	
Figure 3-8	Density of Production Wells	
Figure 3-9	Density of Public Supply Wells	
Figure 3-10	Water Level Monitoring Network	
Figure 3-11	Water Quality Monitoring	
Figure 3-12	Historical Surface-water and Climate Monitoring Network	
Figure 3-13	Annual Precipitation at the McArthur CIMIS Station	
Figure 3-14	Lassen County General Plan Land Use Map	
Figure 4-1	Topography	
Figure 4-2	Regional Geologic Map	
Figure 4-3	GeothermEx 1975 Local Geologic Map	
Figure 4-4	DWR 1963 Local Geologic Map	
Figure 4-5	DWR 1963 Upland Recharge Areas and Areas of Confining Conditions	
Figure 4-6	Geologic Cross Section A-A'	
Figure 4-7	Geologic Cross Section B-B'	
Figure 4-8	Local Faults	
Figure 4-9	Taxonomic Soils Classifications	
Figure 4-10	Hydrologic Soils Group Classifications	
Figure 4-11	SAGBI Classifications	
Figure 4-12	Piper Diagram showing major cations and anions	
Figure 4-13	Recharge, Discharge and Major Surface-water Bodies	
Figure 5-1	Water Level Monitoring	
Figure 5-2	Hydrograph of Well 17K1	
Figure 5-3	Hydrograph of Well 32A2	
Figure 5-4	Average Water Level Change Since 2000 Using Spring Measurements	
Figure 5-5	Groundwater Elevation Contours and Flow Direction Spring 2018	
Figure 5-6	Groundwater Elevation Contours and Flow Direction Fall 2018	
Figure 5-7	Precipitation, Pumping and Change in Groundwater Storage	
Figure 5-8	Arsenic Trends	
Figure 5-9	Iron Trends	
Figure 5-10	Manganese Trends	
Figure 5-11	Specific Conductance Trends	
Figure 5-12	TDS Trends	
Figure 5-13	Distribution of Elevated Specific Conductance	
Figure 5-14	Distribution of Elevated TDS Concentrations	
Figure 5-15	Location of Known Potential Groundwater Contamination Sites	
Figure 5-16	Vertical Displacement at CGPS P347	
Figure 5-17	InSAR Change in Ground Elevation 2015 to 2019	
Figure 5-18	Potentially Interconnected Surface Water	5-27

Figure 5-19	Potential Groundwater-Dependent Ecosystems	5-30
Figure 6-1	Hydrologic Cycle	
Figure 6-2	Water Budget Components and Systems	6-2
Figure 6-3	Annual and Cumulative Precipitation and Water Year Types 1984 to 2018	6-3
Figure 6-4	Average Total Basin Water Budget 1984-2018 (Historic)	6-4
Figure 6-5	Average Land System Water Budget 1984-2018 (Historic)	6-5
Figure 6-6	Average Surface-Water System Water Budget 1984-2018 (Historic)	6-5
Figure 6-7	Average Groundwater System Water Budget 1984 to 2018 (Historic)	6-6
Figure 6-8	Cumulative Groundwater Change in Storage 1984 to 2018 (Historic)	6-6
Figure 6-9	Average Projected Total Basin Water Budget 2019-2068 (Future Baseline)	6-8
Figure 6-10	Cumulative Groundwater Change in Storage 1984 to 2068 (Future Baseline)	6-8
Figure 6-11	Average Projected Total Basin Water Budget 2019-2068 (Future with Climate Change)	6-9
Figure 6-12	Cumulative Groundwater Change in Storage 1984 to 2068 (Future with Climate Change)	
Figure 7-1	Relationship among the MTs, MOs, and IMs for a hypothetical basin	7-2
Figure 7-2	Analysis of Wells That Could Potentially Go Dry at Different Depths	7-5
Figure 7-3	Domestic Well Density and Representative Groundwater Level Wells	7-6
Figure 8-1	Water Level Monitoring Networks	8-3
Figure 8-2	Water Quality Monitoring Network	8-8
Figure 8-3	Proposed Surface-Water and Climate Monitoring Network	8-12
Figure 9-1	Big Valley Watershed Boundary	9-2
Figure 9-2	Current and Proposed Stream Gages	9-11
Figure 9-3	Roberts Reservoir Scenarios	9-14
Figure 9-4	Allen Camp Dam Drawing	9-15
Figure 9-5	Canopy cover percentage of forested areas within the Big Valley watershed	9-17
Figure 10-1	Excel Water Level Tool	10-6
Figure 10-2	Excel Water Budget Tool	10-7
Figure 10-3	GIS Database	10-8
Figure 10-4	Implementation Schedule	10-10
Figure 11-1	GSP Development Process	11-7

List of Tables

Table ES-1	2016 Land Use Summary by Water Use Sector	3
Table ES-2	Projects and Potential Implementation Timeline	10
Table 1-1	Big Valley Groundwater Basin Prioritization	1-7
Table 3-1	Available DWR Land Use Surveys	3-8
Table 3-2	2016 Land Use Summary by Water Use Sector	3-9
Table 3-3	Well Inventory in the BVGB	3-13
Table 3-4	Water Quality Monitoring Programs	3-21
Table 3-5	Datasets Available from State Water Board's GAMA Groundwater Information System	3-22
Table 3-6	Annual Precipitation at Bieber from 1985 to 1995	3-24
Table 3-7	Monthly Climate Data from CIMIS Station in McArthur (1984-2018)	3-25
Table 3-8	Plan Elements from CWC Section 10727.4	
Table 4-1	Well Depths in DWR Inventory	4-13
Table 4-2	Aquifer Test Results	4-16
Table 5-1	Historic Water Level Monitoring Wells	5-3
Table 5-2	Change in Storage 1983-2018	5-10
Table 5-3	Water Quality Statistics	5-13
Table 5-4	Known Potential Groundwater Contamination Sites in the BVGB	5-21
Table 5-5	Big Valley Common Plant Species Rooting Depths	5-29
Table 8-1	Big Valley Groundwater Basin Water Level Monitoring Network	8-2
Table 8-2	Summary of Best Management Practices, Groundwater Level Monitoring Well Network and Dat	a Gaps8-7
Table 8-3	Big Valley Groundwater Basin Water Quality Monitoring Network	8-9
Table 8-4	Summary of Groundwater Quality Monitoring, Best Management Practices and Data Gaps	8-10
Table 9-1	Available Funding Supporting Water Conservation	9-3
Table 9-2	Projects and Potential Implementation Timeline	9-4
Table 9-3	Required Elements for Projects and Management Actions	9-5
Table 10-1	Annual Report DMS Data Types	10-4
Table 10-2	GSP Update DMS Data Types	10-5
Table 10-3	GSP Implementation Cost Statistics for 2020 GSPs in California	10-11
Table 10-4	Summary of Big Valley Cost Estimates	
Table 10-5	Summary of GSP Funding Mechanisms	10-14
Table 11-1	Pre-GSP Development Outreach Efforts	11-1

List of Appendices

Appendix 1A Appendix 2A Appendix 2B	Background Information Regarding Basin Prioritization and Boundary Resolutions Establishing Lassen and Modoc Counties as the GSAs for the BVGB MOU Establishing the Big Valley Groundwater Advisory Committee
Appendix 3A	Monitoring Well Surveyors Report
Appendix 4A	Aquifer Test Results
Appendix 5A	Water Level Hydrographs
Appendix 5B	Groundwater Elevation Contours 1983 to 2018
Appendix 5C	Transducer Data from Monitoring Well Clusters 1 and 4
Appendix 6A	Water Budget Components
Appendix 6B	Water Budget Details
Appendix 6C	Water Budget Bar Charts
Appendix 7A	Pumping Cost Calculations
Appendix 8A	Water Level Monitoring Well Details
Appendix 8B	New Monitoring Well As-Built Drawings
Appendix 8C	Selection from DWR Monitoring BMP
Appendix 11A	GSA Letters to Governor and Legislature
Appendix 11B	List of Public Meetings
Appendix 11C	Brochure Summarizing the Big Valley GSP May 2021
Appendix 11D	Comment Matrix

Acronyms and Abbreviations

ACWA Ash Creek Wildlife Area

AF acre-feet

AFY acre-feet per year

AgMAR Agriculture Managed Aquifer Recharge

ASR Aquifer Storage and Recovery

Basin Big Valley Groundwater Basin

Basin Plan Water Quality Control Plan

bgs below ground surface

BIA U.S. Bureau of Indian Affairs

Big Valley Groundwater Basin

BLM U.S. Bureau of Land Management

BMO Basin Management Objective

BMP Best Management Practices

BVGB Big Valley Groundwater Basin

BVAC Big Valley Groundwater Basin Advisory Committee

BVWUA Big Valley Water Users Association

C&E communication and engagement

CAL FIRE California Department of Forestry and Fire Protection

CASGEM California Statewide Groundwater Elevation Monitoring

CDEC California Data Exchange Center

CDFA California Dept of Food and Agriculture

CDFW California Department of Fish and Wildlife

CEQA California Environmental Quality Act

CFCC California Financing Coordinating Committee

CGPS continuous global positioning system

CIMIS California Irrigation Management Information System

CRP conservation reserve program

CWA Clean Water Act

CWC California Water Code

DDW State Water Resources Control Board's Division of Drinking Water

District Lassen-Modoc County Flood Control and Water Conservation District

DMS Data Management System

DOI Department of the Interior

DTW depth to water

DWR California Department of Water Resources

EC electrical conductivity

EQIP Environmental Quality Incentives Program

ET evapotranspiration

ETo reference evapotranspiration

°F degrees Fahrenheit

Forest Service U.S. Forest Service

ft bgs feet below ground surface

ft/d foot or feet per day

ft/yr foot or feet per year

GAMA Groundwater Ambient Monitoring and Assessment Program

GAMA GIS GAMA Groundwater Information System

GDE groundwater dependent ecosystem

General Order Statewide ASR General Order

GISgeographic information system

GP General Plan

gpm gallons per minute

GSA Groundwater Sustainability Agency

GSP Groundwater Sustainability Plan

HCM hydrogeologic conceptual model

HSG Hydrologic Soils Group

IC institutional controls

ILRP Irrigated Lands Regulatory Program

IM Interim Milestone

in/hr inches per hour

InSAR Interferometric Synthetic Aperture Radar, a technology used to detect subsidence

IRWMP Upper Pit Integrated Regional Water Management Plan

IWFM Integrated Water Flow Model

LCGMP Lassen County Groundwater Management Plan

LCWD #1 Lassen County Waterworks District #1

LNAPL Light non-aqueous phase liquid (found in petroleum hydrocarbons)

LUST Leaking underground storage tank

M million

MCL Maximum Contaminant Level

Mn manganese

MOMeasurable Objective

MOU Memorandum of Understanding

msl mean sea level

MT Minimum Threshold

MTBE Methyl tert-butyl ether

NCCAG Natural Communities Commonly Associated with Groundwater

North Cal-Neva North Cal-Neva Resource Conservation and Development Council

NCWA Northern California Water Association

NECWA Northeastern California Water Association

NEPA National Environmental Policy Act

NOAA National Oceanic and Atmospheric Administration

NPDES National Pollutant Discharge Elimination System

NR Natural Resources

NRCS Natural Resources Conservation Service

NSP Nonpoint Source Program

OS Open Space

OWTS Onsite Water Treatment System

PFAS per/polyfluoroalkyl substances

PG&E Pacific Gas and Electric

Plan Groundwater Sustainability Plan

Reclamation United States Bureau of Reclamation

RWMG Regional Water Management Group

RWQCB Regional Water Quality Control Board

RWQCB-R5 Regional Water Quality Control Board Region 5

Regulations GSP Regulations, California Code of Regulations Title 23, Division 2, Chapter 1.5

SAGBI Soil Agricultural Groundwater Banking Index

SB Senate Bill

SC specific conductance

SGMA Sustainable Groundwater Management Act of 2014

SMC Sustainable Management Criteria

SRISacramento River Index of water year types

SSURGO Soil Survey Geographic Database

State Water Board California State Water Resources Control Board

SVE Surprise Valley Electric

SVWQC Sacramento Valley Water Quality Coalition

SWEEP State Water Efficiency and Enhancement Program

SY specific yield

TBA tert-Butyl alcohol

TDS total dissolved solids

TMDL Total Maximum Daily Load Program

TNC The Nature Conservancy

UCCE University of California Cooperative Extension

U.S. United States

USDA U.S. Department of Agriculture

USFS U.S. Forest Service

USGS United States Geologic Survey

UST Underground Storage Tank

WAA Water Availability Analysis

WCR well completion report

WDR Waste Discharge Requirement

WRP wetland reserve project

WY Water Year (October 1 – September 30)

Executive Summary

ES.1. Introduction & Plan Area (Chapters 1 – 3)

- 3 The Big Valley Groundwater Basin (BVGB, Basin, or Big Valley) lies on the border of Modoc and Lassen
- 4 counties in one of the most remote and untouched areas of California. The sparsely populated Big Valley has a rich
- 5 biodiversity of wildlife and native species who live, feed and raise young on the irrigated lands throughout the
- 6 Basin. The snow-fed high desert streams entering the Basin have seasonal hydrographs with natural periods of
- 7 reduced flows or complete cessation of flows late in the summer season. The Pit River is the largest stream and is
- 8 so named because of the practice, employed by the Achumawi and other Native American bands that are now part
- 9 of the Pit River Tribe, of digging pits in the river channel when it went dry to expose water and trap game that
- came to water at the river. Farming and ranching in Big Valley date back to the late 19th and early 20th centuries,
- when families immigrated to Big Valley and made use of the existing water resources. A large amount of the land
- in the Basin is still owned and farmed by the families who homesteaded here.
- Historically, agriculture was complemented by a robust timber industry as a key component of the economy for
- Big Valley, which supported four lumber mills. Due to regulations and policies imposed by state and federal
- governments, the timber industry has been diminished over time and subsequently caused a great economic
- hardship to the Big Valley communities. Stakeholders realize that the Sustainable Groundwater Management Act
- of 2014 (SGMA) will unfortunately cause a similar decline to agriculture. The change in land management has
- transformed once thriving communities in the Basin to "disadvantaged" and "severely disadvantaged"
- communities. Viable agriculture is of paramount importance to the residents of Big Valley because it supports the
- local economy and unique character of the community. As required by SGMA, stakeholders have developed a
- 21 sustainability goal:

22

23

24

25

26

27

28

The sustainability goal for the Big Valley Groundwater Basin is to maintain a locally governed, economically feasible, sustainable groundwater basin and surrounding watershed for existing and future legal beneficial uses with a concentration on agriculture. Sustainable management will be conducted in context with the unique culture of the basin, character of the community, quality of life of the Big Valley residents, and the vested right of agricultural pursuits through the continued use of groundwater and surface water.

- 29 Lassen and Modoc counties are fulfilling their unfunded, mandated roles as Groundwater Sustainability Agencies
- 30 (GSAs) to develop this Groundwater Sustainability Plan (GSP) after exhausting its administrative challenges to the
- California Department of Water Resources' (DWR's) determination that Big Valley qualifies as a medium-priority
- basin. Both counties are disadvantaged, have declining populations, and have no ability to cover the costs of GSP
- development and implementation.
- 34 The Basin, shown on Figure ES-1, encompasses an area of about 144 square miles (92,057 acres), with Modoc
- 35 County representing 28 percent and Lassen County comprising 72 percent of the Basin by area. The Basin includes
- the towns of Adin and Lookout in Modoc County and the towns of Bieber and

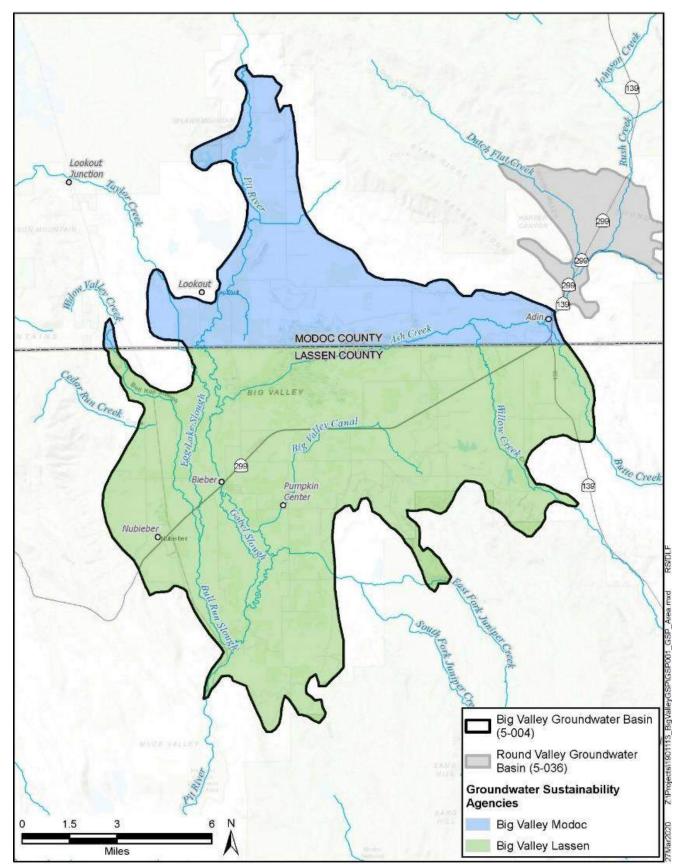


Figure ES-1 Groundwater Sustainability Agencies in Big Valley Groundwater Basin.

Source: DWR 2018d

- Nubieber in Lassen County. The Ash Creek State Wildlife Area straddles both counties occupying 22.5 square
- miles in the center of the Basin in the marshy/swampy areas along Ash Creek. Land use in the BVGB is detailed in
- **Table ES-1**.

44

45

Table ES-1 2016 Land Use Summary by Water Use Sector

Water Use Sector	Acres	Percent of Total
Community ^a	250	<1%
Industrial	196	<1%
Agricultural	22,246	24%
State Wildlife Area ^b	14,583	16%
Managed Recharge	-	0%
Native Vegetation and Rural Domestic ^c	54,782	60%
Total	92,057	100%

Notes:

Source: See Chapter 6 - Water Budget for explanation of approach

ES.2. Basin Setting (Chapters 4 – 6)

Hydrogeologic Setting

- The topography of BVGB is relatively flat in the central area with increasing elevations along the perimeter,
- particularly in the eastern portions where Willow and Ash Creeks enter the Basin. This low relief in the Basin
- results in a meandering river morphology and widespread flooding during large storm events. The Basin is
- 49 underlain by a thick sequence of sediment derived from the surrounding mountains of volcanic rocks and is
- interbedded with lava flows and water-lain tuffs. The volcanic material is variable in composition and is Miocene
- to Holocene age (23 million to several hundred years ago). The compositions of the lava flows are primarily
- basalt¹ and basaltic andesite², while pyroclastic³ ash deposits are rhyolitic⁴ composition. In general, the Basin
- boundary drawn by DWR was intended to define the contact between the valley alluvial deposits and the
- surrounding mountains of volcanic rocks. During development of this GSP, the Basin boundary has been found to
- be grossly inaccurate in many areas and is not clearly isolated from areas outside the valley floor. The mountains
- outside of the groundwater Basin capture and accumulate precipitation, which produces runoff that flows into
- 57 BVGB. Moreover, DWR (1963) stated that these mountains serve as "upland recharge areas" and provide
- 58 subsurface recharge to BVGB via fractures in the rock and water bearing formations that underlie the volcanics.

^a Includes the use in the communities of Bieber, Nubieber and Adin

^b Made up of a combination of wetlands and non-irrigated upland areas

^c Includes the large areas of land in the Valley which have domestic wells interspersed

¹ Basalt is an extrusive (volcanic) rock with relatively low silica content and high iron and magnesium content.

² Andesite is an extrusive rock with intermediate silica content and intermediate iron and magnesium content.

³ Pyroclastic rocks are formed during volcanic eruptions, typically not from lava flows, but from material (clasts) ejected from the eruption such as ash, blocks, or "bombs."

⁴ Rhyolitic rocks are extrusive with relatively high silica content and low iron and magnesium. Rhyolites are the volcanic equivalent of granite.

- The Bieber Formation (TQb), formed in the Pliocene-Pleistocene age (5.3 million to 12 thousand years ago) and
- shown in **Figure ES-2**, is the main formation of aquifer material defined within the BVGB, and DWR (1963)
- estimates that it ranges in thickness from a thin veneer to over 1,000 feet. The formation was deposited in a
- lacustrine (lake) environment and is comprised of unconsolidated to semi-consolidated layers of interbedded clay,
- silt, sand, gravel, and diatomite. The coarse-grained deposits (gravel and sand) are aquifer material⁵ and are part of
- 64 the Big Valley principal aquifer. The "physical bottom" has not been clearly encountered or defined but may
- extend 4,000 to 7,000 feet or deeper. The "practical bottom" of the aquifer is 1,200 feet because that depth
- encompasses the known production wells and water quality may be poorer below that depth. As required by
- 67 SGMA, 1,200 feet is used as the "definable bottom" for this GSP. A single principal aquifer is used for this GSP
- because distinct, widespread confining beds have not been identified in the subsurface.
- 69 The Natural Resources Conservation Service (NRCS) Hydrologic Soils Group (HSG) classifications provide an
- 70 indication of soil infiltration potential and ability to transmit water under saturated conditions based on hydraulic
- conductivities of shallow, surficial soils. Characterizing these soils is important because water must first penetrate
- the shallow subsurface to provide any chance of groundwater recharge. According to the HSG dataset, the Basin is
- composed of only soils with "slow" or "very slow" infiltration rates. While the soils are not highly permeable,
- some research has found that water can penetrate through these soils, indicating that managed aquifer recharge
- 75 projects such as on-farm recharge may be viable.

Groundwater Conditions

- Historic groundwater elevations are available from a total of 22 wells in Big Valley that are part of the CASGEM⁶
- monitoring network, six located in Modoc County and 16 in Lassen County. In addition to these 22 wells, five well
- 79 clusters were constructed in late 2019 and early 2020 to support the GSP. Groundwater level hydrographs from the
- 80 historic wells show that most areas of the Basin have remained stable, and a few areas have seen some decline
- averaging 0.53 feet per year of groundwater level decline in the last 38 years.⁷
- To determine the annual and seasonal change in groundwater storage, groundwater elevation surfaces⁸ were
- developed for spring and fall for each year between 1983 and 2018. **Figure ES-3** shows this information
- graphically, along with the annual precipitation. This graph shows that groundwater storage generally declines
- during dry years and stays stable or increases during normal or wet years. During the period from 1983 to 2000,
- groundwater levels dipped in the late 1980s and early 1990s, then recovered during the wet period of the late
- 87 1990s. After 2000, while most wells are still stable, a few wells have

⁵ Meaning the sediments contain porous material with recoverable water.

⁶ California Statewide Groundwater Elevation Monitoring Program

⁷ Average slope of the trend lines in Appendix 5A.

⁸ Groundwater elevation surfaces are developed from the known groundwater elevations at wells throughout the Basin and then estimating/interpolating elevations at intermediate locations *via* a mathematical method known as kriging. The kriging elevation surface is based on a grid covering the entire basin that has interpolated groundwater elevation values for each node of the grid.

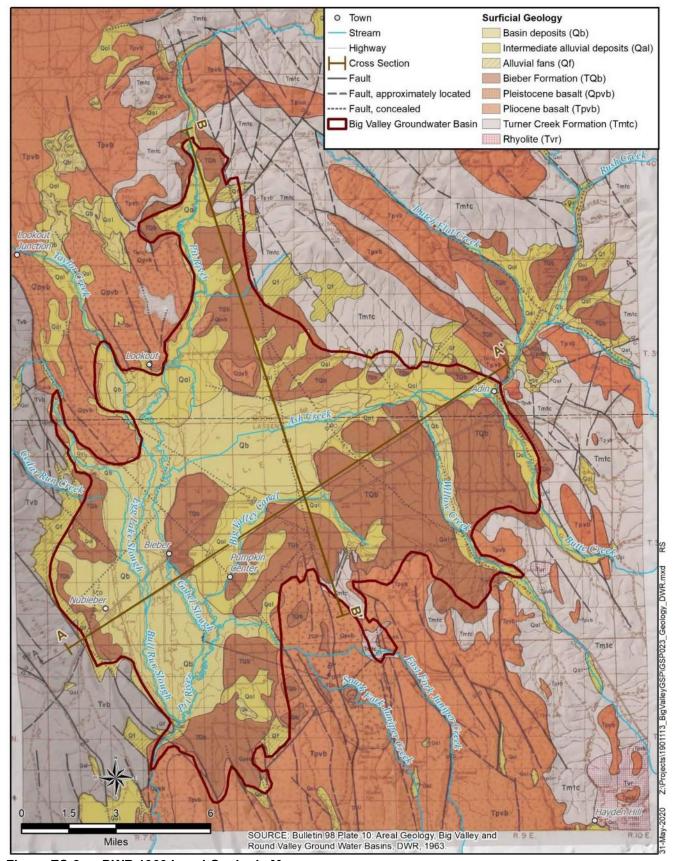


Figure ES-2 DWR 1963 Local Geologic Map.

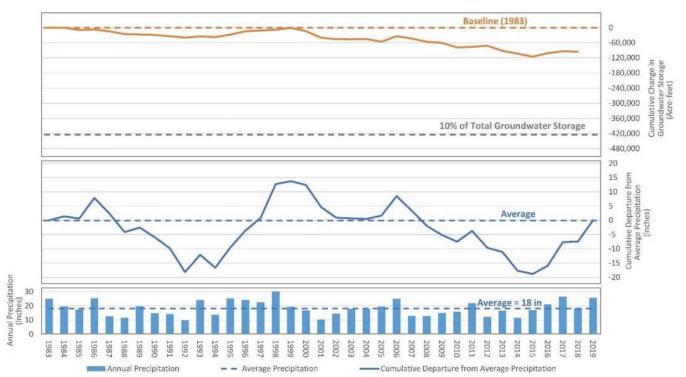


Figure ES-3 Cumulative Change in Groundwater Storage and Precipitation

generally declined, resulting in a reduction in overall groundwater storage. The amount of decline represents a cumulative reduction in storage of less than 2 percent of groundwater storage.⁹

Groundwater in the BVGB is generally of good- to excellent-quality (DWR 1963, United States Bureau of Reclamation [Reclamation] 1979). An analysis of available historic water quality indicates that some naturally occurring constituents associated with volcanic formations and thermal waters are slightly elevated. These elevated concentrations are extremely isolated and primarily not above thresholds that are a risk to human health nor does the water quality affect beneficial uses. There are no contamination plumes or cleanup sites that are likely to affect groundwater quality for beneficial use.

Water Budget

91

92

93

94

95

96

97

98

99

100

101

102

103

104

105

A historic water budget was developed for the 1983-2018 timeframe, shown in **Figure ES-4.** From this water budget analysis, a rough estimate for the sustainable yield is about 39,300 acre-feet per year (AFY) and a rough estimate of average annual overdraft is 5,000 AFY.

⁹ Based on assessment in Section 5.2, indicating storage has been reduced by about 96,000 AF since 1983 and using a total storage of about 5.2 million AF (92,057 acre basin area * 1,200 feet to definable bottom * 5% specific yield)

	TOTAL BASIN WATER BUDGET Acre-Feet						
item	Flow Type	Origin/ Destination	Component	Estimated		■ Precipitation on Land System	
(1)	Inflow	Into Basin	Precipitation on Land System	136,800		Precipitation on Reservoirs	
(14)	Inflow	Into Basin	Precipitation on Reservoirs	500	INFLOW	Stream Inflow	
(13)	Inflow	Into Basin	Stream Inflow	371,100		Stream Inflow	
(27)	Inflow	Into Basin	Subsurface Inflow	1		 Subsurface Inflow 	
(32)	Inflow	(1)+(14)+(13)+(27)	Total Inflow	508,400			
(5)	Outflow	Out of Basin	Evapotranspiration	154,000		Evapotranspiration	
(24)	Outflow	Out of Basin	Stream Evaporation	400		 Stream Evaporation 	
(23)	Outflow	Out of Basin	Reservoir Evaporation	700		Reservoir Evaporation	
(19)	Outflow	Out of Basin	Conveyance Evaporation	-	OUTFLOW	·	
(18)	Outflow	Out of Basin	Stream Outflow	358,500		Conveyance Evaporation	
(29)	Outflow	Out of Basin	Subsurface Outflow	-		Stream Outflow	
(33)	Outflow	(5)+(24)+(23)+(19)+(18)+(29)	Total Outflow	ow 513,600		 Subsurface Outflow 	
(34)	Storage Change	(32)-(33)	Change in Total System Storage	(5,000)			

Figure ES-4 Average Total Basin Water Budget 1984-2018

ES.3. Sustainable Management (Chapters 7 – 9)

Sustainable Management Criteria

- Sustainable Management Criteria (SMC) define the conditions that constitute sustainable groundwater management. The following is a description of the SMC for each of the six sustainability indicators:
 - **Groundwater Levels:** Do not allow groundwater levels to decline to a level where the energy cost to lift groundwater exceeds the economic value of the water for agriculture. The minimum threshold for each well in the monitoring network was determined to be the depth at which groundwater pumping becomes uneconomical for agricultural use.
 - **Groundwater Storage:** Groundwater levels are used as a proxy for this sustainability indicator because change in storage is directly correlated to changes in groundwater levels.
 - **Seawater Intrusion:** This sustainability indicator does not apply to Big Valley.
 - Water Quality: Due to the existence of excellent water quality in the Basin, a significant amount of existing water quality monitoring, generally low-impact land uses, and a robust effort to conduct conservation efforts by agricultural and domestic users, per §354.26(d), SMCs were not established for water quality because undesirable results are not present and not likely to occur. At the five-year update of this GSP, data from various existing programs will be assessed to determine if degradation trends are occurring in the principal aquifer.
 - Land Subsidence: Based on evaluation of subsidence data from a continuous GPS station and Interferometric Synthetic Aperture Radar (InSAR) provided by DWR, no significant subsidence has occurred. Therefore, per §354.26(d), SMCs were not established for subsidence because undesirable results are not present and not likely to occur. At the five-year update of this GSP, subsidence data will be assessed for any trends that can be correlated with groundwater pumping.
 - Interconnected Surface Water: Data for this sustainability indicator is limited. Currently there is no evidence to suggest that undesirable results have occurred or are likely to occur. At the five-year update, future data will be evaluated.

Monitoring Network

134

140

146

- Monitoring networks are developed to promote the collection of data of sufficient quality, frequency, and
- distribution to characterize groundwater and related surface-water conditions in the Basin and to evaluate changing
- conditions that occur as the Plan is implemented. The GSAs developed monitoring networks for the parameters
- listed below. **Figure ES-5** shows the water level monitoring networks.
- Groundwater levels
 - Groundwater storage *via* groundwater levels as proxy
- Shallow groundwater for interconnection of groundwater and surface water
- Groundwater quality
- Land subsidence
- Streamflow and climate
- Land use

Projects and Management Actions

- 147 Through an extensive planning and public outreach process, the GSAs have identified an array of projects and
- management measures that may be implemented to meet sustainability objectives in the BVGB. Some of the
- projects can be implemented immediately while others will take significantly more time for necessary planning
- and environmental review, navigation of regulatory processes, and implementation. The various projects and
- estimated timeline can be found in **Table ES-2**.

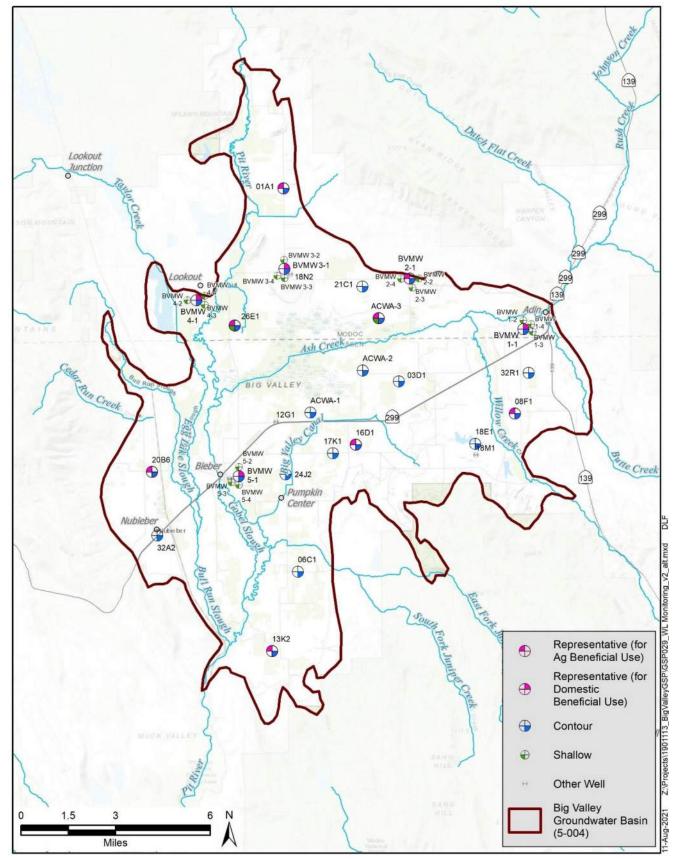


Figure ES-5 Groundwater Level Monitoring Networks

Table ES-2 Projects and Potential Implementation Timeline

No.	Category	Description	Estimated Time for Potential Implementation (years)			
	, 3 . ,		0-2	2-8	>8	
1	0.45	AgMAR	X	Χ	X	
2	9.1 Recharge Projects	Drainage and Basin Recharge	Х	Х	Х	
3	Frojecis	Ag Injection Wells			Х	
4		Stream Gages	X			
5		Refined Water Budget	X	Х		
6	9.2 Research	Agro-Climate Station	X			
7	and Data Development	Voluntary Installation of Well Meters	X	Х		
8	Bovolopmoni	Adaptive Management	X	Х	Х	
9		Mapping and Land Use	X	Х		
10	9.3 Increased	Expanding Existing Reservoirs		Х		
11	Storage Capacity	Allen Camp Dam			Х	
12	9.4 Improved	Forest Thinning and Management	X	Х	Х	
13	Hydrologic	Juniper Removal	Х	Х	Х	
14	Function	Stream and Meadow Restoration	Х	Х	Х	
15		Irrigation Efficiency	X	Х		
16	9.5 Water Conservation	Landscaping and Domestic Water Conservation	Х	Х		
17	Conservation	Conservation Projects	X	Х		
18		Public Communication	Х			
19		Information and Data Sharing	Х	Х		
20	9.6 Education and Outreach	Fostering Relationships	X			
21	and Outleadi	Compiling Efforts	X	Х		
22		Educational Workshops	X			

Note: AgMAR = Agricultural Managed Aquifer Recharge

ES.4. Plan Implementation (Chapters 10 – 11)

The GSP lays out a roadmap for addressing the activities needed for GSP implementation. Implementing this GSP requires the following activities:

- GSA Administration and Public Outreach: The fundamental activities that will need to be performed by the GSAs are public outreach and coordination of GSP activities. Public outreach will entail updates at County Board of Supervisors' meetings and/or public outreach meetings. At a minimum the GSAs will receive and respond to public input on the Plan and inform the public about progress implementing the Plan as required by §354.10(d)(4) of the Regulations. Coordination activities would include ensuring monitoring is performed, annual reports to DWR, five-year GSP updates, and coordinating projects and management actions.
- Monitoring and Data Management: Data collection and management will be required for both annual
 reporting and five-year updates. Monitoring data that will be collected and stored in the data management
 system (DMS) for reporting will include water levels, precipitation, evapotranspiration, streamflow, water
 quality, land use, and subsidence.

- Annual Reporting: According to §356.2 of the Regulations, the Big Valley GSAs are required to provide an annual report to DWR by April 1 of each year following the adoption of the GSP. The first annual report will be provided to DWR, with assistance by GEI, by April 1, 2022 and will include data for the prior Water Year (WY), which will be WY 2021 (October 1, 2020 to September 30, 2021), despite DWR's definition of a WY being inconsistent with what works for Big Valley¹⁰. The Annual Report will establish the current conditions of groundwater within the BVGB, the status of the GSP implementation, and the trend towards maintaining sustainability.
- Plan Evaluation (Five-Year Update): Updates and amendments to the GSP can be performed at any time, but at a minimum the GSAs must submit an update and evaluation of the plan every 5 years (§356.4). While much of the content of the GSP will likely remain unchanged for these five-year updates, the Regulations require that most chapters of the plan be updated and supplemented with any new information obtained in the preceding 5 years.

Cost of Implementation

171

172

173

174

175

176

177

178

179

180

181182

183

184185

186

Cost is a fundamental concern to the GSAs and stakeholders in the BVGB, as the Basin is disadvantaged and there is no revenue generated in the counties to fund the state-mandated requirements of SGMA. Therefore, the GSAs will rely on outside funding to implement this unfunded mandated Plan.

_

The water year defined by DWR runs from October 1-September 30 to accommodate for the unique Mediterranean and annual grass growing season in much of the state. It does not fit well in the mountainous and great basin areas of the state like Big Valley that are primarily perennial native vegetation and cropping systems which do not follow the same growing cycle. In the annual system, plants start growing around the end of October, but in the perennial system, plants are still growing from the prior water year and October and soon go dormant for winter. This also mirrors the way that water is used in these areas as well. The end of irrigation season extends into October in the perennial system making water measurements sometimes difficult and not truly marking the end of the irrigation season. (Snell 2021)

1. Introduction § 354.2-4

1.1 Introduction

187

188

199

- The Big Valley Groundwater Basin (BVGB, Basin, or Big Valley) is located in one of the most remote and 189 190 untouched areas of California. The sparsely populated Big Valley has a rich biodiversity of wildlife and native species who feed, live, and raise young primarily on the irrigated lands throughout the Basin. The Basin has 191 multiple streams which enter from the North, East, and West. The Pit River is the only surface-water outflow and 192 193 exits at the southern tip of the Basin. The streams that enter the Basin are some of the most remote, least improved, 194 and most pristine surface waters in all of California. The snow-fed high desert streams entering the Basin have seasonal hydrographs with natural periods of reduced flows or complete cessation of flows late in the summer 195 season. The Pit River is the largest stream and is so named because of the practice, employed by the Achumawi 196 and other Native American bands that are now part of the Pit River Tribe, of digging pits in the river channel when 197 it went dry to expose water and trap game that came to water at the river. In addition to the Pit River, the Basin is 198
- Farming and ranching in Big Valley date back to the late 19th and early 20th centuries when families immigrated to

also fed by Ash Creek year-round, along with Willow Creek and many seasonal streams and springs.

- Big Valley and made use of the existing water resources. A large amount of the land in the Basin is still owned and
- farmed by the families that homesteaded here. The surnames on the tombstones at any of the three cemeteries are
- 203 the same names that can be overheard during a visit to the Bieber Market or the Adin Supply store, local
- 204 institutions and gathering places for the residents of this tight-knit community. These stores are remaining
- evidence of a much more vibrant time in Big Valley.
- Following World War II, with the advent and widespread use of vertical turbine pumps, farmers and ranchers
- began using groundwater to irrigate the land, supplementing their surface-water supplies to make a living in Big
- Valley. The local driller, Conner's Well Drilling, has drilled the majority of wells in Big Valley and the third-
- 209 generation driller, Duane Conner has been on the advisory committee during the development of this Groundwater
- Sustainability Plan (GSP or Plan) (Conner 2020-2021).
- 211 Historically, agriculture was complemented by a robust timber industry, a key component of the economy for Big
- Valley, which supported four lumber mills. Due to regulations and policies imposed by state and federal
- 213 government, the timber industry has been diminished over time which has caused a great economic hardship to the
- Big Valley communities. Stakeholders realize that the Sustainable Groundwater Management Act of 2014
- 215 (SGMA) will unfortunately cause a similar decline to agriculture. The loss of jobs due to the closure of all four
- lumber mills and the reduction of timber yield tax, which had provided financial support to the small rural schools
- and roads, is evident in the many vacant buildings which once had thriving businesses. In addition to the loss of
- jobs, the reduced student enrollment in local schools has caused an economic hardship to the school district, which
- struggles to remain viable. The change in land management has transformed once thriving communities in the
- Basin to "disadvantaged" and "severely disadvantaged" communities as defined by multiple state agencies,

- including the Department of Water Resources (DWR). The addition of SGMA will increase the severity of the
- disadvantaged and severely disadvantaged status in the Basin due to increased regulatory costs and potential
- 223 actions that must be taken to comply with SGMA and is likely to intensify rural decline in this area. With the
- increased cost of this unfunded mandate for monitoring, annual reports and GSP updates, land values will likely
- decline and lower the property tax base.
- The two counties that overlie the BVGB are fulfilling their unfunded mandated role as the Groundwater
- Sustainability Agencies (GSAs) since there are no other viable entities that can serve as GSAs. Both counties have
- severe financial struggles as their populations and tax base are continually declining. The counties not only lack
- 229 the tax revenue generated out of Big Valley to implement SGMA, but they have no buffer from revenue generated
- county-wide to cover such costs. As such, the GSAs are depending almost solely on outside funding sources for
- development and implementation of this Plan.
- 232 With the demise of the timber industry, agriculture has been the only viable industry remaining to support
- residents living and working in the Basin, with many of the families who ranch and farm today having cultivated
- 234 the land for over a century. These families are fighting to maintain the viability and productivity of their land so
- 235 that their children and grandchildren can continue to pursue the rural lifestyle that their forebearers established.
- The ranchers and farmers have developed strategies to enhance the land with not only farming and ranching in
- 237 mind, but also partnerships with state and federal agencies as well as local non-governmental agencies (NGOs).
- The purpose of these partnerships is to maintain and improve the condition of privately-owned land for the
- enhancement of plant and animal populations while addressing invasive plant and pest concerns.
- The Ash Creek Wildlife Area (ACWA) is an example of a local rancher who provided land for conservation efforts
- with an understanding that managed lands promote wildlife enhancement for the enjoyment of all. The California
- Department of Fish and Wildlife (CDFW) has largely left the property unmanaged. (Albaugh 2021, Conner 2021)
- 243 While the ACWA does offer some refuge, most species graze and rear their young on the private lands around the
- Basin which are actively being cultivated because those lands offer better forage and protection from predators.
- 245 Below is an account from the former landowner of how the ACWA property has fared since being sold to the
- 246 government.

248

249

250251

252

253

254255

256257

258

The government bought the ranch as a refuge for birds and wildlife. When I was running cattle on that ranch it was alive with waterfowl. They fed around and amongst the cattle. It was a natural refuge. The cattle kept the feed down so the birds didn't have to worry about predators, and they could feed on the new growth grass. After the government got their hands on it all the fences were removed, at taxpayer expense. In the years since, the meadows have turned into a jungle -- old dead feed and tules. The birds are gone, moved to other ranches where they get protection from skunks and coyotes and other predators that work on waterfowl and wildlife. Under the management of the U.S. Fish and Wildlife the value of the land has been completely destroyed. All those acres of wonderful grass and the irrigation system that for generations have produced food for the people of this country now produce nothing. (Stadtler 2007)

- Recently the CDFW has attempted to manage the property by constructing a 65-acre wetland using their water
- 260 rights from the Big Valley Canal. In conjunction with the project and to more efficiently move adjudicated water
- 261 to users (including ACWA) down-canal, the CDFW constructed a ¾-mile pipeline to replace an unlined portion of
- the canal. The pipeline has purportedly increased flows down-canal of the pipeline from 4cfs to 8cfs. The
- abandoned portion of unlined canal travels through a private land-owner's property. Although CDFW asserts that
- 264 there are no documented water rights holders on the abandoned canal, it has dried that portion of the land-owner's
- property and reduced groundwater recharge there. However, the constructed wetlands likely provide more recharge
- on the ACWA property than the abandoned canal provided on private property. 11 (CDFW 2021)
- Such projects which advance state priorities over private landowners exacerbate the negative sentiments from local
- stakeholders toward state government and make them extremely wary of unintended consequences of government
- programs. This distrust, coupled with the burden imposed on locals through regulations such as SGMA, are some
- of the fundamental reasons why residents of this area generally consider themselves distinct from the rest of the
- state. Furthermore, local political leaders have pointed out that the state is behind on tax payments to the
- 272 disadvantaged counties. (Albaugh 2021)
- The BVGB differs physically from California's other groundwater basins because the climate sees extreme cold.
- On average, there are fewer warm-temperature days, making the growing season considerably shorter than in other
- parts of the state. Ground elevations in the Basin range from about 4,100 to over 5,000 feet, and along with its
- 276 northerly latitude in the state, this creates conditions where snow can fall in any month of the year. According to
- 277 the Farmer's Almanac, the average growing season for the Big Valley Basin is about 101 days. The typical crops
- for the Big Valley Basin are low-land-use-intensity and low-value crops such as native pasture, grass hay, alfalfa
- hay, and rangeland.
- The vast majority of the farmed land utilizes low-impact farming, employing no-till methods to grow nitrogen-
- fixing crops which require little to no fertilizer or pesticide application. While this climate and range of viable
- crops is a challenge to farmers and ranchers, it helps maintain the pristine nature of surface water and groundwater.
- As an example of how local landowners have been good stewards of their water resources, they have participated
- in the Natural Resources Conservation Service's (NRCS's) Environmental Quality Incentives Program (EQIP),
- drilling wells away from streams to encourage watering of cattle outside of riparian corridors. Now these
- additional wells have increased the inventory of wells in the Basin, one of the criteria used by DWR to categorize
- 287 Big Valley as medium priority and subject to the SGMA unfunded mandate of developing a GSP. (Albaugh 2020-
- 288 2021)
- The GSAs are also aware of the impact of poor water stewardship, such as illegal water uses (e.g. unlicensed
- 290 marijuana growers). These operations may utilize groundwater, are known to have illegal diversions of surface
- 291 water and have a negative impact on water quality. However, the counties have not received the state and federal
- support needed to identify, eliminate, and prosecute these operations.
- The Big Valley Basin has a population of 1,046 residents and a projected slow growth of 1,086 by 2030. (DWR
- 294 2021a). The largest town (unincorporated community) within the Basin is Adin, California, which had a
- 295 population of 272 residents according to the 2010 Census (USCB 2021). Located in Modoc

¹¹ This paragraph is based on information provided by CDFW and hasn't been verified.

- 296 County, Adin had a 2.43 percent decline in population from 2017 to 2018. Both Modoc and Lassen are
- 297 experiencing a decline in population county-wide (USCB 2021).
- As detailed in this GSP, there are three major beneficial uses of groundwater: agriculture, community/domestic,
- and environmental. However, the importance of agriculture to Big Valley cannot be overstated, as it is the
- economic base upon which community/domestic users rely and provides the habitat for many species important to
- 301 healthy wildlife and biodiversity. Both groundwater and surface water are important to maintaining this ecosystem.
- There are efforts being made to diversify the economic base of the community. While economic diversity of Big
- Valley is not the purview of this GSP, it is acknowledged that at present and for the foreseeable future, the Big
- Valley communities rely almost solely on farming and ranching to support their residents. The financial and
- regulatory impact of implementing SGMA will negatively affect this disadvantaged community. Therefore,
- minimizing the GSP's impact to agriculture while complying with SGMA and working to enhance water supply in
- 307 Big Valley is the thrust of this GSP.

1.2 Sustainability Goal

- The GSAs are developing this GSP to comply with SGMA's unfunded mandates, maintain local control and
- preclude intervention by the State Water Resources Control Board (State Water Board), and prove that the Basin is
- sustainable and should be ranked as low priority. Satisfying the requirements of SGMA generally requires four
- 312 activities:

- 1. Formation of at least one GSA to fully cover the basin (Multiple GSAs are acceptable and Big Valley has two GSAs.)
- 2. Development of this GSP that fully covers the basin
- 3. Implementation of this GSP and management to achieve quantifiable objectives
- 4. Regular reporting to DWR
- Two GSAs were established in the Basin: County of Modoc GSA and County of Lassen GSA, each covering the
- portion of the Basin in their respective jurisdictions. This document is a single GSP, developed jointly by both
- 320 GSAs for the entire Basin. This GSP describes the BVGB, develops quantifiable management criteria that
- accounts for the interests of the Basin's legal beneficial groundwater uses and users, and identifies projects and
- management actions to ensure and maintain sustainability.
- The Lassen and Modoc GSAs developed a Memorandum of Understanding (MOU) which details the coordination
- between the two GSAs. The MOU states that the Big Valley Advisory Committee (BVAC) is to be established to
- provide local input and direction on the development of a GSP. The counties solicited applicants to be members of
- 326 the BVAC through public noticing protocols. Big Valley landowners and residents submitted applications to the
- 327 County Boards of Supervisors, who then appointed the members of the BVAC. The BVAC is comprised of one
- county board member from each county, one alternate board member from each county, and two public applicants
- from each county. The BVAC and county staff have dedicated countless hours to reviewing the data and content of
- 330 the GSP,

largely uncompensated. After careful consideration of the available data and community input from the BVAC and interested parties, the GSAs have developed the following sustainability goal:

The sustainability goal for the Big Valley Groundwater Basin is to maintain a locally governed, economically feasible, sustainable groundwater basin and surrounding watershed for existing and future legal beneficial uses with a concentration on agriculture. Sustainable management will be conducted in context with the unique culture of the basin, character of the community, quality of life of the Big Valley residents, and the vested right of agricultural pursuits through the continued use of groundwater and surface water.

The BVGB sustainability goal will be culminated through DWR's better understanding of the surface-water and groundwater conditions over time and the implementation of projects and management actions described in this GSP. Several areas of identified data gaps have been established and, while an estimated future water budget has been completed, its accuracy is uncertain since many assumptions had to be made due to the lack of available data. The monitoring network established under this Plan includes new and existing monitoring wells, inflow/outflow measurement of surface water, groundwater quality, and land subsidence.

- The implementation of projects such as winter recharge studies currently in progress will help establish the feasibility of immediate actions the GSAs can take to improve Basin conditions. A detailed off-season water availability analysis has not been conducted on the Upper Pit River watershed and this has been identified as a data gap within the Basin. The GSAs are working to locate funds to conduct an off-season and storage-capacity water accounting which will provide the amount of available surface water for potential winter recharge in the Basin. Additional research will be conducted on the available use of non-active surface-water rights for storage. An additional stream gage is being installed where the Pit River enters the Basin and will provide a more accurate accounting of the amount of surface water entering the Big Valley Basin from the Pit River. While better accounting is needed, it should be noted that SGMA and this GSP will not affect existing water rights in the Basin.
- The understanding that has been further engrained by the GSAs is that with proper management, coordination and support from federal and state landowner partners, the Big Valley Basin, which is not currently at risk of overdraft, will remain sustainable for the benefit of all interested parties. The BVGB should be re-ranked as low priority.

1.3 Background of Basin Prioritization

- The Big Valley GSAs are being forced to develop this GSP after exhausting their challenges to the California
 Department of Water Resources' (DWR's) determination that Big Valley qualifies as a medium-priority basin.

 DWR first prioritized the state's basins in 2014, at which time Big Valley was the lowest-ranked medium-priority basin that had to develop a GSP. In 2019, DWR changed their prioritization process and criteria and issued draft and final prioritizations. In the end, Big Valley is still the lowest-ranked medium-priority basin.
- From the draft to final re-prioritization, the Big Valley GSAs recognize the scoring revisions made by DWR for Component 8.b, "Other Information Deemed Relevant by the Department." However, the

- 366 GSAs continue to firmly believe that the all-or-nothing scoring for Component 7.a, regarding documented
- declining groundwater levels, is inconsistent with the premise of SGMA: that prioritization levels recognize
- different levels of impact and conditions across the basins of the state. DWR's adherence to treating all declines
- the same, assigning a fixed 7.5 points for any amount of documented groundwater level decline, renders
- meaningless the degrees of groundwater decline and penalizes those basins experiencing minor levels of decline,
- including Big Valley which has only experienced approximately 0.53 feet per year of groundwater level decline on
- average in the last 38 years.
- Additionally, the GSAs recognize the adjustments made to Component 7.d regarding overall total water quality
- degradation. Noting that degradation implies a lowering from human-caused conditions, the Big Valley GSAs urge
- DWR to further refine the groundwater quality scoring process for Secondary Maximum Contamination Levels
- 376 (MCLs) which are not tied to public health concerns, but rather aesthetic issues such as taste and odor.
- 377 Secondary MCLs which are due to naturally occurring minerals should not be factored into the scoring process. In
- the BVGB, the water quality conditions reflect the natural baseline and are not indicative of human-caused
- degradation and cannot be substantially improved through better groundwater management.
- The inaccurate Basin boundary was drawn with a 63-year old regional scale map (CGS 1958), and subsequent
- geologic maps with more precision and detail are available. Additionally, the "upland" areas outside the Basin
- boundary are postulated to be recharge areas interconnected to the Basin, which is contrary to DWR's definition of
- a lateral basin boundary as being, "...features that significantly impede groundwater flow" (DWR 2016c). The
- 384 GSAs submitted a request to DWR for basin boundary modification to integrate planning at the watershed level
- and leverage a wider array of multi-benefit water management options and strategies within the Basin and larger
- watershed. DWR's denial of the boundary modification request greatly hampers jurisdictional opportunities to
- protect groundwater recharge areas in higher elevations. The final boundary significantly curtails management
- options to increase supply through upland recharge, requiring that groundwater levels be addressed primarily
- through demand restrictions. See Appendix 1A for communications with DWR regarding Basin prioritization
- ranking and boundary modification. Due to information that has come to light during this process, the Basin
- boundary has been shown to be inaccurate. The GSAs will submit a Basin boundary modification.
- Development of this GSP by the GSAs, in partnership with the BVAC and members of the community, does not
- 393 constitute agreement with DWR's classification as a medium-priority basin nor does it preclude the possibility of
- other actions by the GSAs or by individuals within the Basin seeking regulatory relief.

1.3.1 Timeline

- In September 2014, the state of California enacted SGMA. This law requires medium- and high-priority
- groundwater basins in California to take actions to ensure they are managed sustainably. DWR is tasked with
- prioritizing all 515 defined groundwater basins in the state as high-, medium-, low- and very-low- priority.
- Prioritization establishes which basins need to go through the process of developing a GSP. When SGMA was
- 400 passed, basins had already been prioritized under the California Statewide

Groundwater Elevation Monitoring (CASGEM) program, and that existing ranking process was used as the initial priority baseline for SGMA.

DWR was required to develop its rankings for SGMA based on the first seven criteria listed in **Table 1-1**. For the final SGMA scoring process, groundwater basins with a score of 14 or greater (up to a score of 21) were ranked as medium-priority basins (DWR 2019). Big Valley scored 13.5 and DWR chose to arbitrarily round the score up to put it in the medium-priority category as the lowest ranked Basin in the state required to develop a GSP. Lassen County reviewed the 2014 ranking process and criteria that were used and found erroneous data. The County made a request to DWR for the raw data that was used, which were eventually provided, and verified the error that would have put the BVGB into the low priority category. However, because the comment period for these rankings had already expired in 2014 (prior to the passage of SGMA), DWR would not revise their ranking. County staff were misled because when the rankings were first publicized, SGMA had not yet existed, and County staff were told that being ranked as a medium priority basin was insignificant and would actually be a benefit to the counties.

Table 1-1 Big Valley Groundwater Basin Prioritization

Table 1-1 Big Valley Groundwater Basin Prioritization					
Criteria	2014	2018	2019	Comments	
2010 Population	1	1	1		
Population Growth	0	0	0		
Public Supply Wells	1	1	1		
Total # of Wells	1.5	2	2	Existing information inaccurate and includes all types of wells, including newly constructed stockwatering wells under EQIP	
Irrigated Acreage	4	3	3		
Groundwater Reliance	3	3.5	3.5		
Impacts	3	3	2	Declining water levels, water quality	
Other Information	0	7	2	Streamflow, habitat, and "other information determined to be relevant"	
Total Score	13.5	20.5	14.5	Medium priority each year	

Source: DWR 2019

403

404

405

406

407

408

409

410 411

412

413

Once SGMA was passed and the onerous repercussions of being ranked as medium priority were better understood (and the counties identified erroneous data), DWR did not offer any recourse, simply saying the Big Valley Basin would remain ranked as medium priority and that the basins would soon be re-prioritized anyway.

In 2016, Lassen County submitted a request for a basin boundary modification as allowed under SGMA. The request was to extend the boundaries of the BVGB to the boundary of the watershed. The purpose of the proposed modification was to enhance management by including the volcanic areas surrounding the valley sediments, including federally managed timberlands and rangelands, that have an impact on

- groundwater recharge. The modification was proposed on a scientific basis but was denied by DWR because the
- request, "...did not include sufficient detail and/or required components necessary and evidence was not provided
- 423 to substantiate the connection [of volcanic rock] to the porous permeable alluvial basin, nor were conditions
- presented that could potentially support radial groundwater flow as observed in alluvial basins." DWR therefore
- justifies denial based on inadequate scientific evidence, yet as stated above they used inaccurate, unscientific
- information to rank the Basin as medium priority in the first place.
- In 2018, DWR released an updated draft basin prioritization based on the eight components shown in **Table 1-1**
- using slightly different data and methodology than previously used. For this prioritization, Big Valley's score
- increased from 13.5 to 20.5, primarily because of an addition of 5 ranking points awarded under the category of
- "other information determined to be relevant" by DWR. DWR's justification for the five points was poorly
- substantiated as "Headwaters for Pit River/Central Valley Project Lake Shasta." Lassen and Modoc counties sent
- a joint comment letter questioning DWR's justification and inconsistent assessment of these five points as well as
- 433 their methodology for awarding the same number of points for water level and water quality impacts to basins
- 434 throughout the state regardless of the severity of the impacts.
- In 2019, DWR released their final prioritization with the BVGB score reduced to 14.5, but still ranked as medium
- priority and subject to the development of a GSP. DWR's documentation of the 2019 prioritization can be viewed
- on their website (DWR 2019).

- 438 Meanwhile, throughout this time, Lassen and Modoc counties began moving forward to comply with SGMA
- unfunded mandates through a public process that established them as the GSAs in 2017. The establishing
- resolutions forming the GSAs adopted findings that it was in the public interest of both counties to maintain local
- control by declaring themselves the GSA for the respective portion of the Basin. The Water Resources Control
- Board would become the regulating agency if the counties did not agree to be the GSAs since there were no other
- local agencies in a position or qualified to assume GSA responsibility. The counties obtained state grant funding to
- develop the GSP in 2018 and began the GSP development process and associated public outreach in 2019.

1.4 Description of Big Valley Groundwater Basin

- The BVGB is identified by DWR in Bulletin 118 as Basin No. 5-004 (DWR, 2016a). The inaccurate Basin
- boundary was drawn by DWR using a 1:250,000 scale geologic map produced by the California Geological
- Survey (CGS 1958) along the boundary between formations labeled as volcanic and those labeled as alluvial. The
- Basin boundary was not drawn with as much precision as subsequent geologic maps, and because of this the
- "uplands" areas outside the Basin boundary are postulated to be recharge areas interconnected to the Basin. The
- 451 63-year old map being used to define the Basin boundary is inadequate and contrary to DWR's definition of a
- lateral basin boundary as being "features that significantly impede groundwater flow" (DWR 2016c).
- 453 The Basin is one of many small, isolated basins in the northeastern region of California, an area with widespread
- volcanic formations, many of which produce large quantities of groundwater and are not

- included within the defined groundwater basin due to their classification as "volcanic" rather than "alluvial."
- The boundary between Lassen and Modoc counties runs west-east across the Basin. Each county formed a GSA
- 457 for its respective portion of the Basin and the counties are working together to manage the Basin under a single
- 458 GSP. The Basin, shown on **Figure 1-1**, encompasses an area of about 144 square miles with Modoc County
- comprising 40 square miles (28%) on the north and Lassen County comprising 104 square miles (72%) on the
- south. The Basin includes the towns of Adin and Lookout in Modoc County and the towns of Bieber and Nubieber
- in Lassen County. The ACWA is located along the boundary of both counties, occupying 22.5 square miles in the
- center of the Basin encompassing the marshy/swampy areas along Ash Creek.
- The BVGB, as drawn by DWR, is isolated and does not share a boundary with another groundwater basin.
- However, Ash Creek flows into Big Valley from the Round Valley Groundwater Basin at the town of Adin.
- Despite the half-mile gap of alluvium which may provide subsurface flow between the two basins, DWR doesn't
- consider them interconnected due to the way the basin boundary was defined.
- The surface expression of the Basin boundary is defined as the contact of the valley sedimentary deposits with the
- surrounding volcanic rocks. The sediments in the Basin are comprised of mostly Plio-Pleistocene alluvial deposits
- 469 and Quaternary lake deposits eroded from the volcanic highlands and some volcanic layers interbedded within the
- alluvial and lake deposits. The Basin is surrounded by Tertiary- and Miocene-age volcanic rocks of andesitic,
- basaltic, and pyroclastic composition. These volcanic deposits may be underlain by alluvial deposits in these
- 472 upland areas. The boundary between the BVGB and the surrounding volcanic rocks generally correlates with
- change in topography along the margin of the valley.
- Throughout the development of this GSP, the inaccuracies of the Basin boundary have become clear and revisions
- 475 to the boundary are needed. The hydrogeology of Big Valley is complex and requiring an all-or-nothing (inside or
- outside Basin Boundary), one-size-fits-all approach to the Basin under SGMA does not sit well with stakeholders
- and will be difficult to implement by the GSAs.

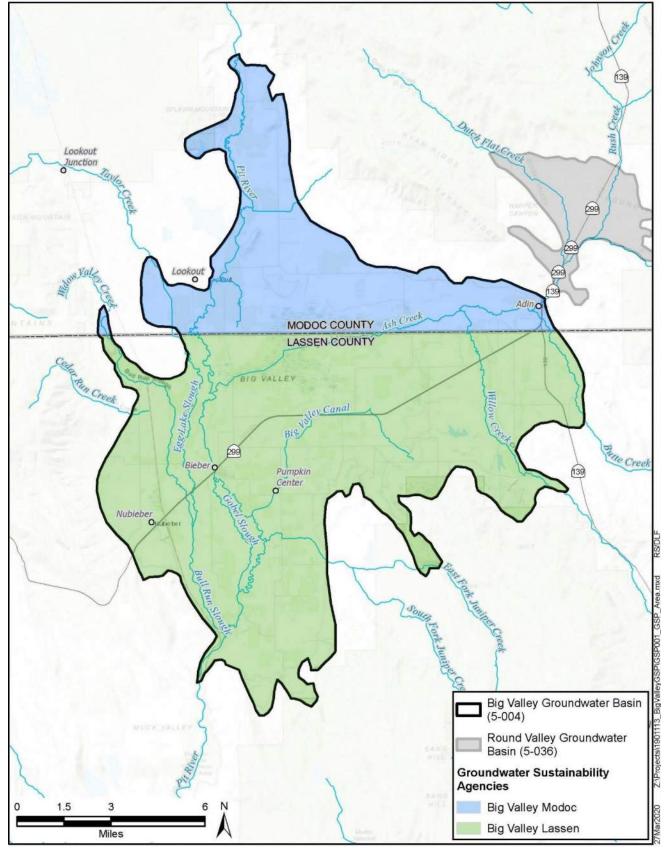


Figure 1-1 Big Valley Groundwater Basin, Surrounding Basins and GSAs Source: DWR 2018d

479

2. Agency Information § 354.6

- The two Big Valley GSAs were established for the entire BVGB to jointly develop, adopt, and implement a single
- 483 mandated GSP for the BVGB pursuant to SGMA and other applicable provisions of law.

2.1 Agency Names and Mailing Addresses

The following contact information is provided for each GSA pursuant to California Water Code (CWC) §10723.8.

Modoc County 204 S. Court Street Alturas, CA 96101 (530) 233-6201 tiffanymartinez@co.modoc.ca.us

Lassen County
Department of Planning and Building Services
707 Nevada Street, Suite 5
Susanville, CA 96130
(530) 251-8269

landuse@co.lassen.ca.us

2.2 Agency Organization and Management Structure

- The two GSAs, Lassen and Modoc counties, were established in 2017 as required by the unfunded SGMA-
- 488 mandated legislation. Appendix 2A contains the resolutions forming the two agencies. Each GSA is governed by a
- five-member Board of Supervisors. In 2019, the two GSAs established the BVAC through an MOU, included as
- 490 **Appendix 2B**. The membership of the BVAC is comprised of:
 - one member of the Lassen County Board of Supervisors selected by said Board.
 - one alternate member of the Lassen County Board of Supervisors selected by said Board.
 - one member of the Modoc County Board of Supervisors selected by said Board.
 - one alternate member of the Modoc County Board of Supervisors selected by said Board.
 - two public members selected by the Lassen County Board of Supervisors. Said members must either reside or own property within the Lassen County portion of the BVGB.
 - two public members selected by the Modoc County Board of Supervisors. Said members must either reside or own property within the Modoc County portion of the BVGB.
 - The decisions made by the BVAC are not binding, but the committee serves the important role of providing formalized, local stakeholder input and guidance to the GSA governing bodies, GSA staff and consultants in developing and implementing the GSP.

481

484

486

491

492

493

494

495

496

497

498

499

500

2.3 Contact Information for Plan Manager

- The plan manager is from Lassen County and can be contacted at:
- 505 Gaylon Norwood
- 506 Assistant Director
- 507 Lassen County Department of Planning and Building Services
- 508 707 Nevada Street, Suite 5
- 509 Susanville, CA 96130
- 510 (530) 251-8269

512

511 gnorwood@co.lassen.ca.us

2.4 Authority of Agencies

- The GSAs were formed in accordance with the requirements of CWC §10723 et seq. Both GSAs are local public
- agencies organized as general law counties under the State Constitution and have land-use responsibility for their
- respective portions of the Basin. The resolutions of formation for the GSAs are included in **Appendix 2B**.

2.4.1 Memorandum of Understanding

- In addition to the MOU establishing the BVAC, the two GSAs may enter into an agreement to jointly implement
- the GSP for the Basin. However, this agreement is not a SGMA requirement.

3. Plan Area § 354.8

519

Area of the Plan 3.1 520 521 This GSP covers the BVGB, which is located within Modoc and Lassen counties and is about 144 square miles 522 (92,057 acres). The Basin is a broad, flat plain extending about 13 miles north to south and 15 miles east to west and consists of depressed fault blocks surrounded by tilted fault-block ridges. The BVGB is designated as basin 523 number 5-004 by the DWR and was most recently described in the 2003 update of Bulletin 118 (DWR 2003): 524 The basin is bounded to the north and south by Pleistocene and Pliocene basalt and 525 Tertiary pyroclastic rocks of the Turner Creek Formation, to the west by Tertiary 526 rocks of the Big Valley Mountain volcanic series and to the east by the Turner 527 Creek Formation. 528 The Pit River enters the Basin from the north and exits at the southernmost tip of 529 the valley through a narrow canyon gorge. Ash Creek flows into the valley from 530 Round Valley and disperses into Big Swamp. Near its confluence with the Pit 531 River, Ash Creek reforms as a tributary at the western edge of Big Swamp. Annual 532 precipitation ranges from 13 to 17 inches. 533 Communities in the Basin are Nubieber, Bieber, Lookout, and Adin which are categorized as census-designated 534 places. Highway 299 is the most significant east-to-west highway in the Basin, with Highway 139 at the eastern 535 border of the Basin. Figure 3-1 shows the extent of the GSP area (the BVGB), as well as the significant water 536 bodies, communities, and highways. 537 Lassen and Modoc counties were established as the exclusive GSAs for their respective portions of the Basin in 538 2017. Figure 3-1 shows the two GSAs within the Basin. Round Valley Basin (5-036) is a very low-priority basin 539 to the northeast; DWR does not consider it to be connected to Big Valley Basin, but there is a half-mile-wide gap 540 of alluvium between the basins. The ACWA occupies 22.5 square miles (14,400 acres) in the center of Big Valley. 541 No other GSAs are associated with the Basin, nor are there any areas of the Basin that are adjudicated or covered 542 by an alternative to a GSP. Landowners have the right to extract and use groundwater beneath their 543

property.

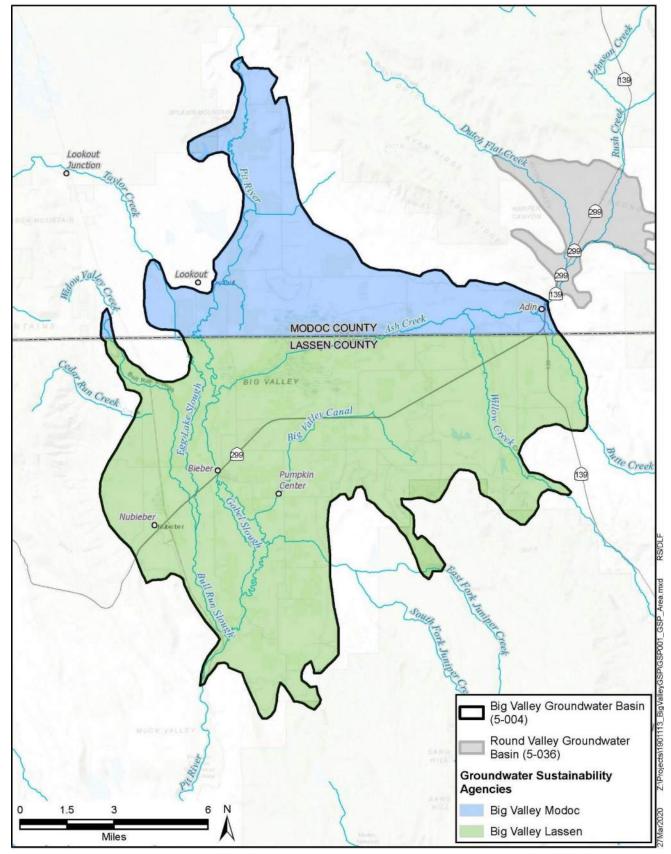


Figure 3-1 Source: DWR 2018d Area Covered by the GSP

3.2 Jurisdictional Areas

- In addition to the GSAs, other entities have water management authority or planning responsibilities in the Basin,
- as discussed below. A map of the jurisdictional areas within the Basin is shown on **Figure 3-2**.

3.2.1 Superior Courts

548

563

- SGMA does not alter existing water rights. Therefore, water use in the Basin exists within the confines of state
- water law and existing water rights. These rights are ultimately governed by court decisions. In Big Valley, two
- decrees govern much of the surface-water rights allocations: Decree 3670 (1947) for Ash Creek and Decree 6395
- 555 (1959) for the Pit River. Any changes to these and any other judgments relevant to Big Valley would have to go
- through the Superior Court of Modoc County.

3.2.2 Federal Jurisdictions

- The U.S. Bureau of Land Management (BLM) and the U.S. Forest Service (USFS or Forest Service) have
- jurisdiction over land within the Basin including portions of the Modoc National Forest, shown on **Figure 3-2**.
- Information on their Land and Resource Management Plan is described in Section 3.8. The Forest Service Ranger
- Station in Adin is a non-community public water supplier with a groundwater well, identified as Water System No.
- 562 CA2500547 (SWRCB 2021).

3.2.3 Tribal Jurisdictions

- The U.S. Bureau of Indian Affairs (BIA) Land Area Representations database identifies one tribal property in the
- BVGB (BIA 2020a). Lookout Rancheria, shown on **Figure 3-2**, is associated with the Pit River Tribe. There are
- other "public domain allotments" or lands held in trust for the exclusive use of individual tribal members within
- the Basin not shown (BIA 2020b).

568 3.2.4 State Jurisdictions

The CDFW has jurisdiction over the ACWA, as shown on **Figure 3-2**.

3.2.5 County Jurisdictions

- The County of Modoc and the County of Lassen have jurisdiction over the land within the Basin in their respective
- counties as shown on Figure 3-1 and Figure 3-2. Information on their respective General Plans is provided in
- Section 3.7 Land Use Plans. Within the Basin, Modoc County includes the census-designated community of
- Adin and part of the community of Lookout. Lassen County contains the census-designated communities of Bieber
- 575 and Nubieber.

576

3.2.6 Agencies with Water Management Responsibilities

577 Upper Pit Integrated Regional Water Management Plan

- Big Valley lies within the area of the Upper Pit Integrated Regional Water Management Plan (IRWMP), which
- was developed by the Regional Water Management Group (RWMG). The IRWMP is managed by the North Cal-
- Neva Resource Conservation and Development Council (North Cal-Neva), a member of the RWMG along with 27
- other stakeholders. Other stakeholders include community organizations,

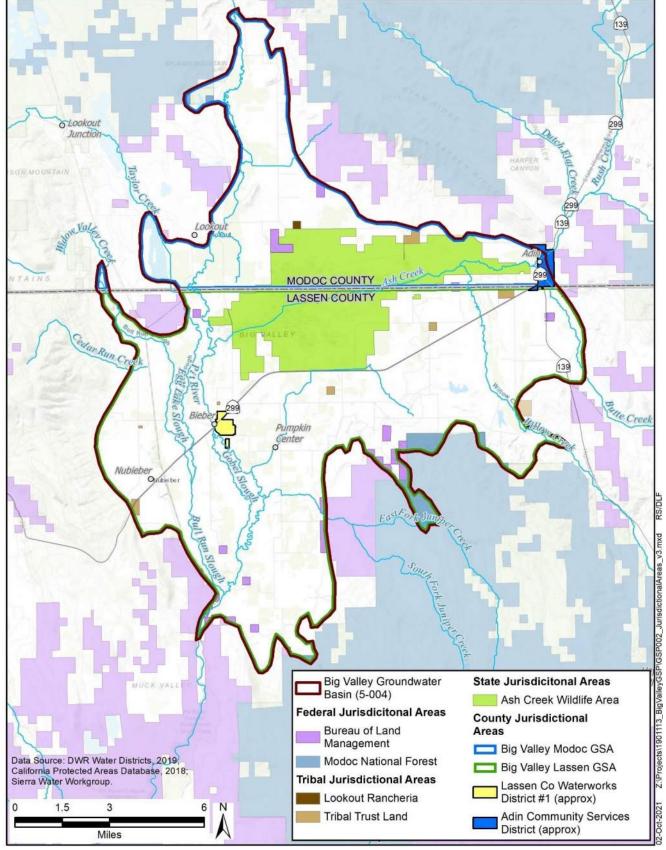


Figure 3-2 Jurisdictional Areas

- environmental stewards, water purveyors, numerous local, county, state and federal agencies, industry, the
- University of California, and the Pit River Tribe. The IRWMP addresses a 3-million-acre watershed across four
- counties in northeastern California. Figure 3-3 shows the Upper Pit IRWMP boundary and the BVGB's location
- in the center of the IRWMP area. **Figure 3-3** also shows the complete watershed that flows into the BVGB and the
- local watershed area. At 92,057 acres, the BVGB comprises about 3 percent of the IRWMP area at its center.
- The IRWMP was established under the Integrated Regional Water Management Act (Senate Bill [SB]1672) which
- was passed in 2002 to foster local management of water supplies to improve reliability, quantity and quality, and
- 591 to enhance environmental stewardship. Several propositions were subsequently passed by voters to provide
- funding grants for planning and implementation. Beginning in early 2011, an IRWMP was developed for the
- Upper Pit River area and was adopted in late 2013. During 2017 and 2018, the IRWMP was revised according to
- 594 2016 guidelines.

Lassen-Modoc County Flood Control and Water Conservation District

- The Lassen-Modoc County Flood Control and Water Conservation District (District) was established in 1959 by
- 597 the California Legislature and was activated in 1960 by the Lassen County Board of Supervisors (LAFCo 2018).
- The entirety of the Lassen and Modoc counties portions of the Basin is covered by the District, extending from the
- common boundary northward beyond Canby and Alturas, as shown on Figure 3-3. In 1965, the District
- established Zone 2 in a nearly 1000-square mile area encompassing and surrounding Big Valley. In 1994, the
- District designated boundaries for management Zone 2A for, "...groundwater management including the
- exploration of the feasibility of replenishing, augmenting and preventing interference with or depletion of the
- subterranean supply of waters used or useful or of common benefit to the lands within the zone" (LAFCo 2018).
- These zones are shown on **Figure 3-4**.

605 Watermasters

- Two entities measure water diversions for reporting to the State Water Resources Control Board (SWRCB). These
- 607 include the Big Valley Water Users Association (BVWUA) and the Modoc County Watermaster. The boundaries
- of these two entities are shown on **Figure 3-4**. Numerous private parties also measure and report their water
- 609 diversions.

610

616

Lassen County Waterworks District #1

- 611 Lassen County Waterworks District #1 (LCWD #1) was established in 1932 originally for the purpose of fire
- protection. Homes started being added to the system in the 1940s. Eventually all residential and commercial
- properties became part of the system, with most properties leaving their private wells unused. LCWD #1 now
- provides both water and sewer services to the customers within its boundary shown on **Figure 3-2**. (Hutchinson
- 615 2021)

Adin Community Services District

- Adin Community Services District provides wastewater services to the town of Adin. The district boundary is
- shown on **Figure 3-2**.

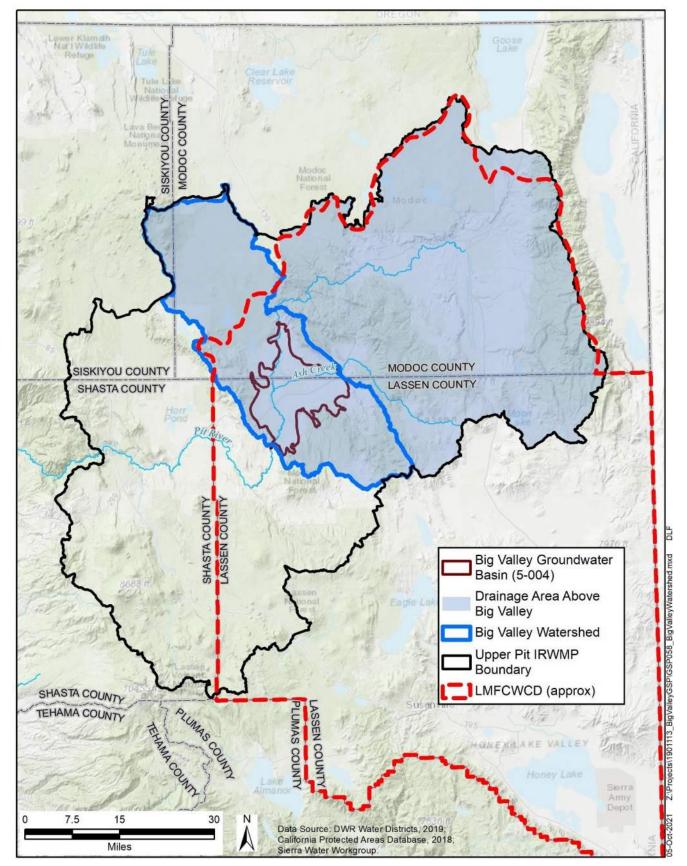


Figure 3-3 Upper Pit IRWMP, Watershed, and LMFCWCD Boundaries

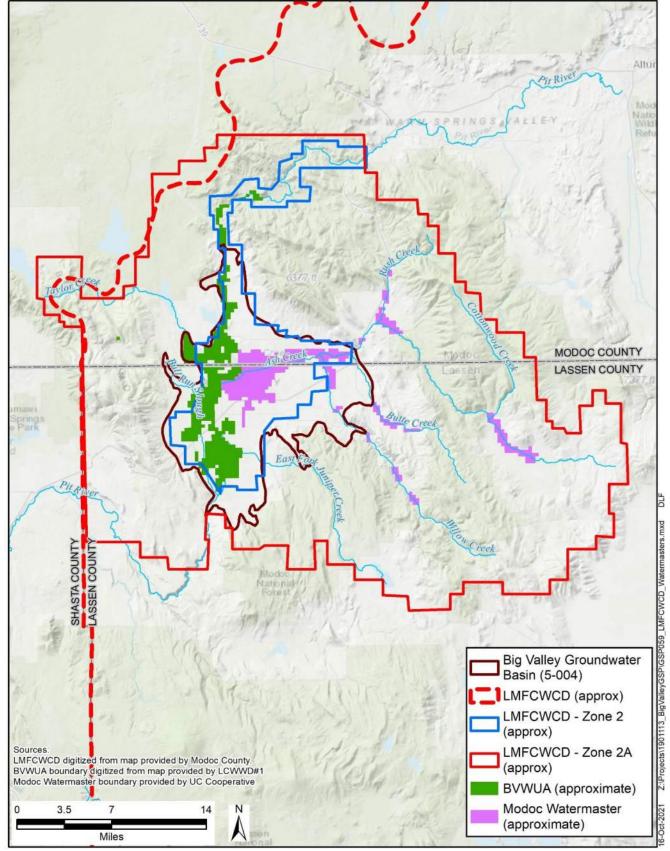


Figure 3-4 LMFCWCD Zones and Watermaster Service Areas

3.3 Land and Water Use

- This section describes land use in the BVGB, water use sectors, and water source types using the best available
- data. The most recent, best available data for distinguishing surface-water and groundwater uses comes from DWR
- land-use datasets. This data is developed by DWR "...to serve as a basis for calculating current and projected
- water uses" (DWR 2021d). Surveys performed prior to 2014 were developed by DWR using some aerial imagery
- with field verification. These previous surveys also included DWR's estimate of water source.
- Since 2014, DWR has developed more sophisticated methods of performing the surveys with a higher reliance on
- remote sensing information. These more recent surveys do not make available the water source. **Table 3-1** is a
- listing of the years for which surveys are available.

Table 3-1 Available DWR Land Use Surveys

Modoc County	Lassen County	Water Source Included				
Yes	Yes	Yes				
Yes	No	Yes				
No	Yes	Yes				
Yes	Yes	No				
Yes	Yes	No ^a				
	Yes Yes No Yes	Yes Yes Yes No No Yes Yes Yes				

Note:

Source: DWR 2020d

634

635

641

642

643

644

645

646

647

648649

650

624

- Land use in the BVGB is organized into the water use sectors listed in **Table 3-2**. These sectors differ from
- DWR's water use sectors identified in Article 2 of the GSP regulations because DWR's sectors don't adequately
- describe the uses in Big Valley. **Figure 3-5** shows the 2016 distribution of land uses and **Table 3-2** summarizes
- the acreages of each. Several data sources were used to designate land uses as described below, including
- information provided by DWR through a remote sensing process developed by Land IQ (DWR 2016d). Other data
- sources are described below.
 - Community This is non-agricultural, non-industrial water use in the census-designated places of Bieber, Nubieber, and Adin, although some of these areas may also have some minor industrial uses. These community areas were delineated using the areas designated as "urban" by DWR (2016d). DWR's data included the areas north and northeast of Bieber (area of the former mill and medical center) as "urban." For this GSP, those areas were re-categorized from urban to industrial, as that is more descriptive of the actual land use. In addition, parcels that make up the core of Nubieber were included as community.
 - Industrial There is limited industrial use in the Basin. The DWR well log inventory shows 6 industrial wells, all located at the inactive mill in Bieber. The areas north and northeast of Bieber, including the former mill and the medical center, have been categorized as industrial. In addition, the parcels associated with railroad operations in Nubieber were added. There is some

^a DWR provided the GSAs a hybrid dataset with the 2011 and 2013 water sources superimposed onto the 2016 land use

- industrial use associated with agriculture, but that is included under the agricultural water use sector.
- **Agricultural** Agricultural use is spread across the Basin and was delineated using DWR's (2016g) landuse data. ¹²
- State Wildlife Area The area delineated in Figure 3-5 is the boundary of the ACWA, located within the center of the Basin. The area includes some wetlands created by the seasonal flow of 6 streams and year-round flow from Ash Creek. The area also has upland ecosystems.
- Managed Recharge Flood irrigation of some fields and natural flooding of lowland areas provides
 recharge to the Basin even though it is not of a formalized nature that would put it into this managed
 recharge category. Some of the future projects and management actions in this GSP include managed
 recharge.
- Native Vegetation Native vegetation is widespread throughout the Basin. Many of the areas under this category also have domestic users. Native vegetation and domestic land uses are categorized together because it is not possible to distinguish between the two with readily available data.
- **Domestic** This sector includes water use for domestic purposes, for users that aren't located in a community service district. Domestic use generally occurs in conjunction with agricultural and native vegetation and is best represented on the map categorized with native vegetation, as most of the agricultural area is delineated by each field and does not include residences.

Table 3-2 2016 Land Use Summary by Water Use Sector

Tuble of Land out Guillinary by Water Goo Gooter						
Water Use Sector	Acres	Percent of Total				
Community ^a	250	<1%				
Industrial	196	<1%				
Agricultural	22,246	24%				
State Wildlife Areab	14,583	16%				
Managed Recharge	-	0%				
Native Vegetation and Rural Domestic ^c	54,782	60%				
Total	92,057	100%				

Notes:

669 670

671

672

651

652

653

654

655

656

657

658

659

660

661

662

663

664

665

666

667

668

Many of the lands within the Basin are enrolled in the Conservation Reserve Program (CRP) and Wetlands Reserve Program (WRP). The CRP is a land conservation program administered by the Farm Service Agency (FSA). In exchange for a yearly rental payment, farmers enrolled in the program agree to promote plant species

673 that will improve environmental health and quality. Contracts for land enrolled

^a Includes the use in the communities of Bieber, Nubieber and Adin

^b Made up of a combination of wetlands and non-irrigated upland areas

^c Includes the large areas of land in the Valley which have domestic wells interspersed Source: Modified from DWR 2020d

¹² This dataset has been identified as being inaccurate and has been included as a data gap.

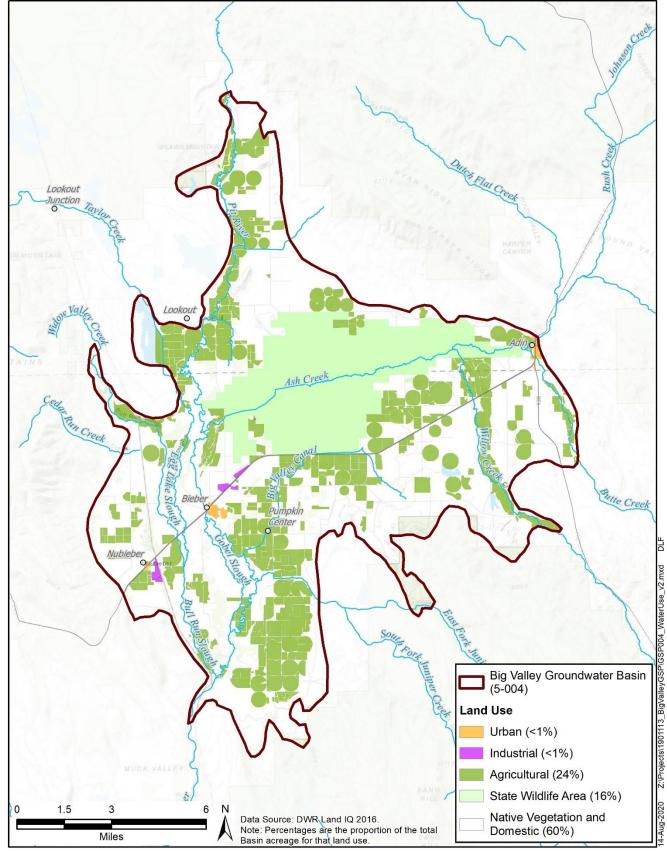


Figure 3-5 Land Use by Water Use Sector

- in the CRP vary in length. The WRP is a similar program for wetlands and was available for enrollment until
- February 7, 2014. Land enrolled in the program before the end date continues to be enrolled until the termination
- of the contract.
- In addition to the uses described above, the Big Valley GSAs are aware of illegal land-use activity within the Basin
- (i.e., unlicensed marijuana cultivation), which is likely having a negative impact on surface-water quality and
- quantity within the Basin and watershed. This illegal activity is occurring both within the alluvial portion of the
- Basin and the upstream watershed and may utilize groundwater and/or illegal diversions of surface water for
- cultivation. Lassen and Modoc counties have limited staff to monitor and enforce this situation on private land.
- However, in the last two growing seasons Lassen County Code Enforcement have identified and abated seven
- large-scale commercial marijuana grows within the Basin as public nuisances, and the Lassen County Sherriff has
- eradicated at least two under penal code. Some enforcement action is also within the purview of state and federal
- agencies. These agencies include the Bureau of Cannabis Control, CDFW, State Water Board,
- 689 USFS, and BLM. The GSAs are not aware that these state and federal agencies have taken aggressive enforcement
- action against this illegal activity and according to county staff, the problem is getting noticeably worse over time.
- The timing and volume of water used for illegal marijuana cultivation and extent of the potential contamination
- cannot be quantified at this time.

3.3.1 Water Source Types

- The Basin has two water source types: groundwater and surface water. Recycled water¹³ and desalinated water are
- ont formally utilized in the Basin, nor is stormwater used as a formal, measured supplemental water supply at the
- time of the development of this GSP. Informal reuse of irrigation water occurs with capture and reuse of tail water
- by farmers and ranchers. Storm water is stored in reservoirs for future use as a water source. **Figure 3-6** and shows
- an approximate distribution of water sources to lands throughout the Basin. Chapter 6 Water Budget provides
- details on how the sources were mapped for this figure.
- There are three public water suppliers (as designated by the State Water Board) in the Basin which use
- groundwater: LCWD #1 in Bieber, the Forest Service Ranger Station in Adin, and the California Department of
- Forestry and Fire Protection (CAL FIRE) conservation camp west of the BVGB. The conservation camp is located
- outside the Basin boundary, but their supply well is inside the Basin and the water is pumped to the camp. Many
- domestic users have groundwater wells, but there are some surface-water rights from Ash Creek and the Pit River
- that are designated for domestic use. The ACWA is fundamentally supported by surface water, but the CDFW
- does have three wells that are utilized in the fall for ecological enhancement.

¹³ Recycled water generally refers to treated urban wastewater that is used more than once before it passes back into the water cycle. (WateReuse Association, 2020)

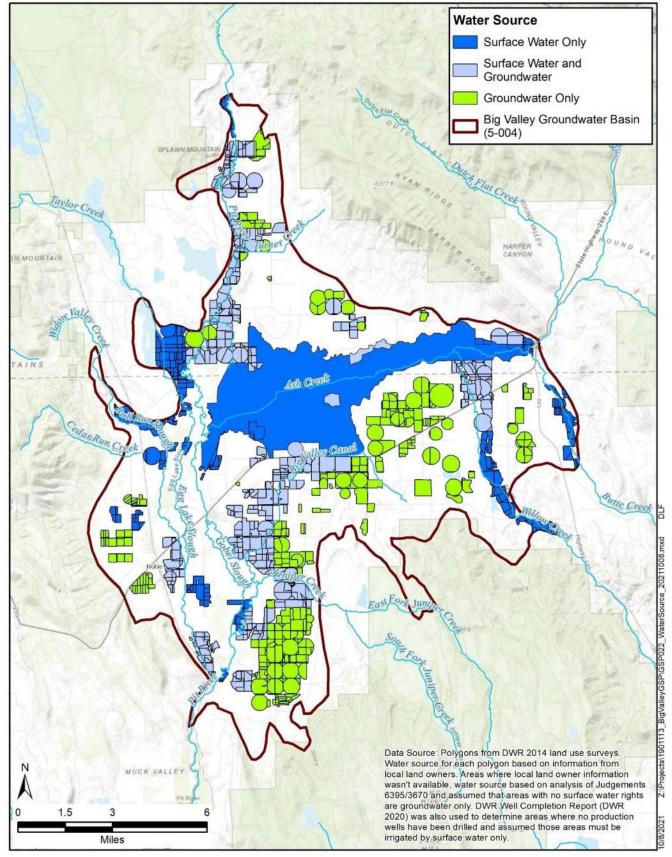


Figure 3-6 Water Sources

3.4 Inventory and Density of Wells

3.4.1 Well Inventory

709

710

713

717

The best available information about the number, distribution and types of wells in Big Valley comes from well

completion reports (WCRs) maintained by DWR. 14 The most recent catalog of WCRs was provided through their

website (DWR, 2018c) as a statewide map layer. This data includes an inventory and statistics about the number of

wells in each section under three categories: domestic, production, or public supply. ¹⁵ **Table 3-3** shows the

unverified number of wells in the BVGB for each county from this data. Many wells may be inactive or abandoned

and this data gap will need to be filled over time. Once this data gap is filled, Basin priority could be affected.

Table 3-3 Well Inventory in the BVGB

WCR 2018 DWR Map Layer		DWR 2015 and 2017 WCR Inventory		ventory	
Type of Well ^a	Lassen County Total Wells	Modoc County Total Wells	Proposed Use of Well ^b	Lassen County Total Wells	Modoc County Total Wells
Domestic	136	81	Domestic	142	79
Production	177	76	Irrigation	157	65
			Stock	11	5
			Industrial	6	0
Public Supply	5	1	Public	5	1
Subtotal =476	318	158	Subtotal = 471	321	150
			Monitor	55	0
			Test	25	29
			Other	7	2
			Unknown	27	7
Total =476	318	158	Total = 623	435	188

Source:

- Lassen and Modoc counties had requested and received WCRs for their areas from DWR during 2015 and 2017,
- respectively. An inventory of the wells was included by DWR. This data source had additional well categories
- included as shown in **Table 3-3**, which are more closely tied to the categories identified by the well drillers when
- each WCR is submitted and provides additional information about the use of the wells.
- The correlation between the 2018 WCR map layer categories and the categories in the 2015 and 2017 WCR
- inventory provided to the counties is indicated in **Table 3-3** by the grey shading. The table shows similar totals
- from the two datasets for the number of domestic, production, and public supply wells. It is unkn

^a DWR 2018 Statewide Well Completion Report Map Layer; downloaded April 2019

^b DWR Well Completion Report Inventories from DWR data provided to the counties in 2015 and 2017

¹⁴ All water-well drillers with a C57 drilling license in California are required to submit a well completion report to DWR whenever a well is drilled, modified, or destroyed.

¹⁵ A section is defined through the public land survey system as a 1 mile by 1 mile square of land.

- own why these two datasets don't match exactly, but both datasets are provided to represent the data available for
- this GSP. As stated earlier, verification of the data in this table needs to occur. This table shows that more than 600
- wells have been drilled, of which 476 are of a type that could involve extraction (e.g., domestic, production, or
- public supply). 16 It is unknown how many wells are actively used, as some portion of them are likely abandoned.
- Abandoned wells no longer in use should be formally destroyed in accordance with state well standards. The 2015
- and 2017 inventory of WCRs showed six well destructions, all on the Lassen County side of the Basin. It should
- be noted that some of the recent wells in the Basin were drilled in cooperation with the EQUIP program to provide
- stock watering outside the riparian area to improve surface-water quality.

3.4.2 Well Density

733

- Figure 3-7, Figure 3-8, and Figure 3-9 show the density of wells in the Basin per square mile for domestic,
- production, and public supply, respectively, based on the 2018 WCR DWR map layer. These maps provide an
- approximation of extraction-well distributions and give a general sense of where groundwater use occurs.
- Figure 3-7 shows that domestic wells are in 74 of the 180 sections (including partial sections) that comprise the
- BVGB. The density varies from 0 to 18 wells per square mile with a median value of two wells per section and an
- average of three wells per section. The highest densities of domestic wells are located near Adin, Bieber and
- Lookout. There are also sections east of Lookout and south of Adin which have high densities. In addition, 22
- 741 wells are present in the four sections around the town of Nubieber. Virtually all the domestic wells in Bieber are no
- longer used since the community water system was developed (Hutchinson 2020-2021).
- Figure 3-8 shows that production wells (primarily for irrigation) are located in 93 of the 180 sections with a
- maximum density of nine wells per section (median: 2 wells per section, average: nearly 3 wells per section). The
- highest densities of production wells are located between the towns of Bieber and Adin, to the southeast of Bieber,
- and one section northeast of Lookout.
- Figure 3-9 shows that public supply wells have been drilled in four sections. It should be noted that the
- designation as a public supply well that is depicted on the map is from the designation provided in the WCR by the
- driller when the well was drilled. The State Water Board identifies three public water suppliers in the BVGB:
- LCWD #1 which is a community system with two wells serve Bieber; the Forest Service station in Adin which
- maintains a well for non-community supply to its employees and visitors; and the CAL FIRE conservation camp
- 752 west of the Basin. These public suppliers account for three of the six public wells with WCRs. The other three are
- either inactive or aren't designated by the State Water Board as public supply. The CAL FIRE conservation camp
- well does not show up as a public supply well in the WCR inventory, but its location is shown on **Figure 3-9**.

Big Valley Groundwater Basin Groundwater Sustainability Plan

¹⁶ It should be noted that the majority of the stock watering wells were drilled in the 2009 to 2014 timeframe as part of the EQIP program to move watering of stock away from stream channels and that this increase in the inventory of wells in the Basin was used by DWR to put Big Valley into the medium prioritization category.

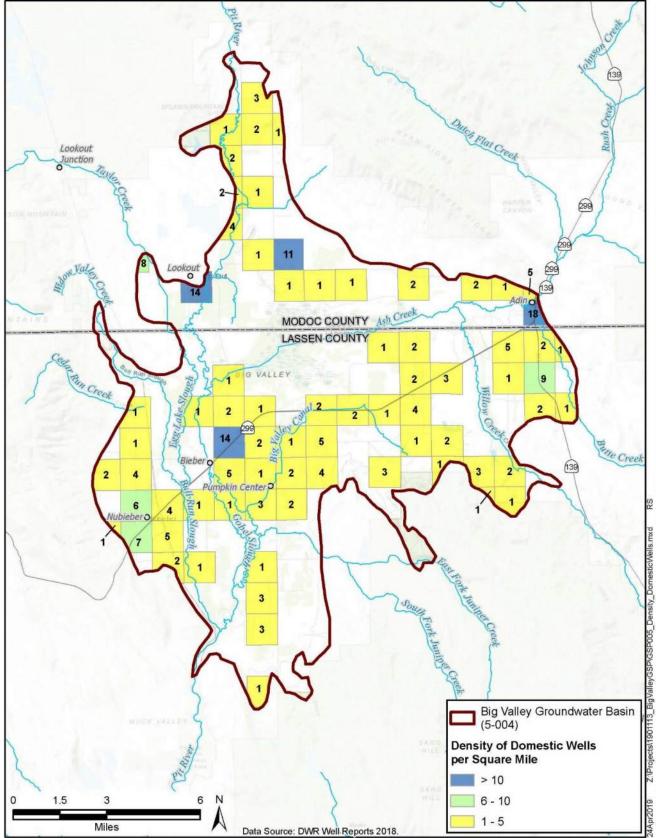


Figure 3-7 Density of Domestic Wells

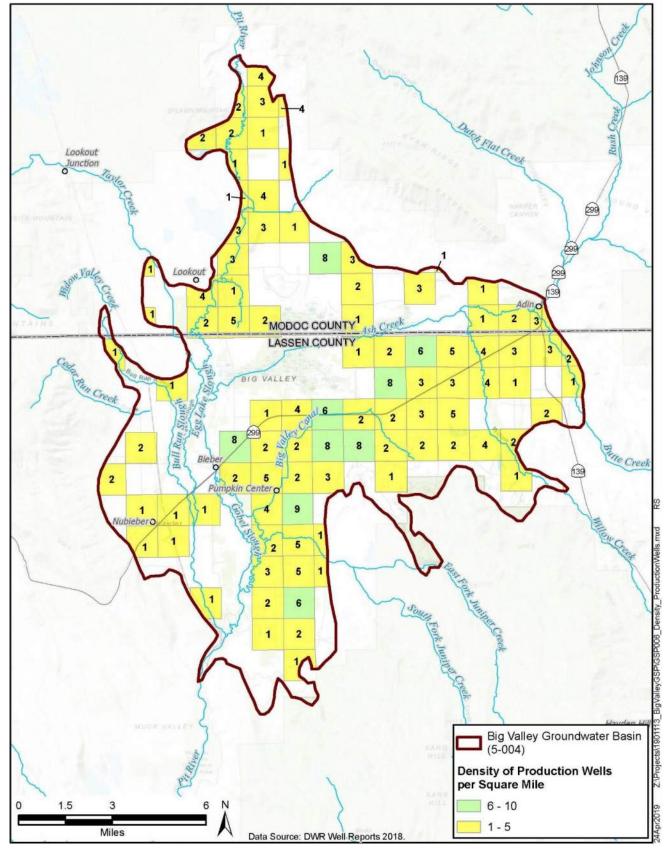


Figure 3-8 Density of Production Wells

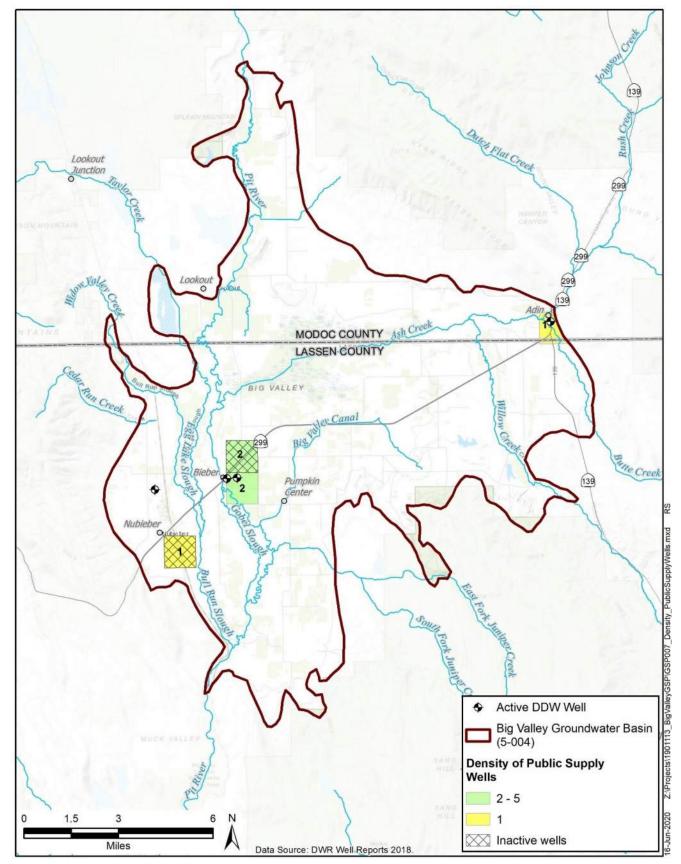


Figure 3-9 Density of Public Supply Wells

3.5 Existing Monitoring, Management and Regulatory Programs

3.5.1 Monitoring Programs

- This section describes the existing monitoring programs for data used in this GSP and describes sources that can
- be used for the GSP monitoring networks.

3.5.1.1 Groundwater Monitoring

767 Levels

761

762

763

766

- Lassen and Modoc counties are the monitoring entities for the CASGEM program. Each county has an approved
- 769 CASGEM monitoring plan which provides for water level measurements twice a year (spring and fall) at 21 wells.
- The monitoring is performed by staff from DWR on behalf of the counties. All but one of the wells have depth
- information, and depths range from 73 to 800 feet below ground surface [ft bgs] (median: 270 ft bgs, mean: 335 ft
- bgs). Figure 3-10 shows the locations of the 21 CASGEM wells and one additional well which has historic data,
- but measurements were discontinued in the 1990s.
- Lassen and Modoc counties drilled five monitoring well clusters between 2019 and 2020. Each cluster consists of
- three shallow wells and one deep well. The locations of these clusters and the depth of the deep well at each site is
- 776 shown on **Figure 3-10**.
- 777 Quality

- Water quality is regulated and monitored under a myriad of programs. **Table 3-4** describes the programs relevant
- to Big Valley. The State Water Board makes groundwater data from many of these programs available on their
- 780 Groundwater Ambient Monitoring and Assessment (GAMA) Groundwater Information System (GAMA GIS)
- website (State Water Board 2019). **Table 3-5** lists and describes the groundwater programs from which historic
- data is available on GAMA GIS. The locations of wells with historic water quality data from GAMA GIS are
- 783 shown on **Figure 3-11**.
- Along with the many programs that monitor surface-water quality, the following are currently in place to monitor
- 785 groundwater quality on an ongoing basis:
 - Public Drinking Water Systems (State Water Board's Division of Drinking Water [DDW])
- Monitoring associated with Underground Storage Tanks (USTs) and Waste Discharge Requirement
- The BVGB contains three active public water suppliers regulated by the DDW: Lassen County Water District #1
- in Bieber, the Forest Service station in Adin, and the CAL FIRE conservation camp west of the Basin. Water
- quality monitoring at wells regulated by the DDW can be used for ongoing monitoring in the Basin, and their
- locations are shown on **Figure 3-11**. At each of five newly-constructed monitoring well clusters, the deep well at
- each site was sampled for water quality after construction. The locations of the well cluster sites are shown on
- 793 **Figure 3-11**.

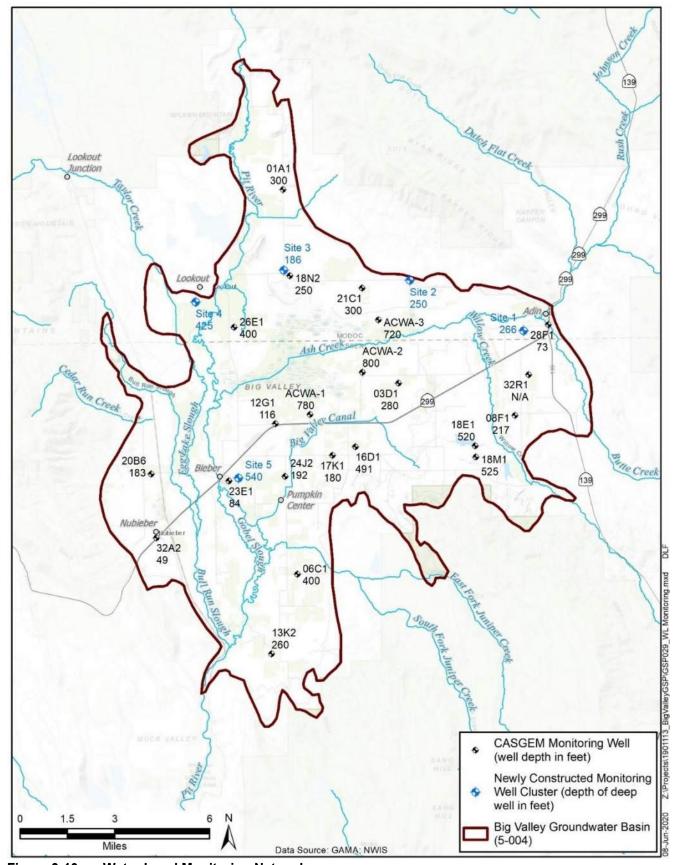


Figure 3-10 Water Level Monitoring Network

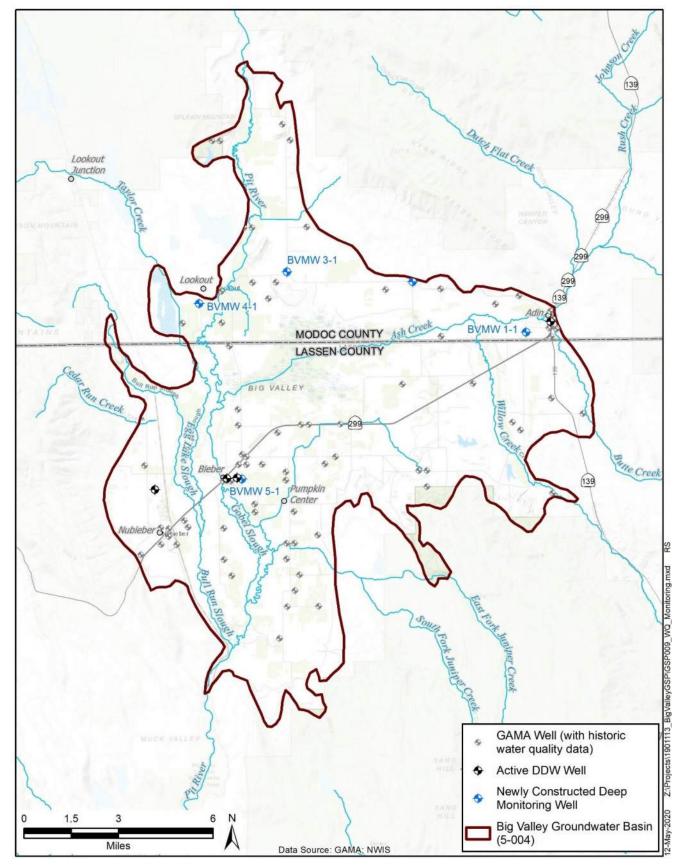


Figure 3-11 Water Quality Monitoring

Table 3-4 Water Quality Monitoring Programs

Program	Description
Irrigated Lands Regulatory Program (ILRP)	Initiated in 2003 to prevent agricultural runoff from impairing surface-waters; in 2012 groundwater regulations were added to the program. To comply with the ILRP, Big Valley growers were forced to join the Northeastern California Water Association (NECWA), which is a sub-watershed coalition of the Northern California Water Association. Growers pay increasing fees to NECWA for monitoring and compliance with the ILRP even though Big Valley farmers grow low intensity crops that generally don't require nitrogen application or cause water quality degradation.
Waste Discharge Requirements (WDR) Program	Also known as the Non-Chapter 15 Permitting, Surveillance and Enforcement Program, this is a mandated program issuing WDRs to regulate the discharge of municipal, industrial, commercial, and other wastes to the land that will, or has the potential to, affect groundwater.
Central Valley Salinity Coalition (CVSC)	Represents the stakeholder groups working with the State Water Board in the CV-SALTS collaborative basin planning process.
RWQCB Basin Plan	Adopted by the Regional Water Board and approved by the State Water Board and the Office of Administrative Law. The U.S. Environmental Protection Agency approves the water quality standards contained in the Basin Plan, as required by the Clean Water Act (CWA).
Public Drinking Water Regulations	Effective July 1, 2018, various sections of California Code of Regulations, Title 27 were revised. Revisions to Title 27 were necessary in order to reorganize, update and incorporate new parameters for administering the Unified Program and accomplishing the objectives of coordination, consolidation and consistency in the protection of human health, safety, and the environment.
Total Maximum Daily Load Program (TMDL) Program	TMDLs are established at the level necessary to implement the applicable water quality standards.
Local Agency Management Programs	These programs regulate Onsite Water Treatment Systems (OWTSs); the programs are designed to "correct and prevent system failures due to poor siting and design and excessive OWTS densities" (RWQCB 2021).
Underground Storage Tank Site Cleanup Program (UST)	The purpose of the UST Program is to protect the public health and safety and the environment from releases of petroleum and other hazardous substances from USTs.
National Pollutant Discharge Elimination System (NPDES)	The NPDES permit program, created in 1972 by the CWA, helps address water pollution by regulating point sources that discharge pollutants to waters of the U.S. The permit provides two levels of control: technology-based limits and water quality-based limits (if technology-based limits are not sufficient to provide protection of the water body).
Nonpoint Source Program (NSP)	NSP focuses and expands the state's efforts over the next 13 years to prevent and control nonpoint source pollution. Its long-term goal is to implement management measures by the year 2013 to ensure the protection and restoration of the state's water quality, existing and potential beneficial uses, critical coastal areas, and pristine areas. The state's nonpoint source program addresses both surface and ground water quality.
Other	Water quality samples are required when a property is sold and when a foster child is placed.

Table 3-5 Datasets Available from State Water Board's GAMA Groundwater Information System

Name	Source
DDW	Division of Drinking Water, State Water Board
DPR	Department of Pesticide Regulation
DWR	California Department of Water Resources
GAMA_USGS	Groundwater Ambient Monitoring and Assessment Program performed by USGS
USGS_NWIS	USGS National Water Information System
WB_CLEANUP	Water Board Cleanup
WB_ILRP	Water Board Irrigated Lands Regulatory Program
Source: GAMA GIS availab	le at https://gamagroundwater.waterboards.ca.gov/gama/gamamap/public/

The Basin has five active groundwater cleanup sites in various stages of assessment and remediation, all located in the town of Bieber. These sites are not appropriate for ongoing monitoring for the GSP because they monitor only the shallow aguifer and represent a localized condition that may not be representative of the overall quality of groundwater resources in the Basin. One of the open sites is the Bieber Class II Solid Waste Municipal Landfill which has ongoing water quality monitoring. The Lookout Transfer Station also has ongoing water quality monitoring but is located outside the boundaries of the BVGB.

- 809 Growers in Big Valley are required to participate in the ILRP, which imposes a fee per acre, through the
- Sacramento Valley Water Quality Coalition (SVWQC). The SVWQC Monitoring and Reporting Plan does not 810
- include any wells within the BVGB. Basin residents have expressed concerns with regulatory programs that 811
- involve costs, especially ongoing costs, particularly for a disadvantaged community. The Goose Lake Basin, which 812
- has similar land use and land-use practices, has been exempted from the ILRP. 813

3.5.1.2 Surface-water Monitoring

Streamflow

802

803

804

805

806

807

808

814

815

822

- Streamflow gages have historically been constructed and monitored within the BVGB, but active, maintained 816
- streamflow gages for streams in BVGB are limited. For the Pit River, the closest active gage that monitors stage 817
- and streamflow is located at Canby, 20 miles upstream of Big Valley. Flow on Ash Creek was measured at a gage 818
- in Adin from 1981 to 1999 and was reactivated in Fall 2019 to provide stream stage data at 15-minute intervals. 819
- There is a gage where the Pit River exits the Basin in the south at the diversion for the Muck Valley Hydro Power 820
- Plant. Stream gages are shown on Figure 3-12. 821

Diversions

- 823 Two watermasters, described below, measure diversions in the BVGB. Those surface-water rights holders who
- 824 divert more than 10 AFY whose rights are not measured by a watermaster must measure and report their diversions
- to the State Water Board. 825

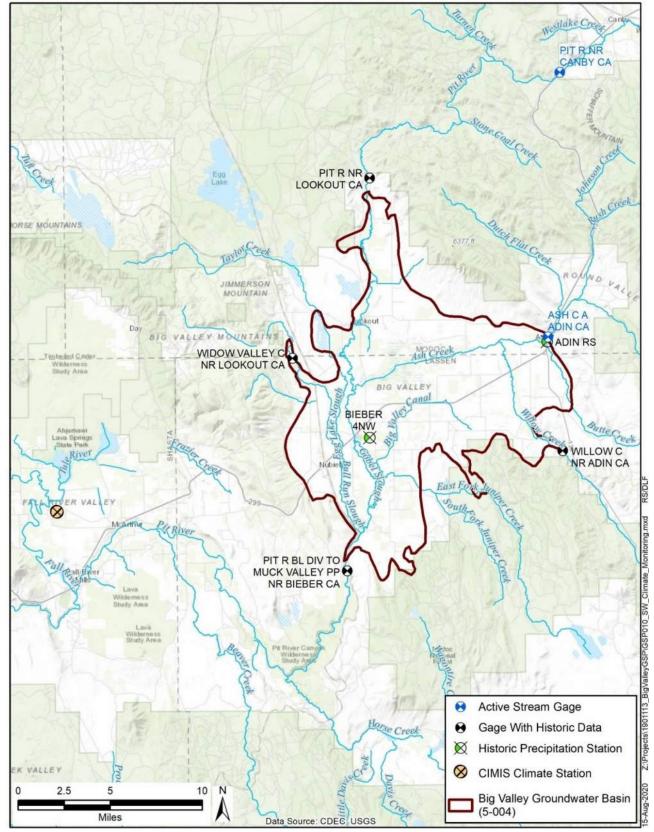


Figure 3-12 Historical Surface-water and Climate Monitoring Network

827

Diversions from the Pit River are detailed in water rights Decree #6395. In 2006, the BVWUA petitioned the 829 Modoc Superior Court who granted permission to separate from the costly state watermaster service. A private 830 watermaster service is now contracted by the BVWUA to administer/distribute allocated 2nd priority rights in 831 conjunction with state watermaster guidelines during the irrigation season (April 1 through September 30) each 832 year as a neutral 3rd party. The watermaster service measures diversions every two weeks and reports the data to 833 each water rights holder. At the end of the irrigation season, the watermaster sends each member a yearly use 834 report. The water rights holder is responsible to submit their reports to the State Water Board. Currently there are 835 five Pit River water rights holders that do not participate in the BVWUA watermaster service. (Hutchinson 2021) 836

Ash Creek water rights are governed by Decree 3670 and Willow Creek by Decree 1237. Ash Creek and Willow Creek are within the Ash Creek Watermaster Service Area (WMSA). The WMSA also includes Butte and Rush Creeks and is under the jurisdiction of the Modoc County Watermaster. The Watermaster files the annual reports to DWR and Modoc County Superior Court. (Modoc County Watermaster 2021)

3.5.1.3 Climate Monitoring

837

838839

840

841

845

846

847

848

849

850

851

The National Oceanic and Atmospheric Administration (NOAA) has two stations located in the Basin: Bieber 4 NW and Adin RS. Neither station is active, thus they only provide historic data. Annual precipitation at the Bieber station is shown for 1985 to 1995 in **Table 3-6**.

Table 3-6 Annual Precipitation at Bieber from 1985 to 1995

Table 3-0	Allitual Frecipitation at Dieber Holli 1903 to 1993
Water Year	Precipitation at Station ID: BBR (inches)
1985	14.1
1986	25.4
1987	11.6
1988	10.9
1989	20.2
1990	16.1
1991	16.5
1992	10.4
1993	28.2
1994	16.3
1995	31.8
Minimum	10.4
Maximum	31.8
Average	18.3

Source: DWR 2021b

The closest California Irrigation Management Information System (CIMIS) station, number 43, is in McArthur, CA, and measures several climatic factors that allow a calculation of daily reference evapotranspiration for the area. This station is approximately 10 miles southwest of the western boundary of the Basin. **Table 3-7** provides a summary of average monthly rainfall, temperature and refe**Error! Reference source not found.** shows annual rainfall for 1984 through 2018. The bar graph along the bottom shows annual precipitation, and the line graph on top shows the cumulative departure from average. The cumulative departure graph indicates when there are dry

periods (downward slope of the line), wet periods (upward slope of the line), and average periods (flat slope of the line). Each time the line graph crosses the dashed line indicates that an average set of years has occurred. A set of average years has occurred between 1983-1997, 1997 to 2010, and 2010 to 2019. The locations of all climate monitoring stations are shown on **Figure 3-12**. Climate monitoring is a data gap that could be filled with a CIMIS station located in the Basin.

Table 3-7 Monthly Climate Data from CIMIS Station in McArthur (1984-2018)

Month	Average Rainfall (inches)	Average ET _o (inches)	Average Daily Temperature (°F)
October	1.4	3.02	49.5
November	2.3	1.21	38.2
December	2.9	0.75	32.1
January	2.5	0.89	32.5
February	2.6	1.57	36.8
March	2.4	3.01	42.4
April	1.8	4.39	48.2
May	1.6	5.93	55.1
June	0.7	7.24	62.8
July	0.2	8.17	69.1
August	0.2	7.18	66.1
September	0.4	5.02	59.5
Monthly Average	1.6	4.03	49.4
Average Water Year	18.8	48.3	49.4

Source: DWR 2020c

3.5.1.4 Subsidence Monitoring

Subsidence monitoring is available in the BVGB at a single continuous global positioning satellite station (P347) on the south side of Adin. P347 began operation in September 2007 and provides daily readings. The five monitoring well clusters constructed in 2019-2020 were surveyed and a benchmark established at each site. These sites can be reoccupied in the future to determine changes in ground elevation at those points if needed. The surveyor's report is included as **Appendix 3A**.

In addition, DWR has provided data processed from InSAR collected by the European Space Agency. The InSAR data currently available provides vertical displacement information between January 2015 and September 2019. InSAR is a promising, cost-effective technique, and DWR will likely provide additional data and information going forward.

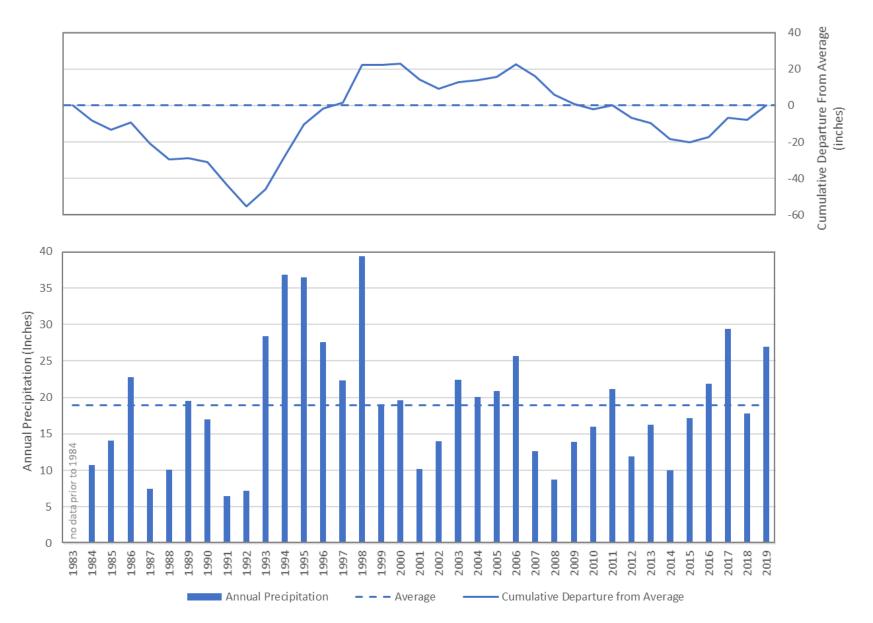


Figure 3-13 Annual Precipitation at the McArthur CIMIS Station

3.5.2 Water Management Plans

- Two water management plans exist that cover the BVGB: the Lassen County Groundwater Management Plan
- 873 (LCGMP) and the Upper Pit River IRWMP.

Lassen County Groundwater Management Plan

- The LCGMP was completed in 2007 and covers all groundwater basins in Lassen County, including the Lassen
- 876 County portion of the BVGB. The goal of the LCGMP is to, "...maintain or enhance groundwater quantity and
- quality, thereby providing a sustainable, high-quality supply for agricultural, environmental and urban use..."
- 878 (Brown and Caldwell 2007). The LCGMP achieves this through the implementation of Basin Management
- Objectives¹⁷ (BMOs), which establish key wells for monitoring groundwater levels and define "action levels,"
- which, when exceeded, activate stakeholder engagement to determine actions to remedy the exceedance. Action
- levels are similar to minimum thresholds in SGMA. A BMO ordinance was passed by Lassen County in 2011 and
- codified in Chapter 17.02.

871

874

883

888

889

890

891

892

893

894

895

896

897

898

899

900

901

902

Upper Pit River Watershed IRWMP

- The Upper Pit IRWMP was adopted by the RWMG in 2013. Twenty-five regional entities were involved in the
- plan development, which included water user groups, federal, state and county agencies, tribal groups, and
- conservation groups. The management of the IRWMP has now transferred to North Cal-Neva who has been
- working to update the IRWMP. The goal of the IRWMP is to:

...maintain or improve water quality within the watershed; maintain availability of water for irrigation demands and ecological needs (both ground and surface water); sustain/improve aquatic, riparian and wetland communities; sustain and improve upland vegetation and wildlife communities; control & prevent the spread of invasive noxious weeds; strengthen community watershed stewardship; reduce river and stream channel erosion and restore channel morphology; support community sustainability by strengthening natural-resource-based economies; support and encourage better coordination of data, collection, sharing and reporting in the watershed; improve domestic drinking water supply efficiency/reliability; address the water-related needs of disadvantaged communities; conserve energy, address the effects of climate variability and reduce greenhouse gas emissions. (NECWA 2017)

The Upper Pit IRWMP contains the entire Watershed above Burney and extends past Alturas to the northeast (see **Figure 3-3**) and includes the entire BVGB. This GSP has been identified as a "Project" in the IRWMP.

3.5.3 Groundwater Regulatory Programs

- The Basin is located within the jurisdiction of the Regional Water Quality Control Board (RWQCB) Region 5 (R5)
- and subject to a Basin Plan, which is required by the CWC (§13240) and supported by the federal Clean Water
- Act. The Basin Plan for the Sacramento River Basin and the San Joaquin River

-

 $^{^{\}rm 17}$ Codified as Chapter 17.02 of Lassen County Code.

- Basin was first adopted by the RWQCB-R5 in 1975. The current version of the Basin Plan was adopted in 2018.
- The Porter-Cologne Water Quality Control Act requires that basin plans address beneficial uses, water quality
- objectives, and a program of implementation for achieving water quality objectives. Water Quality Objectives for
- both groundwater (drinking water and irrigation) and surface water are provided in Chapter 3 of the Basin Plan
- 910 (State Water Board, 2020c).

934

Lassen County Water Well Ordinance

- Lassen County adopted a water well ordinance in 1988 to provide for the construction, repair, modification, and
- destruction of wells in such a manner that the groundwater of Lassen County aquifers will not be contaminated or
- polluted. The ordinance ensures that water obtained from wells will be suitable for beneficial use and will not
- jeopardize the health, safety, or welfare of the people of Lassen County. The ordinance includes requirements for
- permits, fees, appeals, standards and specifications, inspection, log of the well (lithology and casing),
- abandonment, stop work, enforcement, and violations and well disinfection. Lassen County Environmental Health
- Department is responsible for the code enforcement related to wells.
- In 1999, Lassen County adopted an ordinance requiring a permit for export of groundwater outside the county
- 920 (Lassen County Code 17.01).

921 Modoc County Water Well Requirements

- Modoc County Environmental Health Department established its requirements for the permitting of work on water
- wells in 1990, based on the requirements of the CWC (§13750.5). The fee structure was last revised in 2018.
- Modoc County also has an ordinance prohibiting the extraction of groundwater for use outside of the groundwater
- basin from which it was extracted (Title 20 Chapter 20.04).

926 California DWR Well Standards

- 927 DWR is responsible for setting the minimum standards for the construction, alteration, and destruction of wells in
- California to protect groundwater quality, as allowed by CWC §13700 to §13806. DWR began this effort in 1949
- and has published several versions of standards in Bulletin 74, and are working on an update that has yet to be
- released. Current requirements are provided in Bulletin 74-81, Water Well Standards: state of California and in
- 931 Bulletin 74-90 (Supplement) (DWR 2021c). Cities, counties, and water agencies have regulatory authority over
- wells and can adopt local well ordinances that meet or exceed the state standards. Lassen and Modoc Counties are
- the well permitting agencies for their respective portions of the Basin.

Title 22 Drinking Water Program

- The DDW was established in 2014 when the regulatory responsibilities were transferred from the California
- Department of Public Health. DDW regulates public water systems that provide, "...water for human consumption
- through pipes or other constructed conveyances that have 15 or more service connections or regularly serves at
- least 25 individuals daily at least 60 days out of the year," as defined by the Health and Safety Code (§116275(h)).
- DDW further defines public water systems as:

- Community: Serves at least 15 service connections used by year-round residents or regularly serves 25year-round residents. LCWD #1 is a community system that provides groundwater in Bieber.
 - Non-Transient Non-Community: Serves at least the same 25 non-residential individuals during 6 months of the year. The State Water Board classifies the Adin Ranger Station and the Intermountain Conservation Camp as systems in this category which serve groundwater.
 - Transient Non-Community: Regularly serves at least 25 non-residential individuals (transient) during 60 or more days per year. There is no system of this category in the BVGB.
- Private domestic wells, industrial wells, and irrigation wells are not regulated by the DDW.
- The State Water Board-DDW enforces the monitoring requirements established in Title 22 of the California Code
- of Regulations for public water system wells and all the data collected must be reported to the DDW. Title 22
- designates the regulatory limits (e.g., MCLs) for various constituents, including naturally occurring inorganic
- chemicals and metals and general characteristics and sets limits for man-made contaminants, including volatile and
- non-volatile organic compounds, pesticides, herbicides, disinfection byproducts, and other parameters.

3.5.4 Incorporation Into GSP

942

943

944

945

946

953

962

964

- Information in these and other various and numerous programs have been incorporated into this GSP and used
- during the preparation of Sustainability Management Criteria (minimum thresholds, measurable objectives, interim
- milestones) and have been considered during development of Projects and Management Actions.

957 3.5.5 Limits to Operational Flexibility

- While some of the existing management programs and ordinances may have the potential to affect operational
- 959 flexibility, they are not likely to be a factor in the Basin. For example, runoff and stormwater quality is of high
- quality and would not constrain recharge options. Similarly, groundwater export limitations by Lassen County and
- Modoc County would be considered for any decisions in the Basin.

3.6 Conjunctive Use Programs

Formally established conjunctive use programs are not currently operating within the Basin.

3.7 Land Use Plans

- The following sections provide a general description of the land-use plans and how implementation may affect
- 966 groundwater. Section 3.2 Jurisdictional Areas, describes the jurisdictional areas within the BVGB and many of
- 967 these entities have developed land-use plans for their respective jurisdictions. This includes the general plans (GPs)
- for Modoc County and Lassen County and the Modoc National Forest Land and Resource Management Plan.

3.7.1 Modoc County General Plan

969

980

981

982

984

985

986

987

988

989 990

992

- The 1988 Modoc County GP was developed to meet a state requirement and to serve as the "constitution" for the
- community development and use of land. The GP discusses the mandatory elements of a GP, including land use,
- housing, circulation (transportation), conservation and open space, noise and safety, as well as economic
- development and an action program in the county. The GP was intended to serve as a guide for growth and change
- in Modoc County. Under the Conservation Element, Modoc County recognizes the importance of "use-capacity"
- for groundwater, among other issues, and the minimization of "adverse resource-use," such as "groundwater
- 976 mining." The Water Resources section advocates the "wise and prudent" management of groundwater resources to
- support a sustainable economy as well as maintaining adequate supplies for domestic wells for rural subdivisions.
- Groundwater quality was recognized as good to excellent within the county's basins.
- Policy items from the Modoc GP related to groundwater include:
 - Cooperate with responsible agencies and organizations to solve water quality problems
 - Work with the agricultural community to resolve any groundwater overdraft problems
 - Require adequate domestic water supply for all rural subdivisions
- The action program included several general statements for water, including:
 - Initiate a cooperative effort among state and local agencies and special districts to explore appropriate actions necessary to resolve long-term water supply and quality problems in the counties
 - Require as a part of the review of any subdivision approval a demonstration to the satisfaction of the county that the following conditions exist for every lot in the proposed development:
 - An adequate domestic water supply
 - Suitable soil depth, slope, and surface acreage capable of supporting an approved sewage disposal system
- In 2018, a GP amendment was adopted to update the housing element section.

3.7.2 Lassen County General Plan

- The Lassen County GP 2000 was adopted in 1999 by the Lassen County Board of Supervisors (Resolution 99-060)
- to address the requirements of California Government Code Section 65300 et seq and related provisions of
- California law pertaining to GPs. The GP reflects the concerns and efforts of the County to efficiently and
- equitably address a wide range of development issues which confront residents, property owners, and business
- 997 operators. Many of these issues also challenge organizations and agencies concerned with the management of land
- and resources and the provisions of community services within Lassen County.

The goals of the GP are to:

999

1000

1001

1002

1003

1004

1005

1006

- Protect the rural character and culture of Lassen County life
 - Maintain economic viability for existing industries such as agriculture, timber, and mining
 - Promote new compatible industries to provide a broader economic base
 - Create livable communities through carefully planned development which efficiently utilize natural resources and provide amenities for residents
 - Maintain and enhance natural wildlife communities and recreational opportunities
 - Sustain the beauty and open space around use in this effort

The GP addresses the mandatory elements (land use, circulation, housing, conservation, open space, noise, and 1007 safety) via several GP documents and alternate element titles. The 1999 GP elements include land use, natural 1008 resources (conservation), agriculture, wildlife, open space, circulation, and safety. Separate documents were 1009 produced for housing, noise, and energy. The land-use element designates the proposed general distribution and 1010 intensity of uses of the land, serves as the central framework for the entire GP, and correlates all land-use issues 1011 1012 into a set of coherent development policies. The GP land-use map from 1999, shown on Figure 3-14, shows Intensive Agriculture as the dominant land use within the Big Valley area, along with scattered population (small) 1013 centers. Otherwise, Extensive Agriculture is the dominant land use. 1014

Groundwater is addressed in several elements, including agriculture, land use, and natural resources. The GP 1015 identified the BVGB as a 'major ground water basin' due to the operation of wells at over 100 gallons per minute 1016 1017 [gpm]. Moreover, the GP expressed concern about water transfers and their impact on local water needs and 1018 environmental impacts due to the possibility of water marketeers either pumping groundwater from the BVGB into 1019 the Pit River and selling it to downstream water districts or municipalities or using groundwater to augment summer flow through the Delta. The GP recognized that safe yield is dependent on recharge and that overdraft 1020 1021 pumping would increase operating costs due to a greater pumping lift. The GP also recognized that overdraft pumping could result in subsidence and water quality degradation. In addition, the GP referred to 1980s legislation 1022 that authorized the formation of water districts in Lassen County to manage and regulate the use of groundwater 1023 resources and to the 1959 Lassen-Modoc County Flood Control and Water Conservation District, as discussed 1024 1025 above. The SGMA process established the requirements for a GSP in the BVGB and creation of the two GSAs. The land-use element identified several issues related to groundwater, including public services where 62 percent 1026 of rural, unincorporated housing units relied on individual (domestic) wells for their water. 1027

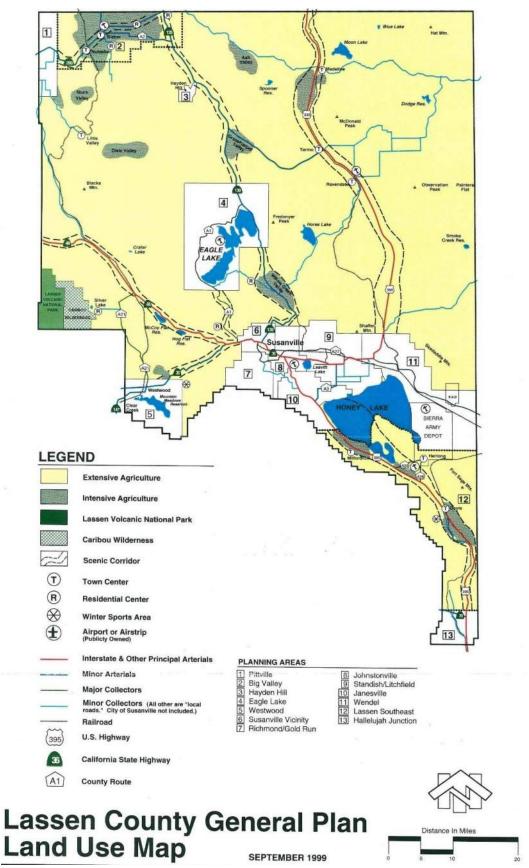


Figure 3-14 Lassen County General Plan Land Use Map

- Another issue included open space and the managed production of resources, which includes areas for recharge of groundwater, among others. The GP referred to the 1972 Open Space Plan, which required that residential sewage disposal systems would not contaminate groundwater supplies. The agriculture element identified an issue with incompatible land uses where agricultural pumping lowers the groundwater level and impacts the use of domestic wells. The wildlife element recognized that changes in groundwater storage could impact wet meadow ecosystems and threaten fish and wildlife species. Groundwater is included in polices under the water resources section of the Natural Resources (NR) and Open Space (OS) Elements, as listed below:
 - NR15 POLICY: Lassen County advocates the cooperation of state and federal agencies, including the State Water Board and its regional boards, in considering programs and actions to protect the quality of ground water and surface-water resources.
 - NR17 POLICY: Lassen County supports measures to protect and ensure the integrity of water supplies and is opposed to proposals for the exportation of ground water and surface waters from ground water basins and aquifers located in Lassen County (in whole or part) to areas outside those basins.
 - Implementation Measure:
 NR-H: Lassen County will maintain ground water ordinances and other forms of regulatory authority to protect the integrity of water supplies in the county and regulate the exportation of water from ground water basins and aquifers in the county to areas outside those basins.
 - NR19 POLICY: Lassen County supports control of water resources at the local level, including the formation of local ground water management districts to appropriately manage and protect the long-term viability of ground water resources in the interest of county residents and the county's resources.
 - OS27 POLICY: Lassen County recognizes that its surface and ground water resources are especially valuable resources which deserve and need appropriate measures to protect their quality and quantity.
 - OS28 POLICY: Lassen County shall, in conjunction with the Water Quality Control Board, adopt specific
 resource policies and development restrictions to protect specified water resources (e.g., Eagle Lake,
 Honey Lake, special recharge areas, etc.) and to support the protection of those resources from
 development or other damage which may diminish or destroy their resource value.
 - Implementation Measure:
 OS-N: When warranted, Lassen County shall consider special restrictions to development in and around recharge areas of domestic water sources and other special water resource areas to prevent or reduce possible adverse impacts to the quality or quantity of water resources.

3.7.3 Modoc National Forest Land and Resource Management Plan

Modoc National Forest lies in the mountain areas surrounding Big Valley to the south and northeast. A small portion of the National Forest extends into the Basin boundary in the south as shown in **Figure 3-2**

- 1063 . The U.S. Forest Service developed their Land and Resource Management Plan in 1991 to, "...guide natural
- resource management activities and establish management standards and guidelines." Regarding water resources,
- the Modoc National Forest Land and Resource Management Plan seeks to "maintain and improve the quality of
- surface water" through the implementation of Best Management Practices (BMPs) among other goals. The plan is
- available on the Modoc National Forest website (USFS 1991).

3.7.4 GSP Implementation Effects on Existing Land Use

The implementation of this GSP is not expected to affect existing designation of land use.

3.7.5 GSP Implementation Effects on Water Supply

- The implementation of this GSP is not expected to influence water supply. Prior to the development of this GSP,
- the counties had established several policies and ordinances for the management of water and land use in the
- BVGB. This GSP will incorporate the previous work and will establish sustainable management criteria to
- 1074 continue the successful use of the groundwater resources during the SGMA implementation period and beyond.

3.7.6 Well Permitting

- Lassen and Modoc counties both require a permit to install a well. The Lassen County Municipal Code (§7.28.030)
- states that, "...no person, firm, corporation, governmental agency or any other legal entity shall, within the
- unincorporated area of Lassen County, construct, repair, modify or destroy any well unless a written permit has
- first been obtained from the health officer of the county." Further, Modoc County Code (§13.12.020) states that,
- "... No person shall dig, bore, drill, deepen, modify, repair or destroy a water well ... without first applying for and
- 1081 receiving a permit..."

1068

1070

1075

1082

1086

1087

1088 1089

1090 1091

1092

1093

1095

1096

3.7.7 Land Use Plans Outside of the Basin

- Areas inside and outside the Basin are subject to the Lassen and Modoc County General Plans or the Modoc
- National Forest Land Resource and Management Plan. Other land-use plans by organizations such as the BLM
- also exist in the watershed.

3.8 Management Areas

SGMA allows for the Basin to be delineated into management areas which:

"...may be defined by natural or jurisdictional boundaries, and may be based on differences in water use sector, water source type, geology, or aquifer characteristics. Management areas may have different minimum thresholds and measurable objectives than the basin at large and may be monitored to a different level. However, GSAs in the basin must provide descriptions of why those differences are appropriate for the management area, relative to the rest of the basin." (DWR 2017)

1094 basin." (DWR 2017)

It should be noted that minimum thresholds and measurable objectives can vary throughout the Basin even without established management areas. The GSAs have not defined management areas within the BVGB.

3.9 Additional GSP Elements, if Applicable

The plan elements from CWC Section 10727.4 require GSPs to address numerous components listed in **Table 3-8**.

The table lists the agency or department with whom the GSA will coordinate or where it is addressed in the GSP.

Table 3-8 Plan Elements from CWC Section 10727.4

Element of Section 10727.4	Approach
(a) Control of saline water intrusion	Not applicable
(b) Wellhead protection areas and recharge areas	To be coordinated with county environmental health departments
(c) Migration of contaminated groundwater	Coordinated with RWQCB
(d) A well abandonment and well destruction program	To be coordinated with county environmental health departments
(e) Replenishment of groundwater extractions	Chapter 9, Projects and Management Actions
(f) Activities implementing, opportunities for and removing impediments to, conjunctive use or underground storage	Chapter 9, Projects and Management Actions
(g) Well construction policies	To be coordinated with county environmental health departments
(h) Measures addressing groundwater contamination cleanup, groundwater recharge, in-lieu use, diversions to storage, conservation, water recycling, conveyance, and extraction projects	Coordinated with RWQCB and in Chapter 9, Projects and Management Actions
(i) Efficient water management practices, as defined in Section 10902, for the delivery of water and water conservation methods to improve the efficiency of water use	To be coordinated with county farm advisors
(j) Efforts to develop relationships with state and federal regulatory agencies	Chapter 8, Plan Implementation
(k) Processes to review land-use plans and efforts to coordinate with land-use planning agencies to assess activities that potentially create risks to groundwater quality or quantity	To be coordinated with appropriate county departments.
(I) Impacts on groundwater-dependent ecosystems	Chapter 5, Groundwater Conditions

1101

1097

4. Hydrogeologic Conceptual Model §354.14

- 1103 A hydrogeologic conceptual model (HCM) is a description of the physical characteristics of a groundwater basin
- related to the hydrology and geology, which defines the principal aquifer based on the best available information.
- The HCM provides the context for the water budget (Chapter 6), sustainable management criteria (Chapter 7), and
- monitoring network (Chapter 8).
- This chapter presents the HCM for the BVGB and was developed by GEI Consultants Inc. (GEI) for the Lassen
- and Modoc GSAs. The content of this HCM is defined by the regulations of SGMA Chapter 1.5, Article 5,
- 1109 Subarticle 2: 354.14.

1102

- 1110 Groundwater characteristics and dynamics in the Basin are variable. Located in a sparsely-populated area, the
- amount of existing data and literature to support this HCM is limited, with the most thorough studies being
- 1112 conducted prior to the 1980s. This HCM provides some limited new data and analyses that further the
- understanding. With that said, there are many data gaps in the HCM that have been identified in this chapter. The
- HCM presents best available information and expert opinion to form the basis for descriptions of elements of this
- GSP: basin boundary, confining conditions, definable bottom, nature of flows near or across faults, soil
- permeability, and recharge potential. Significant uncertainty exists in this HCM, and stakeholders have expressed
- concern about the possible regulatory repercussions associated with making decisions using incomplete and/or
- uncertain information, particularly as the relevance of the information changes under evolving regulatory
- 1119 frameworks.

1123

- Recommendations and options for prioritizing and addressing the data gaps are part of this document. The
- stakeholders in the disadvantaged communities of the BVGB have limited financial means to address data gaps, so
- the data gaps presented at the end of this chapter are contingent on outside funding.

4.1 Basin Setting

- BVGB is located in Lassen and Modoc counties in northeastern California, 50 miles north-northwest of Susanville
- and 70 miles east-northeast of Redding (road distances are greater). Most of BVGB is in Lassen County (72%)
- with the remainder in Modoc County. At its widest points, the BVGB is approximately 21 miles long (north-south)
- in the vicinity of the Pit River and 15 miles wide (east-west) south of ACWA. The Basin has an irregular shape
- totaling about 144 square miles or 92,057 acres. (DWR 2004) The topography of BVGB is relatively flat within
- the central area with increasing elevations along the perimeter, particularly in the eastern portions where Willow
- and Ash Creeks enter the Basin. Ground surface elevations range from about 4,100 feet above mean sea level (msl)
- near the south end of BVGB to over 4,500 feet msl at the eastern edge of the Basin. In the north-central portion of
- the Basin, two buttes protrude from the valley (Pilot Butte and Roberts Butte). The Pit River enters the BVGB at
- an elevation of 4,150 feet msl and leaves the Basin at 4,100 feet msl over the course of about 30 river miles, giving
- the Pit River a gradient of less than 2 feet per mile. By contrast, the Pit River above and below Big Valley has a
- gradient over 50 feet per mile. This low gradient in the Basin results in a meandering river morphology and
- widespread flooding during large storm events. Ash Creek

enters the Basin at Adin at an elevation of 4,200 feet msl, eventually joining the Pit River when flows are sufficient 1137 to make it past Big Swamp. **Figure 4-1** shows the ground topography for the BVGB. 1138

Portions of eight topographic maps (7.5-minute) cover the BVGB area and are named as follows (north-south, 1139 west-east): 1140

1141	Donica Mountain	Halls Canyon	
1142	Lookout	Big Swamp	Adin
1143	Bieber	Hog Valley	Letter

Bieber Hog Valley Letterbox Hill

4.2 **Regional Geology and Structure**

The regional geology is depicted on the Alturas Sheet (CGS 1958), a 1:250,000 scale map with an excerpt shown 1146 on Figure 4-2. The BVGB is in the central area of the Modoc Plateau geomorphic province. According to the 1147 California Geological Survey (CGS 2002), the Modoc Plateau is, "...a volcanic table land" broken into blocks by 1148 1149 north-south faults. The Basin is underlain by a thick sequence of lava flows and tuffs. The volcanic material is variable in composition as described below, is Miocene to Holocene age, ¹⁸ and erupted into sediment-filled basins 1150

1151 between the block-faulted mountain ranges (Norris and Webb 1990).

According to MacDonald (1966), the Modoc Plateau is transitional between two geomorphic provinces: block 1152 faulting of the Basin and Range to the east and volcanism of the Cascade Range to the west. This transition can be 1153 observed on Figure 4-2 with the numerous faults trending north-northwest surrounding Big Valley and the most 1154 recent center of volcanism (indicated by the numerous cinders [asterisks] centered around Medicine Lake, with 1155 several eruptions about 1000 years before present) about 30 miles northwest of Big Valley. Moreover, the historic 1156 volcanism and tectonics occurred concurrently, which disrupted the drainage from the province and resulted in the 1157 formation of numerous lakes, including an ancestral lake in Big Valley. Volcanic material was deposited as lava 1158 flows, ignimbrites (hot ash flows), subaerial and water-laid layers of ash (cooler), and mudflows combined with 1159 sedimentary material, although thick sections of rock can be either entirely sedimentary or volcanic. The 1160 composition of the lava flows is primarily basalt¹⁹ and basaltic andesite²⁰, while pyroclastic²¹ ash deposits are 1161 rhyolitic²² composition. 1162

1144

¹⁸ Miocene is 23 million to 5.3 million years ago; Holocene is 12,000 years ago to present.

¹⁹ Basalt is an extrusive (volcanic) rock with relatively low silica content and high iron and magnesium content.

²⁰ Andesite is an extrusive rock with intermediate silica content and intermediate iron and magnesium content.

²¹ Pyroclastic means formed from volcanic eruptions, typically not from lava flows, but from material (clasts) ejected from the eruption such as ash, blocks, or "bombs."

²² Rhyolitic rocks are extrusive with relatively high silica content and low iron and magnesium. Rhyolites are the volcanic equivalent of granite.


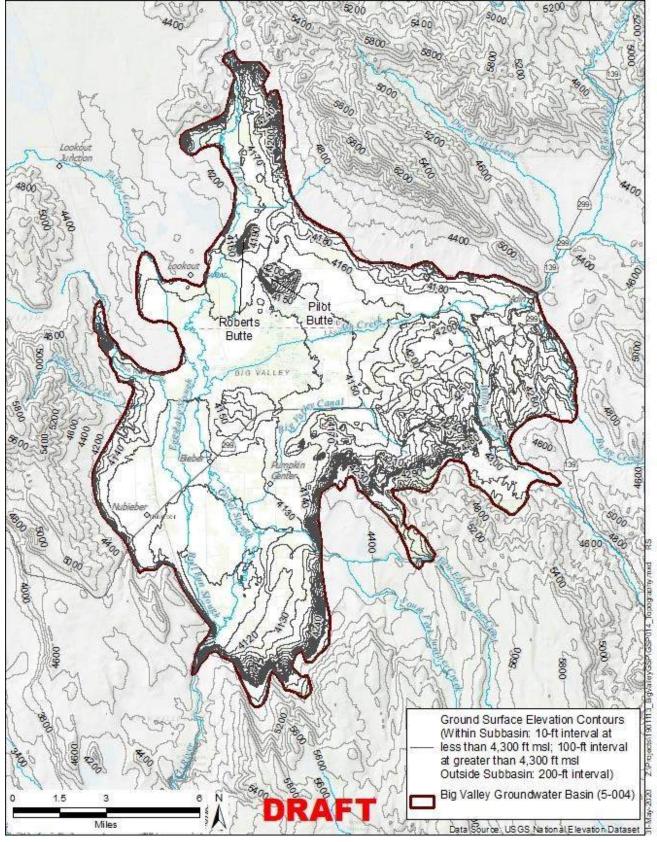


Figure 4-1 Topography Source: USGS 2016

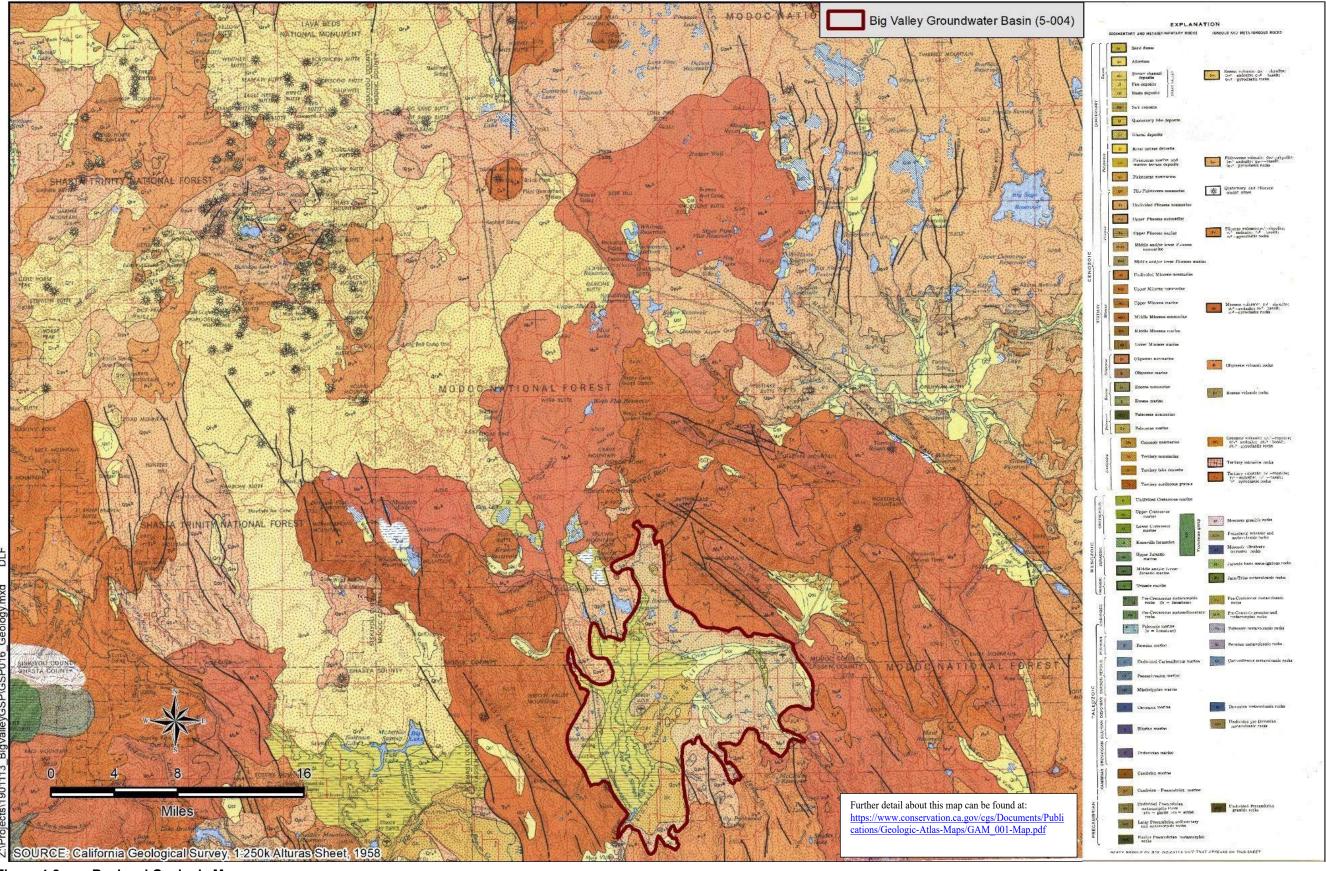

4-4

Figure 4-2 Regional Geologic Map

1166

4.2.1 Lateral Basin Boundaries

1168

1190

- The CGS (1958) geology map (**Figure 4-2**) was used by DWR to draw the BVGB boundary. That 63-year-old
- map has proven to be inaccurate in many places, and more recent, more accurate geologic maps are available
- 1171 (DWR 1963, GeothermEx 1975). The lateral boundaries of BVGB are described by DWR (2004) as, "...bounded
- to the north and south by Pleistocene and Pliocene basalt and Tertiary pyroclastic rocks of the Turner Creek
- Formation, to the west by Tertiary rocks of the Big Valley Mountain volcanic series, and to the east by the Turner
- 1174 Creek Formation." In general, the boundary drawn by DWR was intended to define the contact between the valley
- alluvial deposits and the surrounding volcanic rocks. Because this boundary was drawn using a regional-scale map
- from 1958 that was drawn with the surface expression of geologic units, a basin boundary modification at a future
- date would be more precise and would include the aquifer materials which extend outside of the current boundary.
- This future modification could include consideration of the "upland recharge areas" described by DWR (1963).
- Additionally, the Basin boundary is inaccurate in the southeastern portion of the Basin where two fingers extend
- into the uplands area. The narrower of the two fingers extends too far into the upland elevations and intersects with
- East Fork Juniper Creek which doesn't drain into the finger, as shown in **Figure 4-1**. East Fork Juniper Creek
- naturally flows to the west and is confluent with the Pit River south of Pumpkin Center. A more thorough mapping
- of the elevations and geologic contacts in the upper area of East Fork Juniper Creek would help to refine the
- boundary between alluvium and upland volcanics as some areas are clearly not underlain by alluvial deposits.
- In the northeastern portion of the Basin, the boundary curves around the base of the Barber Ridge and Fox
- Mountain. The CGS contact between the alluvium and volcanics here is well below the change in slope of the
- mountain range. More recent mapping (GeothermEx 1975) extends alluvium 1.5 miles further upslope as shown
- on Figure 4-3. This 1975 mapping also shows other locations along the current basin boundary that should be
- modified, including the aforementioned narrow finger at East Fork Juniper Creek.

4.3 Local Geology

- Several geologic maps were available at a more detailed scale than the CGS (1958) map. Two of them had
- accompanying studies that more thoroughly described the geology. Although relatively old studies, they both
- provide useful information. However, they differ slightly on some details, particularly the surface geology. Further
- refinement of their contacts may be necessary. The two maps are shown on Figure 4-3 and Figure 4-4.
- The two different reports were written for different purposes, with DWR (1963) being developed as a general
- investigation of the potential groundwater resources, and GeothermEx (1975) as a specific investigation of
- potential hydrothermal groundwater resources. All reviewed sources agree that the BVGB is surrounded by
- mountain blocks of volcanic rocks of somewhat variable composition, but primarily basalt. Although these
- mountains are outside of the groundwater basin, they may be underlain by alluvial formations. The mountains
- capture and accumulate precipitation, which produces runoff that flows into BVGB. Moreover, DWR (1963) stated
- that these mountains serve as "upland recharge areas"

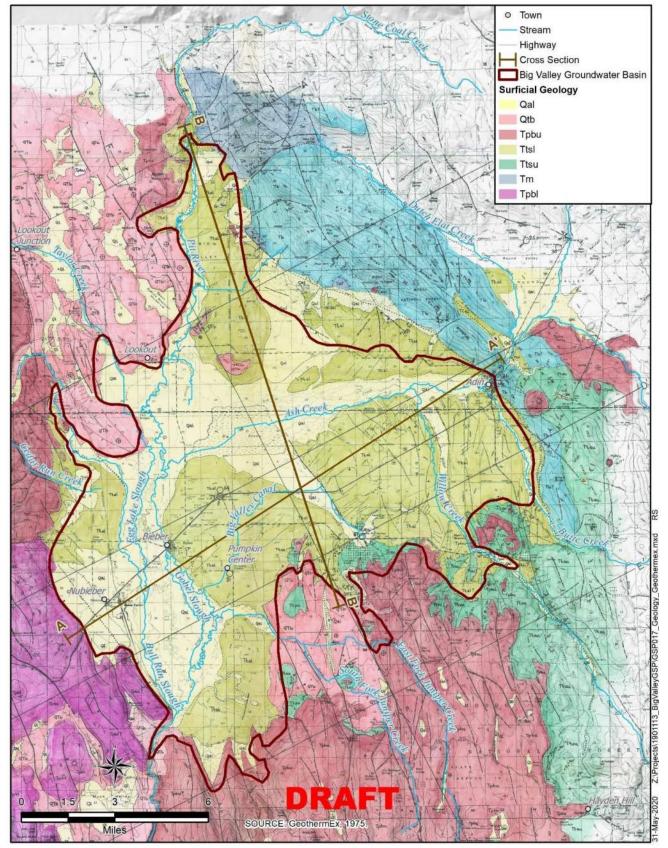


Figure 4-3 GeothermEx 1975 Local Geologic Map

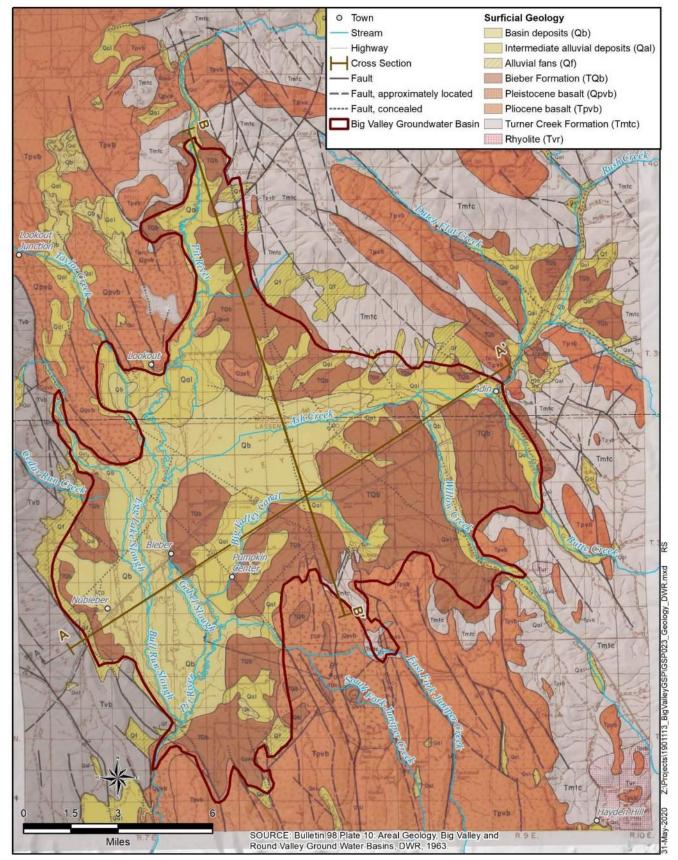


Figure 4-4 DWR 1963 Local Geologic Map

and provide subsurface recharge to the BVGB. These recharge areas suggested by DWR are shown in red shading

on **Figure 4-5** and correlate with Pliocene to Pleistocene²³ basalts (Tpbv and Qpbv). These units are mapped by

DWR (1963) outside the Basin to the northwest and southeast, as well as along the crests of Barber and Ryan

Ridges to the northeast of Big Valley.²⁴ GeothermEx (1975) generally concurs with this mapping, except for the

Ridges to the horneast of Dig variety. Geometring (1973) generally concurs with this mapping, except for the

areas along Barber and Ryan Ridges, which they map as a much older unit (Miocene), corroborated by a

radiometric age date measured at 13.8 million years. This distinction is important because an older unit is more

likely to underlie the Basin sediments and is less likely to be hydraulically connected to the BVGB. At the

northwestern end of Barber Ridge, GeothermEx mapped the oldest unit in the BVGB area (Tm) of andesitic

composition. This unit contains the site of the Shaw Pit quarry.

4.4 Principal Aquifer

4.4.1 Formation Names

1207

1215

1216

1224

The Pliocene-Pleistocene²³ age Bieber Formation (TQb) is the main formation of aquifer material defined within

BVGB, and DWR (1963) estimates that it ranges in thickness from a thin veneer to over 1,000 feet. It meets the

ground surface around the perimeter of the Basin, especially on the southeast side (DWR 1963). The formation

was deposited in a lacustrine (lake) environment and is comprised of unconsolidated to semi-consolidated layers of

interbedded clay, silt, sand, gravel, and diatomite²⁵. Layers of black sand and white sand (pumiceous) were

identified as highly permeable but discontinuous and mostly thin. GeothermEx (1975) did not embrace the DWR

name and identified this formation as an assemblage of tuffaceous, diatomaceous lacustrine, and fluvial sediments

(Ttsu, Ttsl). Both investigations identified the formation in the same overall location based on a comparison of the

two geologic maps, but the GeothermEx map provides more detail and resolution than the DWR map. For the

purposes of the GSP, the name Bieber Formation will be used.

Recent Holocene²⁶ deposits (labeled with Q) were mapped within the center of the Basin and along drainage

1228 courses from the upland areas and are identified by DWR (1963) as alluvial fans (Qf), intermediate alluvium (Qal)

and Basin deposits (Qb). The composition of these unconsolidated deposits varies from irregular layers of gravel,

sand and silt with clay to poorly sorted silt and sand with minor clay and gravel (Qal) to interbedded silt, clay and

"organic muck" (Qb). The latter two deposits occur in poorly drained, low-lying areas where alkali²⁷ could

accumulate. The thickness of these sediments is estimated to be less than 150 feet. GeothermEx (1975) identified

these deposits as older valley fill (Qol), lake and swamp deposits (Ql), fan deposits (Qf) and undifferentiated

alluvium (Qal). All these recent deposits are aquifer material²⁸ and are part of the Big Valley principal aquifer.

1235 There is discrepancy

²³ 5.3 million years to 12 thousand years ago.

²⁴ The GSAs specifically requested a basin boundary modification to include these upland recharge areas within the Basin boundary. The request was denied by DWR as not being sufficiently substantiated. (*See Appendix 1A*)

²⁵ Diatomite is a fine-grained sedimentary rock made primarily of silica, and is formed from the deposition of diatoms, which are microscopic creatures with shells made from silica.

²⁶ Recent geologic period from 12 thousand years old to present.

²⁷ Alkali means relatively high in alkali and alkali earth metals (primarily sodium, potassium, calcium, and magnesium) and generally results in a high pH (greater than 7 or 8).

 $^{^{\}rm 28}$ Meaning they contain porous material with recoverable water.

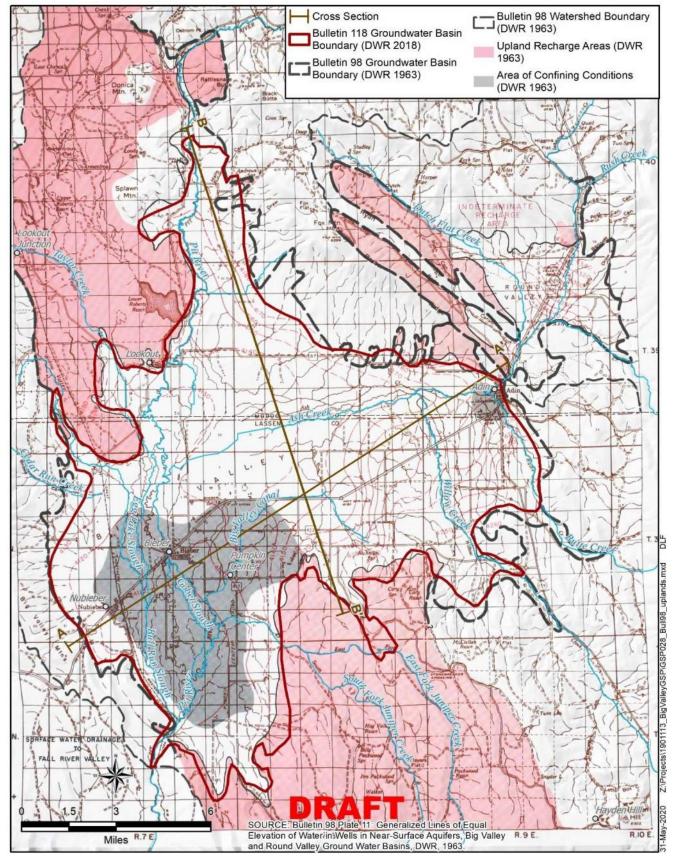


Figure 4-5 DWR 1963 Upland Recharge Areas and Areas of Confining Conditions

- between the two maps in the northeastern portion of the Basin, where GeothermEx extends the alluvial sediments
- much further upslope toward Barber Ridge and Fox Mountain as discussed in Section 4.3 Local Geology.
- The principal aquifer consists of the Bieber Formation (TQb and recent deposits (Qal, Qg, Qb)). While DWR
- 1241 (1963) delineates an "area of confining conditions" in the southwest area of the Basin on **Figure 4-5**, the data to
- support the confinement and the definition of a broad-scale, well-defined aquitard²⁹ is not currently available.
- 1243 As described herein, aquifer conditions vary greatly throughout the Basin. However, clearly defined, widespread
- distinct aquifer units have not been identified, and with the data currently available all the water bearing units in
- the Basin are defined as a single principal aquifer for this GSP.

4.4.2 Geologic Profiles

- Figure 4-6 and Figure 4-7 show cross-sections across Big Valley. The locations of the cross-sections are shown
- on Figure 4-3, Figure 4-4 and Figure 4-5. The locations of these sections were drawn to be similar to those drawn
- by DWR (1963) and GeothermEx (1975) and characterize the aquifers in two directions (southwest-northeast and
- northwest-southeast). The sections show the lithology of numerous wells across the Basin. Very little geological
- correlation could be made across each section which is likely to be related to the concurrent block faulting and
- volcanic and alluvial depositional input from various highland areas flowing radially into Big Valley. These
- complex structural and depositional variables result in great stratigraphic variation over short distances. The
- pertinent information from cross-sections presented by DWR (1963) and GeothermEx (1975) are shown on the
- sections.

1256

1246

4.4.3 Definable Bottom

- The SGMA and DWR GSP regulations do not provide clear guidance for what constitutes a "definable bottom" of
- a basin. However, DWR (2016a) Bulletin 118 Interim Update describe the "physical bottom" as where the porous
- sediments contact the underlying bedrock and the "effective bottom" as the depth below which water could be
- unusable because it is brackish or saline.
- The "physical bottom" of BVGB is difficult to define because few borings have been drilled deeper than 1200feet
- and the compositions of the alluvial and bedrock formations are similar (derived from active volcanism), with
- 1263 contacts that are gradational. Also, some of the lavas most likely flowed into Big Valley forming lava lenses that
- are now interlayered with permeable aquifer sediments. Moreover, the base of the aquifer system is likely variable
- across BVGB due to the concurrent volcanism and horst/graben faulting of the bedrock.
- The deepest lithologic information in the Basin is derived from two test borings by DWR to depths of 1843 and
- 1267 1231 feet and from two geothermal test wells near Bieber to depths of 2125 and 7000 feet. The 7000-foot well is
- east of Bieber, but only has lithologic descriptions to a depth of 4100 feet, including descriptions of aquifer-type
- materials (sands) throughout. The other three deep lithologies give similar indication of aquifer material to their
- total depth.

²⁹ Layer of low permeability that prevents significant flow, except at very slow rates.

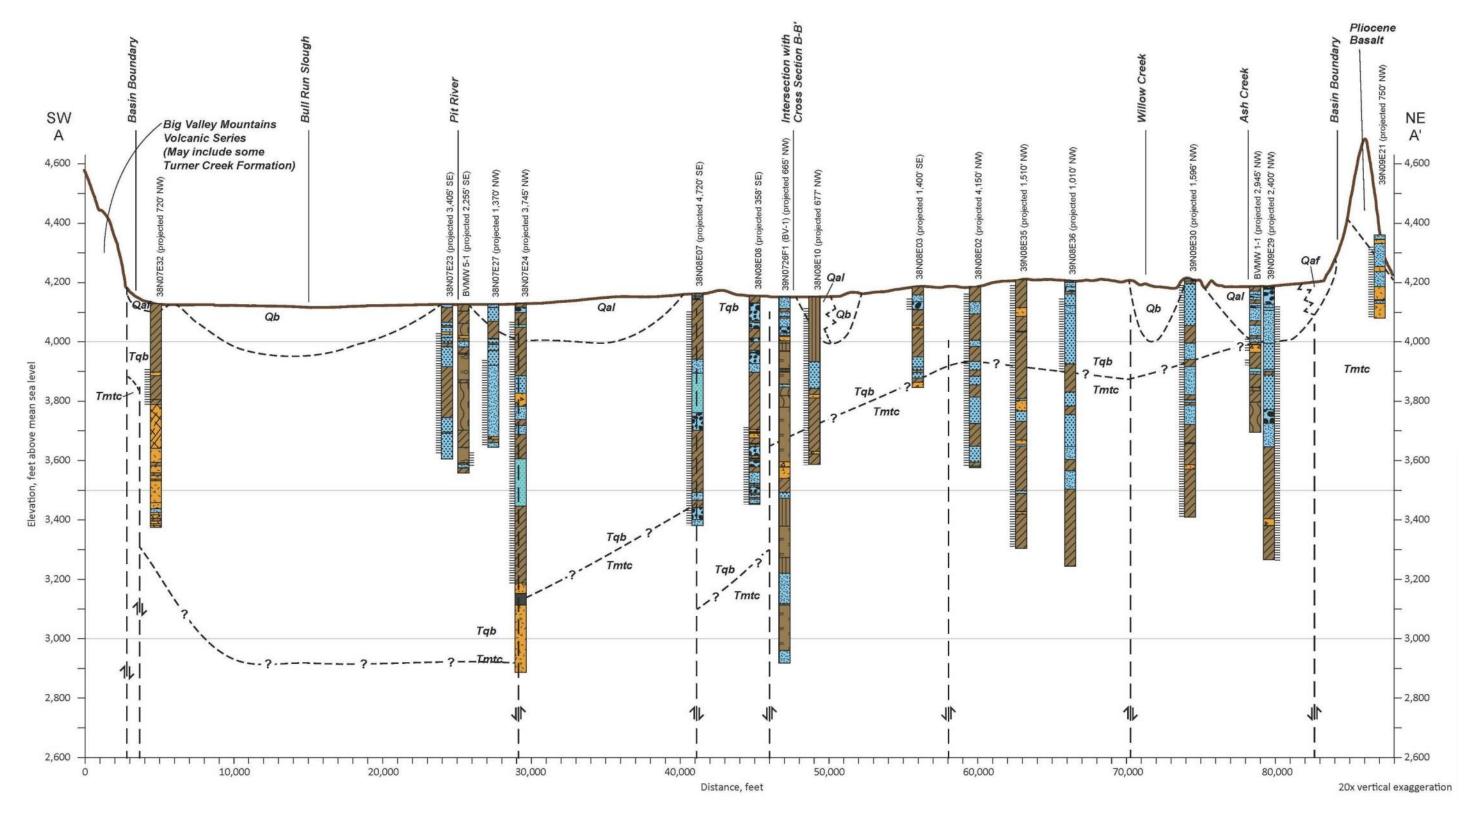


Figure 4-6 Geologic Cross Section A-A'
Note: Key to lithologic symbologies is in development and will be included in future draft(s)

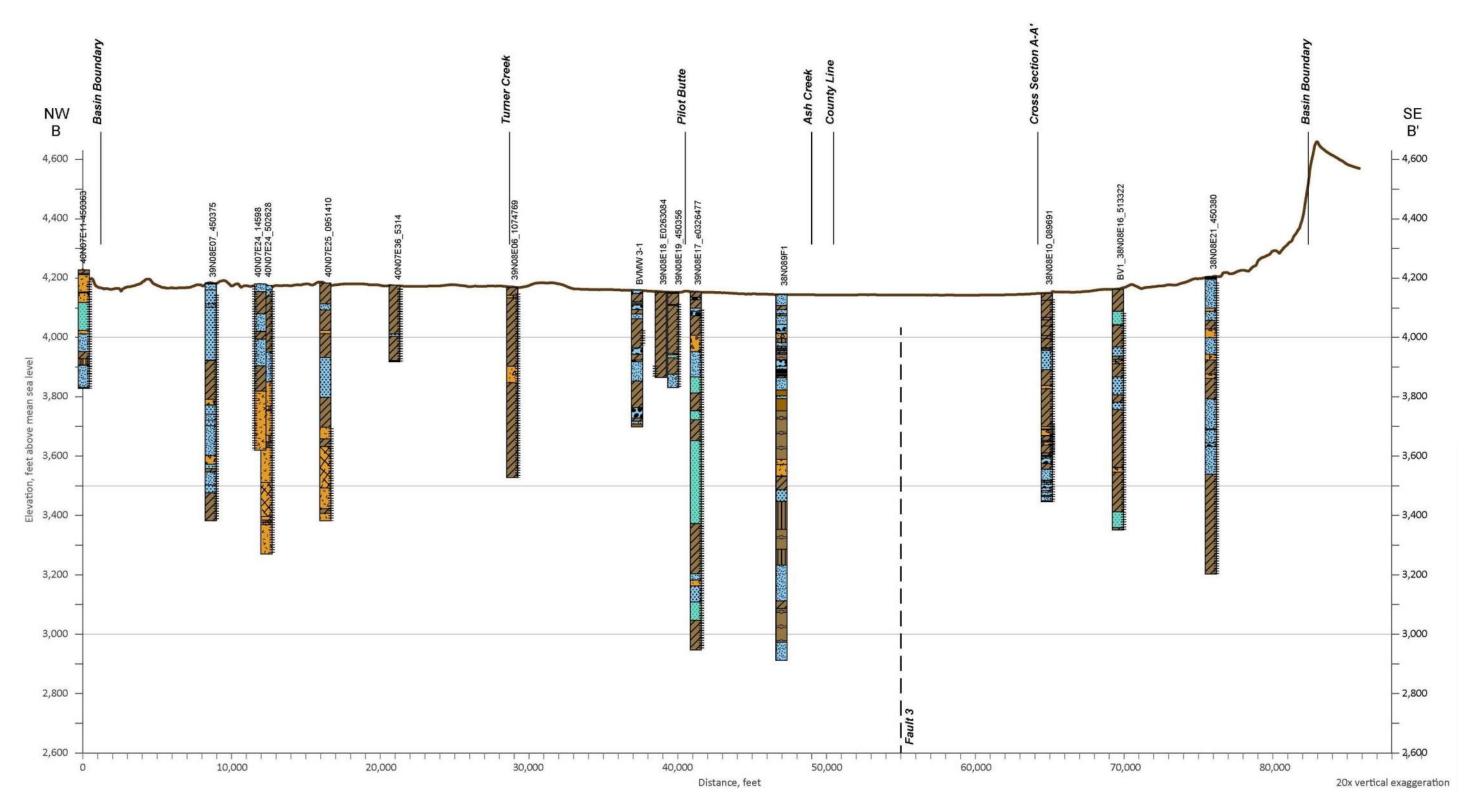


Figure 4-7 Geologic Cross Section B-B'
Note: Key to lithologic symbologies is in development and will be included in future draft(s)

The two geothermal wells also had temperature logs and some water quality. Water temperatures increased to over 100°F at depths of about 2000 to 3000 feet. One of them located near the Bieber School had water quality samples collected from the 1665- to 2000-foot interval and indicated water quality higher in total dissolved solids (632 milligrams per liter) than is present in shallower portions of the Basin.

The information from these two wells indicated that temperature and water quality concerns increase with depth, but a clear delineation of where water becomes unusable cannot be determined with the data available. With limited scientific evidence to clearly define a physical or effective bottom of the aquifer, an approach to define a practical bottom is being used to satisfy the GSP Regulations which require the aquifer bottom to be defined (§ 354.14(a)(1)), as described below.

The approach for defining the practical bottom is to ensure that all known water wells are included within the aquifer. DWR's well log inventory shows that over 600 wells have been installed in the BVGB. Although DWR's well log inventory does not completely and precisely assess the total number or status of the wells (e.g. abandoned), it is the only readily-available data. The well inventory has been identified as a data gap within this GSP. Wells in this inventory with known depths are summarized in **Table 4-1**. The only borings drilled deeper than 1,200 feet are the two DWR test borings and two geothermal wells discussed previously.

Table 4-1 Well Depths in DWR Inventory

14810 1 1			it involues y
Depth Interval (ft bgs)	Deepest Well per Section ^a		Count of All Wells
< 200	10%		41%
200 – 400	16%	43%	25%
400 – 600	27%	43%	17%
600 – 800	28%	42%	12%
800 – 1000	14%	4270	4%
1000 – 1200	4%		1%
> 1200b	1%		< 1%

Notes:

1281

1282

1283

1284

1285

1286

1287

1288

1289

1290

1291

1292

1293

1294

1295

1296 1297 For this GSP, the "practical bottom" of the aquifer is set at 1200 feet but may extend to 4,100 or deeper. This delineation of 1200 feet is consistent with DWR's approach, established over 50 years ago, which declared a practical bottom of 1000 feet. A depth of 1200 feet encompasses the levels where groundwater can be accessed and monitored for beneficial use but does not preclude drilling and pumping from greater depths.

^a Section is a 1 mile by 1 mile square. There are 134 sections in the BVGB

^b Test borings: BV-1 and BV-2 were drilled deeper than 1200 feet

4.4.4 Structural Properties with Potential to Restrict Groundwater Flow

- Faults can sometimes affect flow, but sufficient evidence has not been gathered and analyzed to determine whether
- any of the faults in Big Valley restrict or facilitate flow. The mountains around BVGB are heavily faulted, with
- older basalt units more faulted than younger basalt units.
- Most of the faults trend to the north/northwest with some perpendicular faulting oriented northeasterly. **Figure 4-8**
- is an excerpt of the regional fault map by the California Geological Survey (2010). Faults on the western side of
- BVGB are shown to be Quaternary in age, while faults on the eastern side are pre-Quaternary (older than 2.6
- million years). Note that numerous faults to the west of BVGB were identified as late Quaternary to Holocene-age
- faults (displacement during the last 700,000 years or within the last 12 thousand years, respectively).
- Some of the faults extend across the Basin, concealed beneath the alluvial materials. Two hot springs are located in
- the Basin near these faults. DWR (1963) acknowledged the potential restriction of groundwater flow by faults but
- did not provide specific information. However, such fault impacts on groundwater flow cannot be determined with
- certainty at this time with the available groundwater level data, given the limited number and the wide spacing of
- wells, and the absence of a pumping test to verify restricting conditions.

4.4.5 Physical Properties and Hydraulic Characteristics

- The physical properties of a groundwater system are typically defined by the hydraulic conductivity,³⁰
- transmissivity,³¹ and storativity³² of the aquifer. The preferred method of defining hydraulic characteristics is a
- pumping test with pumping rates and water levels monitored (either in the pumping well or preferably a nearby
- monitoring well) throughout the test. Such pumping tests were performed after the construction of five sets of
- monitoring wells (MWs) in late 2019 and early 2020.
- The tests were performed by pumping each 2.5-inch-diameter MW for 1 hour at a rate of 8 gpm while measuring
- water level drawdown in the pumping well. A well efficiency³³ of 70 percent was assumed, and the length of the
- well screen was used as a proxy for the aguifer thickness (b). **Table 4-2** shows the results of the Theis³⁴ solution
- that best matched the drawdown curve at each well. Storativity (S) ranged from highly confined (3.0x10⁻⁶ at
- BVMW 3-1) to unconfined (1.5×10^{-1}) at BVMW 4-1. Hydraulic

_

1298

³⁰ Hydraulic conductivity (K) is defined as the volume of water that will move in a unit of time under a unit hydraulic gradient through a unit area. It is a measure of how easily water moves through a material and is usually given in gallons per day per square foot (gpd/ft²) or feet per day (ft/day).

³¹ Transmissivity (T) is the product of K and aquifer thickness (b) and is a measure of how easily water moves through a thickness of aquifer. It is usually expressed in units of gallons per day per foot of aquifer (gpd/ft) or square feet per day (ft²/day).

³² Storativity (S, also called storage coefficient) is defined as the volume of water that an aquifer releases from or takes into storage per unit surface area per unit change in groundwater elevation. High values of S are indicative of unconfined or water table aquifers, while low values indicate confined (pressurized) aquifers. S does not have units.

³³ A pumping well will experience more groundwater level drawdown than a nearby non-pumping well due to inefficiency in the movement of groundwater from the aquifer into the well. The predicted drawdown divided by the actual drawdown is well efficiency.

³⁴ Theis is a mathematical solution to estimate K, T, and S and is based on pumping rate and the resultant rate of groundwater level drawdown (Theis, 1935).

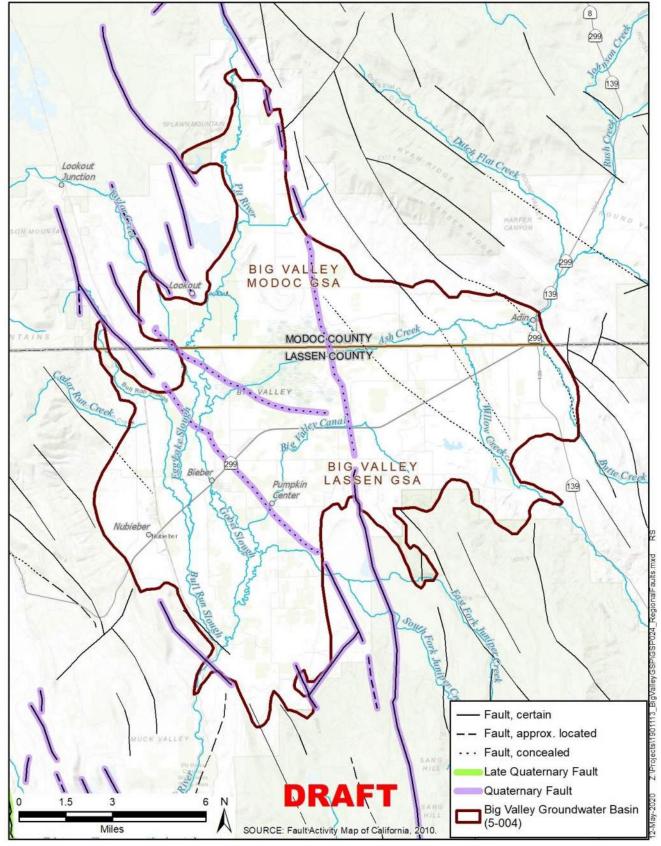


Figure 4-8 Local Faults

1323

Table 4-2 Aquifer Test Results

Parameter	Units	BVMW 1-1	BVMW 2-1	BVMW 3-1	BVMW 4-1	BVMW 5-1		
Well depth	ft	265.5	250.5	185.5	425	540		
Thickness ^a (b)	ft	50	40	50	30	50		
Flow (Q)	gpm	8	8	8	8	8		
Drawdown after 1 hour	ft	4.3	16.0	27.5	2.0	3.0		
Transmissivity (T)	gpd/ft	3000	750	700	4200	4500		
Storativity (S)	unitless	1.5x10 ⁻³	1.0 x10 ⁻³	3.0x10 ⁻⁶	1.0 x10 ⁻¹	2.0 x10 ⁻³		
Hydraulic Conductivity (K)	ft/d	8	3	2	19	12		
Assumed to be the length of the screen interval								

^a Assumed to be the length of the screen interval

Source: GEI 2021

1326

1327

1328

1329

1330

1331

1332

1333

1334

1335 1336

1337

1338

1339

1340 1341

1342

1343

1344

1345

1325

conductivity (K) ranged from 2 feet per day (ft/d) to 19 ft/d, which is consistent with silty sand and clean, fine sand. The K values may range higher since pumping tests in larger wells with larger pumps for longer periods of time tend to give higher T and K values. The results of these five pumping tests are documented further in

Appendix 4A. More thorough assessment of Basin aquifer characteristics is needed and is identified as a data gap.

Specific yield (SY) is another important aquifer characteristic, as it defines the fraction of the aquifer that contains recoverable water and therefore governs the volume of groundwater stored in the Basin. Reclamation (1979) discussed the SY in Big Valley and postulated that it varies with depth, at 7 percent for the first 100 ft bgs, 6 percent for the 100 to 200 ft bgs and 5 percent from 200 to 1000 ft bgs. However, Reclamation doesn't give any

supporting evidence for these percentages. SY in the Sacramento Valley has been estimated to vary between 5 to

10 percent (DWR 1978). Since Big Valley aquifer materials were primarily deposited in a lacustrine environment

(as opposed to Sacramento Valley which has a higher percentage of riverine deposits), Big Valley's SY is likely on

the lower end at 5 percent. This conservative percentage will be used for all depth intervals in this GSP.

4.5 Soils

Information on soils within the BVGB were obtained from the Soil Survey Geographic Database (SSURGO) of the NRCS. The SSURGO data includes two categories of information relevant to the GSP: taxonomic soil orders and hydrologic soil groups. Taxonomic data include general characteristics of a soil and the processes of formation, while hydrologic data relate to the soil's ability to transmit water under saturated conditions and is an important consideration for hydrology, runoff, and groundwater recharge. The following section describes the soils of BVGB.

4.5.1 Taxonomic Soil Orders

- Of the 12 established taxonomic soil orders, three were found within the BVGB, as listed below, and their distributions are presented in **Figure 4-9**. Descriptions below were taken from the Illustrated Guide to Soil Taxonomy (NRCS, 2015):
 - Alfisol Naturally fertile soils with high base saturation and a clay-enriched subsoil horizon. Alfisols develop from a wide range of parent materials and occur under broad environmental conditions, ranging from tropical to boreal. The movement of clay and other weathering products from the upper layers of the soil and their subsequent accumulation in the subsoil are important processes. The soil-forming processes are in relative balance. As a result, nutrient bases (such as calcium, magnesium, and potassium) are supplied to the soil through weathering, and the leaching process is not sufficiently intense to remove them from the soil before plants can use and recycle them.
 - Mollisol Very dark-colored, naturally very fertile soils of grasslands. Mollisols develop predominantly
 from grasslands in temperate regions at mid-latitudes and result from deep inputs of organic matter and
 nutrients from decaying roots, especially the short, mid, and tall grasses common to prairie and steppe
 areas. Mollisols have high contents of base nutrients throughout their profile due to mostly non-acid parent
 materials in environments (subhumid to semiarid) where the soil was not subject to intense leaching of
 nutrients.
 - Vertisol Very clayey soils that shrink and crack when dry and expand when wet. Vertisols are dominated by clay minerals (smectites) and tend to be very sticky and plastic when wet and very firm and hard when dry. Vertisols are commonly very dark in color and distinct soil horizons are often difficult to discern due to the deep mixing (churning) that results from the shrink-swell cycles. Vertisols form over a variety of parent materials, most of which are neutral or calcareous, over a wide range of climatic environments, but all Vertisols require seasonal drying.
- Mollisols are the most prominent soil order within the BVGB occupying nearly 78 percent of the total area.

 Vertisols occupy over 16 percent and are found mostly on the southwestern side of BVGB within the floodplain of the Pit River. Small patches of Vertisols are scattered in the remainder of the Basin. Alfisols occupy over 5 percent of the Basin and are found mostly on the west side of the Basin and along Hot Spring Slough in the south-central portion of the Basin.

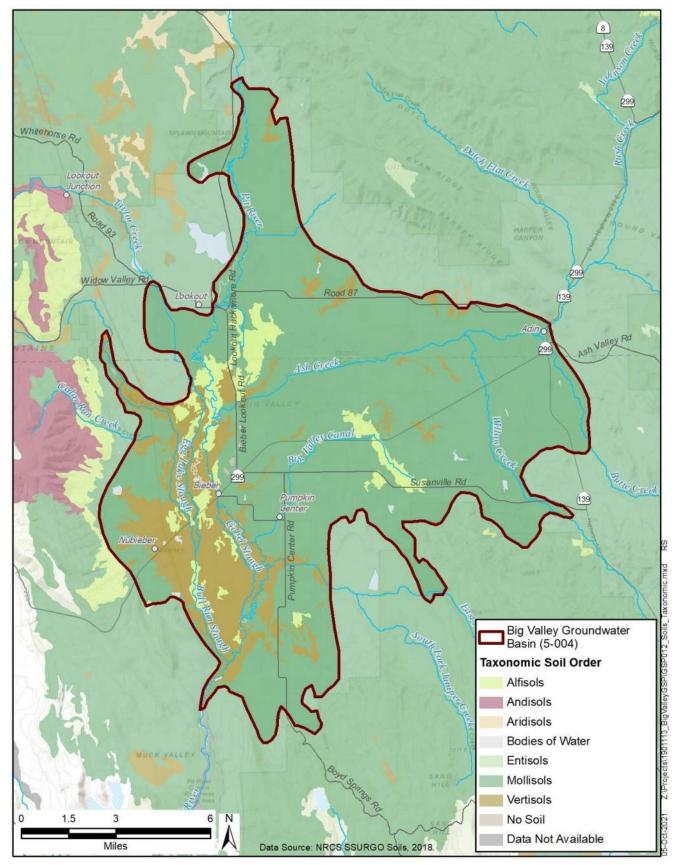


Figure 4-9 Taxonomic Soils Classifications

4.5.2 Hydrologic Soil Groups

the four HSGs are:

1377

1382

1383

1384

1385

1386

1391

1392

1393

1394

1395

1396

1397

1398

- The NRCS Hydrologic Soils Group (HSG) classifications provide an indication of soil infiltration potential and ability to transmit water under saturated conditions, based on hydraulic conductivities of shallow, surficial soils. **Figure 4-10** shows the distribution of the hydrologic soil groups, where higher conductivities (greater infiltration) are labeled as Group A and lowest conductivities (lower infiltration) as Group D. As defined by the NRCS (2012),
 - Hydrologic Group A "Soils in this group have low runoff potential when thoroughly wet. Water is transmitted freely through the soil. Group A soils typically have less than 10% clay and more than 90% sand or gravel and have gravel or sand textures." Group A soils have the highest conductivity values (greater than 5.67 inches per hour [in/hr]) and therefore a high infiltration rate.
- Hydrologic Group B "Soils in this group have moderately low runoff potential when thoroughly wet.

 Water transmission is unimpeded. Group B soils typically have between 10 and 20% clay and 50 to 90% sand and have loamy sand or sandy loam textures." Group B soils have a wide range of conductivity values (1.42 in/hr to 5.67 in/hr), and a moderate infiltration rate.
 - Hydrologic Group C "Soils in this group have moderately high runoff potential when thoroughly wet. Water transmission through the soil is somewhat restricted. Group C soils typically have between 20 and 40% clay and less than 50% sand and have loam, silt loam, sandy clay loam, clay loam and silty clay loam textures." Group C soils have a relatively low range of conductivity values (0.14 to 1.42 in/hr), and a slow infiltration rate.
 - Hydrologic Group D "Soils in this group have high runoff potential when thoroughly wet. Water movement through the soil is restricted or very restricted. Group D soils typically have greater than 40% clay, less than 50% sand and have clayey textures. In some areas, [Group D soils] also have high shrinkswell potential." Group D soils have conductivity values less than 0.14 in/hr, a very slow infiltration rate.
- A dual hydrologic group (C/D) is assigned to an area to characterize runoff potential under drained and undrained conditions, where the first letter represents drained conditions, and the second letter applies to undrained conditions.
- According to this HSG dataset, BVGB does not show high infiltration rates (Group A) and only a tiny area (<0.1%) of Group B soil (moderate infiltration) are present, located on the western edge of the Basin at the top of
- 1405 Bull Run Slough near Kramer Reservoir. The remainder of the Basin is shown with hydrologic soils Groups C and
- D, slow to very slow infiltration rates (Group C at 30% and Group D at 58% of Basin area). Most of the ACWA is
- underlain by the dual hydrologic group C/D (11% of Basin area) and due to the wetland nature of this area contains
- primarily undrained soils corresponding to the very slow infiltration rates.

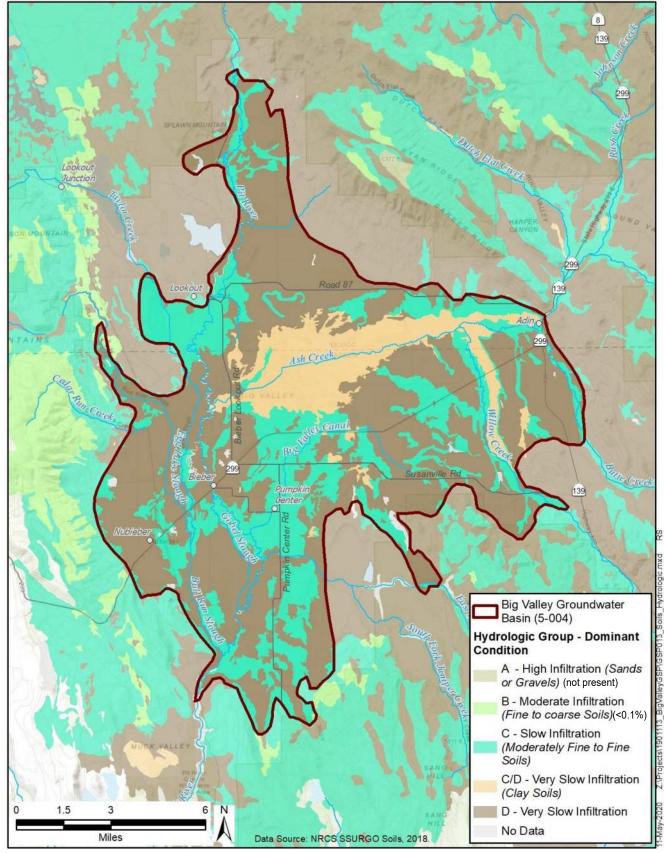


Figure 4-10 Hydrologic Soils Group Classifications

- 1411 It should be noted that the NRCS develops these maps using a variety of information including remote sensing and
- some limited field data collection and does not always capture variations that may occur on a small scale.
- 1413 Historical experience from landowners and additional field data could identify areas of better infiltration. These
- soils groups do not necessarily preclude vertical movement of water and, while recharge may be slower than
- desired, recharge is still possible. Additionally, Group C and D soils may have slow infiltration rates due to
- shallow hardpan, and groundwater recharge could potentially be enhanced if this hardpan can be disrupted. Soil
- permeability has been identified as a data gap, particularly at the small scale.

4.5.3 Soil Agricultural Groundwater Banking Index

- The University of California at Davis has established the Soil Agricultural Groundwater Banking Index (SAGBI)
- using data within the SSURGO database, which gives a rating of suitability of the soils for groundwater recharge.
- This index expands on the HSG to include topography, chemical limitations, and soil surface condition. This effort
- has resulted in a mapping tool that illustrates six SAGBI classes (excellent-very poor) and has been completed for
- much of the state. This mapping tool is only available for the Modoc County portion of BVGB as shown on
- 1424 **Figure 4-11**, and the index varies mostly between moderately poor to very poor. Small areas of moderately good
- are present along the Pit River as it enters BVGB and to the west of Adin. It should be noted that the SAGBI is a
- large-scale, planning level tool and does not preclude local site conditions that are good for groundwater recharge.

4.6 Beneficial Uses of Principal Aquifer

- Primary beneficial uses of groundwater in the BVGB include agricultural, environmental, municipal and domestic
- uses. A description of each is provided below.
- 1430 Agricultural

1418

- 1431 Agricultural users get their supply from surface-water diversions, groundwater, or a combination of the two.
- 1432 **Figure 3-6** from the previous chapter illustrates DWR's estimate of the primary source being used around the
- Basin. The primary crops are grain and hay crops (primarily alfalfa) with some wild rice. Agricultural use provides
- numerous environmental benefits and the majority of wildlife habitat in the Basin. (Albaugh 2021)
- 1435 Industrial
- 1436 Industrial groundwater use is limited in the BVGB. According to DWR well logs, six industrial wells have been
- drilled, all of them near Bieber at Big Valley Lumber, which is not currently in operation. **Figure 3-5** shows some
- areas of industrial use, but more use is likely present throughout the Basin as agricultural users have some
- 1439 associated industrial needs.
- 1440 Environmental
- Environmental uses for wetland and riparian botanical and wildlife habitat occur within the ACWA in the center of
- the Basin, near the overflow channels adjacent to the Pit River in the southern portion of the Basin, and along the
- riparian corridors of some of the minor streams that flow into Big Valley. Additionally, private lands throughout
- the Basin provide for environmental uses, including those enrolled in the CRP and WRP programs discussed in
- 1445 Section 3.3.

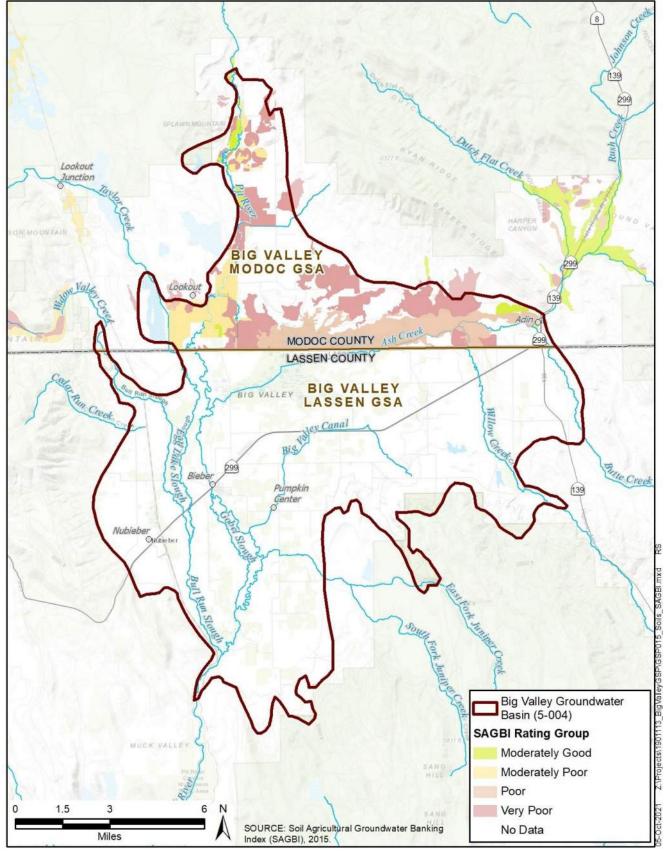


Figure 4-11 SAGBI Classifications

Municipal

1448

1453

1457

1463

1466

1468

1498

- The State Water Board recognizes three public water systems that use groundwater under the purview of the
- DDW: LCWD #1 which serves the community of Bieber, the Forest Service Station in Adin (a non-community,
- non-transient system), and the CAL FIRE conservation camp west of the Basin whose well is located within the
- 1452 Basin boundary.

Domestic

- Domestic users include residents who use their own wells for household purposes. The BVGB has a population of
- about 1,046. With the 312 Bieber residents receiving water from municipal supply, the majority of the remaining
- 1456 734 residents are domestic users.

4.7 General Water Quality

- Previous reports have characterized the water quality as excellent (DWR 1963, Reclamation 1979). The central
- area of the Basin, where naturally occurring hot springs influence the chemistry, has elevated levels of sulfate,
- 1460 fluoride, boron, and arsenic (Reclamation 1979). These localized areas with higher mineral content occur near the
- major faults that traverse the valley.

1462 **Figure 4-12** shows a Piper Diagram for water samples that were collected in late 2019 and early 2020, and

- characterizes the relative concentrations of the major cations (Ca, Mg, Na, K) and anions (SO₄, Cl, HCO₃). The
- dominant cations are derived from the minerals in the aquifer and range from sodium-rich to mixed with higher
- amounts of calcium and magnesium, which increases the water hardness. The major anion is strongly bicarbonate,
 - which is derived from carbon dioxide in the atmosphere and soil zone and indicates that the water is generally
- 1467 young in geologic terms.

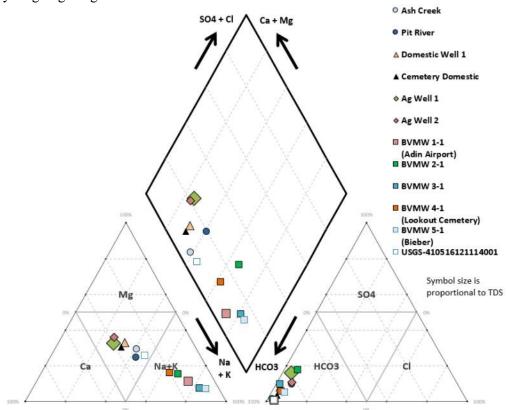


Figure 4-12 Piper Diagram showing major cations and anions

- Some areas in the Basin have elevated levels of iron, manganese, and/or arsenic, all of which are naturally
- occurring in volcanic terrains such as Big Valley. The nature and distribution of these constituents will be
- 1473 discussed further in Chapter 5 Groundwater Conditions.

4.8 Groundwater Recharge and Discharge Areas

4.8.1 Recharge

1474

1475

1477

1484

1489

1500

1476 Groundwater recharge in BVGB likely occurs *via* several mechanisms discussed below.

Underflow from adjacent upland areas and other areas outside the Basin

- The upland areas consist of fractured basalt flows where the precipitation infiltrates vertically through joints and
- fractures until it reaches underlying aquifer material and then travels horizontally into the Basin. DWR has
- postulated that the areas shown in pink on **Figure 4-13** provide recharge in such a way. However, other areas
- adjacent to the Basin could provide some recharge in a similar fashion. In addition, underflow enters the Basin
- where the Pit River and Ash Creek enter the Basin. A Basin boundary modification is needed to encompass other
- important recharge areas outside the currently defined Basin boundary.

Infiltration of precipitation on the valley floor

- Some direct infiltration of rain and snow on the valley floor occurs. However, because the aquifer materials in the
- Basin are largely lacustrine and much of the soils have slow infiltration rates, a high proportion of the precipitation
- likely runs off or is evapotranspirated. **Figure 4-13** shows the areas from the NRCS datasets that may have a
- slightly higher infiltration rate (HSG B and HSG C) than the other areas and therefore potentially more recharge.

Rivers and streams that flow through the Basin

- Streams that flow through the Basin lose water to the aquifer, particularly where they enter the Basin. Aquifer
- materials are typically coarser on the fringes of the Basin where the stream gradient begins to flatten. In general,
- recharge likely occurs in the eastern portions of the Basin along Ash Creek, Butte Creek, and Willow Creek and
- then flows westerly through the subsurface. As Ash Creek flows to the center of the Basin and Big Swamp, the
- water slows and spreads out into a large marsh. The CDFW has recently enhanced this slowing and spreading of
- water through "pond and plug" projects which bring the water up out of the previously incised channel. Other pond
- and plug projects have been successfully implemented in the region. Even though the soils and aquifer materials in
- this portion of the Basin have slow infiltration rates, recharge is likely to occur from Big Swamp because of the
- long period of time that the shallow soils remain wet and saturated. Support from the public has been received at
- outreach meetings to conduct more pond and plug projects within and near the Basin.

Deep percolation of irrigation water

- Depending on the irrigation method, particularly flood irrigation, deep percolation of irrigation water into the
- aguifer occurs. Flood irrigation is an active practice in the Basin and provides valuable recharge.

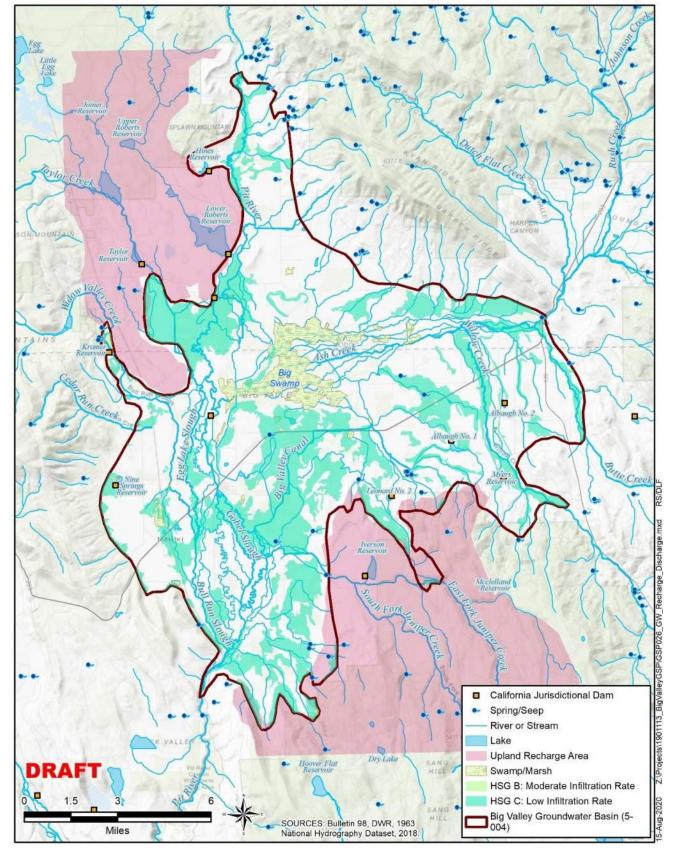


Figure 4-13 Recharge, Discharge and Major Surface-water Bodies

4.8.2 Discharge

1505

1513

1520

1523

- Historically, flow out of the groundwater aquifer (and out of the Basin) most likely occurred at the southern
- portion of the Basin where the aquifer discharged to the Pit River. DWR (1963) indicates that artesian³⁵ conditions
- occurred in this southwestern area. The gaining river³⁶ then transported the water out of the Basin. However, based
- on currently documented water levels, this area is no longer artesian and likely hasn't been a gaining stream for
- decades. There are numerous springs throughout the Basin shown on **Figure 4-13** where groundwater is
- discharged, including several hot springs in the center of the Basin. Evapotranspiration may also be a significant
- 1512 discharge mechanism.

4.9 Surface-Water Bodies

- 1514 **Figure 4-14** shows the numerous small streams that enter the Basin and flow towards the center where they
- 1515 connect with the two major streams: Pit River and Ash Creek. The figure also shows the many small ponds and
- several reservoirs that are in and around the perimeter of the Basin. The dams that are within the jurisdiction of the
- DWR Division of Safety of Dams are shown. While many of these impoundments are located outside of Basin
- boundaries, they represent supplies that hydrologically flow to/through the Basin. The reservoirs provide options
- for the timing of release of those waters, rather than importing supplies from sources external to the Basin.

4.10 Imported Water Supplies

- BVGB users do not import surface water into the Basin because all surface water used in the Basin originates in
- the watershed of the Pit River or the watershed of a local BVGB stream.

4.11 Data Gaps in the Hydrogeologic Conceptual Model

- 1524 As discussed in the introduction, hydrogeology has inherent uncertainties due to sparse data and in the case of Big
- Valley, a limited number of detailed studies on the groundwater resources in the Basin. Identified below are some
- of the uncertainties associated with the hydrogeology in the Basin. In some instances, this uncertainty can be
- reduced while other uncertainties will remain. The filling of the data gaps below is contingent on the needs that
- arise as the GSP is developed and implemented and the level of available outside funding.

1529 **Basin Boundary**

- 1530 The current, inaccurate Basin boundary was drawn by DWR with a regional scale map (CGS 1958) and was not
- drawn with as much precision as subsequent geologic maps. Additionally, the "uplands" areas outside the Basin
- boundary are postulated to be recharge areas interconnected to the Basin, which is contrary to DWR's definition of
- a lateral Basin boundary as being "...features that significantly impede groundwater flow" (DWR 2016c). Further
- refinement of the Basin boundary is desired and necessary, particularly in the areas of "upland recharge" mapped
- by DWR, the fingers in the southeastern portion of the Basin, and in the northeastern portion of the Basin below
- 1536 Barber Ridge and Fox Mountain.

³⁵ Artesian aquifers are under pressure and wells screened in them flow at the surface.

³⁶ Gaining rivers are where groundwater flows toward the river and contributes to surface-water flow.

Confining Conditions

1537

1545

- 1538 Confining conditions probably exist throughout much of the Basin. Often, the confinement is simply a result of
- depth and the fact that horizontal hydraulic conductivities are 10 times (or more) greater than vertical
- 1540 conductivities. However, in the southwest portion of the Basin, DWR (1963) documented an area of confined
- groundwater conditions. It is unknown whether that confinement is due to a single, coherent aquitard or is just a
- result of depth. In addition, aguifer characteristics in the various areas of the Basin are not thoroughly understood
- as discussed in Section 4.4.5, and an assessment is needed on how aguifer characteristics vary throughout the
- Basin in shallow and deep portions of the aquifer.

Definable Bottom

- This HCM has used the "practical" depth of 1,200 feet as the definable bottom. If stakeholders seek to develop
- 1547 groundwater deeper than this depth, newly constructed wells will demonstrate that the "physical bottom" and the
- base of fresh water ("effective bottom") extend deeper.

1549 Faults as Barriers to Flow

- 1550 It is unknown if the faults which traverse the Basin are barriers to flow. Groundwater contours indicate that there is
- east-to-west flow, but this flow is uncertain due to a mapped fault between the two areas. This uncertainty could be
- reduced by conducting a pumping test with observation well(s) on the other side of the fault.

1553 Soil Permeability

- 1554 The NRCS mapping of soils indicates primarily low- to very-low-permeability soils throughout the Basin.
- However, there is some variation of permeabilities indicated by the maps, which are drawn at a large scale with
- limited field verification. Further field investigation of soils and permeability tests could help identify more
- permeable areas where groundwater recharge could be enhanced.

1558 Recharge

- The recharge sources below have been identified, but the rate and amount of recharge is unknown. In the water
- budget (see Chapter 6 Water Budget), the amount of recharge is roughly estimated. Below are the data gaps
- related to recharge.
- Effect of Ash Creek on recharge (including Big Swamp)
 - Effect of Pit River on recharge (including overflow channels)
- Effect of smaller streams on recharge (including Willow Creek)
- Amount of recharge from direct precipitation
- Amount of recharge from deep percolation of applied water
- Amount of recharge from upland recharge areas
- Amount of recharge from seepage of ditches, canals and reservoirs

5. Groundwater Conditions §354.16

- 1570 This chapter presents available information on groundwater conditions for the BVGB developed by GEI for the
- Lassen County and Modoc County GSAs. This chapter provides some of the information needed for the
- development of the monitoring network and the sustainable management criteria of this GSP. The content of this
- 1573 chapter is defined by the regulations of SGMA (Chapter 1.5, Article 5, Subarticle 2: 354.16). GEI Professional
- Geologists provided the content of this chapter and will affix their professional stamps (as required by the
- regulations) certifying that it was developed under their supervision once the chapter is finalized into the GSP.

5.1 Groundwater Elevations

- 1577 Historic groundwater elevations are available from a total of 22 wells in Big Valley, six located in Modoc County
- and 16 in Lassen County as shown on **Figure 5-1** and listed in **Table 5-1**. Twenty of the wells are part of Lassen
- and Modoc counties' monitoring network, which was approved by the counties in 2011, in compliance with the
- 1580 CASGEM program. DWR staff measure water levels in these wells twice annually (spring and fall) on behalf of
- the counties. Some measurements from wells are missing, which is typically a result of access issues to the wells
- site, or occasionally a well owner who has removed their well from the monitoring program. These wells may or
- may not be used as part of the GSP monitoring network, which will be addressed in Chapter 8 Monitoring
- 1584 Networks.

1569

- The first water level measurements in the BVGB began in the late 1950s at two wells near Bieber (17K1) and
- Nubieber (32A2). Regular monitoring of these two wells began in the mid-1960s and monitoring began in most of
- the other wells during the late 1970s or early 1980s. Three wells located on the ACWA were added to the
- 1588 CASGEM networks in 2016. Of the 22 historically monitored wells, one well (12G1) has not been monitored since
- 1589 1992 and one well (06C1) has no measurements since 2015. Construction details are not available for one well
- 1590 (32R1) and could benefit from a 'downhole' video inspection of the well casing to determine the depth interval
- associated with the water levels.
- In addition to these 22 wells, five well clusters were constructed in late 2019 and early 2020 to support the GSP.
- Their locations are also shown on **Figure 5-1**. Each cluster consists of a deep well (200-500 feet) and three shallow
- wells (60-100 feet). These wells were drilled to explore the geology, with the deep well giving water level
- information for the main portion of the aquifer at that location. The three shallow wells are screened shallow to
- determine the direction and magnitude of flow in the shallow subsurface and potentially to give an indication if
- 1597 groundwater interacts with surface water and possibly the location of groundwater recharge. Limited water level
- information is available from these five clusters.

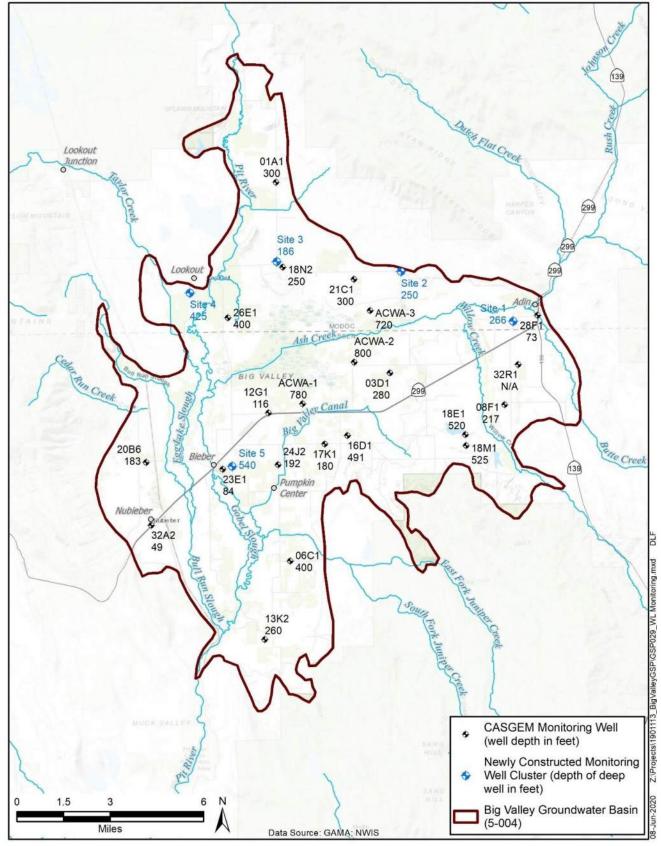


Figure 5-1 Water Level Monitoring

Table 5-1 Historic Water Level Monitoring Wells

Well Name	State Well Number	CASGEM ID	County	Well Use	Well Depth (feet bgs)	Ground Elevation (feet msl)	Reference Point Elevation (feet msl)	Period of Record Start Year	Period of Record End Year	Number of Measure- ments	Minimum Groundwater Elevation (feet msl)	Maximum Groundwater Elevation (feet msl)
18E1	38N09E18E001M	411356N1209900W001	Lassen	Irrigation	520	4248.40	4249.50	1981	2019	73	4198.20	4234.10
23E1	38N07E23E001M	411207N1211395W001	Lassen	Residential	84	4123.40	4123.40	1979	2020	81	4070.40	4109.10
260	39N07E26E001M	411911N1211354W001	Modoc	Irrigation	400	4133.40	4135.00	1979	2020	79	4088.90	4131.30
01A1	39N07E01A001M	412539N1211050W001	Modoc	Stockwatering	300	4183.40	4184.40	1979	2020	81	4035.40	4163.90
03D1	38N08E03D001M	411647N1210358W001	Lassen	Irrigation	280	4163.40	4163.40	1982	2020	71	4076.60	4148.60
06C1	37N08E06C001M	410777N1210986W001	Lassen	Irrigation	400	4133.40	4133.90	1982	2016	69	4066.20	4126.80
08F1	38N09E08F001M	411493N1209656W001	Lassen	Other	217	4253.40	4255.40	1979	2020	83	4167.90	4229.50
12G1	38N07E12G001M	411467N1211110W001	Lassen	Residential	116	4143.38	4144.38	1979	1993	28	4130.98	4138.68
13K2	37N07E13K002M	410413N1211147W001	Lassen	Irrigation	260	4127.40	4127.90	1982	2018	70	4061.90	4109.70
16D1	38N08E16D001M	411359N1210625W001	Lassen	Irrigation	491	4171.40	4171.60	1982	2020	74	4078.73	4162.40
17K1	38N08E17K001M	411320N1210766W001	Lassen	Residential	180	4153.30	4154.30	1957	2020	146	4115.08	4150.00
18M1	38N09E18M001M	411305N1209896W001	Lassen	Irrigation	525	4288.40	4288.90	1981	2020	74	4192.30	4232.70
18N2	39N08E18N002M	412144N1211013W001	Modoc	Residential	250	4163.40	4164.40	1979	2020	80	4136.60	4160.20
20B6	38N07E20B006M	411242N1211866W001	Lassen	Residential	183	4126.30	4127.30	1979	2019	80	4076.94	4116.60
21C1	39N08E21C001M	412086N1210574W001	Modoc	Irrigation	300	4161.40	4161.70	1979	2020	79	4082.10	4148.50
24J2	38N07E24J002M	411228N1211054W001	Lassen	Irrigation	192	4138.40	4139.40	1979	2019	77	4056.70	4137.70
28F1	39N09E28F001M	411907N1209447W001	Modoc	Residential	73	4206.60	4207.10	1982	2020	76	4194.57	4202.10
32A2	38N07E32A002M	410950N1211839W001	Lassen	Other	49	4118.80	4119.50	1959	2020	133	4106.70	4118.80
32R1	39N09E32R001M	411649N1209569W001	Lassen	Irrigation	unknown	4243.40	4243.60	1981	2020	64	4161.20	4205.50
ACWA-1	38N08E07A001M	411508N1210900W001	Lassen	Irrigation	780	4142.00	4142.75	2016	2020	8	4039.15	4126.35
ACWA-2	39N08E33P002M	411699N1210579W001	Lassen	Irrigation	800	4153.00	4153.20	2016	2020	8	4126.40	4139.35
ACWA-3	39N08E28A001M	411938N1210478W001	Modoc	Irrigation	720	4159.00	4159.83	2016	2020	7	4136.23	4150.58
Notes:												

Notes:

bgs = below ground surface msl = above mean sea level

source: https://sgma.water.ca.gov/webgis/?appid=SGMADataViewer

5.1.1 Groundwater Level Trends

1603

1604

1605 1606

1607

1608

1609

1610 1611

1612

1613

Figure 5-2 and **Figure 5-3** show hydrographs for the two wells with the longest monitoring records along with background colors representing the Water Year (WY) type: wet, below normal, above normal, dry, and critical dry. These WY types are developed from the Sacramento River Index (SRI), which is calculated from annual runoff of the Sacramento River Watershed, of which the Pit River is a tributary. The SRI (no units) has varied between 3.1 and 15.3 (average: 8.1) over its 115-year history (1906-2020) and is divided into the five WY categories. For 1983 to 2018, the average SRI is 7.9.

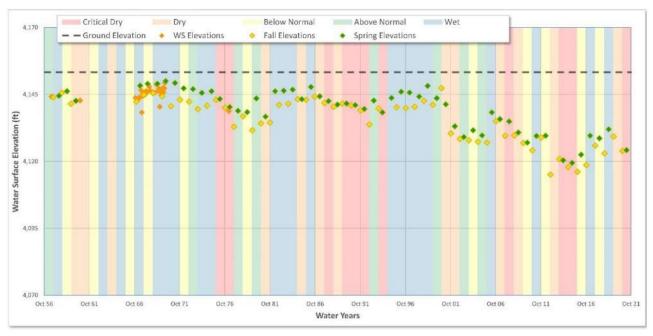


Figure 5-2 Hydrograph of Well 17K1

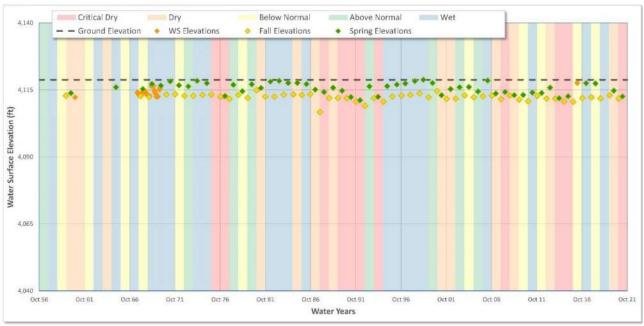


Figure 5-3 Hydrograph of Well 32A2

- The water level record for these two wells illustrates that some areas of the Basin have experienced little to no
- 1615 change in water levels, while other areas have fluctuated and declined during the last 20 years. Declines during the
- drought period of the late 1980s and early 1990s were offset by recovery during the wet period of the late 1990s.
- 1617 Water levels in some wells have declined during the sustained dry period that has occurred since 2000.
- 1618 Hydrographs for all 22 wells are presented in **Appendix 5A**. On each of these hydrographs, an orange trend line is
- shown, which is determined from a line of best fit for the spring water level measurements between WY 1979 and
- 1620 2021. The average water level change during that period, in feet per year, is also shown. Sixteen wells show
- relatively stable (less than -1.0 foot per year [ft/yr] of decline) or rising water levels, and six wells show declining
- water from -1.0 ft/yr to -3.1 ft/yr. The locations of these water level changes are shown graphically on **Figure 5-4**,
- with the stable or rising water levels shown in green, and areas with declines more than -1.0 ft/yr in orange.

5.1.2 Vertical Groundwater Gradients

- Vertical hydraulic gradients are apparent when groundwater levels in wells screened deep in the aquifer differ from
- water levels measured shallow in the aquifer at the same general location. Significant vertical gradients can
- indicate that the deep portion of the aquifer is separate from the shallow (e.g., by a very low permeability clay
- layer) and/or that pumping in one of the aquifers has occurred and the vertical flow between the aquifers is in
- progress of stabilizing. Chapter 4 Hydrogeologic Conceptual Model defines a single principal aquifer in the
- BVGB. However, vertical gradients likely exist, and the five recently constructed well clusters will have data to
- describe these gradients once sufficient water level data are available from those wells. The locations of the
- clusters are shown on **Figure 5-1**.

1624

1633

5.1.3 Groundwater Contours

- Spring and fall 2018 water level measurements from the 21 active CASGEM wells were used to illustrate current
- 1635 groundwater conditions. The 2018 data was used to illustrate current conditions because there were several wells
- without data for 2019 or 2020. Figure 5-5 and Figure 5-6 show the 2018 seasonal high and seasonal low
- 1637 groundwater elevation contours, respectively, which were interpolated from the locations of the 21 active wells.
- 1638 Each contour line shows equal groundwater elevation. Groundwater flows from higher elevations to lower
- elevations, perpendicular to the contour lines. The direction of flow is emphasized on the figures in certain areas
- with arrows. In general, groundwater is highest in the east, where Ash, Willow and Butte Creeks enter the Basin.
- The general flow of water is to the west and south. The contours do indicate, however, northerly flow from the
- lower reaches of Ash Creek. In the southern portions of the BVGB, groundwater flows toward the east.

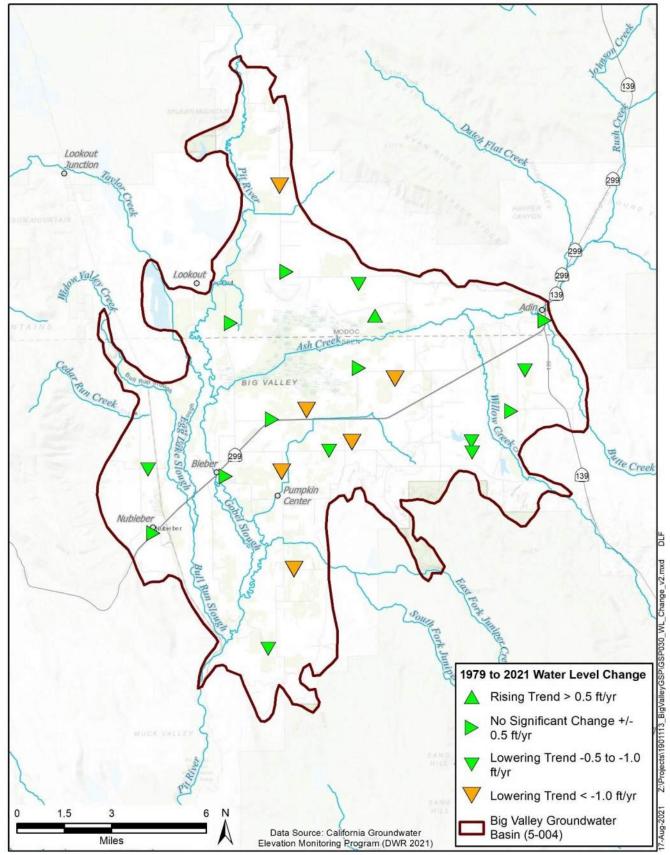


Figure 5-4 Average Water Level Change Since 2000 Using Spring Measurements

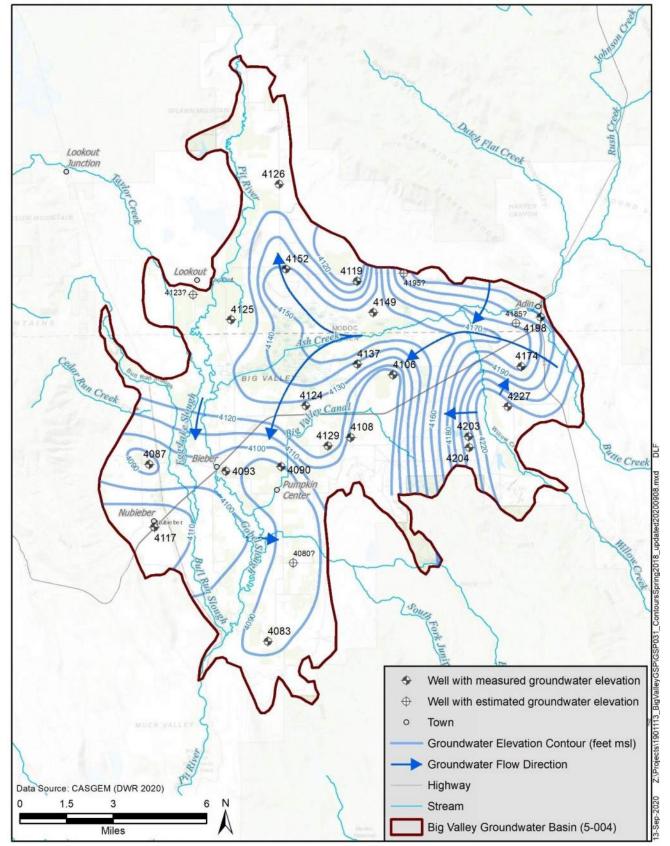


Figure 5-5 Groundwater Elevation Contours and Flow Direction Spring 2018

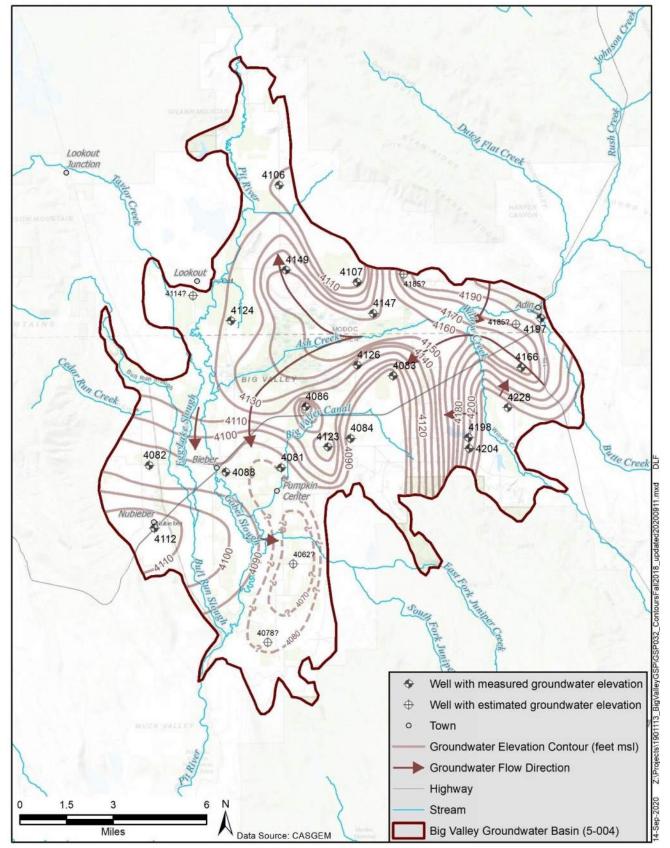


Figure 5-6 Groundwater Elevation Contours and Flow Direction Fall 2018

5.2 Change in Storage

1649

1669

1671

- To determine the annual and seasonal change in groundwater storage, groundwater elevation contoured surfaces³⁷
- were developed for spring and fall for each year between 1983 and 2018. These surfaces are included in **Appendix**
- 1652 **5B**. The amount of groundwater in storage for each set of contours was calculated using software which can
- subtract the groundwater elevation surface from the ground elevation surface (using a digital elevation model) at
- each grid cell (pixel) and calculate the average depth to water (DTW) for the entire Basin. This average DTW was
- then subtracted from the practical bottom of the Basin (1,200 feet), multiplied by the area of the Basin, and
- multiplied by 5 percent, which is used as the specific yield³⁸.
- 1657 **Table 5-2** shows, from 1983 to 2018, the total groundwater in storage for each year and the cumulative change in
- storage. The highest SRI occurred in 1983 and the fourth lowest SRI occurred in 2015. Moreover, this 36-year
- period also include five of the lowest ten SRIs and five of the highest ten SRIs, which demonstrates the high
- degree of variability in climatic conditions.
- 1661 **Figure 5-7** shows this information graphically, along with the annual precipitation from the McArthur station. This
- graph shows that groundwater storage generally declines during dry years and stays stable or increases during
- normal or wet years. During the early portion of the 36-year period, groundwater levels dipped, then recovered to
- 1664 1983 conditions by 1999 due to six consecutive years of above-average precipitation. Since 2000, groundwater
- storage has generally declined by about 96,000 acre-feet (AF) (using spring measurements) which is a slight
- increase from the historic low of about 116,000 AF in spring 2015.
- Annual groundwater use is not shown on **Figure 5-7** as required by SGMA regulations. Groundwater use will be
- addressed in Chapter 6 Water Budget.

5.3 Seawater Intrusion

The BVGB is not located near the ocean, and therefore seawater intrusion is not applicable to this GSP.

5.4 Groundwater Quality Conditions

- 1672 As noted in Chapter 4, previous reports have characterized the water quality in the BVGB as excellent (DWR
- 1673 1963, Reclamation 1979). Groundwater is generally suitable for all beneficial uses and only localized
- 1674 contamination plumes have been identified in the BVGB. This section presents an analysis of recent groundwater
- 1675 quality conditions and the distribution of known groundwater contamination sites in compliance with GSP
- 1676 Regulation §354.16(d).

³⁷ Groundwater elevation surfaces are developed using a kriging mathematically method and the known groundwater elevations at wells throughout the Basin. Kriging predicts (interpolates) what groundwater levels are between known points. The kriging surface consists of a grid (pixels) covering the entire basin that has interpolated groundwater elevation values for each node of the grid.

³⁸ The fraction of the aquifer material that contains recoverable water. Specific yield is described in more detail in Chapter 4 – Hydrologic Conceptual Model.

1677 Table 5-2 Change in Storage 1983-2018

Table 5	-Z Cilali	ge in Storage	Spring		
	Average		Cumulative		
	Spring Depth	Spring	Change in		
	to Water ¹	Storage ²	Storage ³		
Year	(feet)	(Acre-feet)	(Acre-feet)		
		-	(Acre-reet)		
1983 1984	29.3 29.4	5,390,192 5,389,508	(684)		
1985	31.4	5,380,526	(9,666)		
1986	31.0	5,382,539	(7,653)		
1987	32.6	5,375,135	(15,057)		
1988	34.9	5,364,459	(25,733)		
1989	35.2	5,363,150	(27,042)		
1990	35.6	5,360,976	(29,216)		
1991	36.8	5,355,677	(34,515)		
1992	38.0	5,350,297	(39,895)		
1993	36.9	5,355,293	(34,899)		
1994	37.5	5,352,221	(37,971)		
1995	35.3	5,362,737	(27,456)		
1996	32.4	5,375,861	(14,332)		
1997	31.8	5,378,600	(11,592)		
1998	31.1	5,382,014	(8,179)		
1999	29.5	5,389,070	(1,122)		
2000	32.3	5,376,287	(13,905)		
2001	38.0	5,350,015	(40,177)		
2002	39.3	5,344,357	(45,835)		
2003	39.4	5,343,881	(46,311)		
2004	39.2	5,344,515	(45,677)		
2005	41.5	5,334,164	(56,028)		
2006	36.7	5,356,175	(34,017)		
2007	38.8	5,346,641	(43,551)		
2008	41.6	5,333,712	(56,480)		
2009	42.5	5,329,337	(60,856)		
2010	46.4	5,311,440	(78,752)		
2011	45.9	5,313,710	(76,482)		
2012	44.9	5,318,299	(71,893)		
2013	49.3	5,298,013	(92,179)		
2014	51.7	5,287,059	(103,133)		
2015	54.4	5,274,644	(115,548)		
2016	51.3	5,288,702	(101,490)		
2017	49.7	5,296,127	(94,066)		
2018	50.1	5,294,464	(95,728)		

Note: Parentheses indicate negative numbers

¹ From water surface elevation contours - Appendix 5A

² Calculated from average depth to water, area of basin, 1,200 foot aquifer bottom, and specific yield of 5%

³ This is the total change in storage since the baseline, defined as Spring 1983.

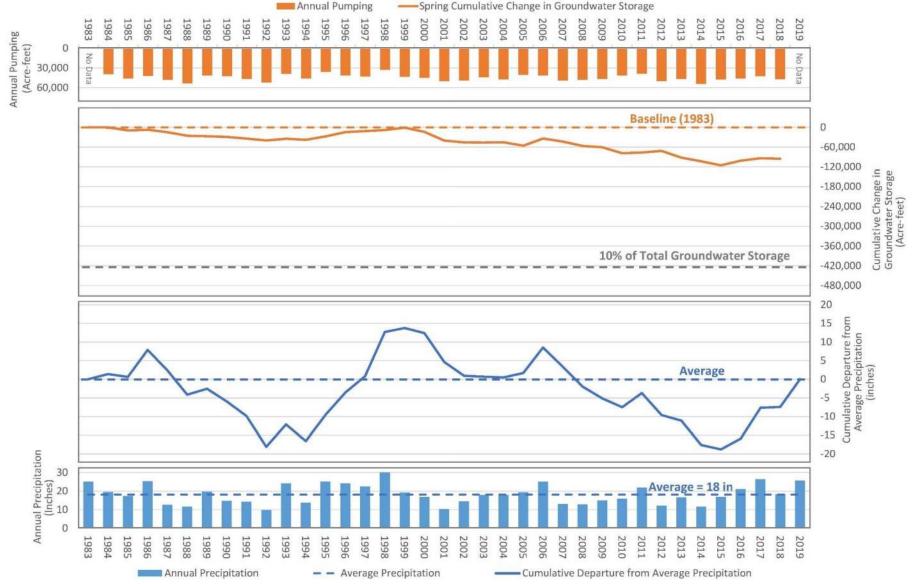


Figure 5-7 Precipitation, Pumping and Change in Groundwater Storage

1680

5.4.1 Naturally Occurring Constituents

- 1683 The concentration of naturally occurring constituents varies throughout the BVGB. Previous reports have noted the
- potential elevated concentrations of arsenic, boron, fluoride, iron, manganese, and sulfate. (DWR 1963,
- Reclamation 1979) All of these constituents are naturally occurring and, in these historic reports, they indicate that
- 1686 most of these constituents are associated with localized thermal waters found near hot springs in the center of the
- 1687 Basin.

1682

- More recent conditions were analyzed using a statistical approach on available data from the GAMA Groundwater
- Information System [GAMA GIS] (State Water Board 2020a). The GAMA GIS data provides the most
- 1690 comprehensive, readily available water quality dataset and contains results from numerous programs, including:
- Division of Drinking Water (public supply systems)
- Department of Pesticide Regulation
 - Department of Water Resources (historic ambient monitoring)
- Environmental Monitoring Wells (regulated facilities and cleanup sites)
- U.S. Geological Survey (USGS) GAMA program
- USGS National Water Information System data
- 1697 Water quality results in these datasets go back to the 1950s. Because conditions can change as groundwater is used
- over time, data prior to the WY 1983 were eliminated from the statistical analysis of the data. WY 1983 was
- 1699 chosen because the bulk of the historic water level wells (**Figure 5-1**) came online by 1983. Data from the
- Environmental Monitoring Wells programs were also eliminated since water quality issues associated with these
- regulated sites are typically highly localized, often are associated with isolated, perched groundwater, and are
- already regulated. The nature and location of groundwater contamination sites are discussed in Section 5.4.2. –
- 1703 Groundwater Contamination Sites and Plumes.
- 1704 **Table 5-3** shows the statistical evaluation of the filtered GAMA water quality data along with the water quality
- 1705 results obtained from the five well clusters constructed to support the GSP. The constituents selected to assess the
- suitability in the Basin are based on thresholds for different beneficial uses. For domestic and municipal uses, the
- inorganic constituents that are regulated under state drinking water standards are shown. Boron and sodium are
- also shown because elevated concentrations can affect the suitability of the water for agricultural uses. The
- suitability threshold concentration for each constituent is shown, using either the MCL or agricultural threshold,
- whichever was lower. Iron and manganese were evaluated for both drinking water and agricultural thresholds. It is
- assumed that water suitable for domestic, municipal, and agricultural purposes would also be suitable for
- environmental and industrial beneficial uses.

Table 5-3 Water Quality Statistics

											# Wells	% of Wells	
									# Wells	% of Wells	with Most	with Most	
									with	with	Recent	Recent	
	Suitability	Suitability				# Meas	% of Meas		Average	Average	Meas	Meas	
	Threshold	Threshold	Total # of			Above	Above	# Wells	Above	Above	Above	Above	
Constituent Name	Concentration	Type	Meas	min	max	Threshold	Threshold	With Meas	Threshold	Threshold	Threshold	Threshold	Comment
Aluminum	200	DW1	41	0	552	2	5%	18	1	6%	0	0%	Low concern due to only two threshold exceedances and zero recent measurements above MCL
Antimony	6	DW1	45	0	36	1	2%	20	1	5%	0	0%	Low concern due to only one threshold exceedance and zero recent measurements above MCL
Arsenic	10	DW1	53	0	12	4	8%	23	3	13%	3	13%	·
Barium	1000	DW1	49	0	600	0	0%	23	0	0%	0	0%	
Beryllium	4	DW1	48	0	1	0	0%	23	0	0%	0	0%	
Cadmium	5	DW1	49	0	1	0	0%	23	0	0%	0	0%	
Chromium (Total)	50	DW1	36	0	20	0	0%	13	0	0%	0	0%	
Chromium (Hexavalent)	10	DW1*	13	0.05	3.29	0	0%	13	0	0%	0	0%	
Copper	1300	DW1	34	0	190	0	0%	21	0	0%	0	0%	
Fluoride	2000	DW1	42	0	500	0	0%	16	0	0%	0	0%	
Lead	15	DW1	28	0	6.2	0	0%	16	0	0%	0	0%	
Mercury	2	DW1	44	0	1	0	0%	19	0	0%	0	0%	
Nickel	100	DW1	46	0	10	0	0%	20	0	0%	0	0%	
Nitrate (as N)	10000	DW1	151	0	4610	0	0%	24	0	0%	0	0%	
Nitrite	1000	DW1	62	0	930	0	0%	20	0	0%	0	0%	
Nitrate + Nitrite (as N)	10000	DW1	2	40	2250	0	0%	2	0	0%	0	0%	
Selenium	50	DW1	49	0	5	0	0%	23	0	0%	0	0%	
Thallium	2	DW1	46	0	1	0	0%	20	0	0%	0	0%	
Chloride	250000	DW2	66	1400	79000	0	0%	43	0	0%	0	0%	
Iron	300	DW2	50	0	11900	26	52%	21	8	38%	9	43%	Low human health concern due to being a secondary MCL for aesthetics
Iron	5000	AG	50	0	11900	2	4%	21	2	10%	2	10%	
Manganese	50	DW2	45	0	807	28	62%	21	12	57%	11	52%	Low human health concern due to being a secondary MCL for aesthetics
Manganese	200	AG	45	0	807	22	49%	21	7	33%	7	33%	
Silver	100	DW2	36	0	20	0	0%	19	0	0%	0	0%	
Specific Conductance	900	DW2	66	125	1220	3	5%	42	1	2%	1	2%	
Sulfate	250000	DW2	60	500	1143000	1	2%	40	0	0%	0	0%	Low concern due to only one threshold exceedance and zero recent measurements above MCL
Total Dissolved Solids (TDS)	500000	DW2	57	131000	492000	0	0%	39	0	0%	0	0%	
Zinc	5000	DW2	34	0	500	0	0%	20	0	0%	0	0%	
Boron	700	AG	40	0	100	0	0%	34	0	0%	0	0%	
Sodium	69000	AG	33	11600	69000	0	0%	21	0	0%	0	0%	
Courses													

Sources:

GAMA Groundwater Information System, accessed June 5, 2020 (SWRCB 2020)

University of California Cooperative Extension Farm Advisor (UCCE 2020)

Notes:

1714

GAMA data was filtered to remove all measurements before Oct 1, 1982 and all GeoTracker cleanup sites

Constituents listed are all inorganic naturally occurring elements and compounds that have a SWRCB drinking water maximum contaminant limit (MCL), plus Boron, which has a threshold for agricultural use.

All measurements in micrograms per liter, except specific conductance which is measured in microsiemens per centimeter.

Green indicates less than 1%

Yellow indicates between 1% and 10%

Red indicates greater than 10%

Threshold Types:

DW1: Primary drinking water MCL

DW2: Secondary drinking water MCL (for aesthetics such as taste, color, and odor)

AG: Agricultural threshold based on guidelines by the Food and Agricultural Organization of the United Nations (Ayers and Westcot 1985)

* Hexavalent chromium was regulated under a primary drinking water MCL until the MCL was invalidated in 2017. The SWRCB is working to re-establish the MCL.

Big Valley Groundwater Basin Groundwater Sustainability Plan The subset of water quality data was analyzed to determine which constituents to investigate further. **Table 5-3** shows that most constituents have not had concentrations measured above their corresponding threshold since 1983 and were not investigated further. Sulfate, aluminum, and antimony only had one or two detections above their threshold, and none of these values were recent so these constituents were not investigated further. Arsenic (As), iron (Fe), manganese (Mn), specific conductance (SC), and total dissolved solids (TDS) were investigated further. All these constituents are naturally occurring.

Arsenic, Iron and Manganese

As, Fe, and Mn show elevated concentrations in over 10 percent of the wells. Although iron and manganese are regulated under secondary drinking water standards (for aesthetics such as color, taste, and odor) but are not of concern for human health as drinking water, these constituents were still chosen for further investigation because they also have multiple detections above the agricultural suitability threshold (Ayers and Westcot 1985). **Figure 5-8** through **Figure 5-10** show the trends over time. Wells with single measurements are shown as dots, where wells that had multiple measurements are shown as lines. These figures indicate that the number of wells with highly elevated concentrations of arsenic and manganese concentrations may have decreased over the last 40 years of groundwater use. Iron concentrations are generally below the agricultural suitability threshold (Ayers and Westcot, 1985), with two recent elevated measurements from the monitoring wells constructed in support of the GSP.

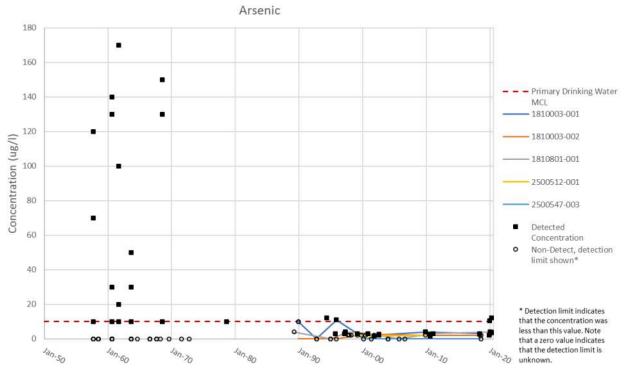


Figure 5-8 Arsenic Trends

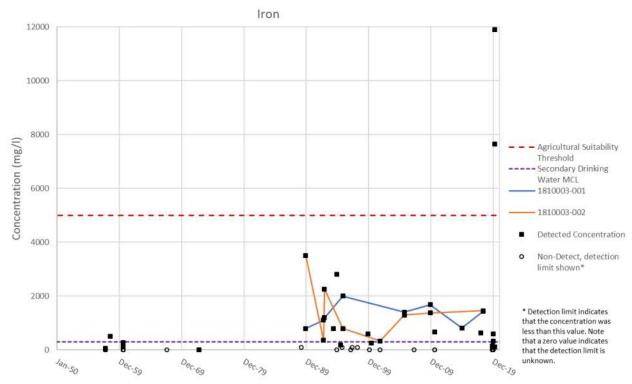


Figure 5-9 Iron Trends

1737

1738

1739

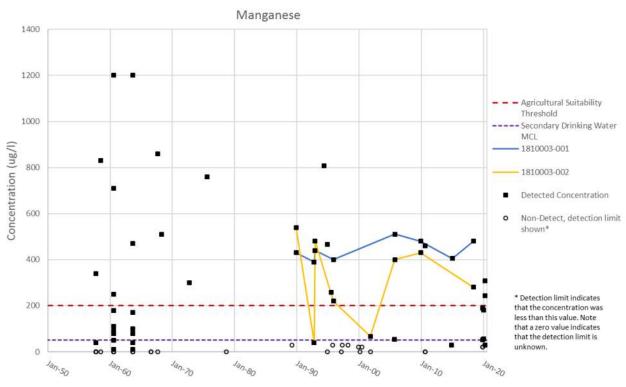


Figure 5-10 Manganese Trends

Specific	Conductance	and Total	Discolved	Solida
Specific	Conductance	and Lotal	Dissolved	Solias

- SC is a measure of the water's ability to conduct electricity. TDS is a measure of the total amount of dissolved
- materials (e.g., salts) in water. SC and TDS are related to one another (higher TDS results in higher SC) and SC is
- often used as a proxy for TDS. Although there was only one recent measurement over the MCL for SC, both SC
- and TDS were investigated further because they are important indicators of general water quality conditions.
- Figure 5-11 and Figure 5-12 show the trends over time. Wells with single measurements are shown as dots, where
- wells that had multiple measurements are shown as lines. These figures indicate that the number of wells with
- highly elevated concentrations of SC and TDS may have decreased over the last 40 years. Figure 5-13 and Figure
- 5-14 show the distribution of elevated levels of SC and TDS around the Basin.

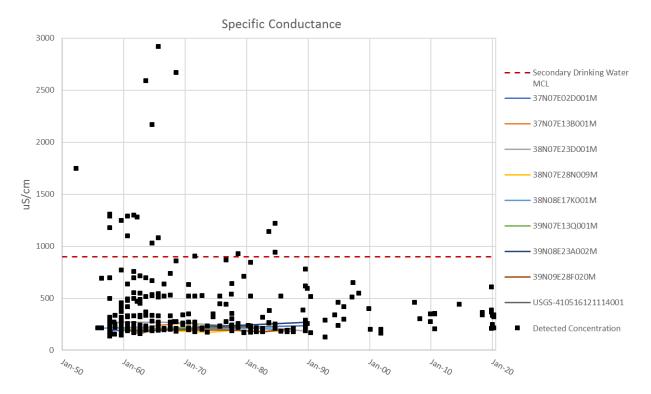


Figure 5-11 Specific Conductance Trends

1751

1752

17531754

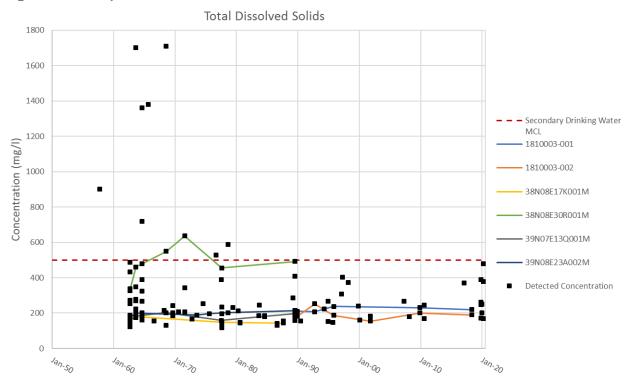


Figure 5-12 TDS Trends

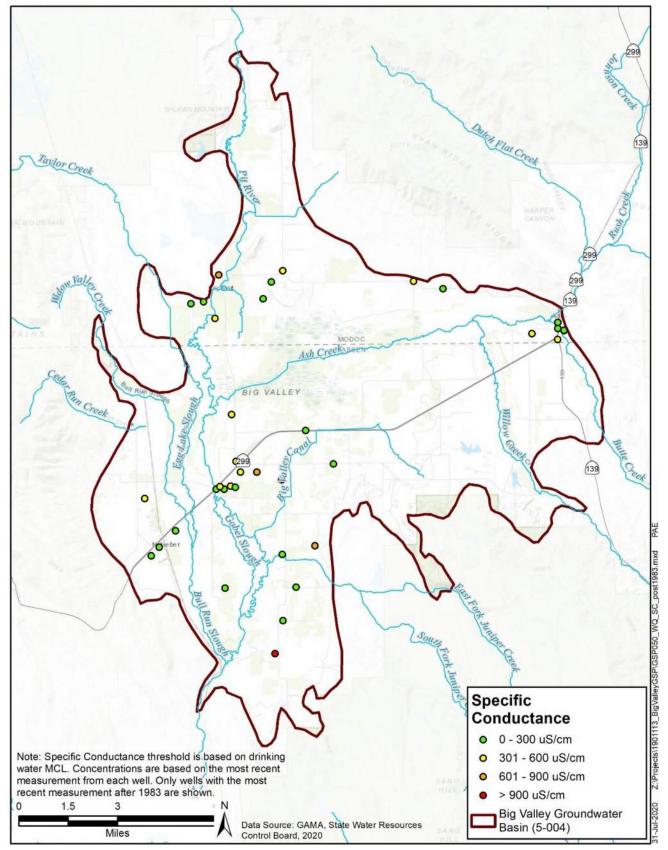


Figure 5-13 Distribution of Elevated Specific Conductance

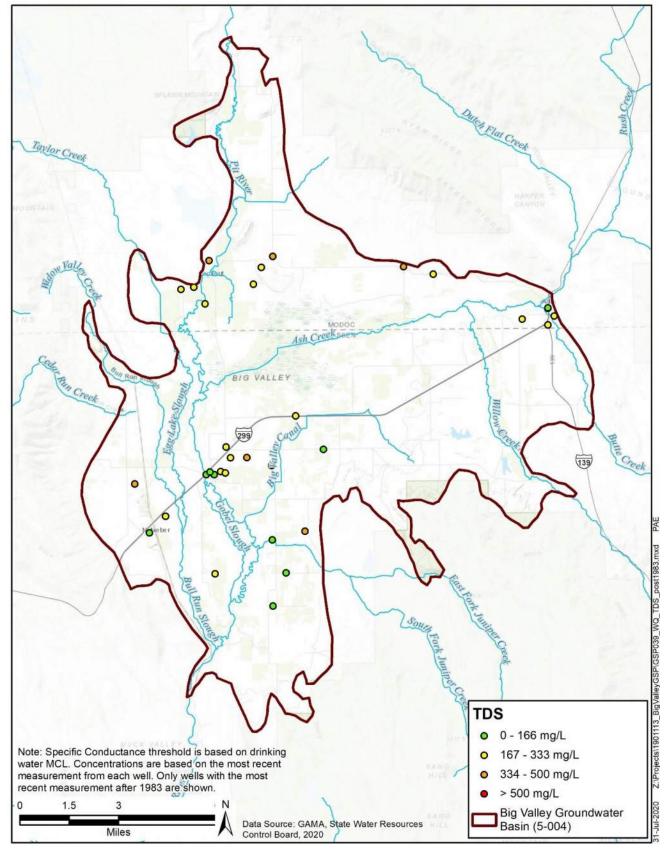


Figure 5-14 Distribution of Elevated TDS Concentrations
5.4.2 Groundwater Contamination Sites and Plumes

1758

To determine the location of potential groundwater contamination sites and plumes, the State Water Board's

1761 GeoTracker website was consulted. GeoTracker catalogs known groundwater contamination sites and waste

disposal sites (State Water Board 2020b). A search of GeoTracker identified ten sites where groundwater could

potentially be contaminated. These sites are in the vicinity of Bieber and Nubieber as listed in **Table 5-4** and

shown on **Figure 5-15**. The sites include leaking underground storage tanks (LUSTs), cleanup program sites, and a

land disposal site. Half of the sites are open and subject to ongoing regulatory requirements. The contaminants are

listed in **Table 5-4**, which also gives a summary of the case history.

1767 Most of the contaminants originated at LUST sites are leaking petroleum hydrocarbons, which are light non-

aqueous phase liquids (LNAPLs). LNAPLs are less dense than water and their solubility is quite low, meaning that

if they reach groundwater, they float on top and generally do not migrate into the deeper portions of the aquifer.

Moreover, many of the constituents can be degraded by naturally occurring bacteria in soil and groundwater so the

hydrocarbons do not migrate far from the LUST sites. However, MTBE,³⁹ TBA,⁴⁰ and fuel oxygenates are more

soluble in water. Two LUST sites and the landfill site are subject to long-term monitoring while a fourth site is

1773 ready for case closure.

1772

1776

1777

1778

1774 The Bieber Landfill is subject to ongoing semi-annual monitoring of groundwater levels and groundwater quality

at four shallow wells. This monitoring is required by the RWQCB (Order No. R5-2007-0175) after the formal

closure of the landfill in the early 2000s. Trace concentrations of several organic constituents⁴¹ have been detected

at MW-1, the closest downgradient well to the site, but rarely at the other three wells. Higher concentrations of

inorganic constituents (e.g., TDS, SC, others) are also present at MW-1. During 2019, the landfill was also

required to analyze groundwater samples from MW-1, MW-2, and MW-4 for per/polyfluoroalkyl substances

1780 (PFAS), which are an emerging group of contaminants that are being studied for their effect on human health and

may be subject to very low regulatory criteria (parts per trillion). Fifteen of 28 PFASs were detected at MW-1, and

nine of 28 PFASs were detected at MW-4 (none at MW-2). The State Water Board/RWQCB evaluation of these

data is still pending.

_

³⁹ Methyl tert-butyl ether (MTBE) is a fuel additive that was used starting in 1979 and was banned in California after 2002. MTBE is sparingly soluble in water and has a primary MCL of 13 ug/l for human health and a secondary MCL of 5 ug/l for aesthetics.

⁴⁰ tert-Butyl alcohol (TBA) is also a fuel additive and is used to produce MTBE. TBA does not have a drinking water MCL in California.

 $^{^{41} 1, 1-}dichoroethane, \ 1, 4-dichlorobenzene, \ cis-1, 2-dichloroethylene, \ benzene, \ chlorobenzene, \ MTBE, \ 2, 4, 5-trichlorophenoxyacetic \ acid$

Table 5-4 Known Potential Groundwater Contamination Sites in the BVGB

GeoTracker ID	Latitude	Longitude	Case Type	Status	Last Regulatory Acitivity	Case Begin Date	Potential Contaminants of Concern	Site Summary
T10000003882	41.12050	-121.14605	LUST Cleanup Site	Open - Assessment & Interim Remedial Action	04/16/20	10/17/11	Benzene, Diesel, Ethylbenzene, Total Petroleum Hydrocarbons (TPH), Xylene	The case was opened following an unauthorized release from an UST(s). Tank removal and further site assessment, including installation of 8 monitoring wells, led to remedial actions. Periodic groundwater monitoring started in October 2013 and has been ongoing though March 2020.
T0603593601	41.13230	-121.13070	LUST Cleanup Site	Open - Remediation	07/29/20	03/22/00	Gasoline	Active gas station with groundwater impacts. Full-scale remediation via groundwater extraction and treatment began in September 2013 and was shut down in April 2017 because it was determined that it was no longer an effective remedy to treat soil and groundwater. At the time of system shutdown, the influent MTBE concentration was 5,650 micrograms per liter which exceeds the Low-Threat Closure Policy criteria. Additionally, high levels of TPHg and sheen/free product are present. A soil vapor extraction system operated for a limited time in 2016/2017 but was not effective. In April 2018, it was determined that active remediation is not a cost-effective path to closure given low permeability of site soils. Staff suggested incorporating institutional controls (IC) and risk-based cleanup objectives instead of active remediation of soil and groundwater. The IC approach was dependent on the submittal of several documents related to soil management, deed restriction, risk modeling and annual groundwater sampling. This information has not been provided, and the RWQCB sent an Order for this information.
T0603500006	41.12241	-121.14128	LUST Cleanup Site	Completed - Case Closed	01/04/00	06/28/99	Diesel	A 2000-gallon UST was removed, and limited contaminated soil was present in the excavation. Petroleum hydrocarbons were not found in the uppermost groundwater. These findings led to the closure of the case.
L10005078943	41.12941	-121.14169	Land Disposal Site	Open - Closed facility with Monitoring*	06/26/20	06/30/08	Higher levels of Inorganic constituents, organic chemicals (synthetic), per/polyfluoroalkyl substances	Disposal activities at Bieber Landfill occurred from the early 1950s until 1994. The landfill was closed during the early 2000s. While active, the site received residential, commercial, and industrial non-hazardous solid waste. Formerly an unlined burn dump, the site was converted to cut-and-cover landfill operation in 1974. Landfill refuse is estimated to occupy less than 13 acres of the 20-acre site. Wastes are estimated to be approximately 10-15 feet thick. The Class III landfill was closed in accordance with Title 27 of the California Code of Regulations. A transfer station was established at the site for the transportation of waste to another landfill. Groundwater levels and quality are monitored twice per year at 4 wells.
T0603500003	41.12124	-121.14061	LUST Cleanup Site	Completed - Case Closed	09/13/94	07/31/91	Heating Oil / Fuel Oil	A 1000-gallon UST was removed, and contaminated soil was present beneath the tank, which led to installation of nine soil borings and three monitoring wells. Contaminated soil was removed but an adjacent building limited the extent of the excavation so contaminated soil remains under the building. Hydrocarbons were initially found in 1 well but not in subsequent sampling. The RWQCB concurred with a request to close the investigation.
T10000003101	41.13151	-121.13658	Cleanup Program Site	Open - Assessment & Interim Remedial Action	07/22/20	04/03/07	Benzene, Toluene, Xylene, MTBE / TBA / Other Fuel Oxygenates, Gasoline, Other Petroleum	A diesel leak was found in association with an industrial chipper. Corrective action included excavation of diesel- impacted soil, removing contaminated water and groundwater monitoring. Results of soil and groundwater sampling indicate low concentrations of TPHg and BTEX and that there is no offsite migration. Staff have determined that the case is ready for closure, pending decommissioning of the site monitoring wells.
SL0603581829	41.09251	-121.17904	Cleanup Program Site	Completed - Case Closed	09/01/05	01/08/05	Petroleum - Diesel fuels, Petroleum - Other	Contaminated soil excavated and transported to Forward Landfill for disposal. Contaminated groundwater (7,000 gallons) extracted with vacuum truck for disposal.
T0603500002	41.12188	-121.13546	LUST Cleanup Site	Completed - Case Closed	07/17/06	10/20/86	Gasoline / diesel	Three USTs were removed, and contaminated soil was present beneath the tank, which led to installation of nine monitoring wells and three remediation wells. Natural attenuation of the hydrocarbon impact was acceptable to the RWQCB due to the limited, well-defined extent of the impact and the limited and declining impact to groundwater. The RWQCB concurred with a request to close the site.
T0603500004	41.12134	-121.13547	LUST Cleanup Site	Completed - Case Closed	03/12/99	06/12/97	Diesel	A 5000-gallon UST was removed and very low levels of petroluem hydrocarbons were detected in the soil, which was allowed to be spread onsite and the case was closed.
T10000002713	41.11993	-121.14271	Cleanup Program Site	Open - Site Assessment	12/30/16	03/10/10	Other Petroleum	The site is an old bulk plant which was built in the 1930s and handled gasoline and diesel. During a routine inspection in March 2010, evidence of petroleum spills were identified at the loading dock area. A follow-up inspection was conducted in April 2010. The ASTs and loading dock were removed but additional contamination was noted under the removed structures. Furthermore, a shallow excavation contained standing water with a sheen. Due to the potential impacts to shallow groundwater, the Regional Water Board became the lead agency in December 2010. Additional information was requested in December 2016. A response is not evident.

^{*}This terminology indicates that the landfill is closed (no new material being disposed), but the site is open with regard to ongoing groundwater monitoring.

¹⁷⁸⁶ Source: GeoTracker (State Water Board 2020b)

¹⁷⁸⁷ MTBE = Methyl tert-butyl ether; TBA = tert-Butyl alcohol

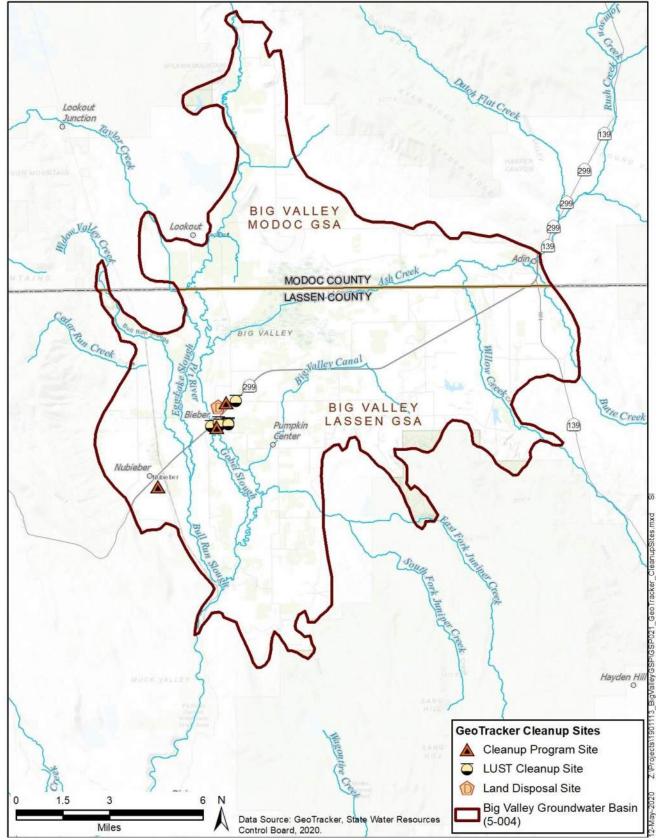


Figure 5-15 Location of Known Potential Groundwater Contamination Sites

Groundwater Sustainability Plan

1788 1789

5.5 Subsidence

1791

1802 1803

1804

1805

1806

1807

1808 1809

1810

1811

1812

1813

1814

1819

- 1792 Vertical displacement of the land surface (subsidence) is comprised of two components: 1) elastic displacement which fluctuates according to various cycles (daily, seasonally, and annually) due to temporary changes in 1793 hydrostatic pressure (e.g., atmospheric pressure and changes in groundwater levels) and 2) inelastic displacement 1794 or permanent subsidence which can occur from a variety of natural and human-caused phenomena. Lowering of 1795 groundwater levels can cause prolonged and/or extreme decrease in the hydrostatic pressure of the aquifer. This 1796 decrease in pressure can allow the aquifer to compress, primarily within fine-grained beds (clays). Inelastic 1797 subsidence cannot be restored after the hydrostatic pressure increases. Other causes of inelastic subsidence include 1798 natural geologic processes (e.g., faulting) and the oxidation of organic rich (peat) soils as well as human activities 1799 such as mining and grading of land surfaces. 1800
- Subsidence can be measured by a variety of methods, including:
 - Regular measurements of any vertical space between the ground surface and the concrete pad surrounding a well. If space is present and increasing over time, subsidence may be occurring at that location. If a space is not present, subsidence may not be occurring, or the well is not deep enough to show that subsidence is occurring because the well and ground are subsiding together.
 - Terrestrial (ground-based) surveys of paved roads and benchmarks.
 - Global Positioning Survey (GPS) of benchmarks. GPS uses a constellation of satellites to measure the 3-dimensional position of a benchmark. The longer the time that the GPS is left to collect measurements, the higher the precision. Big Valley has one continuously operating GPS (CGPS) station near Adin.
 - Monitoring of specially constructed "extensometer" wells. There are no extensometers in the BVGB.
 - Use of InSAR, which is microwave-based satellite technology that has been used to evaluate ground surface elevation and deformation since the early 1990s. InSAR can document changes in ground elevation between successive passes of the satellite. Between 2015 and 2019, InSAR was used to evaluate subsidence throughout California, including Big Valley.
- Subsidence was recognized as an important consideration in the 2007 LCGMP (Brown and Caldwell 2007) but was not identified as an issue for Big Valley specifically. The analysis in the LCGMP was based on indirect observations (groundwater levels) and anecdotal information. This section presents additional data that has become available since the development of the LCGMP.

5.5.1 Continuous GPS Station P347

- 1820 A CGPS station (P347) was installed at the CalTrans yard near Adin in September 2007. The station is part of the
- Plate Boundary Observatory, which is measuring 3-dimensional changes in the Earth surface due to the movement
- of tectonic plates (e.g., Pacific and North American plates).
- 1823 **Figure 5-16** is a plot of the vertical displacement at P347 and shows a slight decline (0.6 inch) over the first
- 1824 11 years of operation, based on the annual mean values (large black open circles). Daily values (blue dots) show
- substantial variation, as much as an inch, but more typically only 0.1 inch on average. This scattering of daily
- values around the annual mean provides an indication of the elastic nature of the displacement. The overall decline



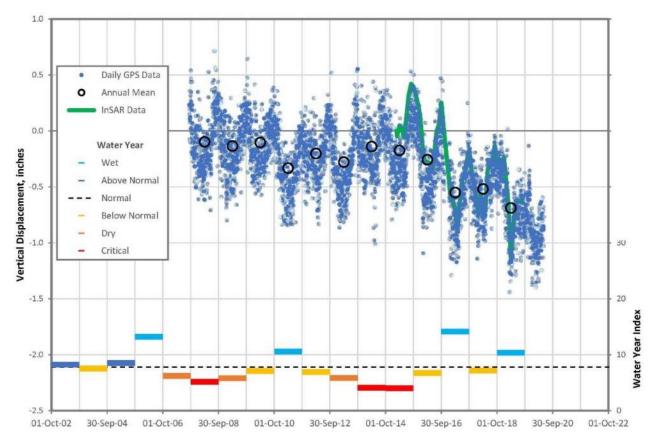


Figure 5-16 Vertical Displacement at CGPS P347

1830 1831

1832

1833 1834

1835

1836

1837

1838

1839

5.5.2 Interferometric Synthetic Aperture Radar

Figure 5-17 is a map of InSAR data made available by DWR for the 4.3-year period between June 2015 and September 2019. The majority of Big Valley was addressed by this InSAR survey, although the survey excludes some areas (shown in white on **Figure 5-17**), including much of the Big Swamp (ACWA), areas along the Pit River near Lookout, and areas south of Bieber. The accuracy of this type of InSAR data in California has been calculated at 18mm (0.7 inches) at a 95% confidence level (Towill 2021). Most of the survey shows downward displacement between 0 and -1 inch throughout Big Valley. This small displacement is close to the level of accuracy of the data, but if true is likely due to natural geologic activities due to its widespread nature.

1840 1841

1842

1843

Two localized areas of subsidence exceeding -1.5 inches are apparent from this data, one in the east-central portion of the Basin north of Highway 299 and one in the southern portion of the Basin between the Pit River and Bull Run Slough. Maximum downward displacement in the Basin is -3.3 inches, over the 4.3-year period. Some of the downward displacement in the Basin may be due to laser leveling of fields, particularly for production of wild rice.

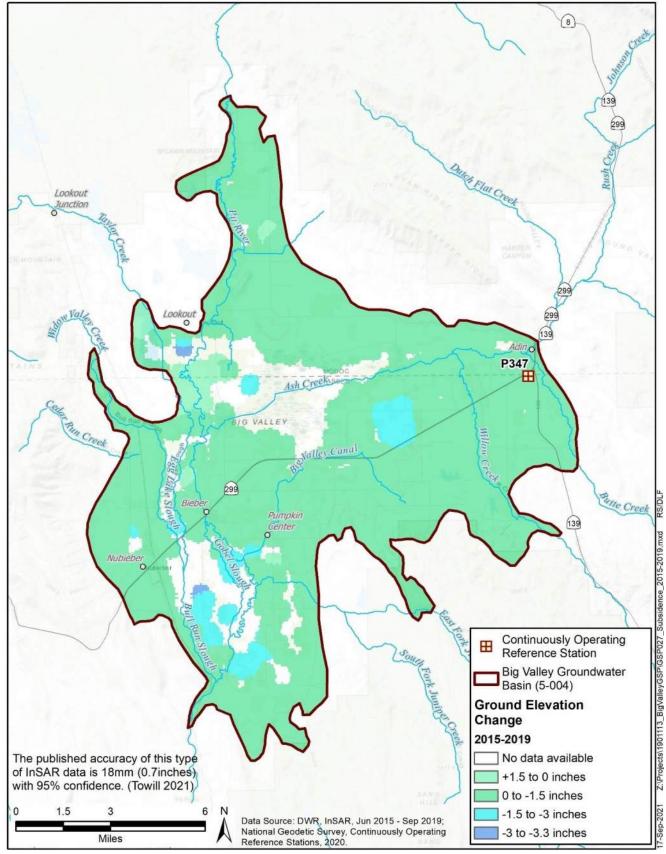


Figure 5-17 InSAR Change in Ground Elevation 2015 to 2019

5.6 Interconnected Surface Water

- Interconnected surface water refers to surface water that is "hydraulically connected at any point by a continuous saturated zone to the underlying aquifer and the overlying surface water is not completely depleted" (DWR 2016c). For the principal aquifer to be interconnected to surface-water streams, groundwater levels need to be near ground surface. As a first determination of where surface water *may* be interconnected, **Figure 5-18** shows the major⁴² streams in the Basin which have groundwater levels near ground surface, with a depth to water of less than 15 feet based on spring 2015 groundwater contours. These areas *may* have the potential to be interconnected with surface water.
- Interconnected streams can be gaining (groundwater flowing toward the stream) or losing (groundwater flowing away from the stream). Preliminary data from the shallow monitoring well clusters⁴³ give an indication the direction of shallow groundwater flow adjacent to streams in two locations in the Basin as shown by the black arrows on **Figure 5-18**.
- Section §354.16(f) of the regulations require an estimate of the "quantity and timing of depletions of [interconnected surface water] systems, utilizing...best available information." The existence and quantity cannot be determined with any reasonable level of accuracy using empirical data, so the best available information is presented in Chapter 6 – Water Budget. The timing of depletions also cannot be determined with existing data.

5.7 Groundwater-Dependent Ecosystems

SGMA requires GSPs to identify groundwater-dependent ecosystems (GDEs) but does not explicitly state the requirements that warrant a GDE designation. SGMA defines a GDE as "ecological communities or species that depend on groundwater emerging from aquifers or on groundwater occurring near the ground surface" (DWR 2016c). GDEs are considered a beneficial use of groundwater.

The most comprehensive and readily accessible data to identify GDEs is referred to as the NCCAG⁴⁴ dataset. Upon inspection of the data,⁴⁵ many inaccuracies were noted. The abstract of the dataset documentation reads:

The Natural Communities dataset is a compilation of 48 publicly available State and federal agency datasets that map vegetation, wetlands, springs, and seeps in California. A working group comprised of DWR, the California Department of Fish and Wildlife (CDFW), and The Nature Conservancy (TNC) reviewed the compiled dataset and conducted a screening process to exclude vegetation and wetland types less likely to be associated with

_

1846

1862

1867

1868

1869

1870

1871

1872

⁴² Named streams from the National Hydrography Dataset [NHD] (USGS 2020a)

⁴³ The clusters are sets of three wells drilled in close proximity to each other for the purpose of determining shallow groundwater flow direction and gradient. At the time of writing this draft chapter, 2 clusters have enough data to determine flow direction; one cluster near Adin and one cluster near Lookout. **Appendix 5C** contains data collected at the two clusters and their flow directions.

⁴⁴ Natural communities commonly associated with groundwater

⁴⁵ By local landowners and local experts familiar with the Basin and its ecological communities.

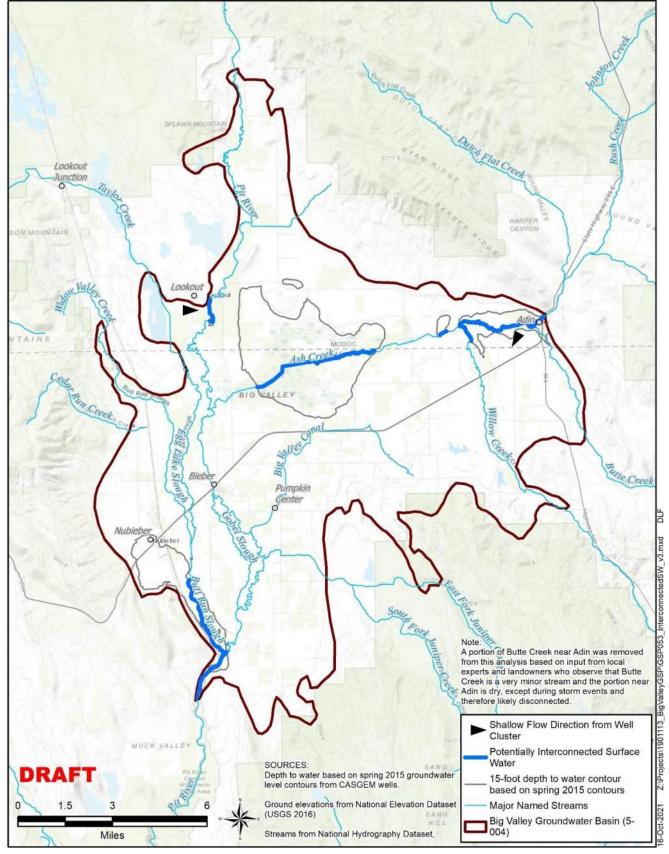


Figure 5-18 Potentially Interconnected Surface Water

1877 1878	groundwater and retain types commonly associated with groundwater, based on criteria described in Klausmeyer et al. (2018).						
1879 1880 1881 1882	Two habitat classes are included in the Natural Communities dataset: (1) wetland features commonly associated with the surface expression of groundwater under natural, unmodified conditions; and (2) vegetation types commonly associated with the sub-surface presence of groundwater (phreatophytes).						
1883 1884 1885 1886	The data included in the Natural Communities dataset do not represent DWRs determination of a GDE. However, the Natural Communities dataset can be used by GSAs as a starting point when approaching the task of identifying GDEs within a groundwater basin. (DWR 2018a)						
1887	The NCCAG geospatial data (DWR 2018a) is separated into two categories: wetlands and vegetation, respectively.						
1888 1889 1890 1891	Palustrine is the dominant habitat at 96 percent of the total wetland area, while riverine is present at four percent and occurs along river courses. Sixteen springs account for a very small area. Most of the springs are in Lassen						
1892 1893 1894	The Vegetation area is subdivided into two primary habitats, based on the plant species. Wet Meadows was the largest primary habitat at 59 percent of the vegetation area, but there was no dominant species. Willow was the second largest habitat at 41 percent of the vegetation area.						
1895 1896 1897 1898 1899 1900	For the NCCAG areas to be designated as actual GDEs, the groundwater level needs to be close enough to the ground surface that it would support the vegetation. For determining potential GDEs, fall 2015 ⁴⁸ depth to water is used, because mid-summer months are the critical limiting factor for plant communities. Furthermore, if groundwater moisture isn't available later in the summer, then the groundwater dependent communities don't have an advantage over communities that are typically not associated with groundwater, such as sagebrush, juniper, and bunchgrass (Lile 2021).						
1901 1902 1903 1904	The depth to water that could potentially be accessed by GDEs depends on the rooting depth of the vegetation. An assessment of native plants in the BVGB found that maximum rooting depths of species present is 10 feet as shown in Table 5-5 . Access to groundwater by plant roots extends above the water table because the groundwater is drawn upward to fill soil pores, and this zone is known as the capillary fringe. The thickness of the capillary						

fringe extends upward several feet, depending on the soil type.

1905

Palustrine are freshwater wetlands, such as marshes, swamps and bogs, not associated with flowing water (Cowardin et al. 2013).
 Riverine are freshwater wetlands located in or near a flowing stream (Cowardin et al. 2013).
 2015 is used because it is the baseline for SGMA.

Table 5-5 Big Valley Common Plant Species Rooting Depths

Species	Rooting Depth					
Carex spp.	Up to 5 feet					
Alfalfa	9 feet					
Aspen	10 feet and less					
Willow	2-10 feet					
Elderberry	10 feet and less					
Saltgrass	2 feet					
Sources: CNPS 2020, TNC 2020, Snell 2020						

1908

1909

1910

1911

1912

1913

1914

1906

As a conservative estimate, a capillary fringe of 10 feet is used. In order for plants to access the water and thrive, not just barely touch, there needs to be significant overlap (of, say 5 feet) between the rooting depth and the capillary fringe (Lile 2021). Furthermore, while roots may extend to a deep level, documentation of maximum depth to water for some of the deep-rooting species in **Table 5-5** to thrive is on the order of 2-3 meters (6-9 feet) (Pezeshki and Shields 2006, Springer et. al. 1999). Therefore, as a conservative estimate for the purposes of delineating GDEs, only those areas in the NCCAG datasets that are in areas with fall 2015 groundwater less than 15 feet are classified as potential GDEs.

Figure 5-19 shows the area with potential GDEs, which is a preliminary assessment and needs to be ground-truthed. Moreover, the data are inaccurate in many places.

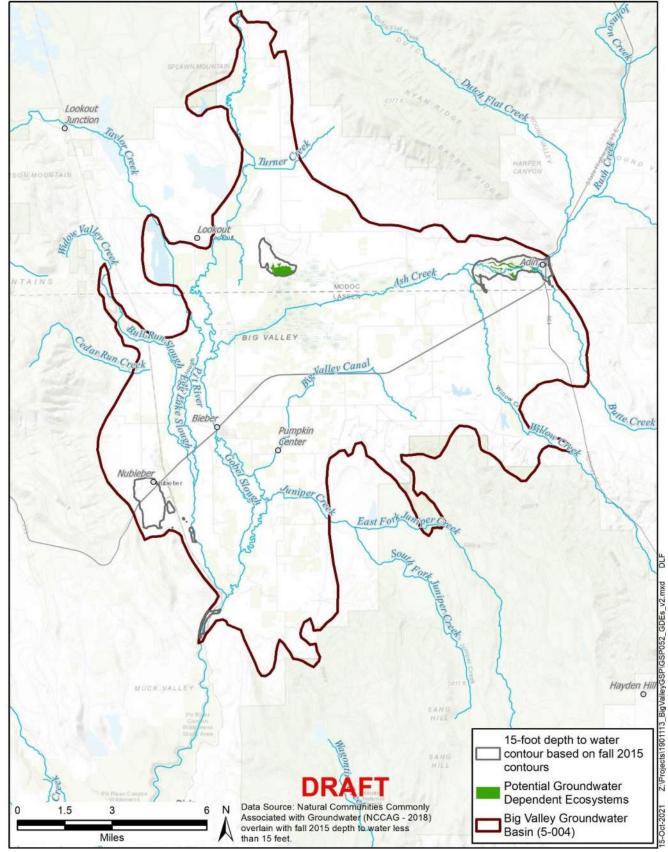


Figure 5-19 Potential Groundwater-Dependent Ecosystems

6. Water Budget § 354.18

 The hydrologic cycle describes how water is moved on the earth among the oceans, atmosphere, land, surfacewater bodies, and groundwater bodies. **Figure 6-1** is a depiction of the hydrologic cycle.

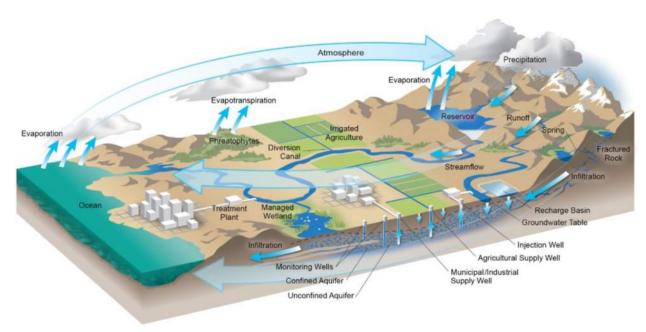


Figure 6-1 Hydrologic Cycle

A water budget accounts for the movement of water among the four major systems in Big Valley: atmospheric, land surface, surface water, and groundwater. The BVGB consists of the latter three systems (land surface, surface water, and groundwater) as shown by the black outline on **Figure 6-2**. This figure shows the exchange between the systems and identifies the specific components of the water budget. The systems and the flow arrows are color coded. Inflows to the BVGB are shown with blue arrows, and outflows from the BVGB are shown with orange arrows. Flows between the systems are shown with green arrows, and flows within a system are shown in purple. The land system, surface-water system, and groundwater system are green, blue, and brown respectively.

Like a checking account, a water budget helps the GSA and stakeholders better understand the deposits and withdrawals and identify what conditions result in positive and negative balances. It should be noted that the development of a water budget is required by the GSP regulations, but the regulations don't require actions based directly on the water budget. Actions are only required based on outcomes related to the six sustainability indicators: groundwater levels, groundwater storage, water quality, subsidence, seawater intrusion, and surfacewater depletions. Therefore, a water budget should be viewed as a tool to develop a common understanding of the Basin and a basis for making decisions to achieve sustainability and avoid undesirable results with the sustainability indicators.

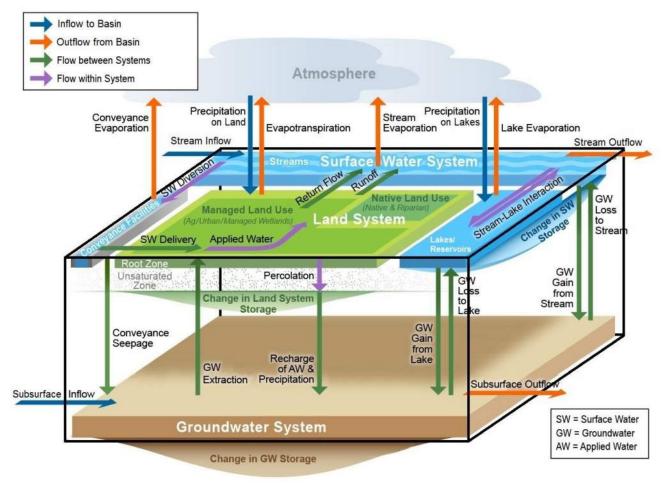


Figure 6-2 Water Budget Components and Systems

6.1 Water Budget Data Sources

Each component shown in **Figure 6-2** was estimated using readily available-data and assembled into a budget spreadsheet. Many groundwater basins in California utilize a numerical groundwater model, such as MODFLOW⁴⁹ or IWFM,⁵⁰ to calculate the water budget. These models require a specialized hydrogeologist to run them, and the methodology by which the water budget is calculated is not readily apparent to the lay person. For the BVGB, a non-modeling (spreadsheet) approach was used so that future iterations of the water budget could be performed by a wider range of hydrology professionals (potentially reducing future GSP implementation costs) and so that the calculations of the specific components could be understood by a broader range of people.

In concept, each component is quantified precisely and accurately, and the resultant budget is balanced. In practice, most of the components can only be roughly estimated and in many cases not at all. Therefore, much of the work to balance the water budget is adjusting some of the unknown or roughly-

1940

1941 1942

1943

1944

1945

1946

1947

1948

1949

1950

1951

1952

1953

⁴⁹ Modular Finite-Difference Groundwater Flow model, developed by USGS.

⁵⁰ Integrated Water Flow Model, developed by DWR.

estimated parameters within acceptable ranges until the budget is balanced and all components are deemed reasonable.

As such, the water budget calculations presented herein are not unique, and the precision of the component estimates are within an order of magnitude. Estimation of nearly all components involves assumptions and, with more Basin-specific data, the accuracy and precision of many of the components are improved. Additional and improved data will result in a budget that more closely reflects the Basin conditions and allows the GSAs to make more informed decisions to sustainably maintain groundwater resources. **Appendix 6A** show the components of the water budget, their data source(s), assumptions, and relative level of precision.

Major data sources include the PRISM⁵¹ model (NACSE 2020) for precipitation, CIMIS (DWR 2020c) for evapotranspiration data, the National Water Information System (USGS 2020b) for surface-water flows, and DWR land-use surveys (DWR 2020d).

6.2 Historical Water Budget

1954

1955

1956

1957

1958

1959

1960

1961

1962

1963 1964

1965

1966

1967

1968 1969

1970

1373

The historic water budget presented in this section covers 1984 to 2018. This period was chosen because it represents an average set of climatic conditions. **Figure 6-3** shows the annual precipitation and year type for the period. The criteria for year types were critical dry below 70 percent of average precipitation, dry between 70 and 85 percent of average precipitation, normal between 85 and 115 percent of average precipitation and wet years greater than 115 percent of average precipitation.



Figure 6-3 Annual and Cumulative Precipitation and Water Year Types 1984 to 2018

⁵¹ PRISM stands for Parameter-elevation Regression on Independent Slopes Model and is provided by the Northwest Alliance for Computational Science and Engineering from Oregon State University. This model provides location-specific, historical precipitation values on monthly and annual time scales. Precipitation was evaluated at Bieber.

The budget was developed using this precipitation and other climate data (evapotranspiration) along with stream flow to estimate the inflows (credits) and outflows (debits) to the total BVGB. The budget was balanced by assuming that the land and surface-water systems remain nearly in balance from year to year and allowing the groundwater system to vary. **Figure 6-4** shows the average annual values for the overall water budget. The detailed water budget for each year is included in **Appendix 6B**. **Appendix 6C** shows graphically how the water budget varies over time.

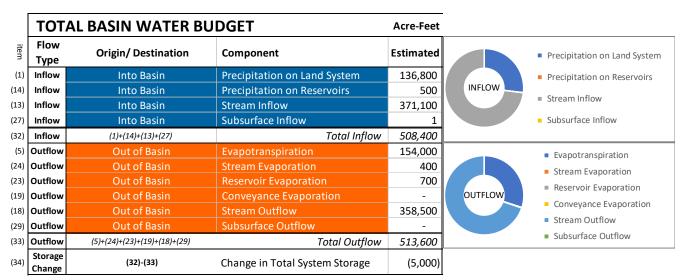


Figure 6-4 Average Total Basin Water Budget 1984-2018 (Historic)⁵²

The evapotranspiration value was calculated using land-use data (crop and wetland acreages) from DWR for 2014, and land use was assumed to be constant throughout the water budget period.

Using the evapotranspiration for irrigated lands, the amount of irrigation from surface water and groundwater was determined using 85 percent irrigation efficiency (NRCS 2020) and a respective 35 to 65 percent split between surface water and groundwater. This surface-water – groundwater split was determined from input received from local landowners, an assessment of surface-water rights (areas without surface-water rights were assumed to use 100% groundwater), well drilling records (areas without wells drilled were assumed to use 100% surface water), and an assessment of aerial imagery to see if water source could be determined. For the evapotranspiration associated with the ACWA, the ecosystem largely relies on surface water and very shallow subsurface⁵³ water. This surface-water delivery⁵⁴ was enhanced by implementation of a "pond and plug" project in 2012 to keep the water table higher and broader throughout ACWA. The ACWA also has three wells that extract groundwater from the deeper aquifers which is applied in portions of the habitat during dry months (fall). These areas with groundwater use are indicated by the light blue areas within ACWA. Based on the limited area and time groundwater is used to support the habitat, 98 percent of the evapotranspiration for ACWA is estimated to come from surface water and two percent from groundwater. Figure 3-6 shows the lands with applied water and their water source based on this assessment.

⁵² To re-emphasize, these are rough estimates and better and more accurate data are needed.

⁵³ Within about the top 10 feet that plant roots can access.

⁵⁴ For the purposes of the water budget, water from Ash Creek is considered "delivered" to the wetland areas.

Stakeholders have noted that despite the efforts to improve estimates of water source and some input from local residents, **Figure 3-6** still contains significant inaccuracies and further refinement of this dataset is needed.

The average annual water budgets for the three systems (land, surface water, and groundwater) are shown on **Figure 6-5**, **Figure 6-6**, and **Figure 6-7**. The detailed water budget for each year is included in **Appendix 6B**. **Appendix 6C** shows graphically how the system water budgets vary over time.

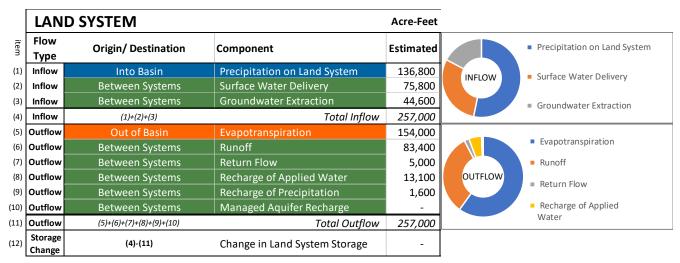


Figure 6-5 Average Land System Water Budget 1984-2018 (Historic)

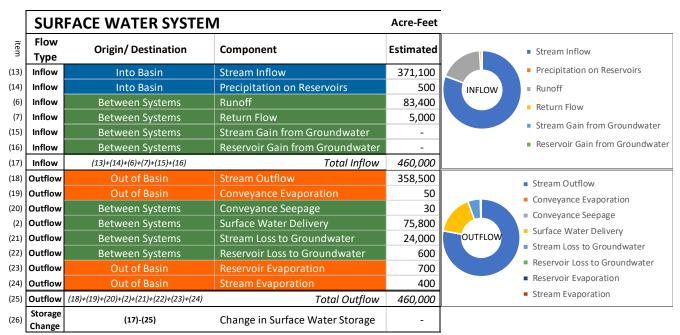


Figure 6-6 Average Surface-Water System Water Budget 1984-2018 (Historic)

2000

2001

2002

2003

2004 2005

2006

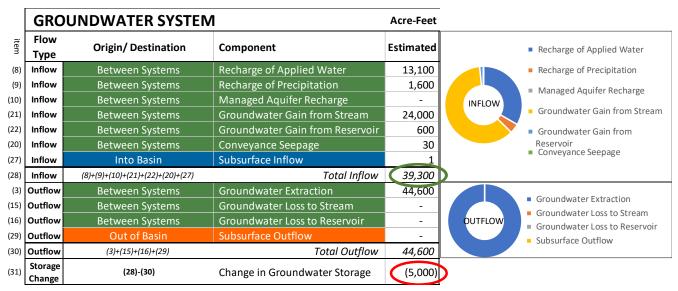


Figure 6-7 Average Groundwater System Water Budget 1984 to 2018 (Historic)

With the land system and surface-water system assumed to be in balance, the groundwater system varies and reflects the change in water stored in the Basin. This change in storage is shown in **Figure 6-8** and is analogous to the change in storage presented in Chapter 5 – Groundwater Conditions, which used groundwater contours to calculate the change. These two approaches show similar trends, but the magnitude of the changes differs slightly, with the groundwater contours showing a maximum cumulative overdraft (2015) of about 116,000 AF and the water budget indicating about 183,000 AF. This difference may indicate that the water budget overdraft may be slightly overestimated or that the average specific yield of the Basin is higher.

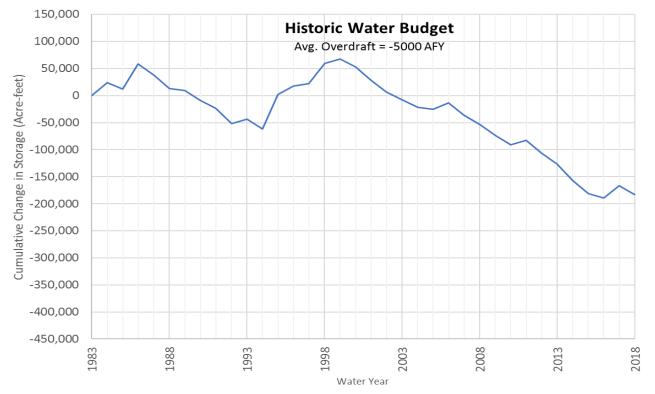


Figure 6-8 Cumulative Groundwater Change in Storage 1984 to 2018 (Historic)

2009

2819 2012

2013

2014

2015

2016

2017

2018

2022	The GSP regulations	require an	estimate of the	sustainable	yield ⁵⁵	for the Basin ((§354.18(b)(7))). This req	uirement

- is interpreted as the average annual inflow to the groundwater system, which for the 34-year period of the historic
- water budget is approximately 39,300 AF, as indicated on item 28 of Figure 6-7 (circled in green) for the
- 2025 groundwater system. The estimate of annual average groundwater use is approximately 44,600 AFY.
- The regulations also require a quantification of overdraft⁵⁶ (§354.18(b)(5)). For the water budget period of 1984 to
- 2027 2018, overdraft is estimated at approximately 5,000 AFY, shown as the average annual groundwater system
- 2028 change in storage, circled in red on **Figure 6-7** (item 31).

6.3 Current Water Budget

- The current water budget is demonstrated by estimating future water budget holding current conditions, land use
- and water use. The projection described in section 6.4.1 below holds these values constant and therefore represents
- both the current and projected.

2029

2033

2037

6.4 Projected Water Budget

- As required by the GSP Regulations, the projected water budget is developed using at least 50 years of historic
- climate data (precipitation, evapotranspiration, and streamflow) along with estimates of future land and water use.
- The climate data from 1962 to 2011 was used as an estimate of future climate baseline conditions.

6.4.1 Projection Baseline

- The baseline projected water budget uses the most recent estimates of population and land use and keeps them
- 2039 constant. **Figure 6-9** shows the average annual future water budget. Long-term overdraft is projected to be about
- 2,000 AFY, which is less than the overdraft for the historic water budget because it uses a longer, wetter time-
- period for its projections. **Figure 6-10** shows the projected cumulative change in groundwater storage.

⁵⁵ The state defines sustainable yield as "the maximum quantity of water, calculated over a base period representative of long-term conditions in the basin and including any temporary surplus, that can be withdrawn annually from a groundwater supply without causing an undesirable result." (CWC §10721(w))

⁵⁶ DWR defines overdraft as "the condition of a groundwater basin or Subbasin in which the amount of water withdrawn by pumping exceeds the amount of water that recharges the basin over a period of years, during which the water supply conditions approximate average conditions." (DWR 2016b)

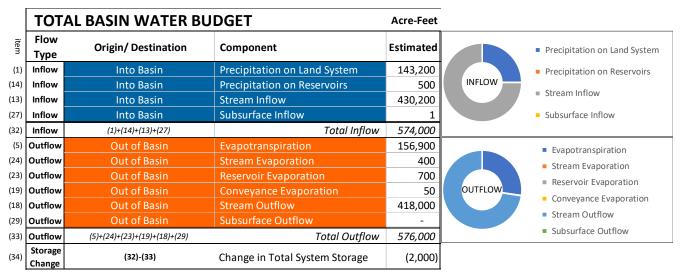


Figure 6-9 Average Projected Total Basin Water Budget 2019-2068 (Future Baseline)

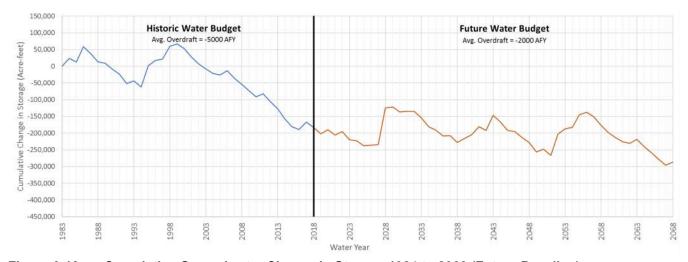


Figure 6-10 Cumulative Groundwater Change in Storage 1984 to 2068 (Future Baseline)

6.4.2 Projection with Climate Change

The SGMA regulations require an analysis of future conditions based on a potential change in climate. DWR provides location-specific change factors for precipitation, evapotranspiration, and streamflow based on climate change models which estimates the changed climatic parameters anticipated by 2070. While there is variability in the climate change models, if the models are correct, they indicate that the future climate in Big Valley will be wetter and warmer, resulting in more precipitation and more of that precipitation falling in the form of rain rather than snow. The change factors were applied to the baseline water budget and are shown in **Figure 6-11** and **Figure 6-12**. Land use was assumed to be constant, with conditions the same as DWR's 2014 land-use survey. Future conditions with climate change projections indicate that the Basin may be nearly in balance, with overdraft of only about 1000 AFY.

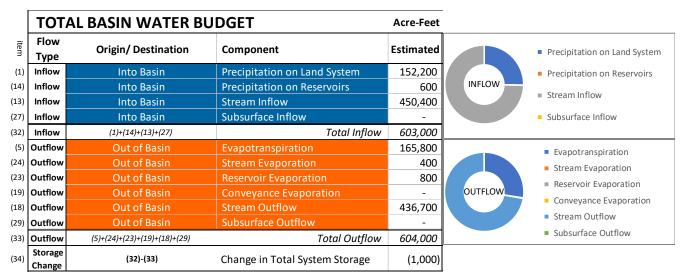


Figure 6-11 Average Projected Total Basin Water Budget 2019-2068 (Future with Climate Change)

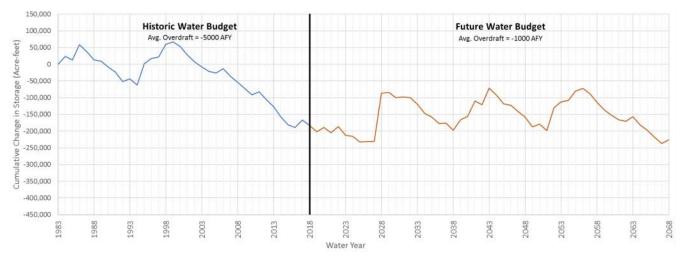


Figure 6-12 Cumulative Groundwater Change in Storage 1984 to 2068 (Future with Climate Change)

2059 2060

2061

7. Sustainable Management Criteria § 354.20

This chapter describes criteria and conditions that constitute sustainable groundwater management for the BVGB, also known as Sustainable Management Criteria (or SMC). Below are descriptions of key terms used in the GSP Regulations and described in this chapter:

- Sustainability goal: This is a qualitative, narrative description of the GSP's objective and desired conditions for the BVGB and how these conditions will be achieved. The Regulations require that the goal should, "culminate in the absence of undesirable results within 20 years" (§ 354.22).
- Undesirable result: This is a description of the condition(s) that constitute "significant and unreasonable" effects (results) for each of the 6 sustainability indicators:
 - o Chronic lowering of groundwater levels
 - o Reduction in groundwater storage
 - o Seawater intrusion Not applicable to BVGB
 - o Degraded water quality
 - Land subsidence

2063

2067

2068

2069

2070

2071

2072

2073

2074

2075

2076

2077

20782079

2080

2081

2082

2083

2084

2085

2086

2087

- o Depletion of interconnected surface water
- **Minimum threshold (MT):** Numeric values that define when conditions have become undesirable ("significant and unreasonable"). Minimum thresholds are established for representative monitoring sites. Undesirable results are defined by minimum threshold exceedance(s) and define when the Basin conditions are unsustainable (i.e., out of compliance with SGMA).
- Measurable objective (MO): Numeric values that reflect the desired groundwater conditions at a particular monitoring site. MOs must be set for the same monitoring sites as the MTs and are not subject to enforcement.
- Interim milestones (IMs): Numeric values for every 5 years between the GSP adoption and sustainability (20 years, 2042) that indicate how the Basin will reach the MO (if levels are below the MO). IMs are optional criteria and not subject to enforcement.

Figure 7-1 shows the relationship of the MT, MO, and IMs. In addition to these regulatory requirements, some
GSAs in other basins have developed "action levels," applicable when levels are above the MT but below the MO,
for each well to indicate where and when to focus projects and management actions. This GSP also has action
levels that are described in this chapter.

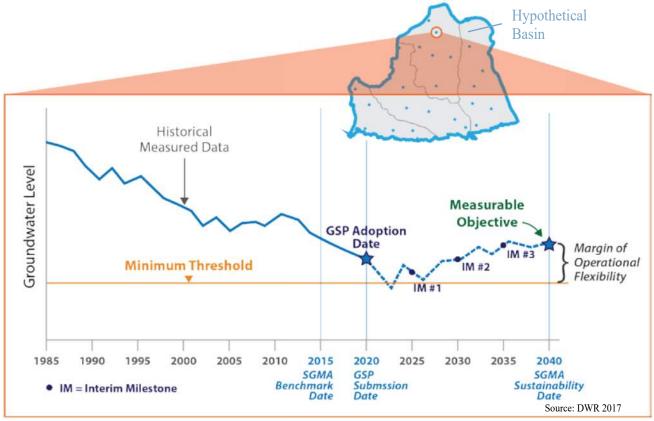


Figure 7-1 Relationship among the MTs, MOs, and IMs for a hypothetical basin

7.1 Process for Establishing SMCs

The SMCs detailed in this chapter were developed by the GSAs through consultation with the BVAC. The sustainability goal was developed by an ad hoc committee and presented to the larger BVAC, GSA staff, and the public for review and comment. The BVAC also formed ad hoc committees for each sustainability indicator and evaluated the data and information presented in Chapters 1-6. In consultation with GSA staff, each committee determined whether significant and unreasonable effects for each sustainability indicator have occurred historically and the likelihood of significant and unreasonable effects occurring in the future. The sections below reflect the guidance given to the GSAs and consultants by the ad hoc committees.

7.2 Sustainability Goal

The sustainability goal was presented in Chapter 1 and is reiterated here:

The sustainability goal for the Big Valley Groundwater Basin is to maintain a locally governed, economically feasible, sustainable groundwater basin and surrounding watershed for existing and future legal beneficial uses with a concentration on agriculture. Sustainable management will be conducted in context with the unique culture of the basin, character of the community, quality of life of the Big Valley residents, and the vested right of agricultural pursuits through the continued use of groundwater and surface water.

7.3 Undesirable Results

2112

2117

2121

- 2113 Undesirable results must be described for each Sustainability Indicator. To comply with §354.26 of the
- 2114 Regulations, the narrative for each applicable indicator includes:
- Description of the "significant and unreasonable" conditions that are undesirable
- Potential *causes* of the undesirable results
 - *Criteria* used to define when and where the effects are undesirable
- Potential *effects* on the beneficial uses and users of groundwater, on land uses, and on property interests
- Sustainability indicators that have not experienced undesirable results and are unlikely to do so in the future
- describe the justification for non-applicability of that Sustainability Indicator.

7.3.1 Groundwater Levels

- For this section, it is necessary to understand that it is natural (and expected) that groundwater levels will rise and
- fall during a particular year and over the course of many years. Chapters 4 through 6 describe the nature of
- 2124 groundwater levels throughout the Basin and how levels have changed over time. These chapters conclude that
- 2125 many areas of the Basin have seen no significant change. Other areas saw a lowering of levels in the late 1980s and
- early 1990s, recovery during the wet period of the late 1990s and lowering water levels since 2000. Groundwater
- usage has only seen minor increases since 2000, therefore the declines are more related to climatic conditions than
- 2128 to a lack of stewardship of the resource. As illustrated in **Figure 5-4**, water levels in 12 wells have shown stable
- 2129 (less than one foot of change) or rising water levels. Nine wells have shown declining trends, with only three of
- 2130 those wells declining by more than two feet per year.
- This context is given both to set the stage for discussion of undesirable results and to illustrate that water levels
- overall have not declined significantly. This re-emphasizes the point raised in Section 1.3 that the GSAs believe
- the Basin should be ranked as low priority. As mentioned previously, the GSAs also believe its ranking of medium
- 2134 priority is due in large part to the DWR's scoring of all basins with water level declines with a fixed number of
- 2135 points rather than considering the severity of declines. Big Valley has seen only minor declines in comparison to
- the widespread decline of hundreds of feet experienced elsewhere in the state. The Basin has demonstrated that it
- can recover during wet climatic cycles (e.g., late 1990s) as shown in **Figure 5-7**. There have not been widespread
- reports of issues or concerns regarding groundwater levels from the residents of the Basin (whether agricultural
- 2139 producers or domestic users or others). The GSAs contend that Big Valley's medium priority ranking is based on
- unscientific concerns raised by DWR based on isolated wells that experienced limited decline during a below-
- 2141 average climatic cycle.
- Therefore, undesirable results have not occurred in the past and the measurable objective established in this section
- is set at the fall 2015 groundwater level for each well in the monitoring network (see Chapter 8 Monitoring
- Networks). Fall 2015 is the most recent measurement prior to the adoption of this GSP and is generally the lowest
- groundwater level throughout the period of record. Since these levels are economically feasible for agricultural
- uses, this level is a reasonable proxy for the desired conditions.

2147 **Description**

- 2148 This section describes undesirable results for groundwater levels by defining significant and unreasonable impacts
- on beneficial uses. As described in Section 1.1 and emphasized in the Sustainability Goal, agricultural production
- 2150 is of paramount importance due to its economic, cultural, and environmental benefits. For agricultural pursuits to
- be viable, growers need a large margin of operational flexibility (refer to Figure 7-1) so that crops can be irrigated
- even during dry years. Accordingly, and consistent with the goal, 140 feet below the 2015 groundwater level was
- established as the minimum threshold.
- 2154 Consistent with the Sustainability Goal, significant and unreasonable lowering of groundwater levels is defined as
- 2155 the level where the energy cost to lift groundwater exceeds the economic value of the water for agriculture.⁵⁷
- 2156 Through discussions in BVAC ad hoc committee meetings among committee members, a local well driller
- (Conner 2021) and the Lassen County Farm Advisor (Lile 2021), the MT was determined to be the depth at which
- 2158 groundwater pumping becomes economically unfeasible for agricultural use.
- The increase in horsepower required to pump from a well approaching the MT would result in an increased cost of
- \$15 per acre foot of water using Surprise Valley Electric (SVE) rates and \$30 per acre foot using Pacific Gas and
- Electric (PG&E) rates (Conner 2021). Calculated on a per-ton basis, the increased cost of water level decline to the
- 2162 MT translates to about \$6.50 per ton using SVE power and \$13 per ton with PG&E (see Appendix 7A).
- Total operating costs for a typical grass hay farm in the intermountain area are estimated to be \$119 per ton. Total
- cash costs, not counting land and depreciation are estimated at \$138 per ton of hay produced (Orloff et al 2016).
- 2165 Considering hay prices have been in the \$200 per ton range (U.S. Department of Agriculture [USDA], Agricultural
- Marketing Service), the potential increase in required pumping power reduces return over cost by 10 to 20 percent.
- To produce grain hay, pumping costs are less because less water is required. Because the relative value of grain
- 2168 hay, approximately \$120 per ton, is also much less, the overall impact to economic returns is equal if not greater.
- Thus, the agricultural production economic threshold for well levels is determined to be the MT.
- Figure 7-2 shows an assessment of the depths of wells throughout the Basin based on DWR well logs. 58 While this
- dataset has inaccuracies, it gives a sense of the impact of lowering water levels on the different well types and
- 2172 indicates that lowering of water levels throughout the Basin to the MT could result in a significant percentage of
- wells going dry. Many of the shallower wells are likely the oldest wells in the Basin and may be unused or
- 2174 abandoned.
- Figure 7-3 shows that domestic well density is not evenly distributed throughout the Basin and that representative
- wells are located near the areas of highest domestic well density.
- 2177 It is also acknowledged that utilizing the margin of operational flexibility by agriculture could have impacts on
- users of surface water if it is determined to be interconnected. This potentially includes

⁵⁷ The Lassen County General Plan identifies this.

⁵⁸ This is an inaccurate dataset, but the best well data available to the GSAs.

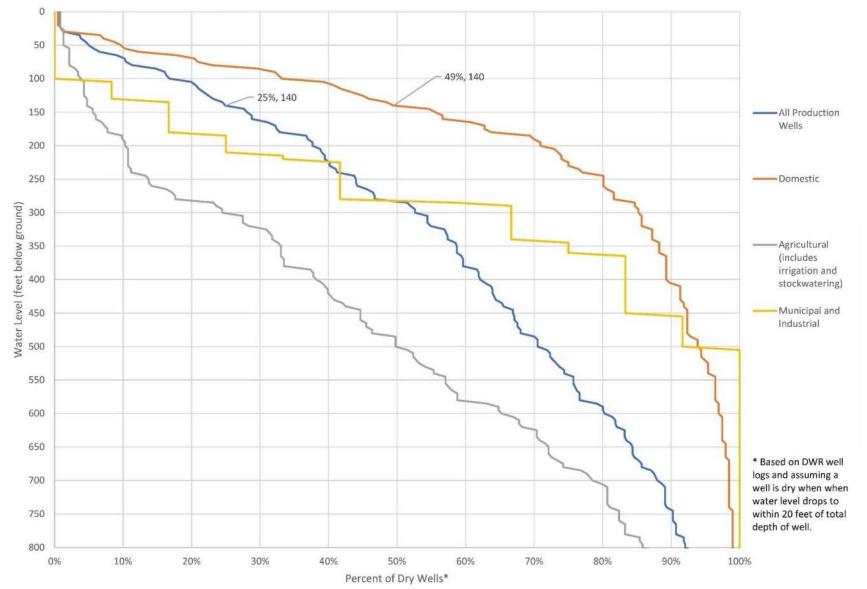


Figure 7-2 Analysis of Wells That Could Potentially Go Dry at Different Depths

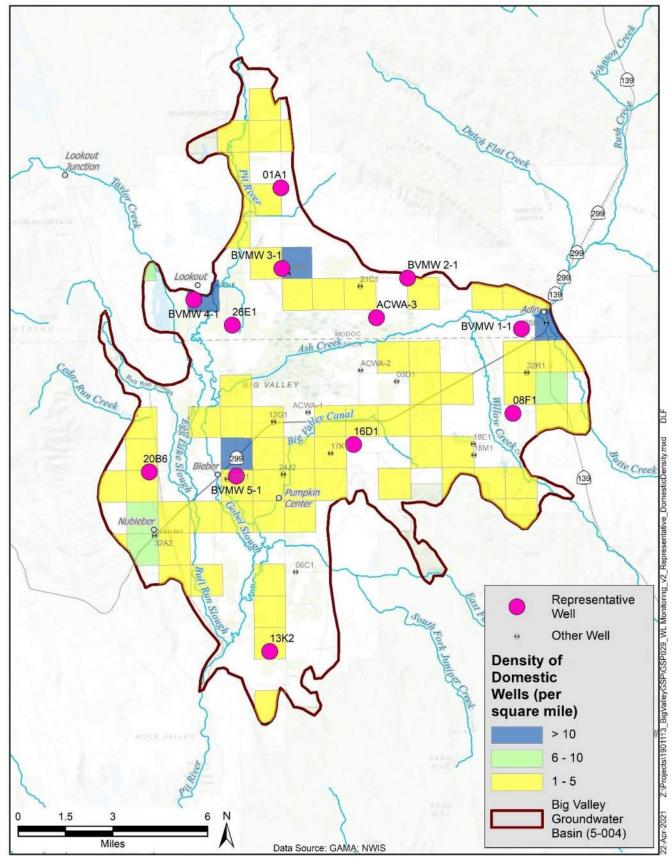


Figure 7-3 Domestic Well Density and Representative Groundwater Level Wells

- 2184 groundwater-dependent ecosystems and surface-water rights holders. Discussion of this effect is discussed in
- 2185 Section 7.3.6 Interconnected Surface Water, below.

2186 Causes

- 2187 Long-term sustainability of groundwater is achieved when pumping and recharge are measured and balanced over
- multiple wet and dry cycles. When the groundwater pumping exceeds recharge, groundwater levels may decline.
- Similarly, when recharge exceeds pumping, groundwater levels may rise. Lower-than-average precipitation and
- snowpack over the last 20 years has resulted in declining groundwater levels in some parts of the Basin. A similar
- period of declining water levels occurred in the late 1980s through the middle of the 1990s. In the late 1990s,
- several years in a row of above-average precipitation caused groundwater levels to fully recover. Future wet
- 2193 periods, enhanced recharge, increased storage, and addressing data gaps will likely cause groundwater levels to
- 2194 experience a similar recovery and maintain balance within the Basin.

Criteria

- The undesirable result criterion for the groundwater level sustainability indicator occurs when the groundwater
- level in one-third of the representative monitoring wells drop below their minimum threshold for 5 consecutive
- 2198 years.

2195

22082209

2210

2211

2212

- In addition to the above definition of undesirable result, it is recognized that although groundwater levels naturally
- 2200 fluctuate, some actions may be justified even before levels fall below the minimum threshold at a particular
- representative well. Thus, the GSAs are defining an "action level" to identify areas within the Basin where
- 2202 management actions and projects are needed (see Chapter 9 Projects and Management Actions). The definition
- of the term "Action Level" is also at the discretion of the GSAs. "Action Levels" and the associated protocol are
- defined as follows:
- 2205 "Action Level": When monitoring within the established monitoring network identifies the following groundwater
- level trends, targeted projects or management actions may be considered, at the discretion of the GSAs, when any
- of the following occur:
 - 1/3 of the representative monitoring wells in the Basin decline below the measurable objective (i.e., the fall 2015 baseline levels) for five consecutive years
 - Water levels at a 1/3 of the representative wells decline three times the average historic decline that well experienced between 2000 and 2018 as shown in **Appendix 5A**
 - Water levels at 1/3 of the representative wells decline more than five feet in one year

2213 Effects

- As discussed above, if groundwater levels were to fall below the minimum threshold, pumping costs would render
- agricultural pursuits in the affected areas unviable. Without agriculture, the unique culture, character of the
- community, and quality of life for Big Valley residents would be drastically changed. Reductions in agriculture
- 2217 would also affect wildlife who use irrigated lands as habitat, breeding grounds, and feeding grounds.
- Low water levels could cause wells to go dry, requiring deepening, redrilling, or developing a new water source.
- However, the long-term costs of agriculture becoming unviable causing reduced property values and tax revenue
- outweigh the short-term costs of investing in deeper wells or alternative water supplies. The potential effect would
- be offset by a shallow well mitigation program, which would apply to wells

- 2222 that have gone dry because water levels have fallen below the measurable objective. Substandard (e.g., hand-dug)
- 2223 wells would not qualify for mitigation. Mitigation would rely on a "good neighbor" practice already demonstrated
- in the Basin and would leverage any state or federal funding that may be secured. For example, the USDA Rural
- Development has offered low-interest loans to drill new or replace existing wells. Additionally, prior to the first
- 2226 five-year update, a program will be developed (see Chapter 9 Projects and Management Actions) to cover a
- 2227 portion of the cost if new residential wells must be drilled because groundwater levels drop below the measurable
- objective. Any such program would apply to legally-established wells and would be dependent on state and federal
- funding. Criteria will likely include well depth, screen interval, age of the well, and other factors.

7.3.2 Groundwater Storage

- The discussion and analysis regarding groundwater levels is directly related to groundwater storage. The
- 2232 groundwater levels for the fall 2015 measurement for each of the wells in the monitoring network (see Chapter 8 –
- 2233 Monitoring Network) is established as the measurable objective for groundwater storage (identical to the
- 2234 groundwater level measurable objective). The measurable objective is established at this level for storage using the
- same reasons discussed in Section 7.3.1 Groundwater Levels. In summary, through public outreach, coordination
- with the BVAC and analysis of available data, the GSAs have determined that groundwater storage has not
- reached significant and unreasonable levels historically. Like the groundwater levels minimum threshold, the
- 2238 minimum threshold for groundwater storage is the same as for groundwater levels. The minimum threshold is set
- 2239 at this level for the same reasons discussed in Section 7.3.1 Groundwater Levels.
- 2240 Chapter 5 contains estimates of groundwater storage from 1983 to 2018 using groundwater contours from each
- year and an assumption that the definable bottom of the groundwater basin is 1,200 feet bgs. During this period,
- storage has fluctuated between a high of about 5,390,000 AF in fall 1983 (and 1999) to a low of 5,214,000 AF in
- 2243 fall 2015.

2244

2248

2230

Description

- Like groundwater levels, significant and unreasonable reduction in groundwater storage is defined as a level at
- 2246 which the energy cost to lift the groundwater exceeds the economic value of the water for agriculture or when a
- significant number of domestic wells are affected.

Justification of Groundwater Elevations as a Proxy

- Again, the use of groundwater elevations as a substitute metric for groundwater storage is appropriate because
- 2250 change in storage is directly correlated to changes in groundwater elevation.

2251 Causes

- 2252 Long-term sustainability of groundwater is achieved when pumping and recharge are measured and balanced over
- 2253 multiple wet and dry cycles. When the groundwater pumping exceeds recharge, groundwater levels may decline.
- Similarly, when recharge exceeds pumping, groundwater levels may rise. Lower-than-average precipitation and
- snowpack over the last 20 years have resulted in declining groundwater levels in some parts of the Basin. A similar
- period of declining water levels occurred in the late 1980s through the middle of the 1990s. In the late 1990s,
- several years in a row of above-average precipitation caused groundwater levels to fully recover. Future wet
- 2258 periods, enhanced recharge,

- increased storage, and addressing data gaps will likely cause groundwater storage to experience a similar recovery
- and maintain balance within the Basin.

2261 Criteria

- As said, the measurable objective and the minimum threshold for groundwater levels and groundwater storage are
- 2263 the same. The monitoring network described in Chapter 8 Monitoring Networks is also the same for both
- groundwater levels and storage. As such, the GSAs will use the voluntary and discretionary "Action Level"
- 2265 protocol described in the groundwater level section as a technique to improve management of groundwater when
- groundwater storage is below the measurable objective but above the minimum threshold.

2267 Effects

2270

2277

- 2268 Please refer to the "Effects" discussion in the groundwater levels section of this chapter, as the content in both
- sections is the same.

7.3.3 Seawater Intrusion

- \$354.26(d) of the GSP Regulations states that "An agency that is able to demonstrate that Undesirable Results
- related to one or more sustainability indicators are not present and are not likely to occur in a basin shall not be
- required to establish criteria for undesirable results related to those sustainability indicators."
- The BVGB is not located near an ocean and ground surface elevations are over 4000 feet above msl. Seawater
- intrusion is not present and is not likely to occur. Therefore, SMCs are not required for seawater intrusion as per
- 2276 §354.26(d) cited above.

7.3.4 Water Quality

- 2278 As described in Chapter 5 Groundwater Conditions, the groundwater quality conditions in the Basin are oveall
- excellent (DWR 1963, Reclamation 1979). After a review of the best available data on water quality in the Basin,
- 2280 it was concluded that all the constituents which were elevated above suitable thresholds are naturally occurring.
- There has been no identifiable increase in the level of concentrations over time, and several constituents have
- indications of improvement in recent decades compared to concentrations in the 1950s and 1960s (e.g., Arsenic
- and Manganese Figures 5-8 and 5-10).
- 2284 While the water quality is considered excellent in the Basin, water quality is an important issue to both agricultural
- 2285 and domestic users within the Basin and they are working in coordination to retain the existence of excellent water
- 2286 quality. The multitude of programs which regulate water quality is listed in Section 3.5.
- In addition, Big Valley residents are voluntarily participating and coordinating in activities that will ensure
- 2288 continued excellent quality water in the Basin. Over the last 15 years, landowners have drilled stock watering wells
- as part of the EQIP program to protect water quality in streams. In 2018, the Upper Pit River Watershed IRWMP
- 2290 2017 Update was completed. This document conducted a thorough analysis of the entire Pit River Watershed and
- found no water quality issues within the BVGB.

- 2292 Agricultural users are also proactively managing water quality *via* partnerships with agencies such as the NRCS to
- implement on-site programs which are designed to improve water quality as detailed in Chapter 9 Projects and
- Management Actions. As described in Section 1.1 Introduction, agricultural users primarily grow low-impact
- 2295 crops with no-till methods and little application of fertilizer or pesticides. Domestic water users are also assisting
- in maintaining good water quality within the Basin through community action. Through the civic process, Big
- Valley residents were engaged in the development of the Modoc and Lassen County ordinances to deter unlicensed
- outdoor marijuana growers and the unpermitted use of pesticides and rodenticides which may make their way into
- 2299 the groundwater and surface water. The domestic water users are also actively seeking to assist in code
- enforcement and reduce the amount of harmful debris within the Big Valley communities that may cause water
- quality issues. Public outreach through the offices of Public Health, Environmental Health, and the Regional
- 2302 Recycling Group Recycle Used Oil and Filter Campaign will assist in maintaining excellent water quality. These
- outreach efforts are further discussed in Chapter 9 Projects and Management Actions.
- Due to the existence of excellent water quality in the Basin, significant amount of existing water quality
- 2305 monitoring, generally low impact land uses, and a robust effort to conduct conservation efforts by agricultural and
- domestic users, per §354.26(d), SMCs were not established for water quality because Undesirable Results are not
- present and not likely to occur. At the five-year updates of this GSP, data from various existing programs,
- 2308 including the RWQCB sites, public supply wells (regulated by the Division of Drinking Water), and electrical
- conductivity transducers installed by the GSAs at three wells (BVMW 1-2, 4-1 and 5-1) will be assessed to
- determine if degradation trends are occurring in the principal aquifer. In addition, water quality impacts resulting
- from projects and management actions will be evaluated during their planning and implementation. At the five-
- 2312 year update, SMCs will be considered only if the trends indicate that undesirable results are likely to occur in the
- 2313 subsequent 5 years.

7.3.5 Land Subsidence

- As detailed in Section 5.5, little-to-no measurable subsidence is occurring in the Basin. Furthermore, causes of
- 2316 micro-subsidence identified by the InSAR data presented in Section 5.5 are likely due to either agricultural land
- leveling operations or natural geologic activity. The specific identified areas of subsidence are considered
- 2318 acceptable and necessary agricultural operations to promote efficient irrigation. Similar situations may occur
- 2319 throughout the Basin and will be investigated if identified through InSAR. As detailed in Chapter 5, very minor
- areas of land subsidence have been observed in the Basin by the Continuous Global Positioning System site near
- Adin (CGPS P347, -0.6 inch over 11 years) and by the InSAR data provided by DWR (maximum of -3.3 inches
- over 4 years). The cause of these downward displacements has not been determined conclusively, but due to the
- 2323 widespread nature is likely natural and unavoidable due to the movement of Tectonic plates.
- Given the lack of significant subsidence and the fact that some subsidence is acceptable to stakeholders in the
- absence of impacts on infrastructure (roadways, railroads, conveyance canals, and wells among others), no
- undesirable results have occurred and none are likely to occur. Therefore, per §354.26(d), SMCs were not
- established for subsidence. At the five-year updates of this GSP, data from GPS P347 and InSAR data provided by
- DWR will be assessed for notable subsidence trends that can be correlated

with groundwater pumping. SMCs and undesirable results for subsidence will be established at the five-year

2330 update only if trends indicate significant and unreasonable subsidence is likely to occur in the subsequent 5 years.

7.3.6 Interconnected Surface Water

- The rivers and streams of the Basin are an important and vital resource for all interested parties. The agricultural
- industry has an extensive history of surface-water use in the Basin and has operated for over a century. Many of
- 2334 the surface-water rights on farms and ranches are pre-1914 water rights. All surface water flowing in the Basin
- during irrigation season is fully allocated. For all interested parties, there is need for better tracking of surface-
- water allocations.

- Section 5.6 presents the available information related to interconnected surface water. It is nearly impossible to
- 2338 quantify surface-water depletion impact based on flow alone, even in an area where there is good data, such as
- pumping quantity, deep aquifer groundwater elevation, precipitation, and surface flow. Many of these criteria are
- current data gaps in the Basin, particularly the variation in precipitation and flow across the Basin. Uncertainty in
- 2341 the amount of surface water entering the Basin and the unpredictability of weather patterns has already been
- established and will continue to be a barrier. Pumping data in the Basin is also a data gap as there is no current
- 2343 monitoring system which annually measures the amount of water pumped. The connection between upland
- recharge areas and the unique volcanic geologic features surrounding the Basin are mostly unknown and make
- understanding the connectivity of surface and groundwater very difficult, if not impossible.
- Furthermore, the number of wells located next to streams and the river in the Basin are not quantified. While
- 2347 Chapter 5 Groundwater Conditions details the streams in Big Valley which *may* be interconnected by a
- 2348 "...continuous saturated zone to the underlying aquifer and the overlying surface water..." (DWR 2016c), there is
- currently no evidence to support interconnected surface water. Therefore, there is a lack of evidence for
- interconnection of streams. Figure 5-18 overlays the general direction(s) of groundwater flow around the Basin in
- relation to the major streams. Also shown is the general direction of flow determined from the newly constructed
- 2352 well clusters near Adin and Lookout. The remaining clusters were constructed later and do not yet have a sufficient
- 2353 period of data to determine flow directions with certainty. The newly constructed monitoring wells will continue to
- 2354 gather data on whether there is any evidence of interconnected surface water.
- 2355 Chapter 4 Hydrogeological Conceptual Model identified data gaps related to the effect of Ash Creek, Pit River,
- and smaller streams on recharge. These data gaps may partially be filled once adequate data from the five
- 2357 monitoring well clusters are collected. Scientific research related to groundwater and surface water will improve
- over time. As this science is made available, the GSAs will work to locate funding for improved data depending on
- 2359 available staffing and financial resources.
- 2360 SMCs were not established for interconnected surface water because there is insufficient evidence to determine
- 2361 that Undesirable Results are present or likely to occur. At the five-year updates of this GSP, data from newly
- established well clusters, new and historic stream gages, and the monitoring network detailed in Chapter 9 –
- 2363 Projects and Management Actions will be assessed to determine if undesirable trends are occurring in the principal
- aquifer. At the five-year update, SMCs will be considered only if the trends indicate that undesirable results are
- 2365 likely to occur in the subsequent 5 years.

7.4 Management Areas

2366

2367 Management areas are not being established for this GSP.

8. Monitoring Networks § 354.34

2369 8.1 Monitoring Objectives

2368

2374

2375

2381

2382

2385

2386

- This chapter describes the monitoring networks necessary to implement the BVGB GSP. The monitoring objectives under this GSP are twofold:
- to characterize groundwater and related conditions to evaluate the Basin's short-term, seasonal, and longterm trends related to the six sustainability indicators, and
 - to provide the information necessary for annual reports, including water levels and updates to the water budget.⁵⁹
- The sections below describe the different types of monitoring required to meet the above objectives, including groundwater levels, groundwater quality, subsidence, streamflow, climate, and land use. Each type of monitoring relies on existing programs not governed by the GSAs and therefore the monitoring networks described in this chapter are subject to change if the outside agencies modify or discontinue their monitoring. The monitoring networks will generally be adjusted to the availability of data collected and provided by the outside agencies.

8.2 Monitoring Network

8.2.1 Groundwater Levels

- Monitoring of groundwater levels is necessary to meet several needs based on the above stated objectives of the monitoring networks, including:
 - Representative monitoring for groundwater levels
 - The groundwater contours required for annual reports
- Shallow groundwater monitoring to help define potential interconnection of groundwater aquifers with surface-water bodies
- Table 8-1 lists existing wells that have been used for groundwater monitoring and includes the newly-constructed,
- dedicated monitoring wells. The table indicates which wells are used for each of the three groundwater level
- monitoring networks. A more detailed table with elements required under §352.4(c) is included in **Appendix 8A**.
- Further details for each well and water level hydrographs are included in **Appendix 5A**. **Appendix 8B** contains the
- As-Built Drawings for the dedicated monitoring wells, also required by §352.4(c). The locations of the wells are
- 2394 shown on **Figure 8-1**.

⁵⁹ Water levels are needed to generate hydrographs, contours, and an estimate of change in storage as required for the annual report. Also required for the annual reports are estimates of groundwater pumping, surface-water use, and total water use which can be estimated from the water budget.

Table 8-1 Big Valley Groundwater Basin Water Level Monitoring Network Depth to Water Groundwater Elevation Groundwater Elevation

					Depth to		Groundwater Elevation				
-					(feet	bgs)	(feet msl)				
		Well	Screen ¹								
Well	Well	Depth	Interval	Representative	Measurable	Minimum	Measurable	Minimum	Contour	Shallow	Monitoring
Name	Use	(feet bgs)	(feet bgs)	Well ²	Objective³	Threshold ⁴	Objective ³	Threshold ⁴	Well	Well	Frequency
01A1	Stockwatering	300	40 - 300	Х	148	288	4035	3895	Х		biannual
03D1	Irrigation	280	50 - 280						Х		biannual
06C1	Irrigation	400	20 - 400						Х		biannual
08F1	Other	217	26 - 217	Х	32	172	4222	4082	Х		biannual
12G1	Residential	116									biannual
13K2	Irrigation	260	20 - 260	Х	66	206	4062	3922	Х		biannual
16D1	Irrigation	491	100 - 491	Х	93	233	4079	3939	Х		biannual
17K1	Residential	180	30 - 180						Х		biannual
18E1	Irrigation	520	21 - 520						Х		biannual
18M1	Irrigation	525	40 - 525								biannual
18N2	Residential	250	40 - 250								biannual
20B6	Residential	183	41 - 183	Х	41	181	4085	3945	Х		biannual
21C1	Irrigation	300	30 - 300						Х		biannual
22G1	Residential	260	115 - 260								biannual
23E1	Residential	84	28 - 84								biannual
24J2	Irrigation	192	1 - 192						Х		biannual
26E1	Irrigation	400	20 - 400	Х	20	160	4114	3974	Х	X	biannual
28F1	Residential	73									biannual
32A2	Other	49							Х		biannual
32R1	Irrigation								Х		biannual
ACWA-1	Irrigation	780	60 - 780						X		biannual
ACWA-2	Irrigation	800	50 - 800						X		biannual
ACWA-3	Irrigation	720	60 - 720	X	23	163	4136	3996	Х	Х	biannual
BVMW 1-1	Observation	265	175 - 265	Х	53	193	4162	4022	Х		continuous
BVMW 1-2	Observation	52	32 - 52							Х	continuous ⁵
BVMW 1-3	Observation	50	30 - 50							X	continuous ⁵
BVMW 1-4	Observation	49	29 - 49							Х	continuous ⁵
BVMW 2-1	Observation	250	210 - 250	Х	22	162	4194	4054	Х		continuous ⁵
BVMW 2-2	Observation	70	50 - 70							Х	continuous ⁵
BVMW 2-3	Observation	70	50 - 70							X	continuous ⁵
BVMW 2-4	Observation	60	40 - 60							X	continuous ⁵
				V	10	150	4146	4000	V	^	
BVMW 3-1	Observation	185	135 - 185	Х	18	158	4146	4006	Х		continuous
BVMW 3-2	Observation	40	25 - 40							Х	continuous
BVMW 3-3	Observation	50	25 - 50							Х	continuous
BVMW 3-4	Observation	50	25 - 50							Х	continuous ⁵
BVMW 4-1	Observation	425	385 - 415	Х	65	205	4088	3948	Х		continuous ⁵
BVMW 4-2	Observation	74	54 - 74							Х	continuous ⁵
BVMW 4-3	Observation	80	60 - 80							Х	continuous ⁵
BVMW 4-4	Observation	93	73 - 93							Х	continuous ⁵
BVMW 5-1	Observation	540	485 - 535	х	47	187	4082	3942	Х		continuous ⁵
				^	4/	10/	4002	3344	^	V	-
BVMW 5-2	Observation	115	65 - 115							X	continuous
BVMW 5-3	Observation	85	65 - 85							X	continuous
BVMW 5-4	Observation	90	70 - 90							X	continuous ⁵

Notes:

-- = information not available

feet bgs = feet below ground surface (depth to water)

feet msl = feet above mean sea level (groundwater elevation NAVD88)

water year = October 1 to September 30

¹ For the purposes of this GSP, the terms "screen" or "perforation" encompases any interval that allows water to enter the well from the aquifer, including casing perforations, well screens, or open hole.

 $^{^{\}rm 2}$ Respresentative wells for Water Levels and Groundwater Storage

³ Measurable objective is set at the Fall 2015 water level or at the lowest water level measured for wells that don't have a Fall 2015 measurement

 $^{^{\}rm 4}$ Minimum threshold is set at 140 feet below the measurable objective

⁵ Continuous measurements are currently available due to the water level transducers installed in the wells. Less frequent monitoring may be appropriate in the future once the period of record of these wells is longer and interconnection of surface and groundwater is better understood.

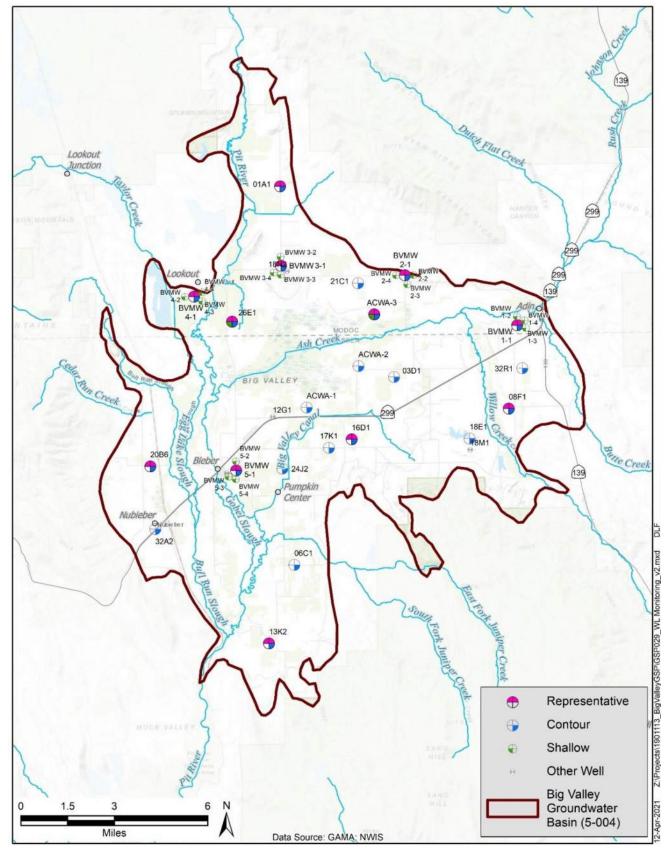


Figure 8-1 Water Level Monitoring Networks

- GSP Regulation §352.4 states that monitoring sites that do not conform to DWR BMPs, "...shall be identified and the nature of the divergence from [BMPs] described." DWR's BMP (DWR 2016e) states that wells should be dedicated to groundwater monitoring. In addition, §354.34 indicates that wells in the monitoring network should
- have "depth-discrete⁶⁰ perforated intervals." Many of the historic wells listed in **Table 8-1** diverge from these standards and the explanation of their suitability for monitoring is described below.
- 2406 Previous groundwater level monitoring in the Basin has relied on existing domestic and irrigation wells that often
- have pumps in them used for irrigation, stock watering, or domestic uses. The intent of groundwater level
- 2408 monitoring is to capture static (non-pumping) water levels. However, historic monitoring is performed before and
- 2409 after the irrigation season: March or April for spring measurements and October for fall measurements. 61 Since
- 2410 these measurements are taken at a time when large-scale groundwater use is typically not active, using production
- 2411 wells is acceptable in the absence of dedicated monitoring wells. DWR staff who monitor the wells will indicate if
- 2412 the well (or a nearby well) is pumping in order to be considered when assessing water level measurements.
- In addition to the well use considerations, most of the historic wells do not have depth-discrete screen intervals, 62
- as the typical well construction practice in the Basin has been to use long (100 feet up to 800 feet) screens,
- 2415 perforations, or open hole below about 30 to 40 feet of blank well casing. This construction practice is designed to
- 2416 maximize well yield. The use of such long-screen wells is acceptable for monitoring in Big Valley because
- 2417 multiple principal aquifers have not been defined in the Basin and therefore these long intervals do not cross
- defined principal aquifers. Since most wells are constructed with this practice, water levels in these long-screen
- wells should be indicative of the aquifer as a whole and less likely to be affected by perched water or isolated
- 2420 portions of the aquifer that may not be interconnected over large areas.

8.2.1.1 Representative Groundwater Levels and Storage Monitoring Network

- The representative monitoring network includes all wells that have been assigned sustainable management criteria
- 2423 (minimum thresholds and measurable objectives). DWR does not give strict guidance on the number or density of
- 2424 wells appropriate for representative monitoring. DWR's BMP document cites sources that recommend well
- densities ranging from 0.2 to 10 wells per 100 square miles (DWR 2016e). Through consultation with the BVAC,
- 2426 12 wells were selected for representative monitoring of the Basin (which has an area of about 144 square miles), a
- density of 8.3 wells per 100 square miles.
- Extensive discussion and consideration were performed by the GSAs and local stakeholders to determine an
- 2429 appropriate water level monitoring network. Based on the comprehensive review of the wells, the network was
- selected based on:

⁶⁰ "Depth-discrete" means that the screens, perforations, or open hole is relatively short (typically less than about 20 feet).

⁶¹ Local stakeholders have advocated for future measurements to occur in mid-March and late-October to ensure they are taken before and after the irrigation season.

⁶² Screens in this context includes perforated casing, well screens, or open hole, all of which allow water to flow into the well.

- Spatial distribution throughout the Basin to represent agricultural pumping areas
- Areas with a high density of domestic wells
- An existing monitoring record (where available) to track long-term trends
- Access for long-term future monitoring
- Well depth (greater than the MT)
- Wells dedicated to monitoring where available
- Table 8-1 shows the MOs and MTs for the 12 representative wells. As stated in Chapter 7 Sustainable
- Management Criteria, MOs are set at the fall 2015 water level. MTs are shown in **Table 8-1** to protect agricultural
- beneficial use.

2450

8.2.1.2 Groundwater Contour Monitoring Network.

- The GSP Regulations (§356.2) require that annual reports include groundwater contours for the previous year
- 2442 (spring and fall) as well as an estimate of change in groundwater storage. Historic groundwater storage changes
- 2443 were estimated in Chapter 5 Groundwater Conditions, using groundwater contours contained in **Appendix 5B**.
- 2444 Therefore, for annual reports to be comparable to historic conditions, the wells used for groundwater contouring
- should be the same, or nearly the same, as those used for the historic contours. Five wells that were used in the
- 2446 historic contours are not included in the groundwater contour monitoring network (18M1, 18N2, 22G1, 23E1 and
- 2447 28F1), because they were either replaced by a new dedicated monitoring well or there was another well close by
- 2448 that makes the measurement unnecessary. **Table 8-1** lists the groundwater contour monitoring network and **Figure**
- 2449 **8-1** shows their locations.

8.2.1.3 Shallow Groundwater Monitoring Network

- 2451 Chapter 5 Groundwater Conditions discusses interconnected surface water and describes the major streams in the
- 2452 BVGB. As described in Chapter 7 Sustainable Management Criteria, there is currently no conclusive evidence
- for interconnection of streams with the groundwater aguifer and all summer flows are 100 percent allocated based
- on existing surface-water rights. Therefore, measurable objectives, minimum thresholds, and a representative
- 2455 monitoring network for interconnected surface water have not been established. Monitoring will be assessed at the
- 2456 five-year update. Through consultation with the BVAC, a shallow monitoring network has been established that
- includes the shallow wells from each of the five monitoring well clusters. These clusters were designed to measure
- 2458 the magnitude and direction of shallow groundwater flow and are equipped with water level transducers that
- collect continuous (15-minute interval) water level measurements so that potential correlations with streamflow
- 2460 gages can be assessed. Well 26E1 was also added to the shallow network due to its position between the two major
- streams (Pit River and Ash Creek), its shallow screen depth (20 feet bgs), and its lack of a pump. Well number
- ACWA-3 was also selected for the shallow network due to its location on the ACWA within the northern portion
- of the Ash Creek wetlands associated with Big Swamp and the possible groundwater-dependent ecosystems shown
- in Figure 5-19. Table 8-1 lists the shallow groundwater monitoring network, and Figure 8-1 shows the well
- 2465 locations.

8.2.1.4 Monitoring Protocols and Data Reporting Standards

- 2467 Currently, DWR measures groundwater levels at 21 wells in Big Valley. The expectation of the GSAs is that DWR
- will also monitor levels at the dedicated monitoring wells and download the transducer data from these wells.
- 2469 Transducer data will be corrected for barometric fluctuations using data from two barometric probes installed at
- 2470 two of the clusters. Water level data will be made available on the state's SGMA Data Viewer website for use by
- 2471 the GSAs in their annual reports and GSP updates. DWR's water level monitoring protocols are documented in
- 2472 their Monitoring Protocols, Standards and Sites BMP (DWR 2016b). Portions of the BMP relevant to water levels
- are included in **Appendix 8C**.

2466

2474

2479

8.2.1.5 Data Gaps in the Water Level Monitoring Network

- Data gaps are identified in this section using guidelines in SGMA Regulations and BMP published by DWR on
- 2476 monitoring networks (DWR, 2016e). **Table 8-2** summarizes the suggested attributes of a groundwater-level
- 2477 monitoring network from the BMP in comparison to the current network and identifies data gaps. No data gaps
- exist except the area near well 06C1, shown on **Figure 8-1**.

8.2.2 Groundwater Quality

- 2480 Chapter 5 describes overall water quality conditions as excellent, and the few constituents that are infrequently
- elevated in Big Valley are all naturally-occurring. Therefore, measurable objectives, minimum thresholds and a
- representative monitoring network have not been established. Monitoring will be assessed at the five-year update.
- To make such an assessment, the GSAs will rely on existing programs, described in Chapter 7. Focus will be on
- the water quality reported for wells regulated by the State Water Board's DDW. DDW wells are shown on Figure
- 2485 **8-2** and are in Bieber and Adin, with one well in the western portion of the Basin. In addition to data from DDW,
- 2486 the GSAs have installed three transducers to measure electrical conductivity (EC) at wells BVMW 1-1, 4-1, and 5-
- 2487 1, shown on **Figure 8-2**. These transducers increase the distribution of the monitoring network around the Basin
- and with increased frequency of measurement will allow the GSAs to better understand temporal trends that may
- 2489 not be apparent from infrequent DDW measurements. The EC transducers may be able to put anomalous⁶³
- measurements from DDW into better context. **Table 8-3** lists the groundwater quality monitoring sites and their
- 2491 details.

⁶³ Anomalous measurements are those that are out of the norm or deviate from what would be expected. The source of the deviation from the norm should be noted and if errors are identified, the measurement(s) removed from the dataset based on professional judgment. At a minimum, anomalous measurements are marked as questionable, and the potential source(s) of the deviation documented.

Table 8-2 Summary of Best Management Practices, Groundwater Level Monitoring Well Network and Data Gaps

Best Management Practice (DWR, 2016d)	Current Monitoring Network	Data Gap
Groundwater level data will be collected from each principal aquifer in the Basin.	12 representative wells	None. There is a single principal aquifer and therefore all wells monitor the aquifer.
Groundwater level data must be sufficient to produce seasonal maps of groundwater elevations throughout the Basin that clearly identify changes in groundwater flow direction and gradient (Spatial Density).	22 contour wells	21 of the 22 proposed contour wells are currently monitored. Well 06C1 was monitored up until WY 2016. This well fills an important spatial area in the southern part of the Basin. To fill the data gap, the well could be re-activated, a new willing well owner found, or a dedicated monitoring well constructed in the area.
Groundwater levels will be collected during the middle of October and March for comparative reporting purposes, although more frequent monitoring may be required (Frequency).	All proposed monitoring network wells, except 06C1, are measured biannually, with the dedicated monitoring wells collecting continuous (15-minute) measurements	None. Current DWR monitoring occurs in March or April and in October for seasonal high (spring) and low (fall) respectively.
Data must be sufficient for mapping groundwater depressions, recharge areas, and along margins of basins where groundwater flow is known to enter or leave a basin.	Groundwater depressions are present in the east-central part of the Basin near 03D1 and in the southern portion of the Basin near Well 06D1 and Well 13K2	03D1 defines the east-central depression. To ensure adequate definition of the southern depression, well 06C1 could be reactivated, a new, willing well owner found, or a dedicated monitoring well constructed in the area.
Well density must be adequate to determine changes in storage.	22 contour wells	Filling of data gap near 06C1.
Data must be able to demonstrate the interconnectivity between shallow groundwater and surface-water bodies, where appropriate.	17 shallow wells, including 5 clusters of 3 shallow wells each	None.
Data must be able to map the effects of management actions, i.e., managed aquifer recharge.	22 contour wells and 17 shallow wells	None. Once projects and management actions are defined, monitoring specific to those projects and management actions will be identified.
Data must be able to demonstrate conditions near Basin boundaries; agencies may consider coordinating monitoring efforts with adjacent basins to provide consistent data across Basin boundaries. Agencies may consider characterization and continued impacts of internal hydraulic boundary conditions, such as faults, disconformities, or other internal boundary types.	22 contour wells and 17 shallow wells	None. There are no direct boundaries with adjacent Basins. Inflow/outflow from Basin addressed above.
Data must be able to characterize conditions and monitor adverse impacts to beneficial uses and users identified within the Basin.	12 representative wells	None

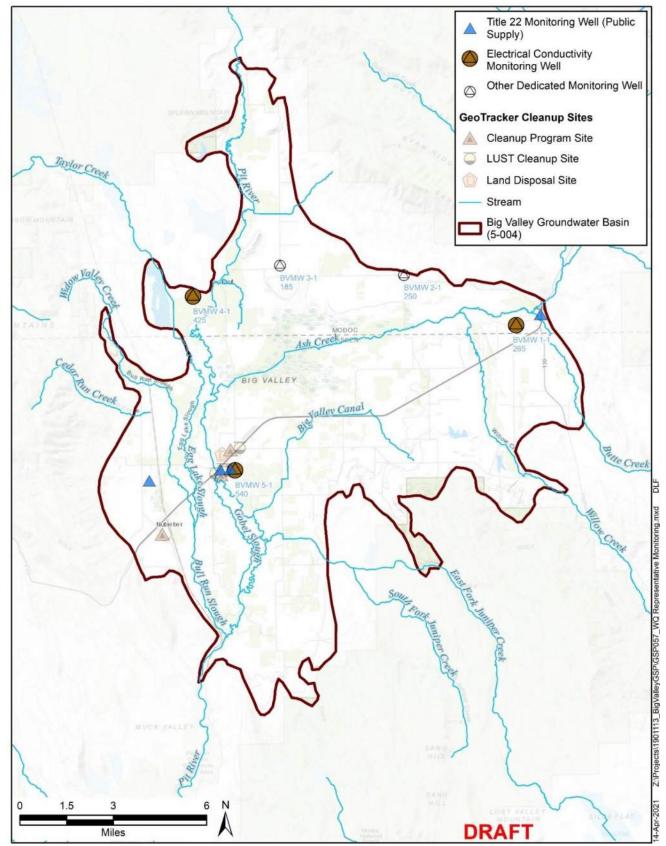


Figure 8-2 Water Quality Monitoring Network

Table 8-3 Big Valley Groundwater Basin Water Quality Monitoring Network

				J			
	SWRCB			Well		Screen ¹	
Well	Public	DWR	Well	Depth	Open	Interval	
Name	Source Code	Site Code	Use	(feet bgs)	Hole	(feet bgs)	Constituents
Bieber Town Well 1	1810003-001		Public Supply	200	yes	62 - 200	Title 22
Bieber Town Well 2	1810003-002		Public Supply	240	no	60 - 240	Title 22
Adin Ranger Station Well 3	2500547-003		Public Supply	-			Title 22
Intermountain Conservation Camp Well 1	1810801-001		Public Supply				Title 22
BVMW 1-1		411880N1209599W001	Observation	265	no	175 - 265	Electrical conductivity
BVMW 3-1		412029N1211587W001	Observation	185	no	135 - 185	Electrical conductivity
BVMW 5-1		411219N1211339W001	Observation	540	no	485 - 535	Electrical conductivity

Notes:

2496

2497

2498

2505

2508

8.2.2.1 Monitoring Protocols and Data Reporting Standards

While DWR provides guidance on protocols and standards for water quality in their BMP (DWR 2016f), these don't generally apply to the Big Valley water quality monitoring network. For the DDW wells, monitoring protocols used by the parties responsible for collecting and analyzing samples will be relied upon. DDW and other data regulated by the State Water Board is made available on their GAMA GIS website. At the five-year update, the GSAs will obtain and analyze the available data. The measurements for EC transducers are made in situ with no samples collected or analyzed in a laboratory.

8.2.2.2 Data Gaps in the Water Quality Monitoring Network

Table 8-4 summarizes the recommendations for groundwater quality monitoring from DWR's BMPs, the current network, and data gaps. There are no data gaps in the water quality monitoring network.

8.2.3 Land Subsidence

As described in Chapter 5 - Groundwater Conditions and Chapter 7 – Sustainable Management Criteria, no significant land subsidence has occurred in the BVGB, and no significant subsidence is likely to occur. Therefore, MOs, MTs and a representative monitoring network have not been established. This assessment was made based on a CGPS station near Adin (P347) and InSAR data provided by DWR. Future assessment of subsidence at the five-year GSP update will rely on data provided by NOAA, who operates Well P347, and updated InSAR data provided by DWR. The data will be assessed to determine if significant subsidence is occurring and the source of that subsidence.

^{-- =} information not available

feet bgs = feet below ground surface (depth to water)

¹ For the purposes of this GSP, the terms "screen" or "perforation" encompases any interval that allows water to enter the well from the aquifer, including casing perforations, well screens, or open hole.

Table 8-4 Summary of Groundwater Quality Monitoring, Best Management Practices and Data Gaps

Best Management Practices (DWR, 2016a)	Current Network	Data Gap	
Monitor groundwater quality data from each principal aquifer in the Basin that is currently, or may be in the future, impacted by degraded water quality.	4 public supply wells and 3	None. Most known contaminants are located in Bieber	
The spatial distribution must be adequate to map or supplement mapping of known contaminants.	monitoring wells with EC transducers.	and Nubieber. Monitoring at wells in Bieber and in BVMW 5-1 have not shown contaminants, but	
Monitoring should occur based upon professional opinion, but generally correlate to the seasonal high and low groundwater level, or more frequent as appropriate.	danoassis.	monitoring there would indicate if they become present.	
Collect groundwater quality data from each principal aquifer in the Basin that is currently, or may be in the future, impacted by degraded water quality.	4 public supply wells and 3		
Agencies should use existing water quality monitoring data to the greatest degree possible. For example, these could include ILRP, GAMA, existing RWQCB monitoring and remediation programs and drinking water source assessment programs.	monitoring wells with EC transducers.	None.	
Define the three-dimensional extent of any existing degraded water quality impact.	No degraded water quality impacts are present.	None.	
Data should be sufficient for mapping movement of degraded water quality.	No degraded water quality impacts are present.	None.	
Data should be sufficient to assess groundwater quality impacts to beneficial uses and users.	No degraded water quality impacts are present.	None.	
Data should be adequate to evaluate whether management activities are contributing to water quality degradation.	None. Projects and management activities that are implemented will assess potential water quality impacts.	None.	

2518 **8.2.3.1 Monitoring Protocols and Data Reporting Standards**

- 2519 Since the monitoring network relies on NOAA and DWR-provided data, the monitoring protocols and reporting
- 2520 standards for those organizations apply.

2521 **8.2.3.2 Data Gaps in the Subsidence Monitoring Network**

- 2522 Since InSAR data is contiguous across the Basin, there are no spatial data gaps. If subsidence is indicated by future
- 2523 InSAR datasets, there may be a need to field verify those areas to determine if field leveling has occurred or there
- is another reason or cause for the subsidence. Additional field validation could potentially be made by re-surveying
- 2525 monuments in the Basin, including those installed at the new monitoring wells.

8.2.4 Monitoring to Support Water Budget

2527 8.2.4.1 Streamflow and Climate

- 2528 Streamflow and climate data are needed to update the water budget. Current monitoring sites are shown on Figure
- 8-3. Modoc County has been working to improve water budget estimates and is proposing to add a stream gage on
- 2530 the Pit River just north of the BVGB, shown on Figure 8-3, which will be maintained by the state. Data gaps for
- smaller streams, such as inflow from Roberts Reservoir, Taylor Creek and Juniper Creek are proposed to be filled
- by investigating SB-88 stream diversion records submitted to the State Water Board.

2533 **8.2.4.2** Land Use

- Land use data is needed for updates to the water budget. Since 2014, DWR has provided land-use mapping using
- remote sensing processed by DWR's LandIQ mapping resource. DWR has provided these datasets for 2014, 2016,
- and 2018.⁶⁴ The GSAs will rely on DWR continuing to provide this land- use data to generate annual updates to
- 2537 the water budget. The most recent land-use data available will be used to generate the evapotranspiration estimates.
- 2538 Current research is being performed to develop the relationship between evapotranspiration (ET) and applied
- water. This research indicates that crops in this area are typically irrigated less than indicated by the assumptions
- 2540 made by multiplying ETo by crop coefficients.

⁶⁴ Landowners in the Basin have pointed out that these datasets are inaccurate, but they represent the best available information.

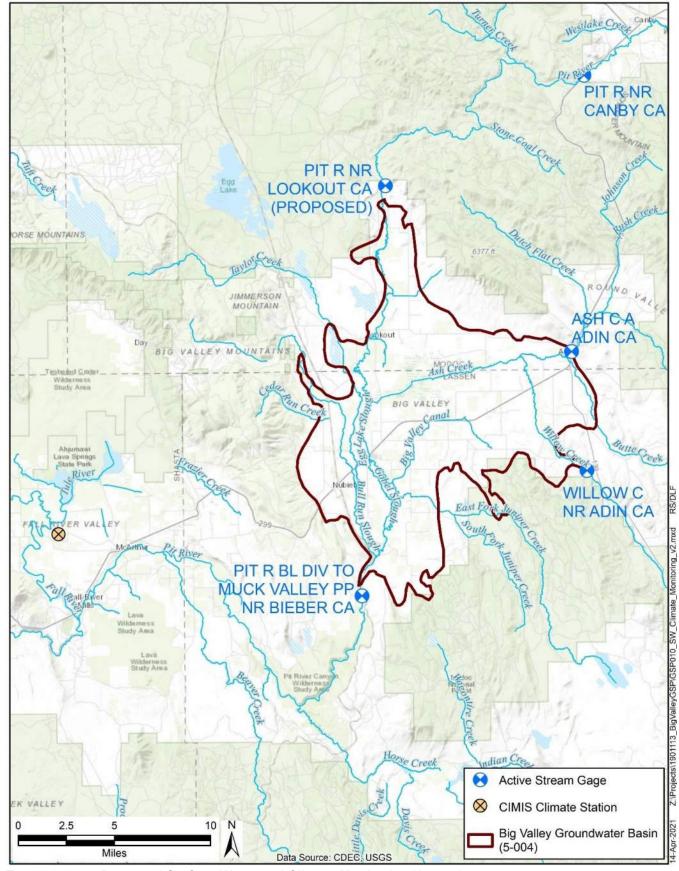


Figure 8-3 Proposed Surface-Water and Climate Monitoring Network

9. Projects and Management Actions §354.44

- Through an extensive planning and public outreach process, the GSAs have identified an array of projects and 2544 management measures that may be implemented to meet sustainability objectives in the BVGB. Additionally, 2545 numerous state and federal programs are available in the Basin to help meet the sustainability goals. Some of the 2546 2547 projects can be implemented immediately, while others will take significantly more time for necessary planning and environmental review, navigation of regulatory processes, and implementation. The Big Valley Basin is 2548 2549 relatively small, and while recharge does occur within the Basin itself, significant recharge comes from the extensive uplands surrounding the Basin. Projects will be located within the greater Big Valley watershed 2550 boundary shown in Figure 9-1. 2551
- Although the Big Valley area is extremely rural and economically disadvantaged, and resource capacity is limited, there are several local, state, and federal agencies that can assist in project development.
- 2554 Project implementation will also be impacted by funding acquisition. **Table 9-1** lists current state and local funding sources that can be targeted to support project planning and implementation.
- With a proactive approach to identify projects for increased recharge and conservation in the Big Valley Basin and 2556 surrounding watershed, it is envisioned that the GSAs will be successful in remaining a sustainable groundwater 2557 basin. With the possible exception of a large surface-water storage project such as Allen Camp Dam, the projects 2558 and management measures describe in this chapter are expected to work in combination and should be considered 2559 2560 as a whole rather than dependent on any single strategy. Should sustainability not be realized, additional projects and management actions will be considered and developed as appropriate. A timeline for projects can be found in 2561 Table 9-2. The Regulations require details about each project to satisfy CWC§354.44. Most of those details can be 2562 found in Table 9-3. One of the items not included in Table 9-3 is a description of the legal authority required for 2563 each project per CWC§354.44(b)(7). The GSAs have the legal authority to coordinate and/or implement each of 2564 the projects described based on their authority under SGMA and state law. Some of these projects include aspects 2565 that will be implemented on private and public land. In those cases, permission and authority to implement the 2566 project will be obtained from the landowner. 2567

2543

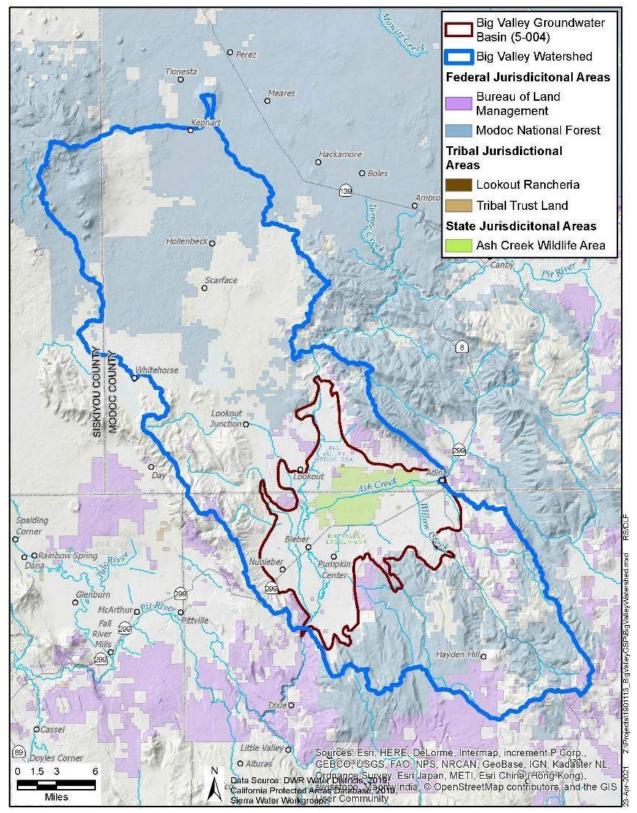


Figure 9-1 Big Valley Watershed Boundary

Table 9-1 Available Funding Supporting Water Conservation

2571

Funding Program Title	Managing Agency	Description of Funding
Wetlands Reserve Program, Crop Reserve Program, Environmental Quality Improvement Program	NRCS (website)	Cost-share funding for wide array of soil, water, and wildlife conservation practices. Funding priorities developed locally.
Conservation Innovation Grants	NRCS (website)	Supports development of new tools, approaches, practices, and technologies to further conservation on private lands.
Partners for Fish and Wildlife Program	US Fish and Wildlife Service (website)	Private land meadow, forest, or rangeland restoration, conservation easement.
State Water Efficiency and Enhancement Program (SWEEP)	California Dept of Food and Agriculture (CDFA) (website)	Supports implementation of water-saving irrigation systems.
Healthy Soils Program	CDFA (website)	Supporting management and conservation practices for enhancing soil health (which includes water holding capacity).
Farmer/Rancher and/or Professional + Producer grants	Western Sustainable Agriculture Research and Education (website)	Farmer-driven innovations in agricultural sustainability including profitability, stewardship, and quality of life.
Alternative Manure Management Program (AMMP) (link)	CDFA (website)	Financial assistance for non-digester manure management.
Sustainable Groundwater Management	DWR (website)	Planning and implementation grants supporting sustainable groundwater management with preference toward disadvantaged communities and economically distressed areas.
State Forest Health Program	CAL FIRE (website)	Improve forest health throughout California.
USDA for household well deepening	USDA Rural Development (website)	No interest loan up to \$11K to improve existing domestic wells.

Table 9-2 Projects and Potential Implementation Timeline

No.	Category	Description	Estimated Time for Potenti Implementation (years)		
			0-2	2-8	>8
1		AgMAR	X	X	X
2	9.1 Recharge Projects	Drainage and Basin Recharge	X	X	X
3		Ag Injection Wells			Х
4		Stream Gages	Х		
5		Refined Water Budget	Х	Х	
6	9.2 Research and Data	Agri-Climate Station	Х		
7	Development	Voluntary Installation of Well Meters	Х	Х	
8		Adaptive Management	X	X	X
9		Mapping and Land Use	Х	Х	
10	9.3 Increased Storage	Expanding Existing Reservoirs		Х	
11	Capacity	Allen Camp Dam			Х
12		Forest Thinning and Management	Х	Х	Х
13	9.4 Improved Hydrologic Function	Juniper Removal	X	X	X
14		Stream and Meadow Restoration	Х	Х	Х
15		Irrigation Efficiency	X	X	
16	9.5 Water Conservation	Landscaping and Domestic Water Conservation	Х	Х	
17		Conservation Projects	X	X	
18		Public Communication	Х		
19		Information and Data Sharing	Х	Х	
20	9.6 Education and Outreach	Fostering Relationships	Х		
21		Compiling Efforts	Х	Х	
22		Educational Workshops	Х		

2575 Note: AgMAR = Agricultural Managed Aquifer Recharge

Project	Brief description	Circumstances under which the project will be implemented	Public notification process	Permitting and regulatory process	Benefits	Schedule	Estimated cost
9.1 Basin Recharge Projects	Agricultural Managed Aquifer Recharge is the practice of using excess surface water (when available) and applying it to agricultural fields to intentionally recharge groundwater aquifers	AgMAR will be performed during winter months during high surface flows. The nature, frequency and timing of these flows will be evaluated through a Water Availability Analysis (WAA).	Notification of available water and success of this projects will be communicated at public GSA meetings. Agreements will be made between the GSAs and interested producers.	Following development of the WAA, an AgMAR permit for surface-water diversions can be solicited from the State Water Board. Currently this permitting process can take 6-18+ months and cause significant economic burden to the applicant. An organized application for Basin-wide winter diversions by the GSAs could lessen some of the regulatory burden since they qualify for a streamlined process but a waiver of fees for extremely disadvantaged communities working to improve groundwater recharge may also be needed.	Irrigating every 5-7 days for roughly 10 weeks in the winter/spring would benefit 2-5 AF of water per acre. Previous research has quantified that over 90% of water is recharged to deep aquifers or available in the soil profile with AgMAR. The limitation to this project is available winter for recharge but a project goal of 1,000 acres per year could provide roughly 10,000 AF of water per year benefit.	Water budget planning and permitting will take 6-18 months and possibly more depending on the case load at the department of water resources. After an off-season water budget is completed, permitting can be distributed to the GSAs for winter recharge location selection. AgMAR could start being used at productive scale by 2024 if all processes go smoothly.	The cost to develop the WAA is still being developed but may be covered under existing grants from DWR. The cost of submitting a streamlined permit will also be developed, including fees.
9.2 Research and Data Development	Stream gages are scientific instruments used to collect streamflow and water quality data to decrease scientific uncertainty in order to inform water management decisions. Agri-Climate/CIMIS stations are helpful in monitoring for climatic factors such as temperature, humidity, wind speed, etc., and overall help refine estimates of ET in the Basin. Refining the water budget for the Basin will improve the accuracy with which management decisions are made because many of the assumptions used to generate the water budget stem from data gaps that need to be addressed, or other efforts to collect and analyze data submitted through other regulatory programs.	In addition to the continued use of existing stream gages which monitor many of the seasonal streams that contribute inflow to the Big Valley Basin, stream gages may be installed if locations and need are determined. Presently, Modoc County is working to install an additional stream gage where the Pit River enters the Basin. Data from Agri-Climate/CIMIS stations may be utilized in order to make water management decisions with regard for climatic factors such as wind, rain etc. Adaptive management will be employed throughout the implementation process to allow for management decisions to reflect the best available data as more information comes available. Employing adaptive management strategies will also expand our capacity to conduct research and data development. Refining the water budget will be done as more data becomes available through the combination of the data development projects described previously.	All research and data development progress will be shared at public GSA meetings. Data collected from gaging stations will be publicly available.	We will continue to work with DWR to ensure compliance with any relevant laws and to obtain any necessary permits related to stream gage installation and maintenance, as well as for other projects that fall under adaptive management strategies and the water budget.	Decreasing data gaps would decrease reliance on assumptions to govern groundwater management decisions. As more data becomes available, more accurate estimates of evapotranspiration would allow for more precise water budgeting estimates.	Gaging stations will be installed where necessary early in the planning process to decrease uncertainty related to streamflow. They will be monitored throughout. Adaptive management strategies are anticipated to be employed throughout the GSP development and implementation phases. Refining the water budget is important early on in order to create a GSP that best reflects existing conditions in the Basin and which may be referenced in the future to perform adaptive management.	Funding is available for the development of new gaging stations. Maintenance costs may vary, but one estimate projects the annual maintenance cost for a single gage to be around \$15,000. Funding for projects related to adaptive management and refining the water budget will be acquired as necessary. Presently, there is funding to maintain or install flow meters on private wells. More funding is likely available for similar projects, such as refining mapping and landuse designations within the Basin.

Project	Brief description	Circumstances under which the project will be implemented	Public notification process	Permitting and regulatory process	Benefits	Schedule	Estimated cost
9.3 Increased Surface-water Storage Capacity	Surface water storage may be used to reduce reliance on groundwater by providing an alternative water source. Presently, Roberts Reservoir and several others, including the Inverson, Silva and BLM reservoirs, mitigate potential overdraft. As water levels in streams and other water courses diminish during the dry months, existing diversions may not adequately meet the needs of users. Expanding the capacity of these reservoirs and possibly constructing new reservoirs such as the Allen Camp Project would allow additional water from snowmelt and storm events to be stored. This would help circumvent reliance on groundwater and would provide reliable supplies of surface water for users.	Projects intended to increase surface-water storage will be implemented when it is economically advisable to do so and when they may help mitigate Basin overdraft.	Pursuant to environmental review, these projects will have opportunities for public comment and project documents will be made publicly available whenever appropriate. Both National Environmental Policy Act (NEPA) and California Environmental Quality Act (CEQA) compliance mandate opportunities for public comment.	Permitting for surface-water storage projects will be subject to NEPA and CEQA depending on whether the project sites are located on federal or state land respectively.	Increasing the capacity to store surface water by capturing runoff could reduce reliance on groundwater during summer months. Further, increasing surface-water storage would improve water security during dry years.	The timeframe for largescale infrastructure projects would likely be upwards of 8 years, as the regulatory and environmental review processes generally require extensive coordination between agencies and stakeholders for planning and compliance.	Large infrastructure projects can be quite expensive. \$1 in May 1981 had the same buying power as \$2.97 in April 2021. A ballpark estimate of the capital costs for the Allen Camp Project in its entirety would amount to approximately \$344,041,830, with the dam and reservoir component amounting to an additional \$174,487,500. These figures assume funding may be available from the federal government in the form of loans under the Small Reclamation Projects Act of 1956. The cost associated with expanding existing reservoirs depends on the method employed. Sediment removal typically costs between "\$8,000 and \$32,000 per acre foot," (Lund 2014) and would be done infrequently. Increasing dam height typically costs between "1,700 to \$2,700 per acre foot" (Lund 2014).
9.4 Improved Hydrologic Function and Upland Recharge	Upland forest recharge enhancement occurs in conjunction with vegetation management and forest fuels reduction by increasing snow-water content and reducing dense forest canopy and associated evapotranspiration.	Upland forest recharge will be enhanced by implementation of forest health and fuels reduction projects within the Big Valley watershed. Such projects are ongoing and in varying stages of planning and implantation. Support from GSAs and local, state, and federal partners will increase implementation rate and scope. Water availability and recharge enhancement will be realized along with fire/fuels and wildlife habitat benefits.	On federally-managed lands, public notification of projects will be conducted under NEPA by the Modoc National Forest or Applegate BLM. State funded projects will follow CEQA public notification process. Opportunities on private land be communicated by GSAs, Pit Resource Conservation District, and other state and local entities.	Projects permitting will vary by land ownership. On federal lands: NEPA and applicable federal land policies. On private lands: state forestry rules are applicable and programs such as CAL FIRE's Forest Health Program will help clarify and streamline permitting processes.	Snow-water content has been shown to increase by 33% to 44% from a dense conifer canopy to an open area. Surface runoff has also been shown to respond to treatments. Recharge figures are difficult to quantify, but even a modest increase in recharge over 10% of the potential upland recharge area could result several thousand AF of water.	The initial upland forest recharge project "Wagontire Project" is scheduled for implementation in 2022 and is expected completion in a 2- to 4-year window.	Project costs vary by site, but an estimated average is from \$500 to \$650 per acre.
9.5 Water Conservation Projects	Water conservation and water use efficiency projects would primarily be adopted by growers and homeowners on their private property. Infrastructure improvements, while requiring capital outlay, are not subject to permitting or public environmental review.	Project implementation will be voluntary with cost-share incentives. Projects will be implemented on a site-by-site basis and designed for overall production and economic efficiency, along with water use savings.	Notification of opportunity to participate will be through local agricultural organizations, extension outreach meetings, and by sponsoring agencies. Broad public notification of individual projects is not required.	Projects in this category such as upgrading irrigation infrastructure, irrigation management techniques, home landscaping, etc. are generally not subject to permitting requirements.	Some practices have been shown to result in efficiency increases in the range of 10% at the field scale. Multiplied over a number of farms, water use savings could be significant.	Irrigation infrastructure and wateruse efficiency incentives are ongoing. UC Cooperative Extension has submitted a grant proposal to SWEEP to initiate an outreach education program in 2022.	Costs vary widely. New irrigation infrastructure on a field scale can exceed \$100,000. Soil moisture meters for irrigation scheduling can be in the \$100s to \$1,000s of dollars per farm. Landscaping and homeowner water efficiency projects in the \$100s to \$1000s per home.
9.6 Education and Outreach	Education and outreach efforts can drive beneficial changes in patterns of use and protect water resources. Existing efforts employed by the GSAs include outreach about funding opportunities that support water conservation methods, coordinating information sharing efforts, and facilitating informational meetings with stakeholder groups.	As an essential part of sustainability, outreach and education will be conducted throughout the development of the GSP, with many opportunities for public engagement.	Public information is available through the Big Valley GSP communication portal, accessible at bigvalleygsp.org. Informational brochures will be distributed to interested parties to make information about the GSP more accessible.	Public engagement is important to the regulatory process of SGMA and other acts that the GSP may be subject to. However, education and outreach are an incredibly important part of meeting the sustainability goals of this GSP, especially as it relates to equity and inclusion.	Public involvement in the GSP development is crucial in attaining sustainability. Research (OECD 2015) has shown that here are many social, economic, and environmental benefits to education and outreach efforts in water management. These benefits can vary widely, but generally include increased levels of social cohesion, equity and conflict avoidance, improved water use efficiency, and improved water quality.	Ongoing efforts to engage the public in outreach and education programs related to groundwater management are essential as part of the Groundwater Sustainability Plan. The anticipated timeline for outreach and education efforts is indefinite, but it is especially important throughout the planning and implementation process of the GSP.	Costs may vary depending on program type.

9.1 Basin Recharge Projects

2580

2596

- Enhancing recharge to get more of the available water into the aquifer is one of the key means to attaining
- sustainability. Priority is given to the immediate Big Valley watershed, but additional recharge projects will be
- 2583 considered for surrounding upland and upstream areas of the Pit River watershed. A more detailed watershed map
- is provided in Chapter 3 Plan Area. For off-season diversion recharge projects to be widely available in the Big
- Valley Basin, an off-season water availability study must be completed for the Pit River watershed up-river of Big
- Valley. This would allow growers to be able to obtain a permit for winter flow diversion. This study would include
- a survey of potential water rights held for off-season use, storage, and hydroelectric power. See footnote link for a
- 2588 more detailed description of what is needed in this process. 65
- Once this survey is completed and approved by a licensed engineer, permits to divert for available surface water
- can be solicited from DWR. Currently this permitting process can take 6 to 18+ months and cause significant
- economic burden to the applicant. An organized application for Basin-wide winter diversions by the GSAs could
- lessen some of the regulatory burden since they qualify for a streamlined process but a waiver of fees for
- extremely disadvantaged communities working to improve groundwater recharge is needed. See footnote link for a
- more detailed description of what is needed in this process.⁶⁶
- Along with permitting costs, there are also costs to the irrigator in electricity and labor costs to apply water.

9.1.1 Agriculture Managed Aquifer Recharge

- One approach to Basin recharge currently being considered is AgMAR, which is the intentional recharge of
- 2598 groundwater aquifers by spreading water over agricultural fields at times when excess surface water (Kocis &
- Dahlke, 2017, Dahlke et al. 2018). With significant surface-water irrigation and diversions already present in Big
- Valley, AgMAR is a viable option in the Basin. Much of the current research on AgMAR has been completed on
- relatively well-drained soils that are not present in Big Valley. Research on Big Valley soils with slow to very-
- slow infiltration rates appears to be initially promising. While recharge of groundwater may be slower in the Basin,
- 2603 it could still be a feasible means for deep water recharge and filling the shallow aquifer and root zone. AgMAR
- 2604 can be utilized for both, increasing recharge and decreasing water application of groundwater during the growing
- season due to a saturated soil profile. A conservative estimate suggests that 25,000 acres in Big Valley of
- agricultural and native vegetation lands are accessible to surface water and available for AgMAR. Priority will be
- 2607 given to low infiltration over very-low infiltration soils for recharge and areas addressing more critical
- 2608 groundwater levels.
- Among the perennial crops, alfalfa is considered a promising candidate for AgMAR for several reasons, and
- significant initial research has been completed throughout California on its feasibility (Dahlke et al. 2018). Eighty
- to eighty-five percent of the alfalfa in California is irrigated by flood irrigation, which in

⁶⁵ https://www.waterboards.ca.gov/waterrights/water_issues/programs/applications/groundwater_recharge/docs/streamlined_waa_guidance.pdf

⁶⁶https://www.waterboards.ca.gov/waterrights/water issues/programs/applications/groundwater recharge/streamlined permits.html

- turn could allow for areas where surface water can be utilized for groundwater recharge (Dahlke et. al. 2018).
- Alfalfa is widely grown in Big Valley and flood irrigation is common. Alfalfa is a nitrogen-fixing plant that
- seldom receives nitrogen fertilizer, which reduces the risk of leaching excess nitrate to groundwater, one of the
- main concerns of AgMAR (Putnam and Lin 2016; Walley et al. 1996). Dahlke, H.E., Et. al. 2018 found that winter
- recharge had no discernible effect on alfalfa yield (first and second cutting) and led to increased crop water
- availability in the deep soil profile, offsetting potential irrigation deficits during the growing season.
- Research currently being completed in Big Valley on the feasibility of AgMAR on perennial grass pasture and hay
- 2619 fields looks promising. Although soils in Big Valley have lower infiltration rates, winter recharge rates of 0.2 0.5
- 2620 AF per acre per irrigation between March and April have shown no damage to crops. Soil infiltration rates show 2
- 2621 to 3.5 inches of infiltration over a 24-hour period to be feasible. Irrigating every 7 to 10 days for six irrigations in
- 2622 the winter/spring would benefit 1 to 2 AF of water per acre into groundwater storage. This is the first AgMAR
- research completed on grass, which is a dominant perennial crop in Big Valley. Given that some forms of applied
- 2624 nitrogen, particularly nitrate, have a propensity for leaching, which has presented a challenge in other parts of the
- state, there has been some concern over nitrogen application and AgMAR. This can easily be addressed with
- 2626 BMPs of applying nitrogen outside of the winter recharge window. This work could also be easily applied to
- 2627 AgMAR feasibility on adjacent rangeland, conservation reserve project (CRP), or NRCS WRP land.

9.1.2 Drainage or Basin Recharge

- Using the same principles as used in AgMAR, excess surface water can be diverted into irrigation drainages or
- 2630 canals and recharge basins to percolate into the groundwater table and replenish upper levels of the aquifer. This
- water is then available to be extracted at a later date for beneficial use. The volume of water recharged is limited
- by the availability and access to surface water, infiltration rates of the soils, losses to evaporation, and available
- infrastructure.

2628

2640

- 2634 The total number of feet or miles of irrigation canals or ditches needs to be determined, along with the availability
- of current water storage basins (reservoirs) for recharge. Additional basins may need to be created for the sole
- 2636 purpose of groundwater recharge. Producers wanting to participate in this program would notify the GSA and
- report diverted water for the purpose of drainage or Basin recharge. The development of a water availability study
- and permitting as described on in **Table 9-3** also applies to this project. Unlined drainages, canals, and basins
- 2639 could recharge up to 90 percent of diverted surface water to the aquifer.

9.1.3 Aquifer Storage and Recovery and Injection Wells

- Aguifer storage and recovery (ASR) is the use of a new or existing well to inject and store water underground
- 2642 during wet periods and then extract by the same or other nearly wells to meet demand during dry periods.
- 2643 Increased aquifer storage provides some of the same benefits as new surface storage but can be phased in over time
- and can be less expensive. From an operations perspective, increased aquifer storage is a practical option since it
- 2645 involves the use of new or existing groundwater wells

- retrofitted for injection. ASR projects require a permit from the RWQCB, and the permitting method is usually the
- Statewide ASR General Order (General Order)⁶⁷ adopted by the State Water Board in 2012.
- 2648 The General Order requires that the water being injected into aquifer storage meet drinking water standards, so in
- 2649 the case of Big Valley, this will require filtration and chlorination of surface water prior to injection into aquifer
- storage.

2658

2659

2664

2665

2666

2667

2668

2669

2670 2671

2673

- Because pre-treatment of the water source for injection and operation and maintenance of ASR wells is relatively
- expensive, ASR is typically used when surface spreading *via* basins or flooded fields is not feasible. ASR may be
- 2653 favored in areas of the Basin constrained by land area limitations, unfavorable surface soils, or shallow confining
- layers at or near the ground surface preventing deep percolation of applied water.
- In Big Valley, the most likely scenarios in which ASR would be implemented are when under the following conditions:
 - Flood MAR projects are not able to stabilize groundwater levels in some location due to the presence of impermeable soils at or near the surface, or
 - As mitigation to reverse declining groundwater levels near public or domestic supply wells.
- ASR would be implemented in phases if the conditions above warrant it. ASR would only be feasible with outside funding assistance through either state or federal grant programs to both cover the capital expenses and assist with the monitoring required for compliance with the ASR General Order. Under these conditions, ASR will be developed in phases as summarized below:
 - Phase 1 Assessment of wells and hydrogeology culminating in a technical report to accompany a notice of intent to inject provided to the RWQCB. This phase will identify locations and monitoring during ASR pilot testing.
 - Phase 2 ASR pilot testing following receipt of a Notice of Applicability from the RWQCB. Pilot testing may include a single well test or may involve multiple wells throughout the Basin based on the finding and recommendations in the technical report developed in Phase 1.
 - Phase 3 Implementation including retrofit of existing wells, construction of new wells, and operation of these facilities to stabilize or increase aquifer storage.
- 2672 More information about ASR is available from the U.S. Environmental Protection Agency.⁶⁸

9.2 Research and Data Development

Data gaps are mentioned and detailed throughout the GSP chapters. Continuing to fill these gaps, participate in research, and collect data to support the GSP is necessary to support sustainability using the best science available.

⁶⁷ https://www.waterboards.ca.gov/water_issues/programs/asr/

⁶⁸ https://www.epa.gov/uic/aquifer-recharge-and-aquifer-storage-and-recovery

9.2.1 Additional Stream Gages and Flow Measurement

- Several seasonal streams contribute inflow to the Big Valley Basin (Figure 9-2). Many of these streams had
- 2678 historical stream gages or have current gages monitored by the USGS and DWR. The Pit River, which is a major
- 2679 inflow river and significant contributor of surface-water irrigation and recharge in Big Valley, has a gage 13 miles
- 2680 from where the Pit River enters Big Valley at the Canby bridge. There are many springs and small tributaries that
- 2681 flow into the Pit River after the Canby bridge, as well as irrigated-lands water use between Canby and the Big
- Valley Basin. Modoc County has been working to install an additional stream gage where the Pit River enters the
- 2683 Basin to fill this data gap and provide more current stream flow information for GSP development and water
- 2684 management. There is also funding for additional stream gages if locations of need can be determined. The current
- and proposed stream gages are in **Figure 9-2**.

9.2.2 Refined Water Budget and Domestic Supply Assessment

- 2687 Many assumptions were taken to create the Big Valley water budget in Chapter 6 Water Budget. Some of these
- assumptions stem from data gaps that need to be addressed, and other areas are opportunities to collect and analyze
- 2689 data that is being submitted through other regulatory programs. This section describes a combination of projects
- 2690 that will help improve the accuracy of the water budget and, in turn, better inform groundwater management in Big
- Valley.

2676

- There is currently no Agri-Climate or CIMIS station located in Big Valley. Nearby stations in other basins have
- 2693 helped to create models to determine averages, but significant geologic features affecting elevation often make
- 2694 weather patterns unpredictable from nearby basins. These stations have more sensors than typical weather stations,
- 2695 including solar radiation, soil temperature, air temperature, wind speed and direction, relative humidity, soil
- 2696 moisture, and rain gauging. These measurements can determine accurate ET, which is very helpful in creating a
- 2697 more refined water budget for the Basin and help maintain sustainable groundwater conditions. ET is used as a
- 2698 metric for applied water, especially when meters on actual applied water are not available. These stations can also
- 2699 help farmers in determining irrigation needs and promote water conversation, particularly early in the growing
- 2700 season.
- With an accurate estimate of ET, the next assumption is the relationship between ET and applied water in Big
- Valley. Since most crops grown in Big Valley are hay crops, irrigation must be stopped when cutting, drying, and
- baling even though ET continues. Pinpointing the relationship between ET and applied water could greatly refine
- 2704 the water budget and amount of irrigation water that is being applied.
- An effort to refine mapping and land-use designations would further increase the accuracy of estimates related to
- water use within Big Valley. The water budget's assumptions are primarily derived from existing sources, many of
- which may need to be updated or expanded upon to reflect current conditions. LandIQ has been a primary tool in
- estimating irrigated acres, although there is some inaccuracy related to the land classifications which field studies
- 2709 could address.

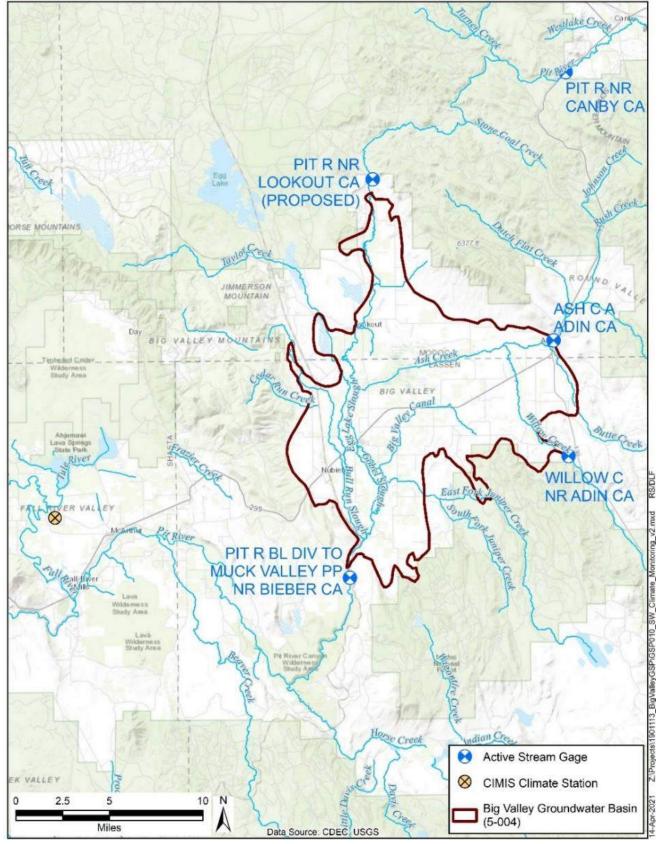


Figure 9-2 Current and Proposed Stream Gages

A voluntary well monitoring program has been available in Big Valley for upwards of two decades through the 2713 Lassen-Modoc Flood Control and Water Conservation District.⁶⁹ Through this program, meters are available for 2714 agricultural and domestic water users. Reinvigorating this program by identifying meters that need to be replaced, 2715 conducting outreach to add new wells to the program, and organizing the historical data to fill data gaps would 2716 both provide critical data to refine the water budget and create the framework for the development of a basin wide 2717 2718 well registry program. Although de minimis extractors (i.e. those that extract 10 AF per year or less for domestic use) have a minimal impact on the water budget and are not regulated under SGMA or by the Big Valley GSAs, 2719 management actions should reflect their intrinsic connection from both water quality and water availability 2720 perspectives. Water level and water quality data collected from this program and from the strictly-monitoring wells 2721 located throughout the basin can be used to assess domestic well supply and to pinpoint areas of concern, such as 2722 shallow and non-operational wells. Additionally, this registry could be used to assess both the need and feasibility 2723 of drilling a domestic supply well for the town of Adin. Funding from DWR in a grant to Modoc County is 2724

currently available to provide flow meters to voluntary applicants.

It would also be beneficial to identify additional monitoring wells to provide unobstructed measurements yearround. Several such wells have been installed at five sites within the Basin and generate continuous water level and water quality data across 15-minute intervals. Surface water quality data is also periodically collected from points in Adin, Bieber, and Lookout within the Basin when funding allows. Expanding on this existing program would further refine the water budget and improve the capacity of the GSAs to make management decisions to the benefit of all users.

Additionally, funding is available to install satellite transducers in key areas throughout the Basin, which would allow for real-time monitoring of domestic well levels. Coupled with an increased effort to both verify well numbers and update lists to reflect active *versus* inactive wells, these real-time monitoring locations will provide more accurate estimates of domestic groundwater demand and supply within the Basin. Thus, these combined actions will further inform water management strategies to ensure that domestic users' groundwater needs are represented equitably in the water budget.

Collectively, the continuation of applied research efforts will help to better quantify the impacts from those actions and thus help refine the water budget. Such research efforts, which will be discussed in depth in later sections of this chapter include: evaluating the effectiveness of off-season groundwater recharge in hay crop fields and pastures; the impacts of forest thinning projects such as fuels reductions and the removal of invasive junipers on water availability within the watershed; and the extent to which surface-water systems, including drainages, canals, and reservoirs contribute to recharge within the Basin. Additional research projects to support the water budget will be identified and undertaken as needed, contingent on funding.

9.2.3 Adaptive Management

There are many unknowns and data gaps with respect to groundwater resources in the Big Valley Basin. As a result, estimates and assumptions are currently used in the plan to determine several key variables.

69

2738

2739

2740

2741

27422743

2744

2745

2746

⁶⁹ Lassen-Modoc County Flood Control and Water Conservation District

- To address the lack of necessary information, a significant commitment to the continued monitoring of both
- 2749 ground and surface water is described in this plan. By further developing and enhancing monitoring networks in
- Big Valley, we can gather the data necessary to inform management and set criteria as more information becomes
- 2751 available.
- 2752 Adaptive management is an approach to improve natural resource management which focuses on learning by
- doing. Learning occurs through monitoring, data development, outreach, and collaborative interpretation. Then, the
- 2754 adaptation of management criteria and tools is applied to existing practices as critical information becomes
- available. This approach is very applicable to the BVGB and will serve to maintain sustainability by providing
- 2756 current site-specific information to inform appropriate SMCs and thresholds as well as the ongoing assessment of
- 2757 projects and management actions in the Basin.
- 2758 Although it is recognized and proven that the Big Valley Basin does not have the unsustainable conditions seen in
- other basins around the state, monitoring and filling data gaps from SMCs that were determined to not require
- 2760 thresholds helps us prepare for annual reports and five-year revisions and make management decisions. These
- SMCs without identified thresholds include interconnected surface water and groundwater, water quality, and
- subsidence. Additionally, monitoring could aid in the analysis of the relationship between groundwater levels and
- 2763 GDEs.

9.3 Increased Surface-water Storage Capacity

- 2765 Increasing the capacity to store surface-water runoff during winter/spring high-flow periods could provide
- significant amounts of water for summer irrigation. An increase in surface water available for irrigation would
- lessen the reliance on groundwater and thus improve the Basin's ability to remain sustainable.

9.3.1 Expanding Existing Reservoirs

- Expansion of several existing reservoirs serving Big Valley Basin would increase the capacity of surface water for
- 2770 irrigation and recharge projects, as well as help balance the water budget. An increase in water storage would make
- 2771 the Basin more sustainable regarding climate variability and decreases in snowpack while also relieving pressure
- on groundwater for irrigation in Big Valley. One larger reservoir, Roberts Reservoir, is located northeast of
- Lookout and has a current capacity of 5,500 AF. Possible scenarios for raising this reservoir's dam are shown in
- 2774 Error! Reference source not found. For example, raising Roberts Reservoir 3 feet would increase capacity by 35
- percent, resulting in a total additional 1900 AF of storage.
- Other reservoirs include Iverson, Silva, and BLM reservoirs. From an engineering perspective, the base of the
- 2777 Iverson reservoir is much wider than it needed to be at the time it was built. This suggests that the foundation
- would easily support construction to increase its height.
- Expanding current reservoirs may possibly be the most time- and cost-effective alternative for expanding surface-
- water storage compared with building new reservoirs, for which navigating the environmental review process and
- other regulations can be difficult.
- All reservoir expansion projects would undergo three phases. Phase 1 examines the feasibility of the proposed
- project and planning. Engineering, permitting, and project design take place during Phase 2.

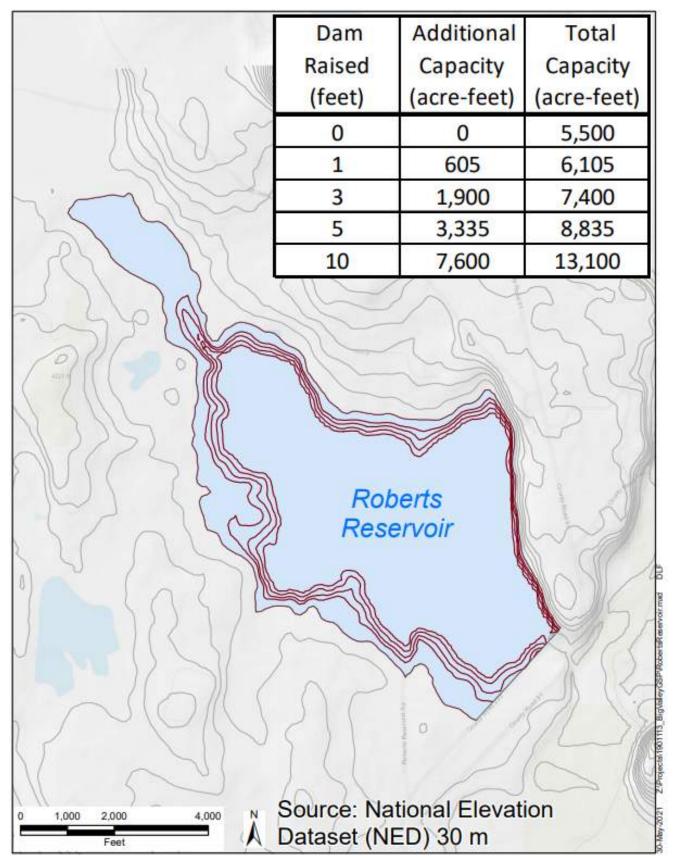


Figure 9-3 Roberts Reservoir Scenarios

Phase 3 covers implementation and construction of the proposed project. Reservoir expansion is typically done through either sediment removal or by physically raising the height of the dam. Typically, expanding reservoirs through sediment removal is very costly, between "8,000 and 32,000 dollars per acre foot" and would be done very infrequently (Lund 2014). Raising dam heights or building new reservoirs is also expensive; an acre foot of storage space generally costs between "1,700 and 2,700 dollars" (Lund 2014). Depending on funding, sediment removal may be investigated, and removed sediment could potentially be repurposed to reinforce existing infrastructure such as the levees that protect Bieber and Lookout from Pit River flood events.

9.3.2 Allen Camp Dam

The Allen Camp Dam and Reservoir (**Figure 9-4**) was authorized by the Department of the Interior (DOI) as part of the Allen Camp Unit of the Central Valley project in 1976 to regulate flows of the Pit River primarily for irrigation and fish and wildlife purposes, as well as flood control and recreation services. Despite strong local support for the project, the DOI's concluding report (DOI 1981) determined that the proposed project was economically advisable based on the existing criteria of the time. Nowit may be appropriate to conduct a new investigation into the feasibility of this project to reflect the changes to water needs of the community, environment and state that have occurred over the last 40 years.

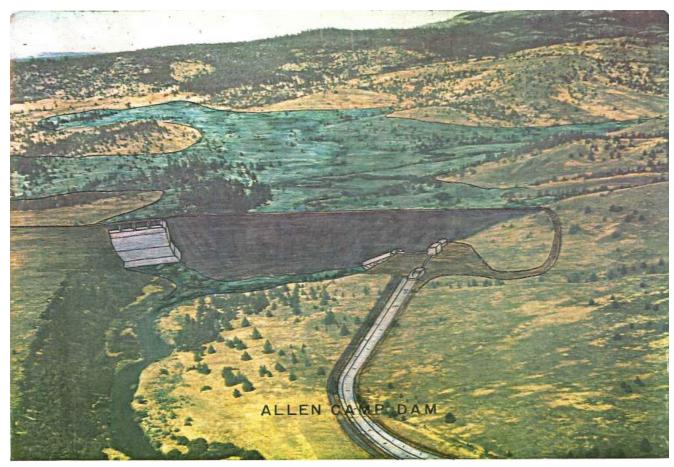


Figure 9-4 Allen Camp Dam Drawing

- According to the original feasibility study (DOI 1981) the dam would be located around 11 miles north of the
- Modoc-Lassen County line, Allen Camp Reservoir would have a 90,000-AF storage capacity, a 18,000-AF
- surcharge, 2,350 acres of water surface area and a normal year yield of 22,400 AF. The dam would be constructed
- from earth and rock fill and would measure 103 feet from the streambed. The construction of the various proposed
- project components would require the acquisition of about 18,240 acres of private land through easements or
- through fee titles and the withdrawal of roughly 11,845 acres of public land. Most of the land acquired would be
- allocated for the dam and reservoir project features, a total of 18,015 acres. In the original document, another
- significant allocation, 11,562 acres, was for the proposed Big Valley National Wildlife Refuge. This addition was
- intended to offset habitat loss for species such as deer and migratory waterfowl. An updated feasibility study for
- 2813 this project should consider the expansion of the Ash Creek Wildlife Refuge since 1970 as an alternative for this
- proposed mitigation measure. The remaining land would be partitioned at 355 acres for the Hillside Canal, 148
- acres for the lateral distribution system and 5 acres for the Nubieber protective dike.
- In 1981, there were 62 ownerships slotted to receive deliveries from this project, accounting for a total
- 2817 11,700 irrigable acres all of which would benefit from full or supplemental water deliveries. The report stated that
- 2818 the groundwater basin area of the project has a storage capacity of roughly 532,000 AF with a safe yield of 7,000
- AFY, with 5,000 AF of that developed. These numbers may have changed over the 40 years that have elapsed
- since the report was published and should be reviewed under an updated feasibility study. An increasingly variable
- climate casts uncertainty over water availability, with drier years driving an increased reliance on groundwater
- supplies. Further, an updated feasibility study might consider how this project could mitigate some of the effects of
- climate variability and watershed conditions on the BVGB by providing a reliable source of surface water, thereby
- 2824 reducing dependence on groundwater.

9.4 Improved Hydrologic Function and Upland Recharge

9.4.1 Forest Health / Conifer and Juniper Thinning

- The watershed surrounding the Big Valley Basin is comprised of approximately 800,000 acres of conifer forest
- and rangeland (Figure 9-5). Management policies, such as fire suppression, have resulted in tree densities that are
- currently much higher than at the beginning of the 20th century. This includes western juniper and other mixed
- conifers (Stephens et al. 2016) (Miller and Tausch 2001).
- There are two main mechanisms by which dense junipers and other conifers impact water availability in forested
- 2832 watersheds. First is the interception of snow (primarily) and rain that gets caught in branches and needles and
- evaporates before ever reaching soil surface, and second is the high rate of transpiration due to dense layered
- canopy and vigorous network of roots (Ryel and Leffler 2011). An excellent summary paper by Smerdon et al.
- 2835 (2009) describes linkages between forest health and tree density and groundwater recharge in a variety of
- 2836 landscapes.

2825

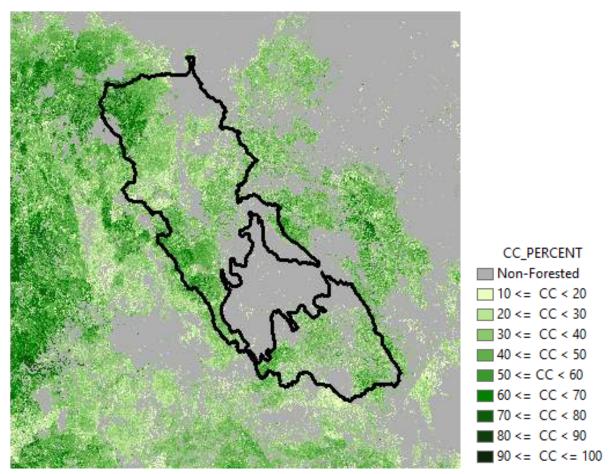


Figure 9-5 Canopy cover percentage of forested areas within the Big Valley watershed

Spring snow water content ranged from 33 to 44 percent higher in the aspen and an open meadow snowpack telemetry (SNOTEL⁷⁰) site *versus* adjacent juniper and conifer forest, where interception of snowfall was much higher (LaMalfa and Ryel 2008). Averaged over the entire catchment, strategically placed fuel treatments in the wetter central Sierra Nevada (American River) creating a relatively light vegetation decrease (8%), resulted in a 12 percent runoff increase, averaged over wet and dry years. With forest treatments, wildfire reduced vegetation by 38 percent and increased runoff by 55 percent. Without treatments, wildfire reduced vegetation by 50 percent and increased runoff by 67 percent.

Forest fuel reduction in drier sites in the southern Sierra had less increase in runoff than wetter sites in the central Sierra Nevada Range. (Saska 2019).

A similar increase in water availability has been documented on juniper-invaded rangelands. During the period of maximum water uptake, mature trees used between 45 and 69 times more water than juniper saplings depending on precipitation and, consequently, soil water availability. In summary, 1) juniper water use varies greatly with precipitation, and 2) because of the large difference between mature and

⁷⁰ SNOTEL is an automated system of snowpack and related climate sensors operated by the NRCS of the USDA in the Western U.S.

- sapling trees, juniper control results in considerable water savings, even after a 14-year period of juniper regrowth (Mata-Gonzales, et al. 2021). Paired watershed studies in Oregon have demonstrated increased deep soil moisture, increased spring flow, and increased surface-water runoff after juniper harvest compared to untreated areas. They have also documented a hydrologic connection between shallow groundwater on juniper sites and a nearby riparian valley (Ochoa et. al. 2016).
- The opportunity to enhance upland watershed recharge is significant as projects are already in planning and 2858 implementation stages to reduce fire risk and improved wildlife habitat (Miller 2001), and programs such as CAL 2859 FIRE's Forest Health Program support project implementation funding. Forest health projects can be developed 2860 and meet multiple resource objectives including hydrologic values. Removal of conifers from meadow edges, 2861 drainages, and spring areas, as well as improving hydrologic function of road crossings, ditches, and stream 2862 channels (where feasible) will enhance hydrologic and recharge benefits of forest health projects. Given the vast 2863 2864 land area surrounding Big Valley, treatment of even a fraction of the land area would result in a significant amount of recharge. This could help mitigate any deficit. Recently, controlled burns and fuels reductions have gained 2865 2866 considerable traction as forest management tools and could be utilized for the purposes discussed. It should be noted that federal support is required for projects that take place on Forest Service and Bureau of Land 2867 Management lands, which much of the watershed surrounding Big Valley is comprised of. Most if not all forest 2868 health projects mentioned here exceed the capacity of the local community to fund and implement, and require 2869 support from state and federal agencies. 2870

9.4.2 Stream Channel Enhancement and Meadow Restoration

- Several meadow restoration techniques exist for the purpose of returning proper hydrologic function to montane 2872 and rangeland meadows. Two used in the Big Valley Basin and surrounding uplands include pond and plug and 2873 2874 beaver dam analogs. Both techniques result in reconnection of a stream channel with a functioning floodplain and 2875 restoration of a degraded meadow's water table up to its historic level. Restoration of the meadow water table results in re-watering of meadow soils and vegetation, with significant effects throughout the restored floodplain 2876 for meadow hydrology, wildlife use, and forage. Restored floodplain connectivity spreads flood flows so that a 2877 meadow's natural ability to settle the coarse or fine sediment delivered from steeper stream reaches is restored and 2878 2879 natural percolation can occur. When floodplain function is restored, a portion of winter and spring runoff is stored in meadow soils rather than racing down the pre-project gully during the runoff season. Data indicates that release 2880 of this stored runoff results in increased stream flow in late spring. (Hunt et. al. 2018) 2881
- In mountains of the western U.S., channel incision has drawn down the water table in many meadow floodplains. 2882 Increasing climate variability is resulting in earlier melt and reduced snowpack, and water resource managers are 2883 investing in meadow restoration which can increase springtime storage and summer flows. Between 2012 and 2884 2885 2015, during a record setting drought, a pond and plug restoration in Indian Valley in the Sierra Nevada Mountains 2886 was implemented and monitored. Despite sustained drought conditions after restoration, summer base-flow from the meadow increased 5 to 12 times. Before restoration, the total summer outflow from the meadow was 2887 2888 five percent more than the total summer inflow. After restoration, total summer outflow from the meadow was 2889 between 35 and 95 percent more than total summer inflow. In the worst year of the drought (2015), when inflow to 2890 the

- meadow ceased for at least one month, summer base-flow was at least five times greater than before restoration.
- 2892 Groundwater levels also rose at four out of five sites near the stream channel. Filling the incised channel and
- reconnecting the meadow floodplain increased water availability and streamflow, despite unprecedented drought
- 2894 conditions. (Hunt et. al. 2018)
- Other studies have also shown that these techniques may increase surface and subsurface storage and groundwater
- elevations that contribute to channel complexity and residence times. These factors could lead to stronger flow
- permanence in channels subject to seasonal drying. Increased availability of water and productivity of riparian
- vegetation can also support human uses in arid regions, such as irrigation and livestock production. (Pilliod et. al.
- 2899 2018)

2901

9.5 Water Conservation

9.5.1 Irrigation Efficiency

- 2902 The fundamental objective of an irrigation system is to deliver an optimum amount of water for crop growth
- during spring, summer, and fall growing seasons while temperature and daylength are conducive to plant growth
- but natural precipitation is lacking. Irrigation water and water application costs comprise the single biggest
- operational cost associated with alfalfa or grass hay production in the intermountain area, accounting for
- approximately 30 percent of total operating costs (Wilson et al. 2020) (Orloff et al. 2016). Increasing the efficiency
- of crop water use is an economic, as well as a conservation-minded, goal. Farmers in the Big Valley area have
- been adopting water conservation measures as feasible opportunities arise and will continue to do so. Support for
- infrastructure, new technology, and education outreach will help attain this goal.
- 2910 Flood, wheel-line, and center pivot irrigation systems are all used on Big Valley farms. The best irrigation system
- depends on water availability, crop, soil type, and infrastructure. Commonly, center-pivots are rated as the most
- efficient systems, but there are appropriate uses for all three types. Many advancements in irrigation efficiency
- 2913 have been made and will continue to be developed and implemented. It is critical that implementation is done at a
- 2914 farm-by-farm basis in such a way as to fit specific conditions and production systems. A one-size-fits-all approach,
- such as SGMA, will be neither effective nor economically viable for the BVGB.
- 2916 It is important that any irrigation system be well-maintained to operate properly. Flood-irrigated fields should be
- appropriately leveled with appropriate width and length of irrigation check to provide for a uniform application of
- 2918 water. Sprinkler systems should be regularly checked for function and be designed with the right nozzle size for
- available flow and pressure. Systems that can utilize larger diameter nozzles can reduce droplet size and
- evaporation loss. Length of irrigation set should make use of soil water-holding capacity without incurring
- excessive tailwater. Specialized systems such as Low Energy Sprinkler Application can improve water use
- 2922 efficiency up to 15 percent. Length of irrigation set should make full use of soil water-holding capacity without
- 2923 incurring excessive runoff.
- To optimize efficiency of water use, the amount and timing of irrigation water applied should closely match the
- amount of water needed by the crop, thus maintaining adequate soil moisture for crop growth while minimizing
- tail water runoff. Effective use of irrigation technology such as soil moisture sensors,

- tracking of evapotranspiration, flow meters, etc. are available to help farmers manage irrigation timing and length
- of set to get the most of their irrigation system. These irrigation efficiency techniques are already being used in the
- 2929 BVGB.

2954

- 2930 Genetic selection and the continued improvement of forage crop species has resulted in the increased availability
- of drought tolerant, heat tolerant, or short-season forage grasses that may provide growers with viable alternatives
- in certain situations, where water availability is otherwise limited. Crop selection is often based on the best fit for a
- 2933 particular soil depth, soil texture, and water availability, in conjunction with value and marketability. Although Big
- Valley cropping systems are heavily constrained by climate and growing season, ongoing forage crop
- improvement may provide growers with a wider range of species and variety options.
- Overall good agronomic practices in terms of soil fertility, weed control, harvest, etc. are critical and promote an
- 2937 efficient use of all resources, including water. As mentioned in other places in this plan, agricultural fields and
- farms provide important wildlife habitat in the valley. Irrigated lands are an important part of the overall
- landscape. A good example is that flood irrigated pastures are highly valued by migratory birds, particularly in the
- spring. Emphasis on water efficiency is important but should not become such a single-focused objective that other
- resource values or farm profitability are ignored.
- 2942 It should be clear that efficient use of water for irrigated forage crop production is multi-faceted, and several small
- improvements, strategically coupled together to fit on-farm conditions, are the most effective approaches. To this
- 2944 end, education outreach *via* U.C. Cooperative Extension, technical support from NRCS, and cost-share and grant
- 2945 programs are all critical to supporting water use efficiency measures. Support and incentive programs that have
- been used and can be further expanded upon in Big Valley are listed in **Table 9-1** (funding program table).

9.5.2 Landscaping and Domestic Water Conservation

- 2948 While Big Valley is extremely rural and economically disadvantaged, there are opportunities to enhance water
- 2949 conservation among domestic water users, particularly regarding domestic landscaping, use of native drought
- 2950 adapted plants, irrigation timers, effective mulch, and rainwater/snow water catchments to reduce water
- requirements. Low-water landscaping can also be integrated with homeowner firesafe planning. Landscaping
- 2952 guides for homeowners can be distributed at public centers and at regional garden supply stores (Hartin et. al.
- 2953 2014) (California Native Plant Society, 2021).

9.5.3 Illegal Diversions and Groundwater Uses

- 2955 As detailed in Section 3.3 Land and Water Use, water use for illegal activities (i.e., unlicensed marijuana
- cultivation) occurs in the Basin and surrounding watershed. Lassen and Modoc County staff have limited time and
- resources to address this issue, but they do actively enforce their local cultivation ordinance (which does not allow
- 2958 for commercial marijuana cultivation) Staff in Lassen County conduct areal patrols and utilize high-resolution
- 2959 aerial imagery from an imaging contractor as part of their effort to identify and abate illegal cultivation.
- 2960 Unfortunately, federal and state agencies responsible for taking enforcement action against illegal marijuana grows
- in their jurisdictions (e.g., on public lands or when illegally diverting surface water) have not been aggressive in
- 2962 identifying and removing said illegal grows in the Basin and watershed. That said, when county resources are
- 2963 available, staff will continue to

- work in the field and with their imaging contractors to identify and abate illegal marijuana cultivation on private land. County staff will continue to report cultivation activities outside of their purview to the BLM, USFS, CDFW,
- State Water Board and the Bureau of Cannabis Control. The GSAs will rely on these agencies to take an
- aggressive approach in Big Valley with the objective of eradicating the Basin and watershed of illegal groundwater
- 2968 pumping and surface-water diversions.

9.6 Public Education and Outreach

- 2970 The GSAs believe that public education and outreach are an important component of this GSP. Education can
- 2971 change use patterns that promote water conservation and protection of water resources. The GSAs support
- 2972 continued education on preventing illegal dumping, illegal marijuana growers, properly sealing abandoned wells
- and BMPs. Continued outreach to support the coordination of efforts and information sharing, fostering
- relationships with relevant agencies and organizations and attending meetings with local and regional groups
- involved in water management are also important. This includes increasing public outreach about funding
- 2976 opportunities and programs that support water conservation methods, increased recharge and mediation
- opportunities for decreasing water levels. **Table 9-1** lists current state and local funding sources that can be
- 2978 targeted to support project planning and implementation. More information on public outreach and communication
- 2979 can be found in Chapter 11 Notice and Communications.
- 2980 Outreach methods that can be expanded include radio public service announcements, cooperator workshops with
- University of California Cooperative Extension (UCCE) and social media posts informing the public about
- upcoming meetings and deadlines, BMPs, plan updates, recharge opportunities and updated water conditions. An
- organized effort to compile recharge and conservation activities would aid GSAs in tracking impacts for future
- 2984 Plan revisions.

10. Implementation Plan

2985

GSP implementation generally consists of five categories of activities: 2986 GSA Administration and Public Outreach 2987 Monitoring and Data Management 2988 **Annual Reporting** 2989 Plan Evaluation (five-year updates) 2990 **Projects and Management Actions** 2991 2992 This chapter contains discussion of the details for each of these activities, then sets forth a schedule for implementation, estimates costs of implementation and discusses funding alternatives. 2993 10.1 GSA Administration and Public Outreach 2994 2995 The nature of GSA administration is not addressed explicitly in the GSP Emergency Regulations. Much of the 2996 work to implement portions of the GSP (e.g., monitoring and projects and management actions) must be performed 2997 by outside entities such as DWR and hydrology professionals. However, this work will need to be coordinated by the GSAs, and some work will need to be performed by GSA staff. 2998 2999 One category of work that rests on GSAs' shoulders is public outreach. The level of effort needed from GSA staff depends greatly on the details of public outreach discussed in Chapter 11 – Notice and Communications. In 3000 addition to the public outreach performed during GSP development, Regulations (§354.10(d)) require GSAs to 3001 develop a communication section of the plan that includes the following: 3002 3003 (1) An explanation of the Agency's decision-making process (2) Identification of opportunities for public engagement and a discussion of how 3004 public input and response will be used 3005 (3) A description of how the Agency encourages the active involvement of diverse 3006 social, cultural and economic elements of the population within the basin 3007 (4) The method the Agency shall follow to inform the public about progress 3008 implementing the Plan, including the status of projects and actions 3009 3010 Chapter 11 will contain the Communications and Engagement Plan, but the requirements of the Regulations are presented here for awareness by GSA staff to refine this chapter and understand the level of effort and expense that 3011 will be required for this component of GSP implementation. Decisions will need to be made regarding whether the 3012 BVAC continues as a functioning body after completion of the GSP. If the BVAC continues, what role they take 3013

activities.

3014

3015

209

and how often they meet will determine the level of GSA staff effort needed to facilitate BVAC meetings and

10.2 GSP Annual Reporting

- According to §356.2 of the Regulations, the Big Valley GSAs are required to provide an annual report to DWR by April 1 of each year following the adoption of the GSP. The first Annual Report will be provided to DWR by April 1, 2022, and will include data for the prior WY, which will be WY 2021 (October 1, 2020 September 30, 2021). While the WY as defined by DWR isn't ideal for use in Big Valley, because it doesn't correlate with the growing season or surface-water irrigation season in Big Valley, the GSAs will assemble data based on DWR's definition as per SGMA statute and regulations. The Annual Report will establish the historic conditions of groundwater within the BVGB, the status of the GSP implementation and the trend towards maintaining sustainability. Unfortunately, while conditions won't differ significantly from when the GSP was developed, the GSAs are still required to submit the Annual Report to comply with GSP regulations. A general outline is included below:
 - General Information

3016

3017

3018

3019

3020

3021

3022

3023

3024

3025

3026

3027

3028

3029

3030

30313032

3033

3034

3036

3037

3038

3039

3040

3041 3042

3043

3044

3045

3046

3047

3048

3049

- Executive Summary
- o Introduction (1 map of Basin)
- Basin Conditions
 - o Groundwater Elevations (2 contour maps, 12 hydrographs)
 - o Estimated Groundwater Extractions (1 table from water budget)
 - Estimated Surface-water Supply (1 table from water budget)
 - o Estimated Total Water Use (1 table from water budget)
 - o Estimated Change in Groundwater Storage (2 maps, 1 graph and 1 table)
- GSP Implementation Progress
 - Progress Toward Measurable Objectives
 - Updates on Projects and Management Actions

Another way to organize this requirement, and for GSA staff and stakeholders to understand the level of effort and expense involved in developing annual reports, is to outline major technical tasks. Much of the effort to develop the annual reports is to take available data collected by outside agencies, generate figures based on that data and then re-submit to DWR. Below is a summary outline of tasks to be performed by GSA staff and/or consultants to develop the annual report:

- Download Water Level Data from state website and generate:
 - o Hydrographs for 12 representative wells
 - O Assumed spring and fall groundwater contours
 - Assumed groundwater difference contours (e.g., fall 2020 to fall 2021)
- Download water budget data from state websites⁷¹
 - o Run water budget for the WY and generate estimates of:
 - Groundwater extractions

⁷¹ This includes precipitation and reference evapotranspiration (ETo) from CIMIS and streamflow data from CDEC, BVWUA, Brookfield Energy, and other sources.

3050		Surface-water supply
3051		■ Total water use
3052	•	Assemble and write Annual Report, including the estimates and assumptions
3053	•	Upload report and data, including the estimates and assumptions, to state website

10.2.1 General Information

3054

3055

3056

3057

3058

3059

3060

3061

3062

3063

3064

3065

3066

3067

3068

3069

3070

3071

3072

3073 3074

3075

30763077

3078

In accordance with §356.2(a), each Annual Report will include, at the front of the report, an executive summary that will summarize the activities and the condition of groundwater levels within the BVGB for the prior year. The executive summary shall also include a map of the BVGB, its GSAs and the monitoring network.

The Annual Report will include an introduction that will describe the following:

- A description of the BVGB and the two GSAs
- The general conditions of the BVGB for the prior WY (precipitation, surface-water allocations, crop demands, municipal demands, etc.)
- Any significant activities or events that would impact the water supply and/or groundwater conditions for the BVGB

10.2.2 Basin Conditions

Included in the Annual Report will be a discussion of specific local water supply conditions per §356.2(b). This section will provide a description of the water supply conditions for the WY being reported along with a graphical representation of the conditions. A WY shall be defined as the 12-month period starting October 1 through September 30 of the following year. Water supply conditions that will be discussed include:

- Assumed Groundwater Elevations elevation data from the monitoring network, including hydrographs for the representative wells and groundwater contours for spring and fall
- Assumed Groundwater Extractions groundwater pumping estimates and measurements for agricultural, municipal, domestic and industrial⁷² pumping; generated from the water budget
- Assumed Surface-water Supply data from surface-water supplies to irrigation demand,⁷³ conveyance losses and groundwater recharge; generated from the water budget
- Assumed Total Water Use total water uses by agricultural, municipal, domestic and industrial sectors; generated from the water budget
- Assumed Change in Groundwater Storage a determination of the groundwater (volumetric) change; calculated from groundwater difference contours and/or the water budget

_

⁷² This includes both in-basin industries as well as fire, wildlife, logging, and construction (which use both surface and groundwater).

⁷³ Summer flows in the BVGB are 100% allocated under existing water rights.

10.2.3 Plan Progress

3079

3080

3081

3082

3083

3084

3085

3086

3087

3088

3089

3090

3091

3092

3093

3094

3095

3096 3097

3098

3099

3100

3101

The Annual Report also needs to describe the progress of the Plan since the previous report, including progress in maintaining measurable objectives and status of projects and management actions.

10.3 Data Management System

The Regulations require a data management system (DMS), but do not give strict guidance on format or how to develop and maintain the DMS. §352.6 of the Regulations states:

Each Agency shall develop and maintain a data management system that is capable of storing and reporting information relevant to the development or implementation of the Plan and monitoring of the basin.

The DMS proposed for Big Valley is separated into two categories: data for annual reports and data for GSP updates, much of which is taking data already managed by the state and returning it to the state in a new format.

10.3.1 Annual Report DMS

Annual reports require water-level data and other data to update the water budget. **Table 10-1** lists the data needed and the sources of those data. The DMS can be stored using common software (Microsoft Excel and ArcGIS) on GSA servers. Water-level data will be downloaded from the state website⁷⁴ and stored in an Excel hydrograph spreadsheet tool. This tool will store the well information, water level data, WY types and sustainable management criteria (minimum thresholds and measurable objectives). The tool will allow users to generate hydrographs and provide the data needed to generate contours. **Figure 10-1** shows a screenshot of the Excel Water Level Tool for storing water well and water level data and generating hydrographs.

Table 10-1 Annual Report DMS Data Types

Data Type	Collecting Entity	Data Source	DMS Tool				
Water Levels	DWR	SGMA Data Viewer	Excel Water Level Tool				
Precipitation	DWR	CIMIS	Excel Water Budget Tool				
Evapotranspiration	DWR	CIMIS	Excel Water Budget Tool				
Streamflow (gages)	USGS/DWR	CDEC	Excel Water Budget Tool				
Streamflow (water rights reporting)	State Water Board	<u>eWRIMS</u>	Excel Water Budget Tool				
GIS Base Data ¹	GSAs	various	GIS Database				

Notes:

¹Base data includes GIS layers such as the county boundaries, streams, roads, well locations, etc., which generally don't change over time and don't need to be updated.

CDEC = California Data Exchange Center

Water budget data will also be stored in an Excel spreadsheet tool as shown in **Figure 10-2**. Each of these spreadsheet tools has instructions, sheets to store raw data and sheets that perform calculations and generate the needed figures for annual reports or other purposes.

⁷⁴ Currently water level data for Big Valley is being managed and stored through <u>DWR's CASGEM system</u>. Once the GSP is completed, the data will be brought into DWR's new <u>SGMA Portal</u> Monitoring Network Module (MNM). Data from either of these systems is available through the <u>SGMA Data Viewer</u>.

Annual reports require maps, which are generated with widely-used ArcGIS software. The geographic information system (GIS) data, including base data such as streams, roads and well locations, will be organized into a folder structure as shown in **Figure 10-3**. Water level data will be imported into GIS to generate contours for annual reports.

10.3.2 GSP Update DMS

Additional types of data are needed to update the GSP, listed in **Table 10-2**. Much of this additional data is GIS-based and will be stored in the GIS database, shown in **Figure 10-3**. Water quality data will need to be downloaded from the State Water Board's GAMA groundwater system in 2026 to support the five-year update.

Table 10-2 GSP Update DMS Data Types

Data Type	Collecting Entity	Data Source	DMS Tool
Water Levels	DWR	SGMA Data Viewer	Excel Water Level Tool
Precipitation	DWR	CIMIS	Excel Water Budget Tool
Evapotranspiration	DWR	CIMIS	Excel Water Budget Tool
Streamflow (gages)	USGS/DWR	CDEC	Excel Water Budget Tool
Streamflow (water rights reporting)	State Water Board	<u>eWRIMS</u>	Excel Water Budget Tool
Water Quality	State Water Board	GAMA	Data to be downloaded for five- year update.
Land Use	DWR	SGMA Data Viewer	GIS Database
Subsidence (InSAR)	DWR	SGMA Data Viewer	GIS Database
GIS Base Data ¹	GSAs	various	GIS Database

Note:

3111

3106

3107

3108

3109

3110

¹ Base data includes GIS layers such as the county boundaries, streams, roads, well locations, etc., which generally don't change over time and won't need to be updated.

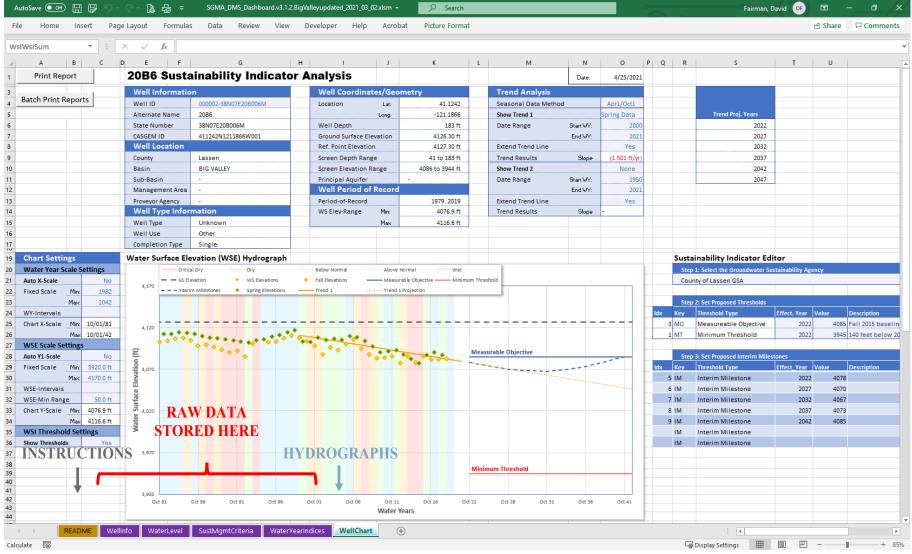


Figure 10-1 Excel Water Level Tool

3113

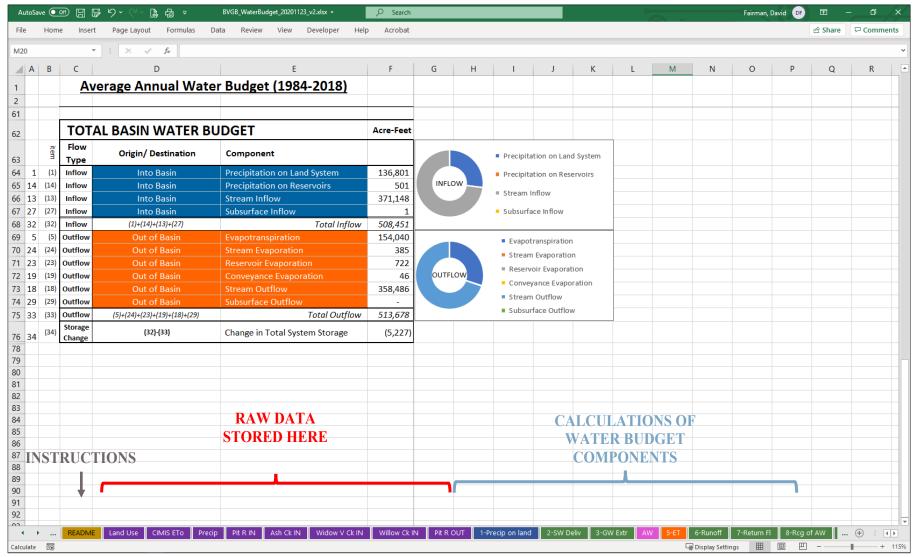


Figure 10-2 Excel Water Budget Tool

3116

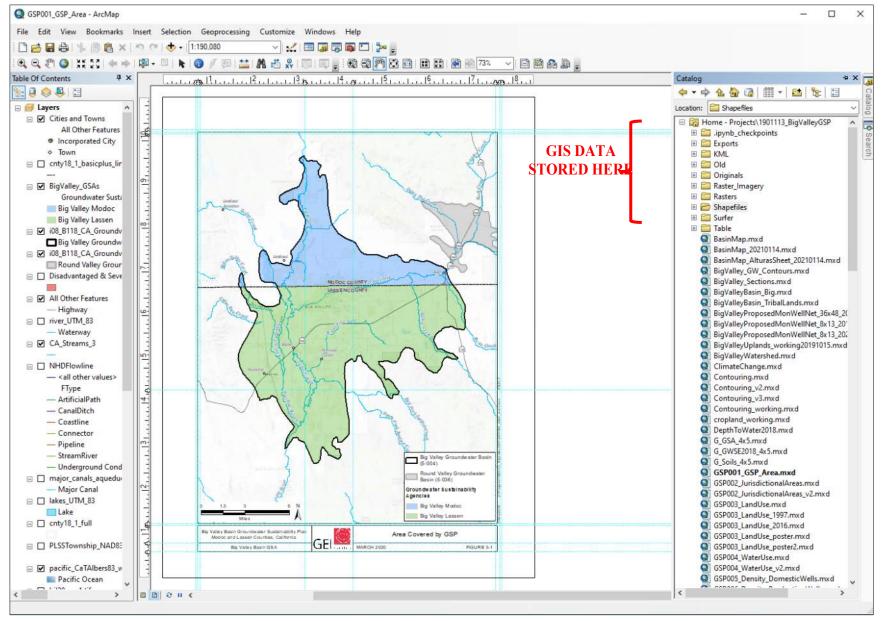


Figure 10-3 GIS Database

10.4 Periodic Evaluations of GSP (Five-Year Updates)

- Updates and amendments to the GSP can be performed at any time, but at a minimum the GSAs must submit an
- update and evaluation of the plan every five years (CWC §356.4). While much of the content of the GSP will
- likely remain unchanged for these five-year updates, the Regulations require that most chapters of the plan be
- 3124 updated and supplemented with any new information obtained in the preceding five years. Chapters that are likely
- 3125 to require significant updates and re-evaluation include:
- Chapter 4 Hydrogeologic Conceptual Model
- Chapter 5 Groundwater Conditions
- Chapter 6 Water Budget

3120

3133

- Chapter 7 Sustainable Management Criteria
- Chapter 8 Monitoring Network
- Chapter 9 Projects and Management Actions
- The Basin Setting (Chapters 4-6) is signed and stamped by a California Professional Geologist or Engineer.

10.5 Implementation Schedule

- Figure 10-5 shows the implementation schedule. See Chapter 9 Projects and Management Actions for the
- schedules for individual projects that are still under development.

10.6 Cost of Implementation

- The legislation and regulations provide little guidance on how to develop and define costs. An analysis of GSPs
- from critically overdrafted basins found a broad variety of approaches, categories of costs and level of detail, from
- a single cost with no detail or justification to detailed costs for multiple categories. The purpose of this section is to
- present some information of cost ranges given for other basins and to give estimates of costs for the categories of
- implementation presented in this chapter, listed below. These costs may change based on how the GSAs choose to
- implement the GSP (e.g., the amount and type of public outreach and the amount and type of support sought from
- outside hydrology professionals such as consultants and/or UCCE).
- GSA Administration and Public Outreach
- Monitoring and Data Management
- Annual Reporting
- Plan Evaluation (five-year updates)
- Projects and Management Actions

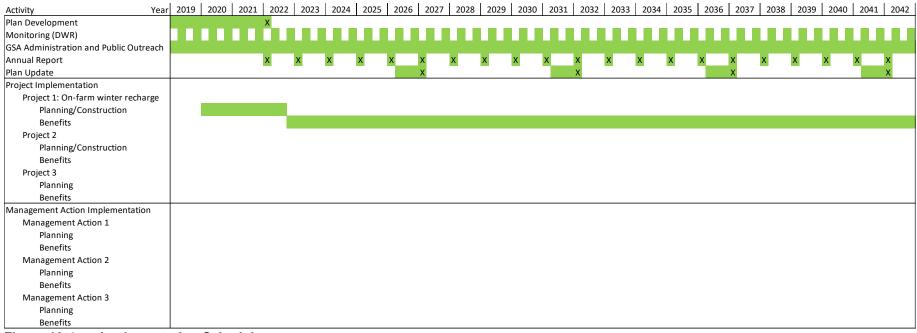


Figure 10-4 Implementation Schedule

3149

31503151

Cost is a fundamental concern to the GSAs and stakeholders in the BVGB, as the Basin is a disadvantaged community and there is little to no revenue generated in the counties to fund the state unfunded mandates of SGMA. This is a big burden for a small, disadvantaged Basin that has no incorporated cities, low value crops and no revenue stream to pay the costs for the mandated GSP. Therefore, the approach in implementing the plan and estimating costs is to leverage as much outside funding and technical support as possible to cover costs. For costs that must be borne by the GSAs, efficient implementation methods while still meeting SGMA requirements to support the GSP is the desired outcome. **Table 10-3** shows a summary of the costs from GSPs submitted in 2020. As mentioned, not every GSP had every category of costs listed, but the number of GSPs that did detail costs for each category is shown. It should be noted that Big Valley is extremely unique in a variety of ways documented in Chapter 1 – Introduction.

Table 10-3 GSP Implementation Cost Statistics for 2020 GSPs in California

		Annual Cost Details											
						Public		Annual		DMS	Annual		5-Year
	Tc	tal Annual	GS	SA Admin	Οι	utreach	M	onitoring	ı	Jpdate	Report	ι	Jpdate
count		34		21		11		23		8	15		20
min	\$	50,000	\$	51,000	\$	5,000	\$	20,000	\$	10,000	\$ 20,000	\$	50,000
max	\$	2,596,384	\$ 1	,538,794	\$	75,000	\$ 1	L,057,590	\$	170,000	\$ 350,000	\$ 1	,400,000
mean	\$	981,296	\$	607,861	\$	27,573	\$	293,907	\$	42,875	\$ 56,267	\$	455,369
median	\$	720,100	\$	418,900	\$	20,000	\$	136,000	\$	20,000	\$ 25,000	\$	330,000

3164 Source: Fricke 2020

10.6.1 GSA Administration and Public Outreach

The fundamental activities that will need to be performed by the GSAs are public outreach and coordination of GSP activities. Public outreach may entail updates at County Board of Supervisors' meetings and/or public outreach meetings. At a minimum the GSAs will receive and respond to public input on the Plan and inform the public about progress implementing the GSP as required by §354.10(d)(4) of the Regulations. Coordination activities would include ensuring monitoring is performed, annual reports to DWR, five-year GSP updates, and projects and management action coordination. Based on current grants which have funded filling of data gaps and identifying recharge opportunities, the GSA administrative costs of projects and management actions may be largely covered by grant funds.

In other GSPs already submitted, 21 GSPs itemized GSA administration and had estimates ranging from \$51,000 to over \$1.5 million (M) per year, with a median of about \$200,000. However, most of these basins are much larger than Big Valley, have more complex governance structures (i.e., have multiple GSPs in the basin) and have more stakeholder groups. This cost for Big Valley could vary depending on the nature of public outreach written in the GSP.

10.6.2 Monitoring and Data Management

Twenty-three GSPs submitted to DWR to date have itemized annual monitoring with cost estimates ranging from \$20,000 to over \$1M per year, with a median of about \$65,000. Twelve GSPs itemized DMS updates with costs ranging from \$3,000 to \$170,000, with a median cost of \$15,000.

- DWR staff currently measure water levels in the Basin and posts results on their website and have indicated that
- they will continue to do so for the foreseeable future. DWR has also indicated that they could monitor water levels
- in the newly constructed monitoring wells. If DWR follows through on this assumption, there would be little to no
- costs to the GSAs for monitoring. The GSAs would need to download and populate the DMS tools detailed above.
- However, for costing purposes, we have assumed this to be covered under the Annual Report cost category.
- 3188 If DWR chooses to discontinue its water level monitoring of wells in Big Valley, the cost could be on the order of
- \$2,000 to \$3,000, which equates to 40 to 60 staff-hours.

10.6.3 Annual Reporting

- Annual Report costs were estimated in 15 GSPs ranging from \$20,000 to \$350,000, with a median cost of \$25,000.
- Annual reports have substantial requirements, including assembling the data, processing and generating the
- necessary charts, maps and tables and writing the text described in Section 10.2 GSP Annual Reporting. There
- are ways to streamline and automate the process of retrieving, reformatting and returning the data to the state,
- many of which are described in Section 10.2.3 Plan Progress. The level of effort and cost will be reduced over
- the course of the first few years. The cost of developing an Annual Report initially is estimated to be \$25,000 for
- the first year, then reducing to approximately \$10,000, if written and submitted by GSA staff. This equates to
- about 200 county staff hours per Annual Report.

10.6.4 Plan Evaluation (Five-Year Updates)

- The cost of updates to the GSP will be lower than the cost of initially developing the GSP. However, the
- Regulations require all parts of the GSP to be updated with recent data and information and will require substantial
- effort from a licensed professional. Of the 20 GSPs submitted that had GSP update cost estimates, they ranged
- from \$50,000 to \$1.4M with a median cost of \$330,000. However, many of the GSPs already submitted are in
- basins with multiple GSPs. In those types of basins, the Basin Setting (Chapters 4-6) is typically performed on a
- basin-wide basis. Big Valley will have to update the complete document. Therefore, a range of about \$200,000 to
- \$300,000 is estimated to update the GSP. **Table 10-4** summarizes the cost estimates of Annual Reports and five-
- year updates.

3190

3199

3208

3212

3213

10.6.5 Projects and Management Actions

- 3209 Costs of projects and management actions are addressed in Chapter 9 Projects and Management Actions. If, and
- when, the GSAs seek outside funding, the costs will be put out to bid to ensure the reasonableness of the costs
- when implemented.

Table 10-4 Summary of Big Valley Cost Estimates

				711	IIuai	COSt Deta	alis			
					1	Annual				
			GSA Admin		Monitoring					
			an	d Public	ar	nd DMS		Annual		5-Year
	To	tal Annual	Outreach		Update		Report		Update	
Low	\$	30,000	\$	20,000	\$	-	\$	10,000	\$	200,000
High	\$	68,000	\$	40,000	\$	3,000	\$	25,000	\$	300,000
-										

Annual Cost Details

10.7 Funding Alternatives

3214

3215

3216

3217

3218

3219

3220

3221

3222

3223

3224 3225

3226

3227

This section discusses funding alternatives. As discussed in various parts of this GSP, the GSAs and residents of Big Valley have no ability to take on the ongoing costs of implementing this GSP and contend that SGMA is an unfunded mandate. Therefore, the GSAs are forced to rely on outside sources to fund the Plan. Table 10-5 describes the various funding options available to the GSAs. The table describes both outside funding (state and federal assistance and grants) and local funding (general fund, fees and taxes). Annual costs are less likely to be funded directly by outside sources because of the premise of SGMA that groundwater basins are best managed locally, and administration, monitoring and reporting costs are most likely to be seen as an obligation for the local GSAs under this premise. However, five-year updates and projects and management actions are good candidates for outside funding. Some of this outside funding that currently exists could be through the DWR Prop 1 grants obtained by the North Cal-Neva, and Modoc County could potentially be leveraged to support annual reporting in the next year or two. This depends on the degree that there is overlap between the scopes of work for the grants and the annual report requirements. These two existing grants are laying the groundwork for recharge projects and filling data gaps. The entire BVGB is a disadvantaged community with much of the Basin designated as severely disadvantaged. The GSAs adamantly oppose new taxes or fees as additional taxes or fees would harm the community and alter the

3228

3229

ability of residents to live and work in the Basin. The GSAs will identify and pursue grants to fund the 3230

implementation of this GSP. To that end the GSA will look toward funding options presented by the California 3231

3232 Financing Coordinating Committee (CFCC) through their Funding Fairs.⁷⁵

Big Valley Groundwater Basin

Groundwater Sustainability Plan

⁷⁵ More information on CFCC including their 2021 Funding Fairs Handbook is available at https://www.cfcc.ca.gov/funding-fairs/.

Table 10-5 Summary of GSP Funding Mechanisms

3233

Table 10-5		of GSP Funding Mechanisms					
Funding	g Mechanism	Description					
Assistance Programs		DWR offers Technical Services Support and Facilitation Services Support Programs to assistance GSAs in development and implementation of their GSPs. If granted, services provided under these programs are offered at no-cost to the GSAs.					
Grant	State Grants	DWR's Sustainable Groundwater Management Grant Program, funded by Proposition 1 and Proposition 68, provides funding for sustainable groundwater planning and implementation projects. Both DWR and the State Water Board offer a number of grant and loan programs that support integrated water management, watershed protection, water quality improvement and access to safe drinking water.					
Funding		Other state agencies and entities with grant or loan programs related to water and environment include the CDFW and California Water Commission.					
	Federal Grants	Federal grant and loan programs related to water planning and infrastructure include the Water Infrastructure Finance and Innovation Act, Water Infrastructure Improvement for the Nation Act and the DOI Reclamation's WaterSMART program.					
General Funds		Cities and counties maintain a general fund which include funding from taxes, certain fees, state shared revenue, interest income and other revenues. While not a funding mechanism, the general funds from cities and counties may be used to fund or provide in-kind services for GSA activities and GSP implementation.					
		Fees include "various charges levied in exchanges for a specific service" (Hanak et al., 2014). This includes water and wastewater bills, or developer or connection fees, and permitting fees.					
	Fees	Under rules established by Proposition 218 (1996), new property-related fee increases are subject to a public hearing and must be approved by either a simple majority of property owners subject to the fee or by two-thirds of all registered voters (Hanak et al., 2014; League of California Cities, 2019).					
Fees	Groundwater Extraction Fees	SGMA grants GSAs certain powers and authorities, including the authority to impose fees. Section 10730 of the Water Code states that a GSA may "permit fees and fees on groundwater extraction or other regulated activity, to fund the costs of a groundwater sustainability program, including, but not limited to, preparation, adoption and amendment of a groundwater sustainability plan, and investigations, inspections, compliance assistance, enforcement, and program administration, including a prudent reserve."					
	Assessments	Assessments are a specific type of fee that are levied on property to pay for a public improvement or service that benefits that property.					
Taxes		Taxes imposed by local agencies include general taxes, special taxes, and property taxes. Taxes generally fall into one of two categories: general or special (Institute for Local Government, 2016). <i>General taxes</i> are defined as "any tax imposed for general governmental purposes" (Cal. Const. art. XIII C, § 1, subd. [a]).					
		Special taxes are "any tax imposed for specific purposes, including a tax imposed for a specific purpose, which is placed into a general fund" (Cal. Const. art. XIII C, § 1, subd. [d]). Proposition 218 (1996) states that special districts, "could not levy general taxes, but only special taxes, and it clarified that local general taxes always required simple majority voter approval and that local special taxes always required two-thirds voter approval."					

3234

11. Notice and Communications §354.10

11.1 Background

3236

3237

3245

3246

3247

3248

3249

3250

3251

SGMA compliance, outreach and communication efforts in the BVGB began before GSP development. When SGMA was signed into law, local agencies in the BVGB explored options for forming GSAs by the June 30, 2017 statutory deadline. On February 23, 2016, Lassen and Modoc counties held a public meeting of the Lassen and Modoc County Boards of Supervisors in Adin to explore whether the District⁷⁶ could become a GSA for the Basin and if that option was preferred over the two counties becoming the GSAs. These were the only two options available under existing public agency structures. The preferred options resulting from the meeting was that the two counties become the GSAs for their respective Basin jurisdictions and develop a single, coordinated GSP.

The county boards moved forward to become GSAs, held public hearings and passed resolutions in early 2017. They registered with DWR as the Big Valley Modoc GSA and Big Valley Lassen GSA, each covering the portion of the Basin in their respective county. After becoming established as the GSAs, the counties developed a workplan under guidance from consultants to determine the scope, schedule and cost for GSP development; an application for a state grant was submitted and grant awarded; and the GSAs submitted a notice of intent to develop one GSP to cover the entire BVGB. A timeline of these events is presented in **Table 11-1**.

Table 11-1 Pre-GSP Development Outreach Efforts

Date	Activity
November 2015	Public Outreach meeting in Adin
February 2016	Joint Lassen-Modoc Board of Supervisors meeting to explore GSA options to comply with SGMA
February 2016 to present	Modoc County Groundwater Advisory Committee Meetings (bimonthly)
January 2017	Public outreach meeting in Bieber to solicit comment on the counties becoming GSAs
February 2017	County of Modoc GSA Formation Public Hearing
March 2017	County of Lassen GSA Formation Public Hearing
July-September 2017	GSP Workplan developed to determine scope, schedule and cost of GSP development
November 2017	Lassen County submits application for state grant to fund GSP development
June 2018	Notice of Intent to develop one GSP for the entire BVGB submitted to DWR
November 2018	Lassen County entered into SGMA grant agreement with the state
February 2019	GSP development started

⁷⁶ Lassen-Modoc Flood Control and Water Conservation District

11.2 Challenges of Developing GSP in a Rural Area and During the COVID Pandemic

- A major challenge and constraint during the development of the GSP was the COVID 19 pandemic that started in
- early 2020. The pandemic made thorough and proper public outreach and participation impossible throughout
- 3256 2020 and early 2021, the time during which key GSP content was developed and discussed by consultants, GSA
- staff and the BVAC. Due to state restrictions from the Governor's executive orders, GSA staff had to cancel
- 3258 BVAC meetings, restrict public attendance at meetings and facilitate participation through remote technology.
- Many interested parties did not feel safe attending meetings in person, and remote attendance did not facilitate
- 3260 appropriate participation.

3252

- Internet connectivity and quality in this portion of the state is poor to nonexistent, and the counties have very
- limited technological resources. These disadvantaged communities are on the losing end of the digital divide.
- While the GSAs made every attempt to conduct BVAC meetings with the ability for remote public participation,
- there were still major logistical and technical challenges both with conducting such meetings and members of the
- public participating. Those participants that had internet connectivity frequently could not hear or understand the
- dialogue in the Big Valley community venues and could not interact in the most effective way. However, the
- 3267 GSAs made the best of the circumstances and addressed all comments provided through the various means.
- The GSAs recognized the obstacles presented by the COVID pandemic early in the efforts to develop a GSP and
- were proactive in reaching out to both the Governor and Legislature to identify potential solutions. The Governor
- severely restricted public meetings (and initially did not allow public meetings at all) because of the pandemic.
- Obviously, this made the GSAs' efforts to develop a GSP with constructive input from the public extremely
- difficult since, as outlined above, there is limited internet connectivity to conduct meetings remotely. Further, the
- limited GSA staff and technology was challenged to offer meetings remotely.
- One obvious solution would be to recognize the emergency that is occurring across the state (and nation) and
- provide additional time to submit the required GSP. As such, on August 11, 2020, a letter was sent from the
- Lassen County Board of Supervisors (acting as the Lassen County GSA) to both the Legislature and the Governor
- requesting additional time. There was no response from either the Legislature or the Governor, so the Lassen
- 3278 County Board of Supervisors sent follow-up letters to the Governor on November 17, 2020, February 16, 2021,
- March 23, 2021, and April 27, 2021. Neither the Legislature nor the Governor responded. However, a response
- was eventually received (dated June 3, 2021) from Karla A. Nemeth, with DWR denying the request, even though
- the Board of Supervisors sent the above letters to the Governor and not to DWR.
- In February 2021, State Assembly Member Devon Mathis introduced Assembly Bill 754 which would have
- extended the GSP deadline. The Lassen and Modoc County Boards of Supervisors sent letters to State Assembly
- 3284 committee leaders in support of the bill. Supervisor Byrne testified before both the Senate and Assembly
- committees in support of the bill citing the constraints of inadequate broadband in the community for meaningful
- public participation. The bill was passed by the State Assembly but did not pass out of committee in the State
- 3287 Senate.

Letters from the GSA to the governor and assembly, along with the response letter from DWR, are included in

3289 **Appendix 11A**.

3290

11.3 Goals of Communication and Engagement

- In developing the GSP, the GSAs implemented communication and engagement (C&E) with the goals of:
- Educating the public about the importance of the GSP and their input. Public input is an important part of the
- 3293 GSP development process. The local community defines the values of the Basin and the priorities for groundwater
- management. This input guided decision-making and development of the GSP, particularly the development of the
- 3295 sustainability goal, sustainable management criteria and projects and management actions.
- Engaging stakeholders through a variety of methods. One size does not fit all when it comes to stakeholder
- engagement in GSP development. This chapter outlines how the GSAs performed C&E at multiple venues through
- a variety of media to reach varied audiences.
- Making public participation easy and accessible. The C&E described in this chapter describes the many
- methods employed to make it easy for the public to be informed and provide input.
- Providing a roadmap for GSP development. The GSAs provided a schedule for stakeholders, keeping C&E
- 3302 efforts consistent and on track.

11.4 Stakeholder Identification

- The Water Code §10723.2 requires consideration of all beneficial uses and users of groundwater. Primary
- beneficial uses of groundwater in the BVGB include agriculture, domestic use and habitat. In addition to farmers
- and individual well owners in the valley, this includes a small community system in Bieber, the Intermountain
- Conservation Camp and CDFW, which uses groundwater to supplement and maintain some habitat in the ACWA
- in the center of the Basin. Other significant uses include industrial uses such as logging, construction and fire
- 3309 suppression.
- The Big Valley GSAs recognize that C&E with Big Valley water users and stakeholders is key to the success of
- GSP development and implementation. Particularly important is the engagement of local landowners given that
- both county seats are distant from Big Valley. Both counties have engaged stakeholders through various processes
- and efforts, including Modoc County's Groundwater Resources Advisory Committee, the LCGMP development
- and Basin Management Objectives program implementation and the BVAC described in this chapter. In addition,
- 3315 the GSAs performed several public workshops to solicit more input from interested parties. A listing of the BVAC,
- public workshop and other public outreach meetings is included in **Appendix 11B**.

3318	The following is an initial list of interested parties that were contacted during GSA formation and GSP
3319	development:

- Agricultural users
- Domestic well owners
- Public water systems
- 3323 CDFW
- Surface water user groups (including BVWUA and the Roberts Reservoir group)
- Lassen-Modoc County Flood Control and Water Conservation District
- Modoc County Groundwater Resources Advisory Committee
 - Federal agencies (including the Forest Service and BLM)
- Tribes (including the Pit River Tribe)
- 3329 DWR

3327

3345

3346

- North Cal-Neva
- Prior to establishing themselves as the GSAs, the names and contact information for the above groups were
- compiled in spreadsheets. People on the interested parties lists were under no obligations and received information
- about GSP development, including meeting announcements and opportunities to provide input and become more
- 3334 involved.
- The GSAs developed a website (described below) to facilitate C&E, and anyone interested in GSP development or
- implementation in the BVGB was able add themselves to the interested parties list. In addition, sign-in sheets at all
- public meetings allowed attendees to add themselves to the interested parties list.
- Outreach with the Pit River Tribe was performed, and tribal contacts were added to the interested parties list when
- it was first developed in February 2016. Therefore, tribal contacts have received all notifications of GSP
- development activity. Applications to become members of the BVAC were sent to the tribes. In addition, the
- 3341 Modoc County Groundwater Resources Advisory Committee, a committee of the Modoc County Board and a
- forum for obtaining updates about GSP development, has a tribal position. Numerous contacts between Modoc
- County staff and tribal contacts have occurred during GSP development. A list of outreach activities with tribal
- contacts is included in **Appendix 11C**.

11.5 Venues and Tools

11.5.1 Stakeholder Survey

- The GSAs performed a C&E survey with the purpose of soliciting information about how stakeholders wish to be
- involved in the GSP and what concerns they have relevant to the GSP. Paper copies of the survey were available at
- public meetings and was also available online.⁷⁷

⁷⁷ https://www.surveymonkey.com/r/TQ9HCQK

11.5.2 Website and Communication Portal

- A website⁷⁸ was deployed for GSP development to facilitate communication and track the communication in a database. The website is meant to enhance, not replace outreach efforts. Tools of the website allowed the GSAs to communicate with interested parties. These tools include the following:
 - Calendar. The website includes a calendar with meeting dates, locations, times and documents such as meeting agendas, meeting minutes, presentations and BVAC packets.
 - Interested Parties List. The website allows users to add themselves to the interested parties list and to select whether they wish to receive communication through email or physical mail.
 - **Documents.** In addition to the meeting documents mentioned above, the website has a general documents page where the GSAs posted GSP chapters, scientific references and other supported documents related to GSP development.
 - **E-Blast.** E-mails are sent to interested parties using the e-blast tool. E-blasts help to notify interested parties with email addresses to receive information about GSP development progress, upcoming meetings and new information or documents available.
 - **Public Comment.** GSP chapters posted on the website are available for public comment during comment periods throughout GSP development. A web form is available for anyone to submit comments on documents open for comment. The form allows the user to comment by page and line number for GSA review and response.
- The website address is included on printed materials and announced at public meetings.

11.5.3 Community Flyers

- Physical copies of flyers announcing upcoming public meetings are posted in high-traffic locations such as
- community centers, public buildings, local markets and post offices.

3372 **11.5.4** Newspaper

3350

3354

3355

3356

3357

3358

3359

3360

3361

3362

3363

3364

3365

3366

3367

3369

3375

- All public meetings, including BVAC meetings, are announced in the Lassen County Times, the Modoc Record,
- The Intermountain News and the Mountain Echo.

11.5.5 Social Media

Information about GSP development and meeting announcements have been, and will continue to be, made available through social media. UC Cooperative Extension in Modoc County hosts the Devil's Garden Research and Education Facebook page, as well as a website with the same name. Through their Facebook page,⁷⁹ events are publicized and shared with other connected pages in the area to reach a wider stakeholder base. This platform also enables workshops and other events to be shared through live v

⁷⁸ https://bigvalleygsp.org

⁷⁹ http://www.facebook.com/devilsgardenresearchandeducation

3381	ideo and recordings.	Recently, a blog	detailing stakeholder	r engagement in Big	Valley was publis	hed to the

3382 website.⁸⁰

3383

3390

3393

3394

3395

3396

3397

3398

3399

3401

3402

3403

3404

3405

34063407

3408

3409

3410

3411

11.5.6 Brochure

- In 2021, the GSAs transitioned from the background and scientific portions of the GSP (Chapters 1-6, including
- Basin Setting and Water Budget) to the policy and decision-making portions of the GSP (Chapters 7-9, Sustainable
- Management Criteria, Monitoring Networks and Projects and Management Actions). To facilitate engagement of
- people who may have been coming into the process at that time, a four-page informational brochure was
- developed, summarizing Chapters 1 through 6. This brochure was distributed on the website, through email and at
- public meetings. The brochure is included as **Appendix 11D**.

11.5.7 Big Valley Advisory Committee

- The GSAs established the BVAC through an MOU to advise both Lassen and Modoc counties on GSP
- preparation. The goals of the BVAC, as stated in the MOU (**Appendix 1C**), include the following:
 - Advise the two GSAs on the preparation of a GSP
 - Provide a forum for the public to comment during the preparation of the GSP
 - Provide recommendations to the two GSAs that would result in actions which have as minimal impact as possible on the residents of Big Valley
 - Advise the two GSAs on the preparation of a GSP to produce the lowest possible future costs to the residents of Big Valley
 - Ensure local control of the BVGB be maintained by the two GSAs
- Prepare a product that is acceptable to the GSA Boards for approval. Membership of the BVAC is composed of:
 - one member of the Lassen County Board of Supervisors selected by said Board.
 - one alternate member of the Lassen County Board of Supervisors selected by said Board.
 - one member of the Modoc County Board of Supervisors selected by said Board.
 - one alternate member of the Modoc County Board of Supervisors selected by said Board.
 - two public members selected by the Lassen County Board of Supervisors. Said members must either reside or own property within the Lassen County portion of the BVGB.
 - two public members selected by the Modoc County Board of Supervisors. Said members must either reside or own property within the Modoc County portion of the BVGB.

The BVAC operates in compliance with the Ralph M. Brown Act (Brown Act). BVAC meetings are noticed and agendas posted according to the Brown Act. BVAC meetings are open to the public and public comment is allowed as much as possible given COVID pandemic restrictions.

⁸⁰ http://www.devilsgardenucce.org/

During the development of Chapters 7 through 9, the BVAC established Ad Hoc committees to investigate, discuss and recommend content for the sustainability goal, sustainable management criteria, monitoring network and projects and management actions.

11.6 Decision-Making Process

 The MOA describes the decision-making process for the BVAC. However, while the BVAC made recommendations, it was not a formal decision-making body like the Lassen or Modoc GSAs. The Lassen County GSA, led by the Lassen County Board of Supervisors and the Modoc County GSA, led by the Modoc County Board of Supervisors, were ultimately responsible for adopting and submitting a GSP to DWR. The GSAs considered all input received from the BVAC and other interested parties.

To develop each chapter of the GSP, the GSAs followed an iterative process illustrated in **Figure 11-1**. The process involved multiple drafts of each chapter, including administrative, public and (often multiple) revised drafts. Once the BVAC was satisfied that the chapter was at a point where the GSAs were comfortable to move on, they voted to "set aside" the chapter until the entire draft GSP was assembled. This recommendation did not indicate approval but was implemented to keep the development process moving forward. The GSP was then assembled into a complete draft to undergo the same process of administrative, public and revised drafts. The BVAC will then vote whether to recommend to the GSA boards if they should approve the GSP. The GSA boards will vote whether to approve the GSP prior to submittal to DWR.

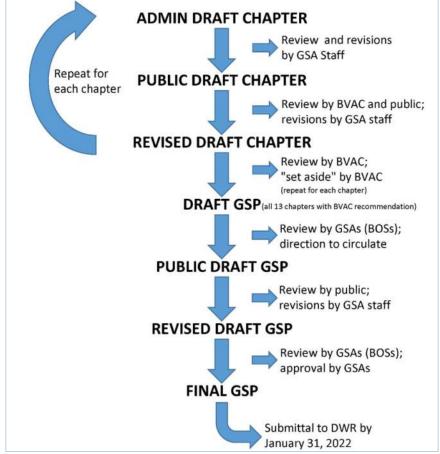


Figure 11-1 GSP Development Process

11.7 Comments and Incorporation of Feedback

3431

3434

3435

3436

3437

3438

3439

3440

3441

34423443

3444

3445

3446

All formal feedback on the GSP was documented both through the GSP website and from public meetings. The comments received, including how each comment was addressed, is included in **Appendix 11E**.

11.8 Communication and Engagement During Plan Implementation

The BVAC was established by the GSAs for the specific purpose of advising during development of the GSP and providing a product that is acceptable to the GSA Boards for approval. The MOU establishing the BVAC therefore expires after the GSP is adopted by the GSAs and submitted to DWR. The C&E during Plan implementation will then shift to the GSA Boards who will continue to inform the public about Plan progress and status of projects and management actions as required by §354.10(d)(4) of the Regulations.

This ongoing C&E will be performed through the forum of meetings of the County Boards of Supervisors where GSA staff will give regular reports to the Boards and the public along with annual reports to be submitted to DWR as required by GSP Regulations. Communication to stakeholders on the interested parties list will continue to occur *via* email and physical mail. Development of annual reports and coordination and implementation of projects and management actions will require significant effort from GSA staff. The GSAs are considering the development of an MOU to clearly define roles, responsibilities and costs of each GSA.

12. References

3448 3449	Albaugh, Aaron. 2020-2021. Personal communication. Lassen County Supervisor District 4, local farmer, landowner, and BVAC member.
3450 3451	Ayers, R.S. and Westcot, D.W., 1985. Water Quality for Agriculture. Food and Agriculture Organization of the United Nations Irrigation and Drainage Paper 29. http://www.fao.org/3/t0234e/t0234e00.htm .
3452 3453 3454	Bauder, T.A., Waskom, R.M., Sutherland, P.L. and Davis, J.G., 2014. Irrigation Water Quality Criteria. Fact Sheet No. 0.506. Colorado State University Extension. https://extension.colostate.edu/topic-areas/agriculture/irrigation-water-quality-criteria-0-506/ .
3455 3456 3457	Big Valley Advisory Committee (BVAC), 2021. During BVAC meetings, committee members have offered firsthand accounts of the widespread use of agricultural lands by waterfowl for feeding, while primarily using the state wildlife area for refuge.
3458 3459	Brown and Caldwell, 2007. Lassen County Groundwater Management Plan. http://celassen.ucanr.edu/files/49536.pdf .
3460 3461	Bureau of Indian Affairs (BIA), 2020a. U.S. Domestic Sovereign Nations: Land Areas of Federally Recognized Tribes. Available at: https://biamaps.doi.gov/indianlands/ .
3462 3463	2020b. Indian Lands of Federally Recognized Tribes of the United States. https://www.bia.gov/sites/bia.gov/files/assets/bia/ots/webteam/pdf/idc1-028635.pdf.
3464 3465	California Department of Fish and Wildlife (CDFW), 2020. CDFW Website. https://wildlife.ca.gov/Lands/Places-to-Visit/Ash-Creek-WA .
3466	2021. Personal communication with CDFW Senior Environmental Scientist, Region 1.
3467 3468	California Department of Water Resources (DWR), 1963. Northeastern Counties Ground Water Investigation. Bulletin 98.
3469	1978. Evaluation of Ground Water Resources: Sacramento Valley, Bulletin 118-6.
3470	2003. Bulletin 118 Basin description for the Big Valley Groundwater Basin (5-004).
3471 3472	. 2004. Bulletin 118: California's Groundwater, Basin Description for the Big Valley Groundwater Basin (5-004). https://water.ca.gov/Programs/Groundwater-Management/Bulletin-118 .
3473	2016a. Bulletin 118: California's Groundwater, Interim Update 2016.
3474	https://water.ca.gov/Programs/Groundwater-Management/Bulletin-118.

3475	2016b. Groundwater Sustainability Plan Emergency Regulations §351.
3476	https://govt.westlaw.com/calregs/Browse/Home/California/CaliforniaCodeofRegulations?guid=I74F39D1
3477	3C76F497DB40E93C75FC716AA&originationContext=documenttoc&transitionType=Default&contextD
3478	ata=(sc.Default).
3479	. 2016c. California Department of Water Resources Emergency Groundwater Sustainability Plan
3480	Regulations.
3481	https://govt.westlaw.com/calregs/Browse/Home/California/CaliforniaCodeofRegulations?guid=I74F39D1
3482	3C76F497DB40E93C75FC716AA&originationContext=documenttoc&transitionType=Default&contextD
3483	ata=(sc.Default).
3484	2016d. Best Management Practices for the Sustainable Management of Groundwater: Water Budget BMP.
3485	https://water.ca.gov/-/media/DWR-Website/Web-Pages/Programs/Groundwater-Management/Sustainable-
3486	Groundwater-Management/Best-Management-Practices-and-Guidance-Documents/Files/BMP-4-Water-
3487	Budget_ay_19.pdf.
3488	. 2016e. Monitoring Networks and Identification of Data Gaps BMP. December 2016. https://water.ca.gov/-
3489	/media/DWR-Website/Web-Pages/Programs/Groundwater-Management/Sustainable-Groundwater-
3490	Management/Best-Management-Practices-and-Guidance-Documents/Files/BMP-2-Monitoring-Networks-
3491	and-Identification-of-Data-Gaps_ay_19.pdf.
3492	. 2016f. Monitoring Protocols, Standards and Sites BMP. December 2016. https://water.ca.gov/-
3493	/media/DWR-Website/Web-Pages/Programs/Groundwater-Management/Sustainable-Groundwater-
3494	Management/Best-Management-Practices-and-Guidance-Documents/Files/BMP-1-Monitoring-Protocols-
3495	Standards-and-Sites_ay_19.pdf
3496	. 2016g. 2016 Statewide Land Use Mapping. Prepared for DWR by LandIQ.
3497	https://gis.water.ca.gov/app/CADWRLandUseViewer/.
3498	. 2017. Sustainable Management Criteria BMP (Best Management Practices). Draft, November 2017.
3499	https://water.ca.gov/-/media/DWR-Website/Web-Pages/Programs/Groundwater-Management/Sustainable-
3500	Groundwater-Management/Best-Management-Practices-and-Guidance-Documents/Files/BMP-6-
3501	Sustainable-Management-Criteria-DRAFT_ay_19.pdf
3502	. 2018a. Natural Communities Commonly Associated with Groundwater (NCCAG) dataset.
3503	https://gis.water.ca.gov/app/NCDatasetViewer/.
3504	2018b. Summary of the "Natural Communities Commonly Associated with Groundwater" Dataset.
3505	https://data.cnra.ca.gov/dataset/natural-communities-commonly-associated-with-groundwater.
3506	. 2018c. Department of Water Resources Well Completion Report Map Application.
3507	https://www.arcgis.com/apps/webappviewer/index.html?id=181078580a214c0986e2da28f8623b37.
	integration with the company of the control of the
3508	
3508 3509	. 2018d. California's Groundwater, Bulletin 118. Basin Boundary dataset available at: https://sgma.water.ca.gov/webgis/?appid=SGMADataViewer.

3510 3511	2019. Basin Prioritization Website. https://water.ca.gov/Programs/Groundwater-Management/Basin-Prioritization .
3512 3513	2020a. California Department of Water Resources Water Management Planning Tool. https://gis.water.ca.gov/app/boundaries/ .
3514 3515 3516	2020b. Handbook for Water Budget Development, With or Without Models, Draft February 2020. https://water.ca.gov/-/media/DWR-Website/Web-Pages/Programs/Groundwater-Management/Data-and-Tools/Files/Water-Budget-Handbook.pdf .
3517	2020c. California Irrigation Management Information System (CIMIS). https://cimis.water.ca.gov/ .
3518	2020d. CADWR Land Use Viewer. https://gis.water.ca.gov/app/CADWRLandUseViewer/ .
3519	2021a. Basin Prioritization Dashboard. https://gis.water.ca.gov/app/bp-dashboard/final/ .
3520	2021b. California Data Exchange Center. https://cdec.water.ca.gov/ .
3521 3522	. 2021c. California Well Standards. https://water.ca.gov/Programs/Groundwater-Management/Wells/Well-Standards .
3523 3524	2021d. DWR Land Use Survey Website. https://water.ca.gov/programs/water-use-and-efficiency/land-and-water-use/land-use-surveys .
3525 3526	California Geological Survey (CGS). 1958. (Gay, T. E. and Aune, Q. A.) Geologic Map of California, Alturas Sheet. 1:250,000. Olaf P. Jenkins Edition.
3527 3528	2002. California Geomorphic Provinces. Note 36. https://www.conservation.ca.gov/cgs/Documents/Publications/CGS-Notes/CGS-Note-36.pdf .
3529	2010. Fault Activity Map of California. https://maps.conservation.ca.gov/cgs/fam/.
3530	California Native Plant Society (CNPS). 2020. Calscape. https://calscape.org/ .
3531	2021. Gardening and Horticulture. https://www.cnps.org/gardening .
3532 3533	Conner, Duane. 2020-2021. Personal communication. Local well driller, farmer, landowner, and BVAC member who has drilled majority of wells in Big Valley.
3534 3535 3536	Cowardin, L. M., Carter, V., Golet, F. C. and LaRoe, E. T. 1979. Classification of Wetlands and Deepwater Habitats of the United States. U.S. Fish and Wildlife Service document FWS/OBS-79/31, December 1979. https://www.nrc.gov/docs/ML1801/ML18019A904.pdf .
3537 3538	Dahlke, H.E., Brown, A.G., Orloff, S., Putnam, S., A. O'Geen. 2018. Managed winter flooding of alfalfa recharges groundwater with minimal crop damage. California Agriculture, 72(1).
3539 3540 3541	Food and Agriculture Organization of the United Nations (FAO), 1998. Crop Evapotranspiration – Guidelines for computing crop requirements – FAO Irrigation and drainage paper 56. http://www.fao.org/3/X0490e/x0490e0b.htm .

3542 3543	Fricke, R., 2020. Personal communication and unpublished data. Analysis of GSP implementation costs presented at 2020 Groundwater Resources Association's annual conference.
3544 3545 3546	GEI Consultants, Inc. 2021. Big Valley Monitoring Well Construction Report. Prepared for North Cal-Neva Resource Conservation & Development Council (on behalf of the Modoc County Groundwater Sustainability Agency) and Lassen County Groundwater Sustainability Agency. Dated April 13, 2021.
3547 3548	GeothermEx (Koenig, J.B. and Gardner, M.C.), 1975. Geology of the Big Valley Geothermal Prospect, Lassen, Modoc, Shasta and Siskiyou Counties, California. October 1975.
3549 3550 3551 3552	Hall, M., Babbitt, C, Saracino, A, Leake, S., 2018. Addressing Regional Surface Water Depletions in California. A proposed approach for compliance with the Sustainable Groundwater Management Act. Published by the Environmental Defense Fund. https://www.edf.org/sites/default/files/documents/edf_california_sgma_surface_water.pdf .
3553 3554 3555	Hanak, E., Gray, B., Lund, J., Mitchell, D. Fahlund, A., Jessoe, K., MedellinAzuara, J, Misczynski, D. Nachbaur, J. and Suddeth, R., 2014. Paying for Water in California. https://www.ca-ilg.org/sites/main/files/file-attachments/basics_of_municipal_revenue_2016.pdf .
3556 3557	Hartin, J., P. Geisel, A. Harivandi and R. Elkins. 2014. Sustainable Landscaping in California. UC Agriculture and Natural Resources publication 8504. https://anrcatalog.ucanr.edu/pdf/8504.pdf .
3558 3559 3560	Hunt, L.J.H., Fair, J. and Odland, M. 2018. "Meadow Restoration Increases Baseflow and Groundwater Storage in the Sierra Nevada Mountains of California." <i>Journal of the American Water Resources Association</i> 54 (5): 1127–1136. https://doi.org/10.1111/1752-1688.12675 .
3561 3562	Hutchinson, Bryan. 2020-2021. Personal communication. Manager of Lassen County Waterworks District #1, Bieber town water supplier.
3563 3564 3565	Institute for Local Government, 2016. Understanding the Basics of Municipal Revenues in California; Cities, Counties and Special Districts. https://www.ca-ilg.org/sites/main/files/file-attachments/basics_of_municipal_revenue_2016.pdf .
3566 3567 3568	Klausmeyer et al, 2018. Mapping Indicators of Groundwater Dependent Ecosystems in California: Methods Report. San Francisco, California. https://groundwaterresourcehub.org/public/uploads/pdfs/iGDE_data_paper_20180423.pdf
3569 3570 3571	Kocis & Dahlke, 2017 "Availability of high-magnitude streamflow for groundwater banking in the Central Valley, California." Environmental Research Letters. 12 (8): https://iopscience.iop.org/article/10.1088/1748-9326/aa7b1b/meta .
3572 3573	LaMalfa E.M. and R.J. Ryel. 2008. Differential snowpack accumulation and water dynamics in aspen and conifer communities: implications for water yield and ecosystem function. Ecosystems 11:569-58.
3574 3575	Lassen County Local Agency Formation Commission (LAFCo), 2018. Lassen-Modoc Flood Control and Water Conservation District Municipal Service Review and Sphere of Influence Update, October 2018.

3576 3577	League of California Cities, 2019. Proposition 26 and 218 Implementation Guide, May 2019. https://www.cacities.org/Prop218andProp26 .
3578 3579	Lile, David. 2020-2021. Personal communication and unpublished data. Lassen County Farm Advisor and UCCE staff.
3580 3581 3582	Lund, Jay. 2014. Expanding water storage capacity in California. California WaterBlog. June 2014. https://californiawaterblog.com/2014/06/09/should-california-expand-reservoir-capacity-by-removing-sediment/ .
3583	Martinez, Tiffany, 2020-2021. Personal communication. Modoc County Assistant Chief Administrative Officer.
3584 3585	Mata-Gonzalez, R., M. A. B. Abdallah and C. G. Ochoa. 2021. Water use by mature and sapling western juniper (<i>Juniperus occidentalis</i>) Trees. Rangeland Ecology and Management 74:110-113.
3586 3587	McClymonds N.E. and O.L Franke, 1972. Water-Transmitting Properties of Aquifers on Long Island, New York. USGS Professional Paper 627-E.
3588 3589	MacDonald, 1966. Geology of the Cascade Range and Modoc Plateau. in Geology of Northern California. California Division of Mines and Geology, Bulletin 190. Edgar H. Bailey, editor, US Geological Survey.
3590 3591 3592	Miller, R.F., Tausch, R.J., 2001. The role of fire in pinyon and juniper woodlands: a descriptive analysis. In: Galley, K.E.M., Wilson, T.P. (Eds.), Proceedings of the Invasive Species: The Role of Fire in the Control and Spread of Invasive Species. Misc. Publ. No. 11, Tall Timbers Res. Sta., Tallahassee, FL, pp. 15–30.
3593	Mitchell, Kevin. 2020-2021. Personal communication. Local farmer, landowner, and BVAC member.
3594	Modoc County Watermaster, 2021. Personal communication.
3595 3596	Natural Resources Conservation Service (NRCS). 1986. Urban Hydrology for Small Watersheds. Technical Release 55. https://www.nrcs.usda.gov/Internet/FSE_DOCUMENTS/stelprdb1044171.pdf .
3597 3598	2012. Hydrologic Soils Group Classifications. https://www.nrcs.usda.gov/wps/PA_NRCSConsumption/download?cid=nrcseprd1296623&ext=pdf .
3599 3600	2015. Illustrated Guide to Soil Taxonomy. Version 2.0 September 2015. https://www.nrcs.usda.gov/wps/PA_NRCSConsumption/download?cid=stelprdb1247203&ext=pdf.
3601	2020. Personal Communication with Alturas office of NRCS.
3602 3603	Neasham, Ernest, 1985. Fall River Valley: An Examination of Historical Sources: Fall River Valley and the intermountain area from the earliest times until 1890. Citadel Press, p.10.

3604	Norris, R.M. and Webb, R.W., 1990. Geology of California. ISBN 978-0471509806.
3605 3606 3607 3608	Northeastern California Water Association (NECWA). 2017. Upper Pit River Watershed Integrated Regional Water Management Plan. Adopted December 5, 2013, updated review draft September 2017. Prepared by Burdick & Company, Auburn, California in collaboration with Upper Pit River Watershed Regional Water Management Group.
3609 3610	Northwest Alliance for Computational Science and Engineering (NACSE). 2020. Parameter-elevation Regressions on Independent Slopes Model (PRISM). https://prism.oregonstate.edu/explorer/ .
3611 3612	Norwood, Gaylon. 2020-2021. Personal communication. Lassen County Assistant Director of Planning and Building Services.
3613	Nunn, Jimmy. 2020-2021. Personal communication. Local farmer, landowner, and BVAC member.
3614 3615 3616 3617	Ochoa, C., P. Caruso and T. Deboodt. 2016. Upland-valley hydrologic connectivity: Camp Creek Paired Watershed Study. In Ecology and Hydrology of Western Juniper Special Report Oregon State University and USDA Agriculture Research Service. https://ecohydrology.oregonstate.edu/project/juniper-paired-watershed-study-central-oregon .
3618	Ohm, John. 2020-2021. Personal communication. Local farmer, landowner, and BVAC member.
3619 3620	Orange, M.N., Matyac, J.S. and Snyder, R.L., 2004. Consumptive Use Program (CUP) Model, Acta Hortic. 664, 461-468. https://www.ishs.org/ishs-article/664_58 .
3621 3622 3623	Organization for Economic Co-operation and Development (OECD). 2015. Stakeholder Engagement for Inclusive Water Governance, OECD Studies on Water, OECD Publishing, Paris. http://dx.doi.org/10.1787/9789264231122-en .
3624 3625 3626	Orloff, S., T. Getts, D. Sumner, D.Stewart and C. Gutierrez. 2016. Sample Costs to Establish and Produce Orchardgrass Hay. UC ANR. https://coststudyfiles.ucdavis.edu/uploads/cs_public/86/b2/86b28877-5976-4d3a-b0e7-862314057bf1/16orchardgrass_intermountain_752016.pdf .
3627 3628 3629	Pezeshki, S. R. and Shields, F. D, 2006. Black Willow Cutting Survival in Streambank Plantings, Southeastern United States. Journal of the American Water Resources Association, February 2006. https://www.nrcs.usda.gov/Internet/FSE_DOCUMENTS/nrcs143_013404.pdf .
3630 3631 3632	Pilliod, D.S., Rohde, A.T., Charnley, S., Davee, R., Dunham, J., Gosnell, H, Grant, G., Hausner, M., Huntington, J., Nash, C. 2018. Survey of Beaver-related Restoration Practices in Rangeland Streams of the Western USA. Environmental Management 61, 58–68 (2018). https://doi.org/10.1007/s00267-017-0957-6 .
3633 3634 3635	Putnam, D.H. and E. Lin. 2016. Nitrogen Dynamics in Cropping Systems - Why Alfalfa is Important. IN Proceedings, CA Plant and Soil Conference, 2-3 February 2016. Fresno, CA. CA-ASA. http://calasa.ucdavis.edu/files/250178.pdf .
3636 3637	Regional Water Quality Control Board (RWQCB) 2021. Region 5 description of OWTS program. https://www.waterboards.ca.gov/centralvalley/water_issues/owts/#lamps .

3638 3639 3640	Ryel, R.J., E. LaMalfa and J. Leffler. 2011. Water relations and water yield in aspen and conifer forests. Presentation at Forest and Watershed Health Symposium, UC Cooperative Extension, Susanville CA http://celassen.ucanr.edu/files/84849.pdf .
3641 3642	Saska, P.C., R.C. Bales, C.L. Tague, J.J. Battles, B.W. Tobin, M.H. Conklin. 2019. Fuels treatment and wildfire effects on runoff from Sierra Nevada mixed-conifer forests. Ecohydrology.
3643 3644 3645 3646	Smerdon, B.D., T.E. Redding and J. Beckers. 2009. An overview of the effects of forest management on groundwater hydrology. BC Journal of Ecosystems and Management 10(1):22–44. http://citeseerx.ist.psu.edu/viewdoc/download;jsessionid=89D5A72A9FE92D0BCF85101E955178C4?doi=10.1.1.533.4354&rep=rep1&type=pdf .
3647	Snell, Laura, 2020-2021. Personal communication, Modoc County Farm Advisor and UCCE staff.
3648 3649 3650	Springer, A.E., Wright, J.M., Shafroth, P.B., Stromberg, J.C., and Patten, D.T., 1999. Coupling groundwater and riparian vegetation models to assess effects of reservoir releases. Water Resources Research, Vol. 35, No. 12, Pages 3621-3630, December 1999.
3651 3652	Stephens, Scott L., Brandon M. Collins, Eric Biber, Peter Z. Fulé. 2016. U.S. federal fire and forest policy: emphasizing resilience in dry forests. Ecosphere. Volume 7: Issue 11.
3653	Stadtler, Phil. 2007. I Made a Lot of Tracks, pages 134-135. Published by CP Media. ISBN: 978-0975984123.
3654 3655	State Water Resources Control Board (State Water Board). 2019. GAMA Groundwater Information System website. Accessed 2019. https://gamagroundwater.waterboards.ca.gov/gama/gamamap/public/ .
3656 3657	2020a. GAMA Groundwater Information System website accessed March 19, 2020. https://gamagroundwater.waterboards.ca.gov/gama/datadownload.asp.
3658	2020b. GeoTracker website accessed May 12, 2020. https://geotracker.waterboards.ca.gov/.
3659 3660	2020c. Water Quality Control Plan for the Sacramento and San Joaquin River Basins. https://www.waterboards.ca.gov/centralvalley/water_issues/basin_plans/#basinplans
3661 3662	2021. Division of Drinking Water's Safe Drinking Water Information System. https://sdwis.waterboards.ca.gov/PDWW/ .
3663	The Nature Conservancy (TNC). 2020. Plant Rooting Depth Database. https://groundwaterresourcehub.org/ .
3664 3665 3666 3667	Towill, Inc. 2021. InSAR Data Accuracy for California Groundwater Basins. CGPS Data Comparative Analysis. Final Report April 7, 2021. Prepared for the California Department of Water Resources. https://data.cnra.ca.gov/dataset/tre-altamira-insar-subsidence/resource/a1949b59-2435-4e5d-bb29-7a8d432454f5 .
3668 3669 3670	United States Bureau of Reclamation (Reclamation), 1979. Ground-Water Geology and Resources Appendix, Allen Camp Unit, California, Central Valley Project, California, Pit River Division, Allen Camp Unit, Definite Plan. October 1979.

3671 3672	United States Census Bureau (USCB), 2020. Census data. https://data.census.gov/cedsci/profile?g=1600000US0606336 .					
3673 3674	2021. State and County Quickfacts. https://www.census.gov/programs-surveys/sis/resources/data-tools/quickfacts.html .					
3675 3676	United States Department of the Interior Water and Power Resources Service (DOI). 1981. Concluding Report. Allen Camp Unit: Pit River Division Central Valley Project California. 90 STAT. 1331. May 1981.					
3677 3678	United States Forest Service (USFS), 1991. Modoc National Forest Land and Resource Management Plan. https://www.fs.usda.gov/main/modoc/landmanagement/planning .					
3679 3680 3681	United States Geological Survey (USGS), 2016. National Elevation Dataset. Digital Elevation Model provided by USGS through the National Map. Based on data downloaded in 2016. https://www.usgs.gov/core-science-systems/national-geospatial-program/national-map .					
3682 3683	2020a. National Hydrography Dataset. https://www.usgs.gov/core-science-systems/ngp/national-hydrography .					
3684	2020b. National Water Information System. https://waterdata.usgs.gov/nwis .					
3685 3686	Walley FL, Tomm GO, Matus A, et al. 1996. Allocation and cycling of nitrogen in an alfalfa-bromegrass sward. Agronomy Journal 88:834–43.					
3687 3688	WateReuse Association, 2020. Water Reuse 101 Glossary. https://watereuse.org/educate/water-reuse-101/glossary/ .					
3689 3690 3691 3692	Wilson R., G. Galdi, D. Stewart and D. Sumner. 2020 Sample Costs to Establish and Produce Alfalfa Hay. UC ANR. https://coststudyfiles.ucdavis.edu/uploads/cs_public/c4/36/c436fc40-8c6b-4ebb-97f6-e407160608bc/2020alfalfascottvalley-mixed_irrigation-1.pdf .					

Appendix 1A Background Information Regarding Basin Prioritization and Boundary

DEPARTMENT OF WATER RESOURCES

NORTHERN REGION OFFICE 2440 MAIN STREET RED BLUFF, CA 96080-2356



April 15, 2016

Mr. Richard Egan, Administrative Officer County of Lassen Administrative Services 221 S. Roop Street, Suite 4 Susanville, California 96130

Dear Mr. Egan

This letter is in response to your request for information regarding the number of irrigated acres reported in the Big Valley Basin prioritization dataset.

As part of the California Statewide Groundwater Elevation Monitoring (CASGEM) Program legislation, and pursuant to the California Water Code, Section 10933, the Department of Water Resources (DWR) is required to prioritize California's 515 groundwater basins. CASGEM directs DWR to consider, to the extent available, all of the data components listed below:

- 1. The population overlying the basin
- 2. The rate of current and projected growth of the population overlying the basin
- The number of public supply wells that draw from the basin
- The total number of wells that draw from the basin
- The irrigated acreage overlying the basin
- The degree to which persons overlying the basin rely on groundwater as their primary source of water
- 7. Any documented impacts on the groundwater within the basin, including overdraft, subsidence, saline intrusion, and other water quality degradation
- Any other information determined to be relevant by DWR (subsequently modified in 2014 to included adverse impacts on local habitat and local streamflow)

In response to the CASGEM legislation, each groundwater basin was prioritized with the best available data and statistically given one of the following rankings: very low, low, medium, or high. To calculate the total irrigated acreage for the initial prioritization, DWR relied on a land survey using detailed analysis units (DAU). Because the DAUs cover a different area than the groundwater basin, DWR estimated the proportion of overlap. For the Big Valley Basin, DWR estimated the irrigated acres for Big Valley groundwater basin based on the proportional amount of irrigated lands in the DAU and additional information gleaned from satellite imagery, ultimately arriving at a figure of 34,129 acres. Recognizing this method was an estimate, all of the groundwater basins were further analyzed by using their actual basin areas for the ranking. This step would have reduced the estimated value of irrigated acreage for the Big Valley basin to 25,545 acres but, for some reason, that did not occur and the value remained at 34,129 acres based on the estimated proportion from the DAU.

Mr. Richard Egan, Administrative Officer April 15, 2016 Page 2

On the other hand, the portion of land in the basin identified as partially irrigated land or meadow pasture, which should have been included in the irrigated acreage calculation, was inadvertently omitted. Including this additional area of 26,260 acres brings the total irrigated acreage for the basin to over 51,800 acres.

DWR completed the initial draft basin prioritization in December of 2013. Public outreach for the draft basin prioritization consisted of three public workshops throughout the State and a statewide Webinar where DWR explained the basin prioritization process and requested feedback and comments. The public outreach for basin prioritization was followed by a three-month window where local agencies and water resource managers were encouraged to provide comments and information. During this time, DWR received and addressed a number of comments and data, and made adjustments to the basin prioritizations accordingly, but DWR did not receive any comments regarding the irrigated lands estimate for the Big Valley Basin. The basin prioritization was finalized in June 2014.

In September 2014, the Sustainable Groundwater Management Act (SGMA) was passed requiring all CASGEM medium and high priority basins to comply with the new SGMA law. SGMA also directed DWR to develop regulations to allow local agencies to revise their groundwater basin boundaries to help improve sustainable groundwater management, to update the basin prioritization once the basin boundaries have been modified, and to consider a new SGMA requirements for data component number eight on the previous page that includes adverse groundwater impacts on local habitat and local stream flows during the next basin prioritization update. (See the list of data components shown on the previous page.) The basin boundary regulation was adopted on October 21, 2015, and the solicitation for groundwater basin boundary changes ended in March 31, 2016. The 2016 basin boundary modifications will change basin areas and the number of basins, which could result in ranking changes for some basins. In addition, DWR is currently working with agencies and local water managers to identify the best available data, to gather and update many of the individual basin prioritization data components, and to improve the overall quality of the basin prioritization. Improvements to the basin prioritization data will include the following updated information:

- Population and population growth will be recalculated for each of the modified basins, with new ranking breakpoints as necessary.
- Public Supply Wells will be reprocessed for all basins with the assistance of California State Water Resources Control Board, Division of Drinking Water, employing additional selection criteria, with new ranking breakpoints as necessary.
- The number of Total Wells will be reprocessed for all basins using DWR 's Online System for Well Completion Reports (OSWCR), employing production well selection criteria, with new ranking breakpoints as necessary;
- Groundwater Reliance (Groundwater Use and percent of total supply) and Irrigated Acreage will be updated for all basins using the latest land use surveys (possibly 2015 statewide) and 2014 water year information.
- Existing groundwater-related impacts will be reviewed and updated.
- Potential adverse impacts to local habitat and streamflow due to groundwater extraction will be identified, and a process will be established for ranking these impacts.

Mr. Richard Egan, Administrative Officer April 15, 2016 Page 3

DWR plans to begin public outreach for the updated draft basin prioritization in fall 2016, with the final basin prioritization update occurring between December 2016 and February 2017. Unfortunately, it is not possible to reprioritize individual basins outside of this process. Because the individual basin priority is dependent on the relative statewide distribution of each data component, there is no way to predict how the updated prioritization would affect the ranking of any particular basin. Even for those basins where it is known that individual data components have been changed due to improved data, the overall basin priority may remain the same, or even increase due to new SGMA requirements for data component number eight and improvements to the other seven data components. DWR is using new data to estimate irrigated acreage in the Big Valley Basin and, as noted above, the newer data, which was provided to Lassen County Administrative Office, supports a higher value (approximately 51,000 acres).

In closing, I encourage you to visit DWR's basin prioritization website at the following address: http://www.water.ca.gov/groundwater/casgem/basin_prioritization.cfm. The website contains all of the groundwater basin ranking results, as well as the methodology used in the statistical analysis. If you have additional question concerning basin prioritization or if you might possibly have additional data associated with components one through eight (shown on the first page of this letter) that you would like DWR to consider during the next basin prioritization update, please contact Roy Hull, Engineering Geologist, at (530) 529-7337.

If you have any questions or need additional information, please contact me at (530) 528-7403.

Sincerely,

CC:

William Ehorn, Chief Regional Planning Branch

Scott Morgan, DWR Legal

County of Lassen

ADMINISTRATIVE SERVICES

ROBERT F. PYLE
District 1
JIM CHAPMAN
District 2
JEFF HEMPHILL
District 3
AARON ALBAUGH
District 4
TOM HAMMOND
District 5

CERTIFIED MAIL/ RETURN RECEIPT 7015 0640 0005 0681 0168; 7015 0640 0005 0681 0175

March 18, 2016

Regional Planning Branch Department of Water Resources 901 P Street, Room 213 Sacramento, CA 94236

Department of Water Resources P.O. Box 942836 Sacramento, CA 94236

RE: Basin Boundary Modification - Big Valley, Bulletin 118 Basin 5-4

To Whom It May Concern:

This letter is intended to supplement a request by Lassen County to modify Bulletin 118 Basin 5-4 (Big Valley) as permitted under water code, section 340. The adjustment request is External and Scientific and primarily correlates to unmanaged (in terms of contemplating groundwater recharge) portions of the watershed directly impacting recharge in Big Valley.

Summary

The proposed boundary adjustment does not examine, or seek to alter, the extent of water-bearing formations identified in the Bulletin 118 Hydrogeologic analysis. Fundamentally (because Big Valley has been designated as medium priority by the Department of Water Resources), this request is an attempt by Lassen County to ensure management of Big Valley, as required by the Sustainable Groundwater Management Act (SGMA), is successful. Lassen County considers the proposed boundary adjustment to be a critical step toward effective and sustainable management because it empowers the Groundwater Sustainability Agency (GSA) with the ability to identify, consider, and mitigate potential impacts to basin recharge, originating in the basins watershed.

Description

Watershed and subwatershed hydrologic unit boundaries created by the Natural Resource Conservation Service (NRCS) form the proposed perimeter of the basin, after the adjustment. This data set was designed by the NRCS to be used as a tool for water-resource management and planning activities. The original dataset boundaries were adjusted by Lassen County at two



Richard Egan County Administrative Officer email: coadministrative asset calls

Julie Morgan Assistant to the CAO email: jmorgan@co.lassen.ca.us

Regina Schaap Administrative Assistant email: rschaap@co.lassen.ca.us

> County Administration Office 221 S. Roop Street, Suite 4 Susanville, CA 96130 Phone: 530-251-8333 Fax: 530-251-2663

Choose Civility

Department of Water Resources March 18, 2016 Page 2 of 3

points to exclude subwatershed boundaries providing recharge for two or more Bulletin 118 basins.

The NRCS data (table 1 below) assign 9 subwatershed basins to Big Valley totaling approximately 380 square miles. However, an adjustment of roughly 200 acres was applied to the Butte Creek subwatershed polygon, in order to include a portion of the Big Valley basin that had been assigned to the Bulletin 118 Basin 5-36 (Round Valley) watershed.

Table 1: \	Watershee	d data						
OBJECTID	ACRES	HU_10_NAME	HU_12_NAME	HU_12_TYPE	STATES SH	IAPE_Length SH	HAPE_Area	
99800	31362	Blacks Canyon-Pit River	Roberts Reservoir-Pit River	S	CA	0.663846	0.013641	1
99589	11815	Juniper Creek	Deer Spring-Juniper Creek	S	CA	0.534262	0.005124	1
99607	9327	Butte Creek-Ash Creek	Hot Springs Slough	U	CA	0.284423	0.004047	1
99624	51531	Widow Valley Creek-Pit River	Bull Run Slough-Pit River	S	CA	0.878017	0.022349	1
99640	24868	Butte Creek-Ash Creek	Butte Creek	S	CA	0.594983	0.01079	1
99641	26769	Willow Creek	Lower Willow Creek	S	CA	0.682247	0.011607	1
99681	20256	Widow Valley Creek-Pit River	Widow Valley Creek	S	CA	0.493075	0.008799	1
99704	43355	Butte Creek-Ash Creek	Big Swamp-Ash Creek	S	CA	0.883789	0.018833	1
99746	24340	Taylor Reservoir	Taylor Creek	S	CA	0.723431	0.010581	1

The proposed boundary will include roughly 50,000 acres of federally managed timberland, 40,000 acres of privately managed timberland, and 60,000 acres of private and public range/grassland currently outside of the Big Valley (Bulletin 118) perimeter. Presently, management of these lands encompassing the Big Valley watershed does not actively consider implications to groundwater recharge. Lassen County contends that effective management of a groundwater basin must consider connectivity of groundwater/ surface water systems. The most basic form of combined groundwater surface water management seeks to ensure sustainable groundwater supplies, by managing and maintaining watersheds and thereby promoting desirable streamflow.

Watershed development to enhance groundwater would promote the use of natural resources, while mitigating the detrimental impacts of land-use activities on soil and water. This proposed adjustment and management approach recognizes that soil, water, and land use occurring in the upland watersheds, are all fundamentally connected to groundwater basins. Some components of watershed development and its role to groundwater are listed in Table 2 below.

Table 2 Common Components of watershed development and its role.

Activity	Objective	Impact
Check dams	Stop/slow down water runoff in gullies	Recharge of groundwater and nearby wells. Creations of open water bodies
Ponds	Groundwater recharge water for cattle	Recharge of groundwater. Creation of big open water bodies
Gully plugs, Gabions	Primarily to trap sediment/silt in gullies and to stabilize	Keeps sediment out of downstream areas. Increased water infiltration due to slowing down water

Department of Water Resources March 18, 2016 Page 3 of 3

The intended impact of this proposal, to adjust the Big Valley basin boundary, is to ensure that watershed development is a function of the GSA through an adopted Groundwater Sustainability Plan (GSP). A coordinated management approach, which includes watershed development aimed at increasing groundwater recharge and overall water resource availability, will be necessary to ensure successful implementation of a GSP.

Lassen County has been in contact with Modoc County, the only other Local Agency with jurisdiction over Big Valley, and they are aware of this request. Please contact the Department of Planning and Building Services at (530) 251-8269, if there are any questions.

Sincerely,

Richard Egan

County Administrative Officer

RE:MLA:mm

Cc: Supervisor Chapman, Chairman District 2; Supervisor Pyle, District 1; Supervisor Hemphill, District 3; Supervisor Albaugh, District 4; Supervisor Hammond, District 5; Bob Burns, County Counsel; Richard Egan, County Administrative Officer.

S:\PLA\Admin\FILES\1252\Response to denial of Big Valley boundary adjustment

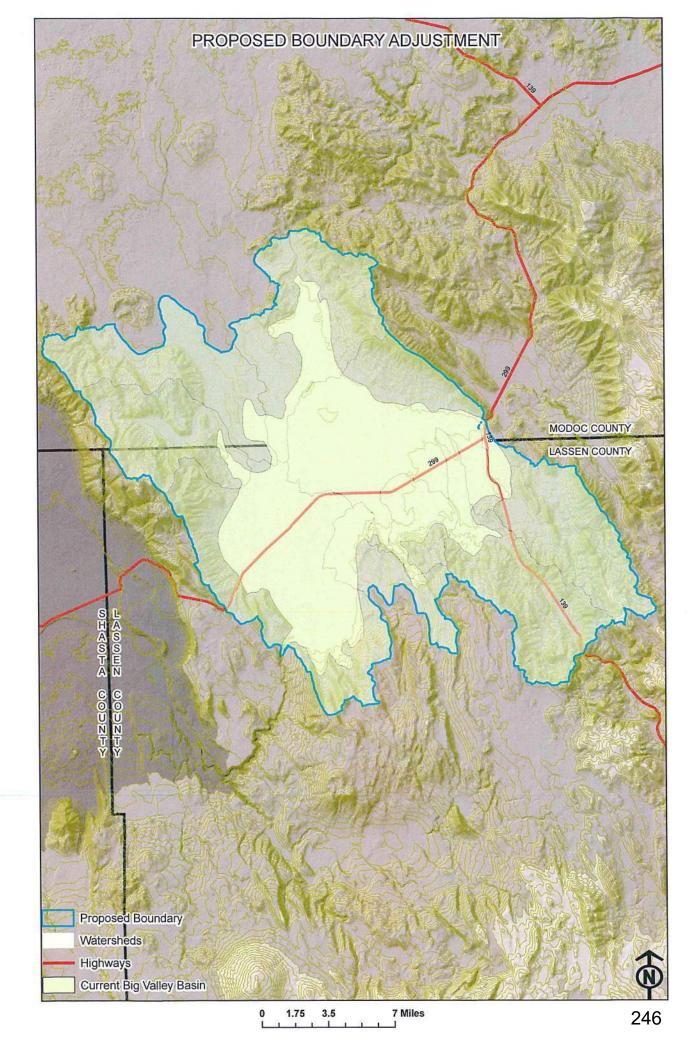


Table 1. 2016 Final Basin Boundary Modifications

Basin/Subbasin	Request Agency	Lead Region Office	Short Description	Modification Type	Recommendation	Regulatory Basis for Denial Article 6	Summary Draft Decisions
1-02.01 KLAMATH RIVER VALLEY - TULELAKE	Tulelake Irrigation District	NRO	Tulelake Irrigation District (TID) is exploring a modification to the Tule Lake	Scientific External	Approved	Aitiolo	This request was approved because it met the technical requirements of the regulation and provided the necessary supporting documentation, technical studies, local outreach and/or notification.
5-04 BIG VALLEY	Lassen County	NRO	Watershed and subwatershed hydrologic unit boundaries form the proposed perimeter	Scientific External	Denied	345.2(c) and (d)	This request did not include sufficient detail and/or required components necessary to support approval of the request. The proposed modification included volcanic rock geologic units (not alluvial basin material) and evidence was not provided to substantiate the connection to the porous permeable alluvial basin, nor were conditions presented that could potentially support radial groundwater flow as observed in alluvial basins.
5-21.52 SACRAMENTO VALLEY - COLUSA, 5-21.51 SACRAMENTO VALLEY - CORNING	Tehama County Flood Control & Water Conservation	NRO	Jurisdictional Consolidation of the Tehama County portion of the Colusa Subbasin	Jurisdiction Consolidation	Approved		This request was approved because it met the technical requirements of the regulation and provided the necessary supporting documentation, technical studies, local outreach and/or notification.
2-9.04 SANTA CLARA VALLEY - EAST BAY PLAIN, 2-9.01 SANTA CLARA VALLEY - NILES CONE	Alameda County Water District	NCRO	Request to correct the boundary of the Niles Cone Groundwater Basin (Niles Cone	Jurisdiction Internal	Approved, as modified		This request was approved with minor modifications to the eastern boundary to align with the lateral extent of alluvium. The request for jurisdictional modification was supported by sufficient technical information and necessary affected local agencies provided letters in support of the modification.
3-03.01 GILROY-HOLLISTER VALLEY - LLAGAS AREA	Santa Clara Valley Water District	NCRO	Modify eastern Llagas Subbasin boundary to match extent of water-bearing sediment	Scientific External	Approved		This request was approved because it met the technical requirements of the regulation and provided the necessary supporting documentation, technical studies, local outreach and/or notification.
5-21.60 SACRAMENTO VALLEY - NORTH YUBA	Yuba County Water Agency	NCRO	Subdivision of the North Yuba Subbasin along the Butte-Yuba county line	Jurisdiction Subdivision	Approved, as modified		The modification request was originally submitted as a jurisdictional subdivision, however, during the review of the request it was revealed that the Department introduced a significant error in the basin boundary sometime between 2003 and 2014, resulting in a portion of Butte County being applied to the North Yuba subbasin. The Department corrected the error during this modification submission period.
5-21.61 SACRAMENTO VALLEY - SOUTH YUBA, 5-21.64 SACRAMENTO VALLEY - NORTH AMERICAN	Placer County	NCRO	Request to adjust the subbasin boundary to align with the Yuba / Placer county	Jurisdiction Internal	Approved		This request was approved because it met the technical requirements of the regulation and provided the necessary supporting documentation, technical studies, local outreach and/or notification.
5-21.67 SACRAMENTO VALLEY - YOLO, 5-21.52 SACRAMENTO VALLEY - COLUSA, 5-21.68 SACRAMENTO VALLEY - CAPAY VALLEY, 5-21.66 SACRAMENTO VALLEY - SOLANO	Yolo County Flood Control And Water Conservation District	NCRO	County Basin Consolidation of four subbasins within Yolo County to existing County	Jurisdiction Internal, Jurisdiction Consolidation	Approved, as modified		The request was approved as a county consolidation of basins within Yolo County with additional internal jurisdictional modifications. The internal jurisdictional modifications included exclusion of some local agency areas within Yolo County which remained in the Solano subbasin. There were also minor jurisdictional modifications applied to the eastern edge of the proposed subbasin and coincident boundaries of Sutter, North American and South American subbasins to align the boundary along county boundaries rather than along hydrologic features.
5-22.01 SAN JOAQUIN VALLEY - EASTERN SAN JOAQUIN, 5-22.16 SAN JOAQUIN VALLEY - COSUMNES		NCRO	A boundary modification to merge a portion of the Cosumnes Subbasin into the Ea	Jurisdiction Internal	Approved		This request was approved because it met the technical requirements of the regulation and provided the necessary supporting documentation, technical studies, local outreach and/or notification.

County of Lassen

ADMINISTRATIVE SERVICES

CHRIS GALLAGHER
District 1
DAVID TEETER
District 2
JEFF HEMPHILL
District 3
AARON ALBAUGH
District 4
TOM HAMMOND

District 5

August 14, 2018

Trevor Joseph
Department of Water Resources
Sustainable Groundwater Management Office
P.O. Box 942836
Sacramento CA 94236-0001

Dear Mr. Joseph:

This letter is in regard to the proposed ranking of the Big Valley Groundwater Basin as a medium priority basin pursuant to the Sustainable Groundwater Management Act (Part 2.74 of the California Water Code). The Lassen County Board of Supervisors has elected to be the Groundwater Sustainability Agency for the Lassen County portion of the basin and the Modoc County Board of Supervisors has elected to be the Groundwater Sustainability Agency for the Modoc County portion of the basin pursuant to said Act and has been designated as such. Lassen and Modoc County are working in a coordinated effort to comply with the Sustainable Groundwater Management Act by retaining local control for the benefit of our constituents.

This letter is to provide comments regarding the above ranking and present justification for consideration to reduce the 2018 Big Valley Groundwater Basin prioritization score.

The 2018 ranking considered the following additional criteria that were not previously considered for the 2014 prioritization (2018 SGMA Basin Prioritization Process and Results):

- The updated SGMA provision in component 8 that requires consideration of "...adverse impacts on local habitat and local stream flows";
- Other information from a sustainable groundwater management perspective in accordance with the provision "Any other information determined to be relevant by the Department...";
- Use of updated datasets and information in accordance with the provision "...to the extent data are available".

Based on the SGMA updates to component 8, the 2018 SGMA Basin Prioritization considered the following four new sub-components:

• Adverse impacts on local habitat and local streamflows



Richard EganCounty Administrative Officer
email: coadmin@co.lassen.ca.us

Julie MorganAssistant to the CAO
email: jmorgan@co.lassen.ca.us

Regina Schaap Executive Assistant to the CAO email: rschaap@co.lassen.ca.us

> County Administration Office 221 S. Roop Street, Suite 4 Susanville, CA 96130 Phone: 530-251-8333 Fax: 530-251-2663

Choose Civility 248

- Adjudicated areas
- Critically overdrafted basins
- Groundwater related transfers

Lassen and Modoc County have carefully evaluated the information and data provided to establish the 2018 SGMA Basin Prioritization results. The datasets, methodologies, and documentation provided for this process are an improvement over the previous prioritization, and DWR made efforts to standardize the datasets and criteria used for nearly all the components including Component 7: Impacts. However, DWR did not make adequate consideration of the severity of the impacts for Component 7 and did not apply consistent methodologies and justification for Component 8. Particular inadequacies related to Big Valley's prioritization include:

Component 7 Impacts: Declining Groundwater Levels

Groundwater levels in Big Valley have remained stable in some areas and declined in others over the last 10 years. Declines have been as much as 30 feet, but have been rising since 2016. Prioritization points for declining groundwater level are appropriate in this basin, however the identical score was given to all basins in the state with documented water level declines. This includes critically overdrafted basins where water levels have declined hundreds of feet, chronically over the course of many decades. Evaluating Big Valley's water level declines on par with these basins does not adequately represent Big Valley's priority in the state and therefore we would like to request DWR reconsider the points associated with this portion of the scoring criteria.

Component 7 Impacts: Water Quality

This scoring appears to be based on 14 measurements that exceeded the Secondary MCL (maximum contaminant level) for iron and manganese at the two wells used to supply water to the town of Bieber. Although secondary MCLs are enforceable standards in California, they are *not* due to public health concerns but, due to nuisance and aesthetics such as taste, color, and odor. Iron and manganese are not typically concerns for agricultural use, which is the primary beneficial use in Big Valley. Iron and manganese are naturally occurring minerals that are prevalent in volcanic areas such as Big Valley. These water quality issues are therefore not due to mismanagement of the resource and conversely cannot be substantially addressed through better management. Again, DWR did not make adequate consideration of the severity of this issue, with Big Valley receiving the same number of points as areas of the state that have significant issues with salinity, nitrate, and toxic metals that have a much greater impact on beneficial uses and human health and have the potential to be better managed under SGMA.

Further we ask that DWR consider methodologies for Component 7 to account for the severity of each impact. If those methodologies cannot be developed, we ask that DWR use their discretion to adjust points in consideration of the low level of severity of these impacts for Big Valley.

Component 8b: Other Information Deemed Relevant by the Department

While DWR did apply their methodologies consistently for Components 1 through 7, they were not consistent with Component 8 and provided little justification in applying five (5) points to Big Valley Basin for:

- 1. "Headwaters for Pit River/Central Valley Project Lake Shasta"
- 2. "Extensive restoration project at Ash Creek State Wildlife Area has improved groundwater levels in immediate vicinity of project but declining groundwater levels over past 10 years persist outside of project area which includes numerous wetlands and tributaries to the Pit River."

This limited information about the application of DWR's discretion on these points begs numerous questions such as:

- 1. What headwaters does this refer to? Headwaters of the Pit River? Headwaters of the CVP? Headwaters of Lake Shasta?
- 2. What are DWR's concerns relative to Big Valley's position within the watershed?
- 3. What concerns does DWR have specific to Big Valley, given that there are numerous other groundwater basins within the Pit River, Lake Shasta, CVP and State Water Project watersheds that were not awarded these points?
- 4. Why are water levels in the vicinity of Ash Creek and other wetlands considered "other information deemed relevant"? Wasn't this information already considered in Component 7: Declining Groundwater Levels and Component 8a: Streamflow and Habitat?

Due to the need for further clarification on the preceding questions regarding component 8b, both Lassen and Modoc GSAs would like to request the points associated with this portion of the scoring criteria be reconsidered.

Lassen and Modoc County understand the vast complexity of evaluating each basins data and information, however, we feel a further assessment of the 2018 SGMA Basin Prioritization score is desired by both GSAs. For the above reasons, Lassen and Modoc County GSAs would like to request an assessment of the questions regarding the basins data, detailed in this letter, to be reviewed for a potential lowering of the overall basin score. We appreciate the consideration of our comments and look forward to hearing from you.

Sincerely,

Chris Gallagher, Chairman Lassen County Board of Supervisors Patricia Cullins, Chair Modoc County Board of Supervisors

Appendix 2A Resolutions Establishing Lassen and Modoc Counties as the GSAs for the BVGB

RESOLUTION NO. 17-013

A RESOLUTION OF THE BOARD OF SUPERVISORS OF LASSEN COUNTY ELECTING TO BE THE GROUNDWATER SUSTAINABILITY AGENCY FOR ALL PORTIONS OF THE BIG VALLEY (BASIN NUMBER 5-004) GROUNDWATER BASIN LOCATED WITHIN LASSEN COUNTY, PURSUANT TO THE SUSTAINABLE GROUNDWATER MANAGEMENT ACT OF 2014

WHEREAS, the Legislature has adopted, and the Governor has signed into law, Senate Bills 1168 and 1319 and Assembly Bill 1739, known collectively as the Sustainable Groundwater Management Act of 2014 (SGMA); and

WHEREAS, the Sustainable Groundwater Management Act of 2014 went into effect on January 1, 2015; and

WHEREAS, the legislative intent of SGMA is to, among other goals, provide for sustainable management of groundwater basins and sub-basins defined by the California Department of Water Resources (DWR), to enhance local management of groundwater, to establish minimum standards for sustainable groundwater management, and to provide specified local agencies with authority and technical and financial assistance necessary to sustainably manage groundwater; and

WHEREAS, the Sustainable Groundwater Management Act of 2014 enables the State Water Resources Control Board to intervene in groundwater basins unless a local public agency or combination of local public agencies form a groundwater sustainability agency (GSA) or agencies by June 30, 2017; and

WHEREAS, retaining local jurisdiction over water management and land use is essential to sustainably manage groundwater and to the vitality of Lassen County's economy, communities and environment, and

WHEREAS, any local public agency that has water supply, water management or land use responsibilities within a groundwater basin may elect to be the groundwater sustainability agency for that basin; and

WHEREAS, Lassen County is a local public agency organized as a general law County under the State Constitution; and

WHEREAS, in 1995 the California Supreme Court declined to review an appeal of a lower court decision, *Baldwin v. County of Tehama* (1994), that holds that State law does not occupy the field of groundwater management and does not prevent cities and counties from adopting ordinances to manage groundwater under their police powers; and

WHEREAS, in 1999 the Lassen County Board of Supervisors adopted Ordinance Number 539 (codified at Chapter 17.01 of County Code), requiring a permit to export any groundwater from Lassen County; and

WHEREAS in 2007, the Lassen County Board of Supervisors adopted a Groundwater

Management Plan; as authorized by California Water Code Section 10753(a); and

WHEREAS, in 2012 the Lassen County Board of Supervisors adopted Ordinance Number 2012-001 (codified at Chapter 17.02 of County Code), which in part adopts a basin management objective program to facilitate the understanding and public dissemination of groundwater information in Lassen County; and

WHEREAS, in December of 2015, the Lassen County Board of Supervisors adopted the Groundwater Monitoring Plan for Lassen County, which was in turn approved by the California Department of Water Resources, making Lassen County the designated monitoring entity pursuant to the California Statewide Groundwater Elevation Monitoring (CASGEM) program; and

WHEREAS, the County overlies those portions of the Big Valley (Basin 5-004) Groundwater Basin located within Lassen County; and

WHEREAS, Section 10723.2 of the Sustainable Groundwater Management Act of 2014 requires that a GSA consider the interests of all beneficial uses and users of groundwater, as well as those responsible for implementing groundwater sustainability plans; and

WHEREAS, Section 10723.8 of the Sustainable Groundwater Management Act of 2014 requires that a local agency electing to be a GSA notify the California Department of Water Resources of its election and its intent to undertake sustainable groundwater management within a basin; and

WHEREAS, On January 26, 2017, the Lassen County Planning and Building Services Department conducted a public meeting within the affected basin, in the community of Bieber, to solicit comment as to whether the Board of Supervisors should or should not be the sustainable groundwater agency for the Big Valley Basin. Notice of said public meeting was published in the Lassen County Times, Mountain Echo, and Modoc County Record; mailed to the list of interested parties; and posted at various places around the basin where announcements are posted; and

WHEREAS, The January 26, 2017, meeting resulted in the identification of additional "interested parties", that were added to the previously compiled list of interested parties.

WHEREAS, the County held a public hearing on this date after publication of notice pursuant to Government Code section 6066 to consider adoption of this Resolution. Notice, as provided for at Government Code Section 6066 was published in the Lassen County Times, Mountain Echo, and Modoc County Record; mailed to the list of interested parties; and posted at various places around the basin where announcements are posted; and

WHEREAS, it would be in the public interest of the people of Lassen County for the County to become the groundwater sustainability agency for all those portions of the Big Valley (Basin 5-004) Groundwater Basin located within Lassen County; and

WHEREAS, the County and other local public agencies have a long history of coordination and cooperation on water management; and

WHEREAS, it is the intent of the County to work cooperatively with other local agencies and Counties to manage the aforementioned groundwater basin in a sustainable fashion; and

WHEREAS, The Environmental Review Officer of Lassen County has determined that the action taken under this Resolution is exempt from the California Environmental Quality Act (Public Resources Code §21000, et seq.) ("CEQA") Under the Class 7 and Class 8, CEQA Guidelines Exemptions §§15307, 15308, and 15320 because the formation of a GSA, as provided for under state law, is meant to assure the maintenance, restoration, or enhancement of a natural resource and the regulatory process involves procedures for the protection of the environment.

NOW, THEREFORE BE IT RESOLVED AS FOLLOWS:

- 1. The foregoing recitals are true and correct.
- 2. The Board of Supervisors further finds that:
 - a. The Board of Supervisors hereby concurs with the Lassen County Environmental Review Officer that adoption of this Resolution is exempt from the California Environmental Quality Act under CEQA Guidelines Exemptions §§15307, 15308, and 15320. The Environmental Review Officer is hereby directed to file a Notice of Exemption with the Lassen County Clerk for the actions taken in this Resolution.
 - b. The proposed boundaries of the basin that the County intends to manage under the Sustainable Groundwater Management Act of 2014 shall be the entirety of the boundaries for the aforementioned groundwater basin, as set forth in California Department of Water Resources Bulletin 118 (updated in 2003), that lie within the County of Lassen; provided that the Board of Supervisors is authorized and directed to evaluate whether basin boundaries should be adjusted in a manner that will improve the likelihood of achieving sustainable groundwater management.
 - c. Lassen County hereby elects to become the groundwater sustainability agency, as defined at Section 10721 of the California Water Code, for all those portions of the Big Valley (Basin 5-004) Groundwater Basin located within Lassen County.
 - d. Within thirty days of the date of this Resolution, the Director of the Planning and Building Services Department is directed to provide notice of this election to the California Department of Water Resources in the manner required by law. Such notification shall include a map of the portion of the basin that the County intends to manage under the Sustainable Groundwater Management Act of 2014, a copy of this resolution, a list of interested parties developed pursuant to Section 10723.2 of the Act, and an explanation of how their interests will be considered in the development and operation of the groundwater sustainability agency and the development and implementation of the agency's groundwater sustainability plan.
 - e. The Director of the Planning and Building Services Department and legal counsel are hereby directed to promptly prepare a Memorandum of Understanding with Modoc County to collaboratively develop a groundwater sustainability plan for

the Big Valley (Basin 5-004) Groundwater Basin for Board consideration.

- f. The Director of the Planning and Building Services Department shall begin discussions with other local agencies in this basin in order to begin the process of developing a groundwater sustainability plan for the basin, in consultation and close coordination with other local agencies, as contemplated by the Act.
- g. The Director of the Planning and Building Services Department be directed to report back to the Board at least quarterly on the progress toward developing the groundwater sustainability plan.

The foregoing resolution was adopted at a regular meeting of the Lassen County Board of Supervisors of the County of Lassen, State of California, held on the 14th day of March 2017 by the following vote:

AYES:	Supervisors Ga	allagher, Teeter, Hemphill, Albaugh and Hammond
NOES:	NONE	
ABSTAIN:	NONE	
ABSENT:	NONE	
		Chairman of the Board of Supervisors County of Lassen, State of California

ATTEST:

JULIE BUSTAMANTE

Clerk of the Board

SUSAN OSGOOD, Deputy Clerk of the Board Crystle Henderson

Crystle Henderson

I, SUSAN OSGOOD, Deputy Clerk of the Board of the Board of Supervisors, County of Lassen, do hereby certify that the foregoing resolution was adopted by the said Board of Supervisors at a regular meeting thereof held on the 4 th day of Mach, 2017.

Deputy Clerk of the County of Lassen Board of Supervisors

RESOLUTION # 2017-09

A RESOLUTION OF THE BOARD OF SUPERVISORS OF THE COUNTY OF MODOC ELECTING TO BE THE GROUNDWATER SUSTAINABILITY AGENCY FOR PORTIONS OF THE BIG VALLEY GROUNDWATER BASIN (BASIN NUMBER 5-004) WITHIN MODOC COUNTY

WHEREAS, the Legislature has adopted, and the Governor has signed into law, Senate Bills 1168 and 1319 and Assembly Bill 1739, known collectively as the Sustainable Groundwater Management Act of 2014; and

WHEREAS, the Sustainable Groundwater Management Act of 2014 went into effect on January 1, 2015; and

WHEREAS, the Sustainable Groundwater Management Act of 2014 enables the State Water Resources Control Board to intervene in groundwater basins unless a local public agency or combination of local public agencies form a Groundwater Sustainability Agency or Agencies (GSA) by June 30, 2017; and

WHEREAS, retaining local jurisdiction over water management and land use is essential to sustainably manage groundwater and to the vitality of Modoc County's economy, communities, and environment, and

WHEREAS, any local public agency that has water supply, water management, or land use responsibilities within a groundwater basin may elect to be the Groundwater Sustainability Agency for that basin; and

WHEREAS, Modoc County is a public agency as defined by 10721 of the Water Code; and

WHEREAS, under Section 10723(a), the County is responsible for portions of the Big Valley Groundwater Basin as shown on the map hereto in "Exhibit A"; and

WHEREAS, the County overlies those portions of the Big Valley 5-004 located within Modoc County; and

WHEREAS, Section 10723.2 of the Sustainable Groundwater Management Act of 2014 requires that a GSA consider the interests of all beneficial uses and users of groundwater, as well as those responsible for implementing groundwater sustainability plans; and

WHEREAS, Section 10723.8 of the Sustainable Groundwater Management Act of 2014 requires that a local agency electing to be a GSA notify the Department of Water Resources of its election and its intent to undertake sustainable groundwater management within a basin; and

WHEREAS, the County held a public hearing on this date after publication of notice in the Modoc Record pursuant to Government Code section 6066 to consider adoption of this Resolution; and

WHEREAS, it would be in the public interest of the people of Modoc County for the County to become the groundwater sustainability agency for all those portions of the Big Valley 5-004 Groundwater Basin located within Modoc County; and

WHEREAS, the County and other local public agencies have a long history of coordination and cooperation on water management; and

WHEREAS, it is the intent of the County to work cooperatively with other local agencies and Counties to manage the aforementioned groundwater basins in a sustainable fashion;

NOW, THEREFORE, BE IT RESOLVED, that Modoc County hereby elects to become the Groundwater Sustainability Agency for all those portions of the Big Valley 5-004 Groundwater Basin located within Modoc County.

BE IT FURTHER RESOLVED that the proposed boundaries of the basin that the County intends to manage under the Sustainable Groundwater Management Act of 2014 shall be the entirety of the boundaries for the aforementioned basin, as set forth in California Department of Water Resources Bulletin 118 (updated in 2003), that lie within the County of Modoc; provided that the Board of Supervisors is authorized and directed to evaluate whether basin boundaries should be adjusted in a manner that will improve the likelihood of achieving sustainable groundwater management.

BE IT FURTHER RESOLVED that within thirty days of the date of this Resolution, the designated Staff Liaison to the Groundwater Resources Advisory Committee ("GRAC") is directed to provide notice of this election to the California Department of Water Resources in the manner required by law. Such notification shall include a map of the portion of the basin that the County intends to manage under the Sustainable Groundwater Management Act of 2014, a copy of this resolution, a list of interested parties developed pursuant to Section 10723.2 of the Act, and an explanation of how their interests will be considered in the development and operation of the groundwater sustainability agency and the development and implementation of the agency's groundwater sustainability plan.

BE IT FURTHER RESOLVED that the designated Staff Liaison to the GRAC and County Counsel are hereby directed to promptly prepare a Memorandum of Understanding with Lassen County to collaboratively develop a Groundwater Sustainability Plan for the Big Valley 5-04 Groundwater Basin for Board consideration.

BE IT FURTHER RESOLVED that the designated Staff Liaison to the GRAC shall begin discussions with other local agencies in this basin in order to begin the process of developing groundwater sustainability plans for the basin, in consultation and close coordination with other local agencies, as contemplated by the Act.

BE IT FURTHER RESOLVED that that the designated Staff Liaison to the GRAC or the Chairman of the GRAC be directed to report back to the Board at least quarterly on the progress toward developing the groundwater sustainability plans.

PASSED AND ADOPTED by the Board of Supervisors of the County of Modoc, State of California, on the 28th day of February, 2017 by the following vote:

Motion Approved:

RESULT:

APPROVED [UNANIMOUS]

MOVER:

David Allan, Supervisor District I

SECONDER: Patricia Cullins, Supervisor District II

AYES:

David Allan, Supervisor District I, Patricia Cullins, Supervisor District II,

Kathie Rhoads, Supervisor District III, Geri Byrne, Supervisor District V

ABSENT:

Elizabeth Cavasso, Supervisor District IV

BOARD OF SUPERVISORS OF THE COUNTY OF MODOC

Geri Byrne, Chair

Modoc County Board of Supervisors

ATTEST:

Deputy Clerk of the Board

Appendix 2B MOU Establishing the Big Valley Groundwater Advisory Committee

MEMORANDUM OF UNDERSTANDING FORMING THE BIG VALLEY GROUNDWATER BASIN ADVISORY COMMITTEE (BVAC) TO ADVISE THE LASSEN AND MODOC GROUNDWATER SUSTAINABILITY AGENCIES DURING THE DEVELOPMENT OF THE GROUNDWATER SUSTAINABILITY PLAN REQUIRED UNDER THE 2014 SUSTAINABLE GROUNDWATER MANAGEMENT ACT FOR THE BIG VALLEY GROUNDWATER BASIN

1. Background

The Sustainable Groundwater Management Act (SGMA) is codified as Part 2.74 of the California Water Code (Section 10720 et seq). The regulations adopted to enforce the provisions of the Act are found in Section 350 et seq, Division 2, Chapter 1.5, Subchapter 2 of Title 23 of the California Code of Regulations. The Sustainable Groundwater Management Act (SGMA) became effective January 1, 2015.

This memorandum of understanding pertains to the Big Valley Groundwater Basin (BVGB), which has been designated as a "medium priority" basin by the California Department of Water Resources (DWR). This designation as a medium priority basin requires preparation of a Groundwater Sustainability Plan (GSP) under the Act.

The SGMA was created to ensure groundwater basins throughout the state are managed to reliably meet the needs of all users, while mitigating changes in the quality and quantity of groundwater. The intent of the Act as described in section 10720.1 of the Water Code is to:

- Provide for the sustainable management of groundwater basins.
- Enhance local management of groundwater consistent with rights to use or store groundwater.
- Establish minimum standards for sustainable groundwater management.
- Provide local groundwater agencies with the authority and the technical and financial assistance necessary to sustainably manage groundwater.
- Avoid or minimize subsidence.
- Improve data collection and understanding about groundwater.
- Increase groundwater storage and remove impediments to recharge.
- Manage groundwater basins through the action of local governmental agencies to the greatest extent feasible, while minimizing state intervention to only when necessary to ensure that local agencies manage groundwater in a sustainable manner.

The role of the Groundwater Sustainability Agency (GSA) is to create a GSP and then to implement and enforce that plan. The plan must include measurable objectives that can be used to demonstrate the basin is sustainably managed within twenty (20) years of implementation.

2. Purpose

The purpose of this memorandum is to:

- a. Establish the Big Valley Groundwater Basin Advisory Committee (BVAC) and its responsibilities.
- b. Establish the membership of the BVAC.
- c. Describe how meetings of the BVAC will be conducted and how information, findings, conclusions, decisions, etc. of the BVAC will be conveyed to the Lassen County Groundwater Sustainability Agency (GSA) and to the Modoc County Groundwater Sustainability Agency (GSA).

3. Recitals

- a. In September 2014, the Governor signed into law a legislative package (three bills), collectively known as the Sustainable Groundwater Management Act (SGMA), which requires local agencies with land use and/or water management or water supply authority to do certain things to reach sustainability of medium and high priority groundwater basins as designated by the State of California Department of Water Resources (DWR). SGMA became effective on January 1, 2015.
- b. The Big Valley Groundwater Basin has been designated a medium priority basin by the DWR.
- c. This MOU is dedicated to the Big Valley Groundwater Basin, not any other basin in either Lassen or Modoc Counties.
- d. The Lassen and Modoc County Board of Supervisors have adopted resolutions (17-013 and 2017-09 respectively) declaring themselves to be the Groundwater Sustainability Agency (GSA) for the portion of the Big Valley Groundwater Basin within their respective jurisdictions.
- e. No other agency pursued GSA status and therefore Lassen and Modoc Counties were awarded exclusive GSA status by DWR for the portion of the Big Valley Groundwater Basin within their respective jurisdictions.
- f. GSAs are required to develop Groundwater Sustainability Plans (GSP) for all medium and high priority basins, and said GSP for the BVGB is to be submitted to the DWR by January 31, 2022.
- g. Absent a qualified planning process which produces a Groundwater Sustainability Plan, the State Water Resources Control Board (State Board) is authorized to declare that the subbasins are out of compliance and thereby they will intervene and place the subbasins on probation with regard to SGMA.
- h. Lassen County has been awarded a grant (Grant Number 4600012669) to provide funding for the preparation of a GSP for the BVGB.

- i. Lassen and Modoc Counties intend to work cooperatively in the preparation of a GSP for the BVGB and prepare one GSP that covers the entirety of the basin.
- j. Lassen and Modoc Counties see the value of stakeholder input into the development and implementation of a Groundwater Sustainability Plan for the Big Valley Groundwater Basin.
- k. It is the intent of this MOU to form an advisory committee that would advise both Lassen and Modoc Counties on the preparation of a GSP for the basin.

4. Goals of the BVAC are as follows:

- a. Work collaboratively and transparently with other members to identify common goals, foster mutual understanding, and develop a GSP that all members and their constituents can live with and support;
- b. Develop a common understanding of existing groundwater resources, including groundwater dependent habitats, public trust resources and the current and future needs of all beneficial uses and users in the Big Valley groundwater basin, as well as current and future water needs:
- c. Solicit and incorporate community and stakeholder interests into committee discussions and emerging committee agreements in order to develop a locally-informed and broadly supported GSP;
- d. Consider and integrate science, to the best of its ability and with support from qualified scientific consultants, during GSP development and implementation;
- e. Support implementation efforts guided by GSP goals to use, monitor, and manage water resources in a sustainable manner, ensure local control, address current and future local water needs, and support the agricultural economy, Adin, Bieber, Nubieber, Lookout, and outlying communities, tourist visitation and fish and wildlife habitat in the basin;
- f. Negotiate in good faith to achieve consensus on management of groundwater resources in the Big Valley groundwater basin into the future;
- g. Advise the Lassen and Modoc GSAs on the preparation of a Groundwater Sustainability Plan (GSP);
- h. Provide a forum for the public to comment during the preparation of the GSP;
- i. Provide recommendations to the Lassen and Modoc GSAs that would result in actions which have as minimal impact as possible on the residents of Big Valley groundwater basin;
- j. Advise the Lassen and Modoc GSAs on the preparation of a GSP to produce the lowest possible future costs to the residents of Big Valley; and
- k. Ensure local control of the Big Valley Groundwater Basin be maintained by the Lassen and Modoc GSAs.

As a standing committee of the Lassen and Modoc GSA's, the Advisory Committee will operate in compliance with the Ralph M. Brown Act (Brown Act). Committee meetings will be noticed and agendas posted according to the Brown Act. All meetings will be open to the public and allow public comment. Speakers will generally be limited to three minutes, but time may be adjusted based upon meeting circumstances. As needed, the Chair may place time limits on public comments to ensure that the committee is reasonably able to address all agenda items

Big Valley Groundwater Basin Advisory Committee Memorandum of Understanding Page 4 of 15

during the course of a meeting. The Lassen GSA will announce committee meetings on its website and through its regular communication channels. Recommendations and advice from the committee will be presented to the Lassen and Modoc GSA's through their staff.

5. BVAC Membership Composition

- 1. One (1) member of the Lassen County Board of Supervisors selected by said Board.
- 2. One (1) alternate member of the Lassen County Board of Supervisors selected by said Board
- 3. One (1) member of the Modoc County Board of Supervisors selected by said Board.
- 4. One (1) alternate member of the Modoc County Board of Supervisors selected by said Board
- 5. Two (2) public members selected by the Lassen County Board of Supervisors. Said members must either reside or own property within the Lassen County portion of the Big Valley Groundwater Basin.
- 6. Two (2) public members selected by the Modoc County Board of Supervisors. Said members must either reside or own property within the Modoc County portion of the Big Valley Groundwater Basin.

Member vacancies

If a vacancy occurs, the respective GSA will select a new committee member. Applications or letter of intent for all members of the committee must be kept on file with the respective GSA. An appointing GSA must notify the other GSA in writing if a member of the BVAC has been replaced.

Committee Member Terms

- Committee members serve four (4) year terms starting from the date of their appointment. If any committee member decides, for any reason, to terminate his or her role, he/she will notify GSA staff as soon as possible after making such a determination. Committee members interested in serving beyond four (4) years must re-apply through the GSA's application process.
- The chair and vice-chair will serve one a (1) year term. At the culmination of the term of a chair or vice-chair, the committee will use its decision-making procedures to nominate and confirm a new chair and vice-chair. Any interested chair or vice chair may be nominated for a second term, however, no chair or vice-chair shall serve more than two (2) consecutive terms.

6. BVAC Roles and Responsibilities

This section describes roles and responsibilities that the Big Valley Advisory Committee Members commit to during development and implementation of the Big Valley groundwater basin GSP.

Convener

The Lassen and Modoc GSA's, are the final decision maker in the GSP process. The GSA's will:

 Provide guidance, evaluation and feedback that directs GSA staff and Advisory Committee members to build and implement an effective GSP;

- Work collaboratively with GSA staff, Advisory Committee members, consultants, and constituents;
- Receive, evaluate, and decide on all GSP and SGMA related actions that come in the form of advice and recommendations from the Big Valley Advisory Committee;
- Welcome feedback that pertains to the GSP from all diverse stakeholder interests in each groundwater basin; and
- Serve as a representative for the basin, making decisions in the best interest of achieving and maintaining long-term groundwater sustainability for all beneficial uses and users of water in the basin.

Advisory Committee Members

Members of the Advisory Committee ("members") collectively represent the diversity of beneficial groundwater uses and users in the Big Valley groundwater basin. Committee members commit to:

- Serve as strong, effective advocates and educators for the interest group (constituency) represented;
- Nominate and confirm a committee chair and vice chair every year;
- Arrive at each meeting fully prepared to discuss all agenda items and relevant issues. Preparation may include, but is not limited to, reviewing previous meeting summaries, draft and final GSP chapters, and other information distributed in advance of each meeting;
- Develop an innovative problem-solving approach in which the interests and viewpoints of all members are considered;
- Explore all options to resolve disagreements, including, as needed, one-on-one discussions with GSA staff, or, at Advisory Committee meetings, interest-based caucuses or small group discussions;
- Act as liaisons throughout the GSP development and implementation process to educate, inform and solicit input from the wider local community and interested constituencies not represented on the committee;
- Present constituent views on the issues being discussed and commit to engage in civil, respectful and constructive dialogue with other members, as well as GSA staff, technical team members and potentially a facilitator;
- Ensure accuracy of information dissemination during or outside meetings, and correct false information as needed or appropriate;
- Avoid representing individual viewpoints as those of the committee and respect confidential conversations;
- Work collaboratively to ensure broad constituent understanding and support for any advice and recommendations that the committee shares with the Lassen and Modoc GSA Boards;
- Coordinate with Lassen and Modoc GSA staff regarding recommendations for any additional committee tasks that should be undertaken by the committee, and which items shall be presented to the GSA Boards for its review and approval;
- Operate at all times in compliance with the Brown Act;
- Attend meetings consistently participation in 75% of the meetings is the minimum expectation. (Given the volume of information to be considered and discussed, it is

essential that members actively participate in committee meetings on a consistent basis. It is understood that professional and personal commitments may at times prevent members from attending committee meetings. In such cases, members shall notify Lassen GSA staff no less than 24 hours in advance to be excused from attending any given committee meeting. As needed, staff will reach out to members who are not actively participating to give them the opportunity to explain their absence and reaffirm their interest to participate on the committee, and thus not lose their seat. Members who do not meet the threshold for active participation, and have not expressed an interest to continue participating, will, at the recommendation of Lassen and Modoc GSA staff, be automatically removed by the appropriate GSA Board from the committee. Alternates may attend in the absence of a committee member but must alert the Lassen and Modoc GSA staff prior to the meeting.); and

• Recuse him/herself from discussion and voting if he/she has a personal interest or stake in the outcome [BVAC members are subject to recusal due to conflicts of interest (as that term is defined by the Political Reform Act) in accordance with Government Code Title 9, Political Reform; Chapter 7, Conflicts of Interest].

Through its public meetings, the committee shall serve as an additional forum for public dialogue on SGMA and GSP development. Finally, with approval by the Lassen and Modoc GSA's, committee tasks may be amended, repealed, or additionally added at any time with the intent to comply with SGMA related activities provided said activities comply under the authorities granted by SGMA law. Alternates may vote on all matters before the BVAC in the absence of the appointed member. Each alternate shall be informed of the business of the BVAC and the actions to be taken when acting on behalf of a member.

The following are desired attributes for BVAC members:

- a. Have knowledge and experience in water resources management.
- b. Represent an agency, organization, tribe, academia, or interest that is underrepresented in the region (e.g., disadvantaged communities or unincorporated areas).
- c. Have the ability and desire to objectively articulate the perspective of his/her BVAC seat and caucus at a level beyond that of his/her individual interest.
- d. Provide recommendations with the best interests of the entire Big Valley region in mind.

7. Appointment

Members of the BVAC shall be appointed by the respective Board of Supervisors acting as the GSA. Members will serve at the pleasure of said Boards and may be terminated at any time without cause. Persons interested in serving on the BVAC shall submit a letter of interest or application to the pertinent Clerk of the Board of Supervisors which includes the following:

- a. Current level of SGMA knowledge;
- b. Knowledge of groundwater in the Big Valley Groundwater Basin;
- c. Their ability to commit to attending meetings of the Advisory Committee
- d. Committee members should have demonstrated ability to work collaboratively with others of differing viewpoints and achieve good faith compromise.

8. BVAC Chair and Vice Chair Roles

The BVAC Chair and Vice Chair must be BVAC members. The Chair and Vice Chair will be determined by a majority vote of the BVAC. The Chair and Vice Chair shall serve for one (1) year term (multiple terms may be held, not to exceed two (2) years).

Although not required, the following attributes are desirable for the Chair and Vice Chair:

- Chair: prior experience working in the role of a Chair of a committee.
- Vice Chair: attributes and ability to assume Chair role and responsibilities, but not necessarily as much experience as the Chair.
- Chair and Vice Chair should come from different GSAs.
- Familiar with the purpose, structure, and content of meetings.
- Willing and able to attend each BVAC meeting until the GSP is drafted. The GSP must be submitted to the DWR by January 31, 2022.
- Ability to even-handedly articulate all interests.
- Consensus-builder.

The role of the Chair and Vice Chair will vary between BVAC meetings; however, the Vice Chair's primary role is to take on Chair responsibilities in the absence of the Chair and/or at the discretion of the Chair. General responsibilities for the Chair are as follows:

- a. Review BVAC agenda prior to finalization and distribution to stakeholders (one week prior to BVAC meetings);
- b. Meet with staff prior to each BVAC meeting to go over the BVAC agenda and presentation(s) so that the BVAC meeting runs smoothly and without interruption;
- c. Manage the BVAC agenda, select members to speak in turn, and keep the BVAC on task and on time;
- d. Convene each BVAC meeting and initiate introductions;
- e. Organize and call on public speakers during appropriate agenda items (if applicable) and determine public comment procedures;
- f. Identify when the BVAC has reached an impasse and needs to move forward with formal voting to resolve an issue;
- g. Summarize key decisions and action items at the end of each BVAC meeting.
- h. Close meetings;
- i. Ensure that notes are prepared summarizing discussion, agreements, and decisions;
- j. Review and provide comments on BVAC meeting notes.

9. Meetings

Meetings will be conducted on a monthly basis or as often as is needed during preparation of the Big Valley Groundwater Basin GSP. Meetings shall be noticed in accordance with the Brown Act. The Lassen County Department of Planning and Building Services will coordinate Brown Act noticing and any other noticing that is executed. The Lassen County Department of Planning and Building Services will prepare and disseminate packets in advance of all meetings, if applicable. Said Department shall serve as staff to the BVAC, and be the repository of all associated records, with a copy of all records sent to the Modoc County Clerk of the Board. The

Director of the Lassen County Planning and Building Services Department or his or her designee shall serve as secretary of the BVAC and may comment on any item but does not have a vote. The designated Modoc County GSA groundwater staff member may comment on any item but does not have a vote. Legal counsel shall be provided by the Modoc County Counsel.

Meetings shall be conducted in accordance with this MOU, SGMA and any other applicable rules or regulations. A quorum is required to convene. The BVAC Chair or Vice Chair will determine if a quorum exists at any BVAC meeting. Formal voting may not occur without a quorum of BVAC members; however, presentations and discussion of agenda topics may occur. A quorum shall be defined as having at least four BVAC representatives, present at every meeting.

Meeting Location

All meetings of the Big Valley Groundwater Advisory Committee must be held within the boundary of the Big Valley Groundwater basin. Lassen GSA staff will work collaboratively with the Chair to determine a location which will encourage the most participation from all stakeholders. Meeting locations shall remain consistent to prevent reduced participation from all stakeholders.

10. Public Comments at BVAC Meetings

BVAC meetings are open to the public, and public comments are welcomed and encouraged. To ensure that members of the public have an adequate chance to provide comments, the BVAC Chair will invite public comments by members of the public in attendance on any agenda item in which the BVAC is making a decision or formulating a recommendation. An open public comment period will be offered at the end of BVAC meetings to allow members of the public to speak to non-agenda topics.

If there is substantial public interest or comment on a topic, the BVAC Chair or Vice Chair may implement the following procedures to ensure that such comments are received in a timely manner:

- Members of the public will be asked to fill out a speaker card to indicate their name, affiliation, contact, and the specific agenda item they wish to speak to (if applicable).
- Speaker cards will be limited to one per person per agenda item. Participants may submit multiple speaker cards to address multiple agenda items.
- The BVAC Chair or Vice Chair will invite those who submitted speaker cards to address the agenda item prior to calling for a consensus decision and/or vote on that item.
- Speaker cards will generally allow three minutes of public speaking time per speaker. However, in the event that there are a large number of public speaker comments, it will be up to the discretion of the BVAC Chair or Vice Chair to reduce the time for each public speaker to ensure that all agenda items are addressed and that the BVAC meeting closes on time.

11. Decision-making Procedures

In order to hold a meeting and conduct its work, a quorum of the Big Valley GSA Advisory Committee must be present.

- 1) Consensus as the Fundamental Principle: The advisory committee shall strive for consensus (agreement among all participants) in all of its decision-making. Working toward consensus is a fundamental principle which will guide group efforts, particularly when crafting any draft or final advisory committee proposals, reports or recommendations for GSA Boards consideration. If the committee is unable to reach consensus, the range of opinions provided, including areas of agreement and disagreement, will be documented in meeting summaries or otherwise communicated in written reports when advisory committee work is shared with the GSA Boards.
- 2) Definition of Consensus: Consensus means all committee members either fully support or can live with a particular decision and believe that their constituents can as well. In reaching consensus, some committee members may strongly endorse a particular proposal, report or recommendation while others may simply accept it as "workable." Others may only be able to "live with it" as less than desired but still acceptable. Still others may choose to "stand aside" by verbally noting disagreement, yet allowing the group to reach consensus without them, or by abstaining altogether. Any of these actions constitutes consensus.

3) Types of Decision-Making:

- a. Administrative: Decisions about the daily administrative activities of the committee—including, but not limited to meeting logistics, meeting dates and times, agenda revisions and schedules. Administrative decisions will typically be put forward to the group by Lassen County Department of Planning and Building Services staff. As needed, staff will consult with the committee. Any administrative decisions by the committee will be made on a simple majority vote of all members present at a meeting. The committee will defer to the decision-making procedures outlined in this section of the MOU in circumstances where it is unclear if a committee decision is administrative in nature, or represents a more substantive GSP/SGMA decision (described below).
- b. <u>Groundwater Sustainability Planning/SGMA Advice and Recommendations</u>: Advice and recommendations about the Big Valley GSP—including but not limited to topics mandated by SGMA and other groundwater related topics that the committee chooses to address. All *GSP/SGMA advice and recommendation decisions* will be made by the decision-making procedures outlined in this section of the MOU.
- 4) Consensus with Accountability: Consensus seeking efforts recognize that a convened group such as Big Valley Advisory Committee makes recommendations, but is not a formal decision-making body like the Lassen or Modoc GSA's. That said, achieving consensus is the goal, as this allows all stakeholder interests represented on the committee to communicate a unified group perspective to the GSA Boards as it considers public policy decisions and actions which may affect the constituencies that members represent, and the wider community. Using a model of consensus with accountability, all committee members shall commit to two principles:
 - All members are expected to routinely express their interests and analyze conditions
 to ensure they have clarity on how their interests and those of others may shift over
 time;

Big Valley Groundwater Basin Advisory Committee Memorandum of Understanding Page 10 of 15

b. All members shall negotiate agreements in a manner that serves their interests, and offers either neutral impact to others, or ideally provides benefit to others' interests as well as their own.

Operating by consensus with accountability will encourage multi-interest solutions based on shared member interests. Such solutions are in turn more sustainable and durable as they represent shared agreements rather than majority/minority dynamics. Most consensus building during the course of GSP development and SGMA implementation will be based on verbal dialogue, deliberation and iterative development of group ideas. The Chair may commonly ask, when it appears consensus or near consensus agreement has emerged or is emerging, if any member cannot live with said agreement. For any final decisions, committee members will demonstrate consensus, or lack thereof, in the following manner:

Nay: I do not support the proposal.

Aye: I support the proposal.

Stand Aside: Member verbally notes he/she is willing to stand

aside and allow group consensus

Abstention: At times, a pending decision may be infeasible for

a participant to weigh in on. Member verbally notes he/she abstains. Abstentions do not prevent

group consensus.

Any member that stands aside or abstains from a decision is encouraged to explain why his/her choice is in his/her best interest.

5) Less than 100% Consensus Decision Making: The advisory committee is consensus seeking but shall not limit itself to strict consensus if 100% agreement among all participants cannot be reached after all interests and options have been thoroughly identified, explored and discussed. Less-than-consensus decision-making shall not be undertaken lightly. If the committee cannot come to 100% agreement, it could set aside the particular issue while it continues work on other issues, then revisit the disagreement later in the process. Finally, the committee recognizes that certain deadlines must be met during the collaborative process to ensure completion of all SGMA opportunities and requirements on time.

If, after thoroughly exploring all ideas and options, consensus is absent or otherwise not forthcoming, the committee, with assistance from the GSA staff, will clearly document majority and minority viewpoints. The Chair and Vice-Chair will then work with GSA staff to incorporate all viewpoints into the meeting summary, and, as warranted, prepare a committee report to the GSA Boards. The chair, in coordination with GSA staff, will then present the report to the GSA Boards, ensuring that all majority and minority viewpoints are clearly communicated and accurately represent the outcomes of committee discussions. Any committee member holding minority viewpoints will have the opportunity, if he/she is not comfortable with the process, to present his/her viewpoints directly to the GSA Boards at the

time the report is presented. Members wishing to do this will express their interest and minority viewpoints with GSA staff in advance of said GSA Board meetings.

6) Decision Outcomes: Advisory committee decisions will be made at appropriate meetings and, in accordance with the Brown Act, will be publicly noticed in advance and shared via the Lassen County GSA's website and SGMA interested parties email list. As described above, all committee proposals, reports and recommendations will reflect the outcomes of collaborative member discussions. All consensus agreements and other negotiated outcomes during GSP development and implementation, as well as discussion outcomes when consensus is not forthcoming, will be documented, as described above, and shared with the GSA Boards.

12. Collaborative Process Agreements and Meeting Ground Rules

Members commit to the following process agreements during discussion, deliberation and attempts to find consensus-based solutions to sustainable groundwater management in the Big Valley groundwater basin. Moreover, members also agree to abide by meeting ground rules in order to intentionally and consistently engage each other in civil and constructive dialogue during the collaborative process.

Process Agreements

- Strive to focus on interests versus positions. A focus on interests instead of positions will help reveal the needs, hopes or concerns behind any member's words. By extension this can help identify shared interests among committee members and, based on those shared interests, multiple options for mutually beneficial agreements.
- Foster mutual understanding and attempt to address the interests and concerns of all participants. For the collaborative process to be successful, all members must seek to understand the interests and concerns of other members, then strive to reach agreements that take all member interests under consideration.
- Inform, educate and seek input from community constituents. To the extent possible, members will share information and solicit input from their constituents, scientific advisors, and others about ongoing committee discussions and potential agreements or recommendations as they emerge.
- View challenges as problems to be solved rather than battles to be won. Challenges will at times arise during discussion of issues. Remember to focus on the challenge versus on each other. Search for multi-interest solutions, rather than win/lose agreements.
- **Be creative and innovative problem solvers.** Creative thinking and problem solving are essential to success in any collaboration. Get beyond the past, climb out of the perceived "box" and attempt to think about the problem, and potential solutions, in new ways.
- Negotiate in good faith. All members agree to candidly and honestly participate in decision making, to act in good faith in all aspects of this effort, and to communicate their interests in

- group meetings. Good faith also requires that parties not make commitments for which they cannot or do not intend to honor.
- Consider the long-term view. SGMA requires submission and approval of a Big Valley GSP by January 31st, 2022. Taking a long-term view of the planning horizon, may help inform collaborative discussions, reduce conflict and thereby ensure long-term sustainability of groundwater resources.

Ground rules

- Use common conversational courtesy and treat each other with respect. Civil and respectful dialogue tends to foster a constructive, thorough and solutions-oriented environment within multi-stakeholder groups.
- Remember that all ideas and points of view linked to the committee's charge have value. All ideas have value in this setting. Simply listen, you do not have to agree. If you hear something you do not agree with or you think is silly or wrong, please remember that a fundamental purpose of this forum is to encourage diverse ideas.
- **Be candid, listen actively and seek to understand others.** This promotes genuine dialogue and mutual understanding. Mutual understanding in turn helps parties identify shared interests. Shared interests set the foundation to finding and developing mutually acceptable agreements.
- **Be concise and share the air.** Keep in mind that time is limited at meetings. Be concise when sharing your perspective so that all members can participate in the discussion. And remember, people's time is precious, treat it with respect.
- Avoid editorial comments. At times it will be tempting to try and interpret the intentions or motivations of others. Please avoid this temptation and instead speak to your own interests and the motivation behind them.
- Stay focused on the meeting agenda. The committee is a Brown Act compliant body. As such it is important to stay focused on the posted agenda for any given meeting.
- Welcome levity and humor to the discussions. Work around water can at times be daunting
 and filled with challenges. Levity and humor is both welcome and helpful at times, as long as
 it does not come at the expense of others.
- Turn cell phones off or to vibrate. Help the group avoid distractions by turning cell phones to vibrate, not checking email during meetings and, if you must take a call, taking it outside the room.

13. Communications/Media Relations

Members are asked to speak only for themselves or the constituency they represent when asked by external parties, including the media, about the committee's work, unless there has been a formal adoption of a statement, report or recommendations by the committee. Members will refer media inquiries to GSA staff while also having the freedom to express their own opinions to the

Big Valley Groundwater Basin Advisory Committee Memorandum of Understanding Page 13 of 15

media. Members should inform media and external parties that they only speak for themselves and do not represent other members or the committee as a whole. The temptation to discuss someone else's statements or positions should be avoided.

14. Indemnification/Defense

Claims Arising from Acts or Omissions.

No GSA, nor any officer or employee of a GSA, shall be responsible for any damage or liability occurring by reason of anything done or omitted to be done by another GSA under or in connection with this MOU. The GSA's further agree, pursuant to California Government Code section 895.4, that each GSA shall fully indemnify and hold harmless each other GSA and its agents, officers, employees and contractors from and against all claims, damages, losses, judgements, liabilities, expenses, and other costs, including litigation costs and attorney fees, arising out of, resulting from, or in connection with any work delegated to or action taken or omitted to be taken by such GSA under this MOU.

15. Litigation

In the event that any lawsuit is brought by a third party against any Party based upon or arising out of the terms of this MOU, the Parties shall cooperate in the defense of the action. Each Party shall bear its own legal costs associated with such litigation.

16. Books and Records

Each Governing Body will be entitled to receive copies of documents, records, historical data, data compiled through consultants and any and all information related to groundwater within the Big Valley Groundwater basin developed pursuant to this MOU; provided that nothing in this paragraph shall be construed to operate as a waiver of any right to assert any privilege that might apply to protect the disclosure to information or materials subject to the attorney-client privilege, attorney work product privilege, or other applicable privilege or exception to disclosure.

17. Miscellaneous

A. Term of Agreement.

This MOU shall remain in full force and effect until the date upon which all Parties have executed a document terminating the provisions of this MOU.

B. No Third-Party Beneficiaries.

This MOU is not intended and will not be construed to confer a benefit or create any right on any third party, or the power or right to bring an action to implement any of its terms.

C. Amendments.

This MOU may be amended only by written instrument duly signed and executed by all Parties.

Big Valley Groundwater Basin Advisory Committee Memorandum of Understanding Page 14 of 15

D. Compliance with Law.

In performing their respective obligations under this MOU, the Parties shall comply with and conform to all applicable laws, rules, regulations and ordinances.

E. Construction of Agreement.

This MOU shall be construed and enforced in accordance with the laws of the United States and the State of California.

18. All notice required by this MOU will be deemed to have been given when made in writing and delivered or mailed to the respective representatives of the Parties at their respective addresses as follows:

For the County of Modoc: Clerk of the Board 204 South Court Street Alturas, CA 96101

For the County of Lassen: Lassen County Planning and Building Services 707 Nevada Street, Suite 5 Susanville, CA 96130 Big Valley Groundwater Basin Advisory Committee Memorandum of Understanding Page 15 of 15

19. Signature

The parties hereto have executed this Memorandum of Understanding as of the dates shown below.

The effective date of this MOU is the latest signature date affixed to this page. This MOU may be executed in multiple originals or counterparts. A complete original of this MOU shall be maintained in the records of each of the parties.

COUNTY OF LASSEN	
By:	Date:
By: Chairman, Lassen County Board of Supervisors	
ATTEST:	
By:	Date:
By:Clerk of the Board	
APPROVED AS TO FORM:	
	Date:
Lassen County Counsel	
COUNTY OF MODOC By: Chairman, Modoc County Board of Supervisors	_ Date: <u>MAY 2 1 2</u> 019
By: Duchel Chrade	

Big Valley Groundwater Basin Advisory Committee Memorandum of Understanding Page 15 of 15

19. Signature

The parties hereto have executed this Memorandum of Understanding as of the dates shown below.

The effective date of this MOU is the latest signature date affixed to this page. This MOU may be executed in multiple originals or counterparts. A complete original of this MOU shall be maintained in the records of each of the parties.

COUNTY OF LASSEN				
By:	_ Date:	6-	1(-K	_
ATTEST: By: Clerk of the Board APPROVED AS TO FORM:	_Date:	4/1	1/2	019
ATTROVED AS TO FORM.	Date:			
Lassen County Counsel	_ =			
an ag				
COUNTY OF MODOC By: Modoc County Board of Supervisors	_Date:	MAY	2 1	2019
ATTEST: By: Lypany A. Wantings Clerk of the Board	_Date:	MAY	21	<u>2</u> 019
APPROVED AS TO FORM:	Datas	MAY	2 8	2019

Appendix 3A Monitoring Well Surveyors Report

CG57153



CIVIL STRUCTURAL SURVEYING

Project: Big Valley Groundwater Basin Survey

Client: GEI Consultants

2868 Prospect Park Drive, Suite 4005/ Rancho Cordova, Ca 95670

Project Details

Equipment Used:

Trimble Precision GPS R-12 Surveying System SECO 4811-32 Level System

Report Units:

Lat/Lon:

WGS84 formatted Degree, Minutes, Seconds

Elevation:

US Survey Feet

Grid Coordinates:

California State Plane Zone 1 Coordinates

Survey Conditions:

Date Surveyed:

7.28.2020

Date of Report:

8.3.2020. Revised 8.5.2020

Weather:

Sunny 60°F - 95°F, Smokey, Wind <10 MPH

Survey Benchmarks:

Source:

National Geodetic Survey

Designation:

"B 136 RM 2"

Description:

Brass disc set in concrete

Location:

Northeast end of runway near Adin, Ca.

NAD 83 (2011)

Latitude

41° 11' 04.52985" N 120° 57' 00.44655" W

Longitude

Ortho Height

4237.75 ft.

California State Plane Zone 1 Coordinates

Northing:

2,316,557.62

Easting:

6,850,625.60

Source:

National Geodetic Survey

Designation:

"W 135 RESET"

Description:

Brass disc set in concrete

Location:

Approximately 2.5 miles North on HWY 299 from Bieber

NAD 83 (2011)

Latitude

41° 08' 43.09015" N

Longitude

120° 06' 43.08683" W

Ortho Height

4152.57 ft.

California State Plane Zone 1 Coordinates

Northing:

2,301,751.78

Easting:

6,806,227.62



Project Procedures:

Project control was established by using our GPS equipment to calibrate to the two NGS benchmarks described above.

Horizontal control is derived from both of the NGS benchmarks, Vertical control is derived from one NGS benchmark designation "B 136 RM 2".

At each site, all monitoring wells were located and each vault lid and casing plug was removed. Then a notch approximately 1/4" wide x 1/4" deep was cut into the side of the PVC well casing in line with the two vault lid mounting bolts. This notch is the elevation point for each well per tasks #1 & #2

At each site, all monitoring wells were located and the center of the vault lid was shot for horizontal location. This was recorded as Latitude / Longitude per task #1 & #2

At each site monitoring well 3 was identified and a PK nail was inserted into the concrete well pad 4" away from the vault lid in line with the two mounting fasteners. This PK nail serves at the site control for subsidence monitoring per task #3



Task #1 Lassen County Monitoring Well Survey

Site 5 Survey Data

Description of Surveyed Point	Latitude	Longitude	Elevation (ft.)
Center of Lid	41°07'18.77103"N	121°08'01.91978"W	#
Notch on PVC Casing		S=	4,128.72
Center of Lid	41°07'19.02273"N	121°08'01.90396"W	=
Notch on PVC Casing	-	*	4,128.59
Center of Lid	41°07'16.26339"N	121°08'11.92014"W	-
Notch on PVC Casing	2	-	4,131.40
Center of Lid	41°07'14.01725"N	121°08'02.37919"W	ä
Notch on PVC Casing	=		4,129.90
	Surveyed Point Center of Lid Notch on PVC Casing Center of Lid	Surveyed Point Latitude Center of Lid 41°07'18.77103"N Notch on PVC Casing - Center of Lid 41°07'19.02273"N Notch on PVC Casing - Center of Lid 41°07'16.26339"N Notch on PVC Casing - Center of Lid 41°07'14.01725"N	Surveyed Point Latitude Longitude Center of Lid 41°07'18.77103"N 121°08'01.91978"W Notch on PVC Casing - - Center of Lid 41°07'19.02273"N 121°08'01.90396"W Notch on PVC Casing - - Center of Lid 41°07'16.26339"N 121°08'11.92014"W Notch on PVC Casing - - Center of Lid 41°07'14.01725"N 121°08'02.37919"W

Site 5 Survey Accuracy

The elevation accuracy of the "Notch on PVC Casing" is \pm 0.01 ft. in realtion to eachother which is based on the site control "PK Nail" from task 3 which is \pm 0.04 ft. to the benchmark.



Task #2 Modoc County Monitoring Well Survey

Site 1 Survey Data

Description of Surveyed Point	Latitude	Longitude	Elevation (ft.)
Center of Lid	41°11'16.91704"N	120°57'35.46950"W	(#)
Notch on PVC Casing	•:	-	4,213.84
Center of Lid	41°11'17.17232"N	120°57'35.20508"W	*:
Notch on PVC Casing	**	-	4,214.21
Center of Lid	41°11'16.05393"N	120°57'33.61346"W	(4 0)
Notch on PVC Casing	20	•	4,218.17
Center of Lid	41°11'16.95194"N	120°57'32.38078"W	-
Notch on PVC Casing	2	U2	4,218.06
	Surveyed Point Center of Lid Notch on PVC Casing Center of Lid	Surveyed Point Latitude Center of Lid 41°11'16.91704"N Notch on PVC Casing - Center of Lid 41°11'17.17232"N Notch on PVC Casing - Center of Lid 41°11'16.05393"N Notch on PVC Casing - Center of Lid 41°11'16.95194"N	Surveyed Point Latitude Longitude Center of Lid 41°11'16.91704"N 120°57'35.46950"W Notch on PVC Casing - - Center of Lid 41°11'17.17232"N 120°57'35.20508"W Notch on PVC Casing - - Center of Lid 41°11'16.05393"N 120°57'33.61346"W Notch on PVC Casing - - Center of Lid 41°11'16.95194"N 120°57'32.38078"W

Site 1 Survey Accuracy

The elevation accuracy of the "Notch on PVC Casing" is \pm 0.01 ft. in realtion to eachother which is based on the site control "PK Nail" from task 3 which is \pm 0.03 ft. to the benchmark.



Task #2 Modoc County Monitoring Well Survey

Site 2 Survey Data

Well ID	Description of Surveyed Point	Latitude	Longitude	Elevation (ft.)
MW 2-1	Center of Lid	41°12'42.69267"N	121°01'43.03716"W	(#1
WW 2 1	Notch on PVC Casing	-	-	4,216.18
MW 2-2	Center of Lid	41°12'42.61763"N	121°01'42.78528"W	*
WW Z Z	Notch on PVC Casing	-		4,216.44
MW 2-3	Center of Lid	41°12'39.42222"N	121°01'43.25643"W	4 0
	Notch on PVC Casing	-	© ≅	4,213.93
MW 2-4	Center of Lid	41°12'43.18967"N	121°01'45.76289"W	-
MARK MASK	Notch on PVC Casing	*:	86	4,209.62

Site 2 Survey Accuracy

The elevation accuracy of the "Notch on PVC Casing" is \pm 0.01 ft. in realtion to eachother which is based on the site control "PK Nail" from task 3 which is \pm 0.03 ft. to the benchmark.



Task #2 Modoc County Monitoring Well Survey

Site 3 Survey Data

Description of Surveyed Point	Latitude	Longitude	Elevation (ft.)
Center of Lid	41°13'00.98392"N	121°06'17.84041"W	4 49
Notch on PVC Casing	-	•	4,164.41
Center of Lid	41°13'01.22973"N	121°06'17.84528"W	20
Notch on PVC Casing	¥	%	4,164.58
Center of Lid	41°12'56.58659"N	121°06'18.32460"W	**
Notch on PVC Casing	-		4,164.02
Center of Lid	41°12'56.60289"N	121°06'19.47421"W	<u>-</u>
Notch on PVC Casing	#		4,164.97
	Surveyed Point Center of Lid Notch on PVC Casing Center of Lid	Surveyed Point Latitude Center of Lid 41°13'00.98392"N Notch on PVC Casing - Center of Lid 41°13'01.22973"N Notch on PVC Casing - Center of Lid 41°12'56.58659"N Notch on PVC Casing - Center of Lid 41°12'56.60289"N	Surveyed Point Latitude Longitude Center of Lid 41°13'00.98392"N 121°06'17.84041"W Notch on PVC Casing - - Center of Lid 41°13'01.22973"N 121°06'17.84528"W Notch on PVC Casing - - Center of Lid 41°12'56.58659"N 121°06'18.32460"W Notch on PVC Casing - - Center of Lid 41°12'56.60289"N 121°06'19.47421"W

Site 3 Survey Accuracy

The elevation accuracy of the "Notch on PVC Casing" is \pm 0.01 ft. in realtion to eachother which is based on the site control "PK Nail" from task 3 which is \pm 0.04 ft. to the benchmark.



Task #2 Modoc County Monitoring Well Survey

Site 4 Survey Data

Well ID	Description of Surveyed Point	Latitude	Longitude	Elevation (ft.)
MW 4-1	Center of Lid	41°12'10.53971"N	121°09'31.31845"W	-
WING TO I	Notch on PVC Casing	= "	4	4,152.40
MW 4-2	Center of Lid	41°12'10.56692"N	121°09'31.64559"W	ω.
	Notch on PVC Casing	21		4,152.73
MW 4-3	Center of Lid	41°12'10.76781"N	121°09'28.29350"W	
WW TO	Notch on PVC Casing	=	(E	4,152.33
MW 4-4	Center of Lid	41°12'12.74277"N	121°09'28.23603"W	
THE STREET	Notch on PVC Casing	*		4,161.32

Site 4 Survey Accuracy

The elevation accuracy of the "Notch on PVC Casing" is \pm 0.01 ft. in realtion to eachother which is based on the site control "PK Nail" from task 3 which is \pm 0.04 ft. to the benchmark.




Task #3 Subsidence Monitoring Network

	Description of	f California State Plane Zone 1		Elevation	Accuracy	
Well ID	Surveyed Point	Northing	Easting	(ft.)	Horizontal	Vertical
MW 1-3	PK Nail in Concrete	2,317,688.600	6,848,083.631	4,218.51	±0.01 ft.	±0.03 ft.
MW 2-3	PK Nail in Concrete	2,325,906.143	6,828,905.491	4,214.55	±0.01 ft.	±0.03 ft.
MW 3-3	PK Nail in Concrete	2,327,419.328	6,807,866.938	4,164.48	±0.02 ft.	±0.04 ft.
MW 4-3	PK Nail in Concrete	2,322,637.642	6,793,395.855	4,152.75	±0.02 ft.	±0.04 ft.
MW 5-3	PK Nail in Concrete	2,292,892.375	6,799,525.718	4,131.74	±0.02 ft.	±0.04 ft.

Appendix 4A Aquifer Test Results

Pumping Test

MW1-1		Adin Airport	
<u>Time</u>	Minutes	Depth to Water (ft)	Drawdow
10:59	0.0	31.6	0
11:00	0.1	34	2.4
11:03	3	34.6	3
11:05	5	34.6	3
11:07	7	35	3.4
11:10	10	35	3.4
11:15	15	35.6	4
11:20	20	35.6	4
11:25	25	35.9	4.3
11:30	30	35.9	4.3
11:35	35	35.9	4.3
11:40	40	35.9	4.3
11:45	45	35.9	4.3
11:50	50	35.9	4.3
11:55	55	35.9	4.3
12:00	60	35.9	4.3
12:01	61	32.6	1
12:02	62	32.6	1
12:05	65	32.4	0.8
12:08	68	32.5	0.9
12:10	70	32.4	0.8
12:15	75	32.4	0.8

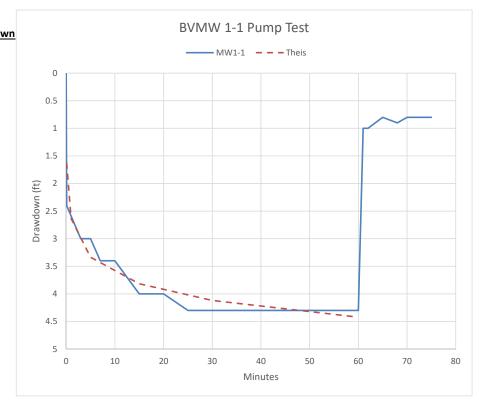


Theis Solution

Thickness (b)	50	ft
Flow (Q)	8	gpm
Well Efficiency	0.7	unitless
Transmissivity (T)	3000	gpd/ft
Radius (r)	1	ft
Storativity (S)1	1.5E-03	unitless
Hydraulic Conductivity (K)	8	ft/d

Pumping Test

MW2-1			
<u>Time</u>	Minutes	Depth to Water (ft)	Drawdown
7:40	0	26	0
7:41	0.1	33	7
7:45	5	34	8
7:48	8	36	10
7:50	10	39	13
7:55	15	39	13
8:00	20	40	14
8:05	25	40	14
8:10	30	41	15
8:15	35	42	16
8:20	40	41.6	15.6
8:25	45	42	16
8:30	50	42	16
8:35	55	42	16
8:40	60	42	16

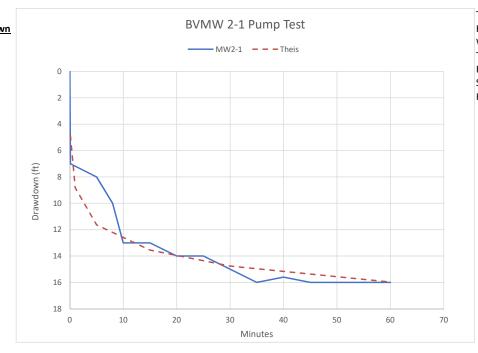


Theis Solution

Thickness (b)	40	ft
Flow (Q)	8	gpm
Well Efficiency	13	unitless
Transmissivity (T)	750	gpd/ft
Radius (r)	1	ft
Storativity (S)1	0	unitless
Hydraulic Conductivity (K)	3	ft/d

Pumpng Test

MW3-1		Lookout	
<u>Time</u>	Minutes	Depth to Water (ft)	Drawdo
9:20	0	18	0
9:21	0.1	34	16
9:22	2	38	20
9:23	3	40	22
9:25	5	41	23
9:30	10	42	24
9:35	15	44	26
9:40	20	44	26
9:45	25	44	26
9:50	30	44	26
9:55	35	45	27
10:00	40	45	27
10:05	45	45	27
10:10	50	45.5	27.5
10:15	55	45.5	27.5
10:20	60	45.5	27.5
10:25	65	36	18
10:30	70	32	14

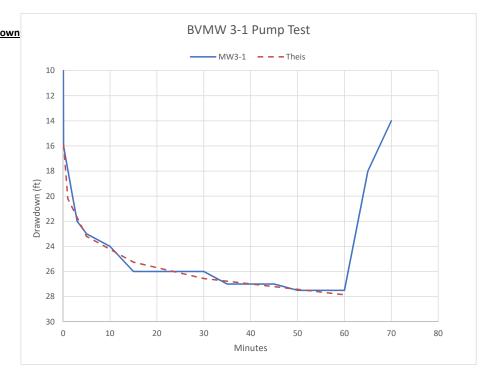


Theis Solution

Thickness (b)	50	ft
Flow (Q)	8	gpm
Well Efficiency	13	unitless
Transmissivity (T)	700	gpd/ft
Radius (r)	1	ft
Storativity (S)1	0.000003	unitless
Hydraulic Conductivity (1.87	ft/d

Pumping Test

MW4-1 Time Minutes Depth to Water (ft) Drawdown 1:55 0 33.5 0 1:57 0.2 34 0.5 1:58 1 34 0.5 1:59 2 0.5 34 2:00 1 34.5 2:05 8 34.5 1 2:10 13 34.5 18 2:15 34.5 1 23 2:20 35 1.5 2:25 28 35 1.5 2:30 33 1.5 35 2:35 38 35 1.5 2:40 43 2 35.5 2:45 48 35.5 2 2:50 53 2 35.5 2:55 58 35.5 2 3:00 63 35.5 2 1.5 3:01 64 35 3:02 65 34 0.5 3:03 66 33.5 0 3:04 67 33.5 0 3:05 68 33.5 0

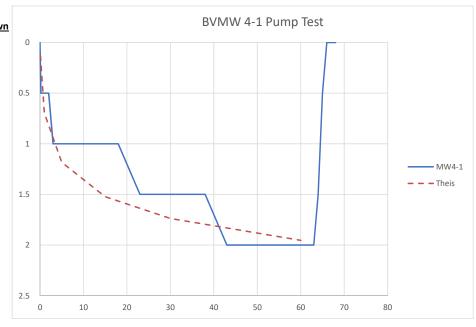

Theis Solution

Thickness (b)	30	ft
Flow (Q)	8	gpm
Well Efficiency	13	unitless
Transmissivity (T)	4200	gpd/ft
Radius (r)	1	ft
Storativity (S)1	0.1	unitless
Hydraulic Conductivity (K)	19	ft/d

Pumping Test

MW5-1

<u>Time</u>	Minutes	Depth to Water (ft)	Drawdow
11:50	0	42	0
11:51	1	44	2
11:52	2	44	2
11:57	7	44.2	2.2
12:00	10	44.6	2.6
12:05	15	45	3
12:10	20	45	3
12:15	25	45	3
12:20	30	45	3
12:30	40	45	3
12:35	45	45	3
12:40	50	45	3
12:45	55	44.6	2.6
12:50	60	44.6	2.6
12:57	63	43	1
12:58	64	42	0



Theis Solution

Thickness (b)	50	ft
Flow (Q)	8	gpm
Well Efficiency	13	unitless
Fransmissivity (T)	4500	gpd/ft
Radius (r)	1	ft
Storativity (S)1	0.002	unitless
Hydraulic Conductivity (K)	12	ft/d

Appendix 5A Water Level Hydrographs


Well Information	
Well ID	022094_38N07E20B006M
Well Name	2086
State Number	38N07E20B006M
WCR Number	128135
Site Code	411242N1211866W001
Well Location	
County	Lassen
Basin	Big Valley
Hydrologic Region	Sacramento River
Station Organization	Lassen County Department of Planning and Building Services
Well Type Inform	ation
Well Use	Residential
Completion Type	Single Well

Well Coordinates/Geometry		
Location	Lat:	41.1242
	Long:	-121.1866
Well Depth		183.00 ft
Ground Surface Elev	ation	4126.30 ft
Ref. Point Elevation		4127.30 ft
Screen Depth Range	:	-
Screen Elevation Ra	nge	-
Well Period of	Record	
Period-of-Record		19792021
WS Elev-Range	Min:	4076.9 ft
	Max	4116.6 ft

Trend Analysis		
Seasonal Data Method		Max/Min
Show Trend 1		Spring Data
Date Range	Start WY:	1979
(Optional)	End WY:	2021
Extend Trend Line		No
Trend Results	Slope	(0.692 ft/yr)
Show Trend 2		None
Date Range	Start WY:	
(Optional)	End WY:	
Extend Trend Line		Yes
Trend Results	Slope	-

Date:

8/17/2021

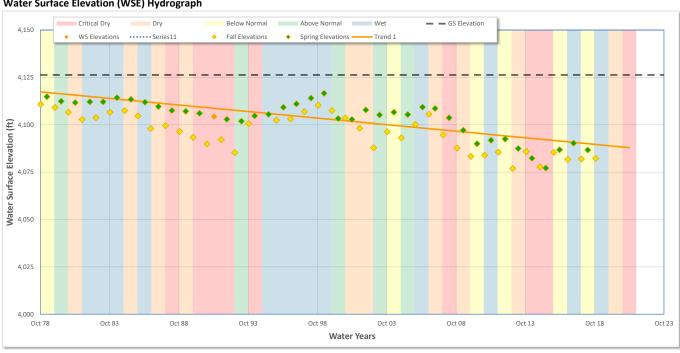


Well Information		
Well ID	022095_38N07E24J002M	
Well Name	24J2	
State Number	38N07E24J002M	
WCR Number	5327	
Site Code	411228N1211054W001	
Well Location		
County	Lassen	
Basin	Big Valley	
Hydrologic Region	Sacramento River	
Station Organization	Lassen County Department of Planning and Building Services	
Well Type Information		
Well Use	Irrigation	
Completion Type	Single Well	

Well Coordinates/Geometry		
Location Lat:	41.1226	
Long	-121.1054	
Well Depth	192.00 ft	
Ground Surface Elevation	4138.40 ft	
Ref. Point Elevation	4139.40 ft	
Screen Depth Range	1 to 192 ft	
Screen Elevation Range	4128 to 3937 ft	
Well Period of Record		
Period-of-Record	19792021	
WS Elev-Range Min:	4056.7 ft	
Max	4137.7 ft	

Trend Analysis		
Seasonal Data Method		Max/Min
Show Trend 1		Spring Data
Date Range	Start WY:	1979
(Optional)	End WY:	2021
Extend Trend Line		No
Trend Results	Slope	(1.115 ft/yr)
Show Trend 2		None
Date Range	Start WY:	
(Optional)	End WY:	
Extend Trend Line		Yes
Trend Results	Slope	-

Date:

8/17/2021

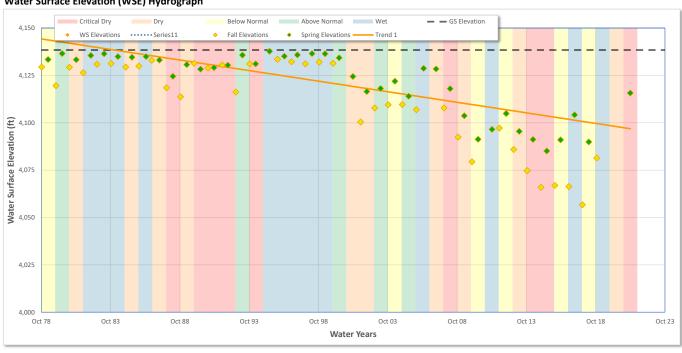


Well Information	
Well ID	022096_38N07E32A002M
Well Name	32A2
State Number	38N07E32A002M
WCR Number	-
Site Code	410950N1211839W001
Well Location	
County	Lassen
Basin	Big Valley
Hydrologic Region	Sacramento River
Station Organization	Lassen County Department of Planning and Building Services
Well Type Information	
Well Use	Other
Completion Type	Single Well

Well Coordinates/Geometry		
Location Lat:	41.0950	
Long:	-121.1839	
Well Depth	49.00 ft	
Ground Surface Elevation	4118.80 ft	
Ref. Point Elevation	4119.50 ft	
Screen Depth Range	-	
Screen Elevation Range	-	
Well Period of Record		
Period-of-Record	19592021	
WS Elev-Range Min:	4106.7 ft	
Max	4118.8 ft	

Trend Analysis		
Seasonal Data Method		Max/Min
Show Trend 1		Spring Data
Date Range	Start WY:	1979
(Optional)	End WY:	2021
Extend Trend Line		No
Trend Results	Slope	(0.055 ft/yr)
Show Trend 2		None
Date Range	Start WY:	
(Optional)	End WY:	
Extend Trend Line		Yes
Trend Results	Slope	-

Date:

8/17/2021

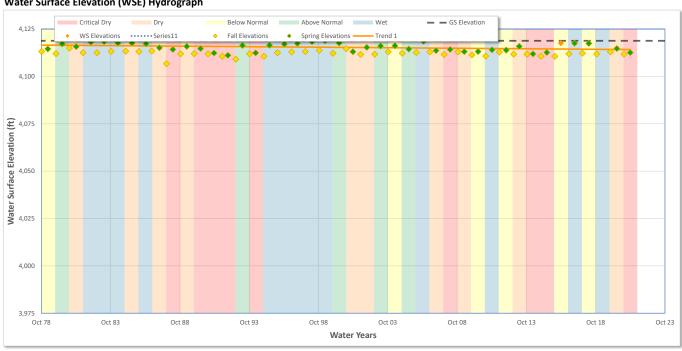


Well Information		
Well ID	022097_38N08E16D001M	
Well Name	16D1	
State Number	38N08E16D001M	
WCR Number	090143	
Site Code	411359N1210625W001	
Well Location		
County	Lassen	
Basin	Big Valley	
Hydrologic Region	Sacramento River	
Station Organization	Lassen County Department of Planning and Building Services	
Well Type Information		
Well Use	Irrigation	
Completion Type	Single Well	

Well Coordinates/Geometry			
Location Lat:	41.1358		
Long:	-121.0625		
Well Depth	491.00 ft		
Ground Surface Elevation	4171.40 ft		
Ref. Point Elevation	4171.60 ft		
Screen Depth Range	-		
Screen Elevation Range	-		
Well Period of Record			
Period-of-Record	19822021		
WS Elev-Range Min:	4078.7 ft		
Max	4162.4 ft		

	Max/Min
	Spring Data
Start WY:	1979
End WY:	2021
	No
Slope	(1.206 ft/yr)
	None
Start WY:	
End WY:	
	Yes
Slope	-
	Slope Start WY: End WY:

Date:

8/17/2021

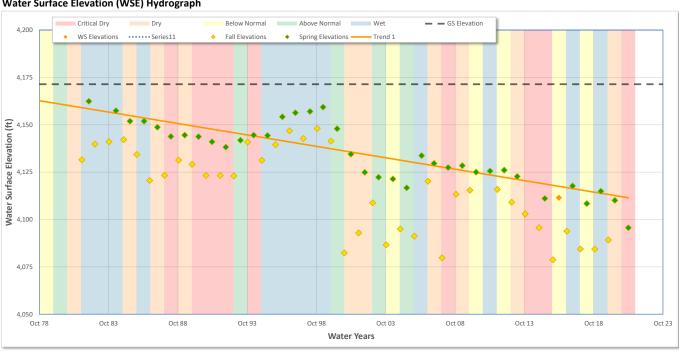


Well Information		
Well ID	022098_38N08E17K001M	
Well Name	17K1	
State Number	38N08E17K001M	
WCR Number	218	
Site Code	411320N1210766W001	
Well Location		
County	Lassen	
Basin	Big Valley	
Hydrologic Region	Sacramento River	
Station Organization	Lassen County Department of Planning and Building Services	
Well Type Information		
Well Use	Residential	
Completion Type	Single Well	

Well Coordinates/Geometry			
Location Lat:	41.1320		
Long:	-121.0766		
Well Depth	180.00 ft		
Ground Surface Elevation	4153.30 ft		
Ref. Point Elevation	4154.30 ft		
Screen Depth Range	30 to 180 ft		
Screen Elevation Range	4259 to 4109 ft		
Well Period of Record			
Period-of-Record	19572021		
WS Elev-Range Min:	4115.1 ft		
Max	4150.0 ft		

Trend Analysis		
Seasonal Data Method		Max/Min
Show Trend 1		Spring Data
Date Range	Start WY:	1979
(Optional)	End WY:	2021
Extend Trend Line		No
Trend Results	Slope	(0.525 ft/yr)
Show Trend 2		None
Date Range	Start WY:	
(Optional)	End WY:	
Extend Trend Line		Yes
Trend Results	Slope	-

Date:

8/17/2021

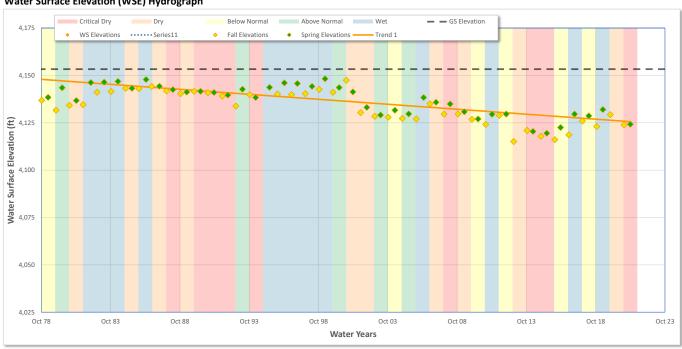


Well Information		
Well ID	022099_38N09E18E001M	
Well Name	18E1	
State Number	38N09E18E001M	
WCR Number	138559	
Site Code	411356N1209900W001	
Well Location		
County	Lassen	
Basin	Big Valley	
Hydrologic Region	Sacramento River	
Station Organization	Lassen County Department of Planning and Building Services	
Well Type Information		
Well Use	Irrigation	
Completion Type	Single Well	

Well Coordinates/Geometry			
Location Lat:	41.1356		
Long:	-120.9900		
Well Depth	520.00 ft		
Ground Surface Elevation	4248.40 ft		
Ref. Point Elevation	4249.50 ft		
Screen Depth Range	-		
Screen Elevation Range	-		
Well Period of Record			
Period-of-Record	19812021		
WS Elev-Range Min:	4162.0 ft		
Max	4234.1 ft		

Trend Analysis		
Seasonal Data Method		Max/Min
Show Trend 1		Spring Data
Date Range	Start WY:	1979
(Optional)	End WY:	2021
Extend Trend Line		No
Trend Results	Slope	(0.758 ft/yr)
Show Trend 2		None
Date Range	Start WY:	
(Optional)	End WY:	
Extend Trend Line		Yes
Trend Results	Slope	-

Date:

8/17/2021

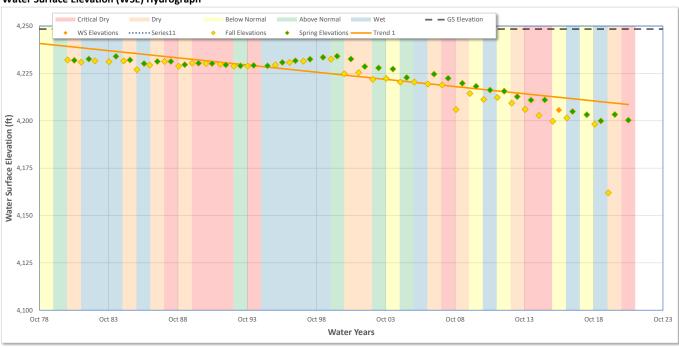

Well Information		
Well ID	022100_38N09E18M001M	
Well Name	18M1	
State Number	38N09E18M001M	
WCR Number	138563	
Site Code	411305N1209896W001	
Well Location		
County	Lassen	
Basin	Big Valley	
Hydrologic Region	Sacramento River	
Station Organization	Lassen County Department of Planning and Building Services	
Well Type Information		
Well Use	Irrigation	
Completion Type	Single Well	

Well Coordinates/Geometry			
Location	Lat:	41.1305	
	Long:	-120.9897	
Well Depth		525.00 ft	
Ground Surface Ele	vation	4288.40 ft	
Ref. Point Elevation		4288.90 ft	
Screen Depth Range		-	
Screen Elevation Range		-	
Well Period of Record			
Period-of-Record		19812021	
WS Elev-Range	Min:	4192.3 ft	
	Max	4232.7 ft	

Trend Analysis		
Seasonal Data Method		Max/Min
Show Trend 1		Spring Data
Date Range	Start WY:	1979
(Optional)	End WY:	2021
Extend Trend Line		No
Trend Results	Slope	(0.599 ft/yr)
Show Trend 2		None
Date Range	Start WY:	
(Optional)	End WY:	
Extend Trend Line		Yes
Trend Results	Slope	-

Date:

8/17/2021




Well Information		
Well ID	022102_39N07E26E001M	
Well Name	26E1	
State Number	39N07E26E001M	
WCR Number	127484	
Site Code	411911N1211354W001	
Well Location		
County	Modoc	
Basin	Big Valley	
Hydrologic Region	Sacramento River	
Station Organization	Modoc County Planning	
	Department	
Well Type Information		
Well Use	Irrigation	
Completion Type	Single Well	

Well Coordinates/Geometry			
Location Lat:	41.1911		
Long:	-121.1354		
Well Depth	400.00 ft		
Ground Surface Elevation	4133.40 ft		
Ref. Point Elevation	4135.00 ft		
Screen Depth Range	20 to 400 ft		
Screen Elevation Range	4187 to 3807 ft		
Well Period of Record			
Period-of-Record	19792021		
WS Elev-Range Min:	4088.9 ft		
Max	4131.3 ft		

Trend Analysis		
Seasonal Data Method		Max/Min
Show Trend 1		Spring Data
Date Range	Start WY:	1979
(Optional)	End WY:	2021
Extend Trend Line		No
Trend Results	Slope	(0.044 ft/yr)
Show Trend 2		None
Date Range	Start WY:	
(Optional)	End WY:	
Extend Trend Line		Yes
Trend Results	Slope	-

Date:

8/17/2021

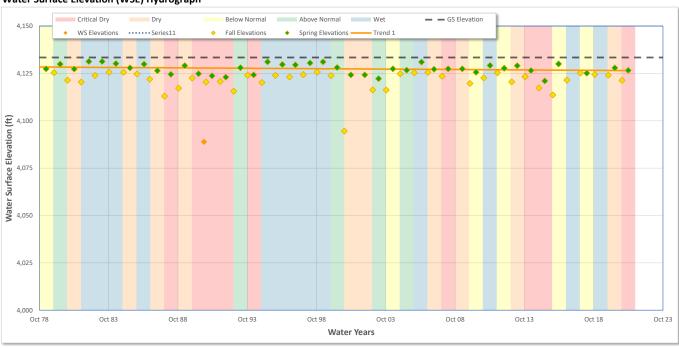


Well Information		
Well ID	022103_39N08E21C001M	
Well Name	21C1	
State Number	39N08E21C001M	
WCR Number	127008	
Site Code	412086N1210574W001	
Well Location		
County	Modoc	
Basin	Big Valley	
Hydrologic Region	Sacramento River	
Station Organization	Modoc County Planning	
	Department	
Well Type Information		
Well Use	Irrigation	
Completion Type	Single Well	

Well Coordinates/Geometry				
Location	Lat:	41.2084		
	Long:	-121.0576		
Well Depth		300.00 ft		
Ground Surface Ele	vation	4161.40 ft		
Ref. Point Elevation	l	4161.70 ft		
Screen Depth Range		30 to 40 ft		
Screen Elevation Range		4114 to 4104 ft		
Well Period of	Well Period of Record			
Period-of-Record		19792021		
WS Elev-Range	Min:	4082.1 ft		
	Max	4148.5 ft		

Trend Analysis		
Seasonal Data Method		Max/Min
Show Trend 1		Spring Data
Date Range	Start WY:	1979
(Optional)	End WY:	2021
Extend Trend Line		No
Trend Results	Slope	(0.699 ft/yr)
Show Trend 2		None
Date Range	Start WY:	
(Optional)	End WY:	
Extend Trend Line		Yes
Trend Results	Slope	-

Date:

8/17/2021

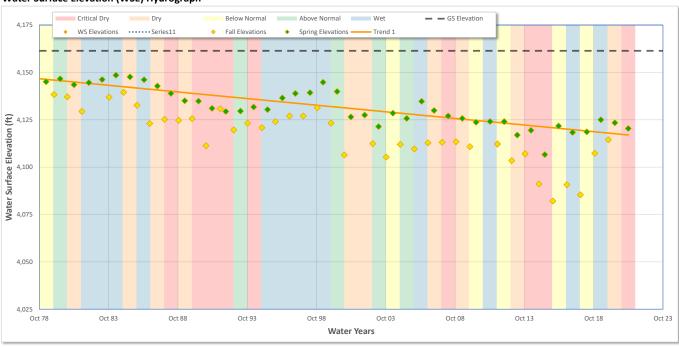


Well Information		
Well ID	022107_39N09E28F001M	
Well Name	28F1	
State Number	39N09E28F001M	
WCR Number	-	
Site Code	411907N1209447W001	
Well Location		
County	Modoc	
Basin	Big Valley	
Hydrologic Region	Sacramento River	
Station Organization	Modoc County Planning	
	Department	
Well Type Information		
Well Use	Residential	
Completion Type	Single Well	

Well Coordinates/Geometry		
Location Lat:	41.1907	
Long:	-120.9447	
Well Depth	73.00 ft	
Ground Surface Elevation	4206.60 ft	
Ref. Point Elevation	4207.10 ft	
Screen Depth Range	-	
Screen Elevation Range	-	
Well Period of Record		
Period-of-Record	19822021	
WS Elev-Range Min:	4194.6 ft	
Max	4202.1 ft	

Trend Analysis		
Seasonal Data Method		Max/Min
Show Trend 1		Spring Data
Date Range	Start WY:	1979
(Optional)	End WY:	2021
Extend Trend Line		No
Trend Results	Slope	(0.055 ft/yr)
Show Trend 2		None
Date Range	Start WY:	
(Optional)	End WY:	
Extend Trend Line		Yes
Trend Results	Slope	-

Date:

8/17/2021

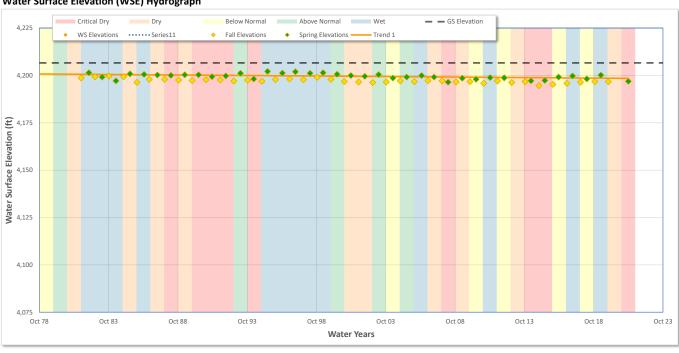


Well Information			
Well ID	036667_37N07E13K002M		
Well Name	13K2		
State Number	37N07E13K002M		
WCR Number	90029		
Site Code	410413N1211147W001		
Well Location	Well Location		
County	Lassen		
Basin	Big Valley		
Hydrologic Region	Sacramento River		
Station Organization	Lassen County Department of Planning and Building Services		
Well Type Information			
Well Use	Irrigation		
Completion Type	Single Well		

Well Coordinates/Geometry			
Location Lat:	41.0413		
Long:	-121.1147		
Well Depth	260.00 ft		
Ground Surface Elevation	4127.40 ft		
Ref. Point Elevation	4127.90 ft		
Screen Depth Range	-		
Screen Elevation Range	-		
Well Period of Record			
Period-of-Record	19822021		
WS Elev-Range Min:	4061.9 ft		
Max	4109.7 ft		

Trend Analysis		
Seasonal Data Method		Max/Min
Show Trend 1		Spring Data
Date Range	Start WY:	1979
(Optional)	End WY:	2021
Extend Trend Line		No
Trend Results	Slope	(0.728 ft/yr)
Show Trend 2		None
Date Range	Start WY:	
(Optional)	End WY:	
Extend Trend Line		Yes
Trend Results	Slope	-

Date:

8/17/2021

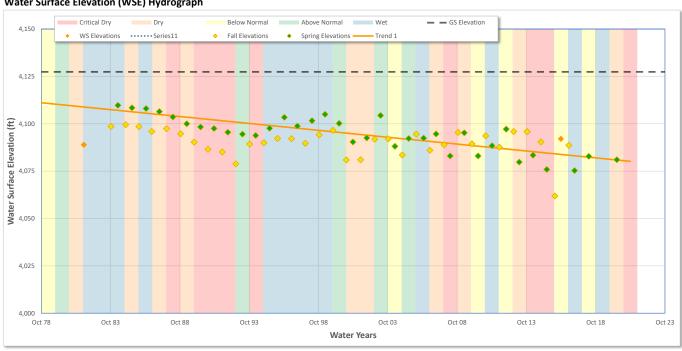

Well Information		
Well ID	036669_38N07E12G001M	
Well Name	12G1	
State Number	38N07E12G001M	
WCR Number	49866	
Site Code	411467N1211110W001	
Well Location		
County	Lassen	
Basin	Big Valley	
Hydrologic Region	Sacramento River	
Station Organization	Lassen County Department of Planning and Building Services	
Well Type Information		
Well Use	Residential	
Completion Type	Single Well	

Well Coordinates/Geometry		
Location Lat:	41.1467	
Long:	-121.1110	
Well Depth	116.00 ft	
Ground Surface Elevation	4143.38 ft	
Ref. Point Elevation	4144.38 ft	
Screen Depth Range	-	
Screen Elevation Range	-	
Well Period of Record		
Period-of-Record	19791994	
WS Elev-Range Min:	4131.0 ft	
Max	4138.7 ft	

Trend Analysis		
Seasonal Data Method		Max/Min
Show Trend 1		Spring Data
Date Range	Start WY:	1979
(Optional)	End WY:	2021
Extend Trend Line		No
Trend Results	Slope	(0.189 ft/yr)
Show Trend 2		None
Date Range	Start WY:	
(Optional)	End WY:	
Extend Trend Line		Yes
Trend Results	Slope	-

Date:

8/17/2021




Well Information		
Well ID	036670_38N07E23E001M	
Well Name	23E1	
State Number	38N07E23E001M	
WCR Number	38108	
Site Code	411207N1211395W001	
Well Location		
County	Lassen	
Basin	Big Valley	
Hydrologic Region	Sacramento River	
Station Organization	Lassen County Department of Planning and Building Services	
Well Type Information		
Well Use	Residential	
Completion Type	Single Well	

Well Coordinates/Geometry			
Location	Lat:	41.1207	
	Long:	-121.1395	
Well Depth		84.00 ft	
Ground Surface Ele	vation	4123.40 ft	
Ref. Point Elevation		4123.40 ft	
Screen Depth Range		-	
Screen Elevation Range		-	
Well Period of	Well Period of Record		
Period-of-Record		19792021	
WS Elev-Range	Min:	4070.4 ft	
	Max	4109.1 ft	

Trend Analysis		
Seasonal Data Method		Max/Min
Show Trend 1		Spring Data
Date Range	Start WY:	1979
(Optional)	End WY:	2021
Extend Trend Line		No
Trend Results	Slope	(0.379 ft/yr)
Show Trend 2		None
Date Range	Start WY:	
(Optional)	End WY:	
Extend Trend Line		Yes
Trend Results	Slope	-

Date:

8/17/2021

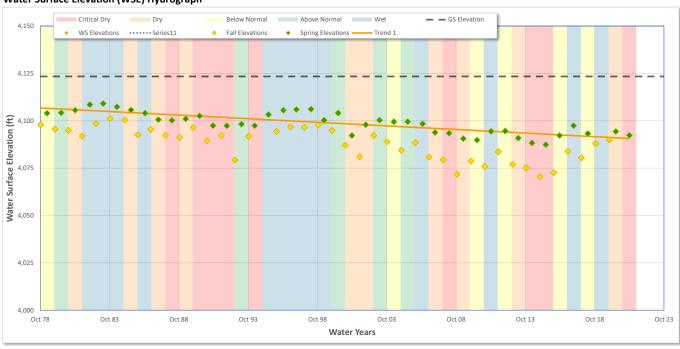


Well Information		
Well ID	036671_38N08E03D001M	
Well Name	03D1	
State Number	38N08E03D001M	
WCR Number	16564	
Site Code	411647N1210358W001	
Well Location		
County	Lassen	
Basin	Big Valley	
Hydrologic Region	Sacramento River	
Station Organization	Lassen County Department of Planning and Building Services	
Well Type Information		
Well Use	Irrigation	
Completion Type	Single Well	

Well Coordinates/Geometry			
Location Lat:	41.1646		
Long:	-121.0360		
Well Depth	280.00 ft		
Ground Surface Elevation	4163.40 ft		
Ref. Point Elevation	4163.40 ft		
Screen Depth Range	50 to 280 ft		
Screen Elevation Range	4093 to 3863 ft		
Well Period of Record			
Period-of-Record	19822021		
WS Elev-Range Min:	4071.6 ft		
Max	4148.6 ft		

Trend Analysis		
Seasonal Data Method		Max/Min
Show Trend 1		Spring Data
Date Range	Start WY:	1979
(Optional)	End WY:	2021
Extend Trend Line		No
Trend Results	Slope	(1.158 ft/yr)
Show Trend 2		None
Date Range	Start WY:	
(Optional)	End WY:	
Extend Trend Line		Yes
Trend Results	Slope	-

Date:

8/17/2021

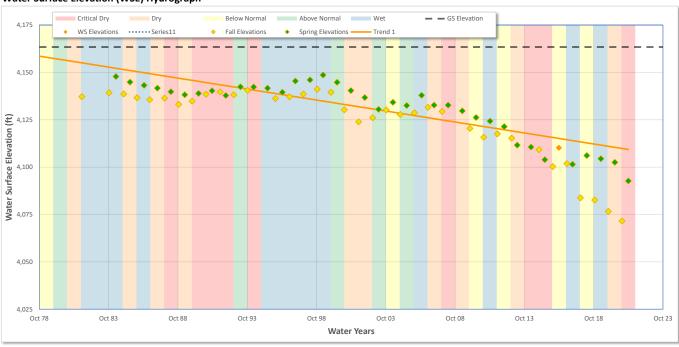

Well Information		
Well ID	036672_38N09E08F001M	
Well Name	08F1	
State Number	38N09E08F001M	
WCR Number	49934	
Site Code	411493N1209656W001	
Well Location		
County	Lassen	
Basin	Big Valley	
Hydrologic Region	Sacramento River	
Station Organization	Lassen County Department of Planning and Building Services	
Well Type Information		
Well Use	Other	
Completion Type	Single Well	

Well Coordinates/Geometry		
Location Lat:	41.1493	
Long:	-120.9656	
Well Depth	217.00 ft	
Ground Surface Elevation	4253.40 ft	
Ref. Point Elevation	4255.40 ft	
Screen Depth Range	-	
Screen Elevation Range	-	
Well Period of Record		
Period-of-Record	19792021	
WS Elev-Range Min:	4220.5 ft	
Max	4229.8 ft	

Trend Analysis		
Seasonal Data Method		Max/Min
Show Trend 1		Spring Data
Date Range	Start WY:	1979
(Optional)	End WY:	2021
Extend Trend Line		No
Trend Results	Slope	0.110 ft/yr
Show Trend 2		None
Date Range	Start WY:	
(Optional)	End WY:	
Extend Trend Line		Yes
Trend Results	Slope	-

Date:

8/17/2021




Well Information		
Well ID	036673_39N07E01A001M	
Well Name	01A1	
State Number	39N07E01A001M	
WCR Number	14565	
Site Code	412539N1211050W001	
Well Location		
County	Modoc	
Basin	Big Valley	
Hydrologic Region	Sacramento River	
Station Organization	Modoc County Planning	
	Department	
Well Type Information		
Well Use	Stockwatering	
Completion Type	Single Well	

Well Coordinates/Geometry		
Location Lat:	41.2539	
Long:	-121.1050	
Well Depth	300.00 ft	
Ground Surface Elevation	4183.40 ft	
Ref. Point Elevation	4184.40 ft	
Screen Depth Range	-	
Screen Elevation Range	-	
Well Period of Record		
Period-of-Record	19792021	
WS Elev-Range Min:	4035.4 ft	
Max	4163.9 ft	

Trend Analysis		
Seasonal Data Method		Max/Min
Show Trend 1		Spring Data
Date Range	Start WY:	1979
(Optional)	End WY:	2021
Extend Trend Line		No
Trend Results	Slope	(1.123 ft/yr)
Show Trend 2		None
Date Range	Start WY:	
(Optional)	End WY:	
Extend Trend Line		Yes
Trend Results	Slope	-

Date:

8/17/2021

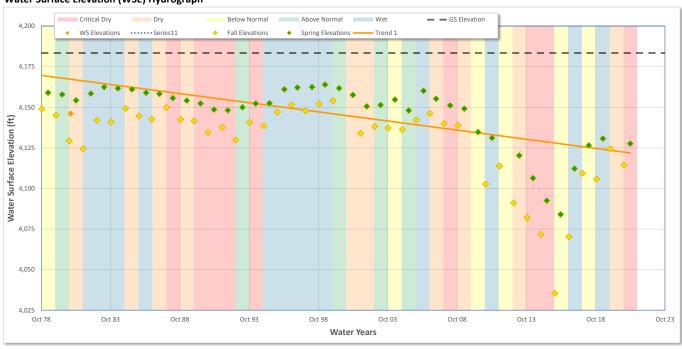


Well Information		
Well ID	036754_39N08E18N002M	
Well Name	18N2	
State Number	39N08E18N002M	
WCR Number	127457	
Site Code	412144N1211013W001	
Well Location		
County	Modoc	
Basin	Big Valley	
Hydrologic Region	Sacramento River	
Station Organization	Modoc County Planning	
-	Department	
Well Type Information		
Well Use	Residential	
Completion Type	Single Well	

Well Coordinates/Geometry		
Location Lat:	41.2144	
Long:	-121.1013	
Well Depth	250.00 ft	
Ground Surface Elevation	4163.40 ft	
Ref. Point Elevation	4164.40 ft	
Screen Depth Range	-	
Screen Elevation Range	-	
Well Period of Record		
Period-of-Record	19792021	
WS Elev-Range Min:	4136.6 ft	
Max	4160.2 ft	

Trend Analysis		
Seasonal Data Method		Max/Min
Show Trend 1		Spring Data
Date Range	Start WY:	1979
(Optional)	End WY:	2021
Extend Trend Line		No
Trend Results	Slope	(0.104 ft/yr)
Show Trend 2		None
Date Range	Start WY:	
(Optional)	End WY:	
Extend Trend Line		Yes
Trend Results	Slope	-

Date:

8/17/2021

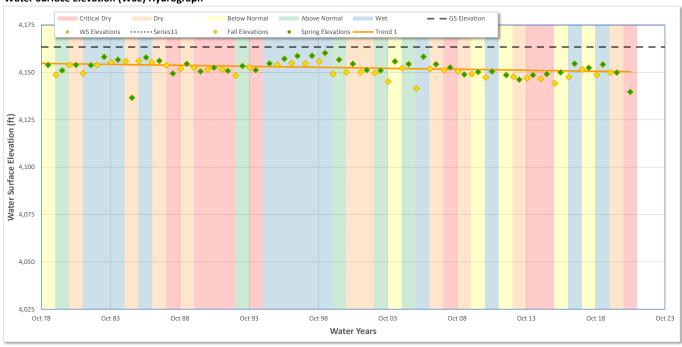


Well Information		
Well ID	036757_39N09E32R001M	
Well Name	32R1	
State Number	39N09E32R001M	
WCR Number	-	
Site Code	411649N1209569W001	
Well Location		
County	Lassen	
Basin	Big Valley	
Hydrologic Region	Sacramento River	
Station Organization	Lassen County Department of Planning and Building Services	
Well Type Information		
Well Use	Irrigation	
Completion Type	Single Well	

Well Coordinates/Geometry		
Location Lat:	41.1680	
Long:	-120.9570	
Well Depth	-	
Ground Surface Elevation	4243.40 ft	
Ref. Point Elevation	4243.60 ft	
Screen Depth Range	-	
Screen Elevation Range	-	
Well Period of Record		
Period-of-Record	19812021	
WS Elev-Range Min:	4161.2 ft	
Max	4205.5 ft	

Trend Analysis		
Seasonal Data Method		Max/Min
Show Trend 1		Spring Data
Date Range	Start WY:	1979
(Optional)	End WY:	2021
Extend Trend Line		No
Trend Results	Slope	(0.964 ft/yr)
Show Trend 2		None
Date Range	Start WY:	
(Optional)	End WY:	
Extend Trend Line		Yes
Trend Results	Slope	-

Date:

8/17/2021

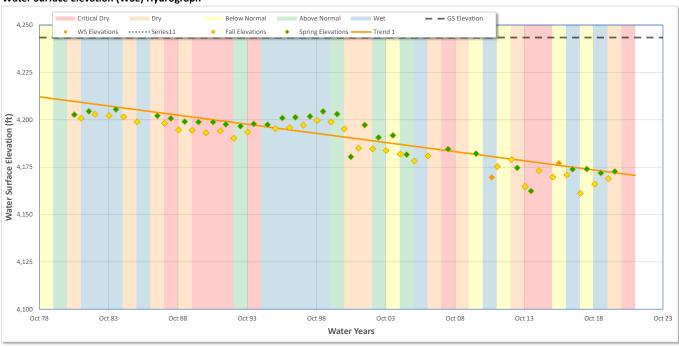

Well Information		
Well ID	039199_37N08E06C001M	
Well Name	06C1	
State Number	37N08E06C001M	
WCR Number	14580	
Site Code	410777N1210986W001	
Well Location		
County	Lassen	
Basin	Big Valley	
Hydrologic Region	Sacramento River	
Station Organization	Lassen County Department of Planning and Building Services	
Well Type Information		
Well Use	Irrigation	
Completion Type	Single Well	

Well Coordinates/Geometry		
Location Lat:	41.0777	
Long:	-121.0986	
Well Depth	400.00 ft	
Ground Surface Elevation	4133.40 ft	
Ref. Point Elevation	4133.90 ft	
Screen Depth Range	-	
Screen Elevation Range	-	
Well Period of Record		
Period-of-Record	19822016	
WS Elev-Range Min:	4066.2 ft	
Max	4126.8 ft	

Trend Analysis		
Seasonal Data Method		Max/Min
Show Trend 1		Spring Data
Date Range	Start WY:	1979
(Optional)	End WY:	2021
Extend Trend Line		No
Trend Results	Slope	(1.301 ft/yr)
Show Trend 2		None
Date Range	Start WY:	
(Optional)	End WY:	
Extend Trend Line		Yes
Trend Results	Slope	-

Date:

8/17/2021




Well Information		
Well ID	051402_ACWA-1	
Well Name	ACWA-1	
State Number	38N08E07A001M	
WCR Number	0962825	
Site Code	411508N1210900W001	
Well Location		
County	Lassen	
Basin	Big Valley	
Hydrologic Region	Sacramento River	
Station Organization	Lassen County Department of Planning and Building Services	
Well Type Information		
Well Use	Irrigation	
Completion Type	Single Well	

Well Coordinates/Geometry			
Location	Lat:	41.1508	
	Long:	-121.0900	
Well Depth		780.00 ft	
Ground Surface Elevation		4142.00 ft	
Ref. Point Elevation		4142.75 ft	
Screen Depth Range		60 to 780 ft	
Screen Elevation Range		4083 to 3363 ft	
Well Period of Record			
Period-of-Record		20162021	
WS Elev-Range	Min:	4039.2 ft	
	Max	4126.4 ft	

Trend Analysis		
Seasonal Data Method		Max/Min
Show Trend 1		Spring Data
Date Range	Start WY:	2016
(Optional)	End WY:	2021
Extend Trend Line		No
Trend Results	Slope	(1.253 ft/yr)
Show Trend 2		None
Date Range	Start WY:	
(Optional)	End WY:	
Extend Trend Line		Yes
Trend Results	Slope	-

Date:

8/17/2021

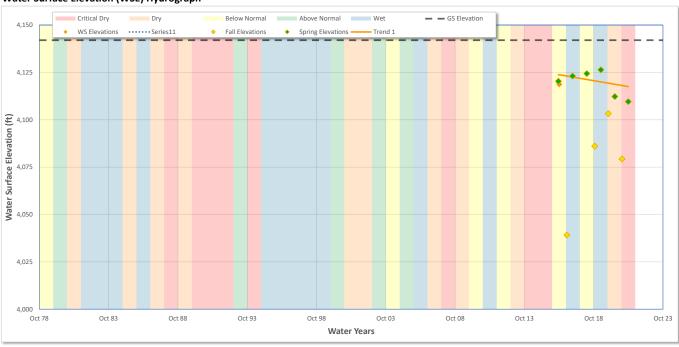


Well Information		
Well ID	051403_ACWA-2	
Well Name	ACWA-2	
State Number	39N08E33P002M	
WCR Number	484622	
Site Code	411699N1210579W001	
Well Location		
County	Lassen	
Basin	Big Valley	
Hydrologic Region	Sacramento River	
Station Organization	Lassen County Department of Planning and Building Services	
Well Type Information		
Well Use	Irrigation	
Completion Type	Single Well	

Well Coordinates/Geometry		
Location Lat:	41.1699	
Long:	-121.0579	
Well Depth	800.00 ft	
Ground Surface Elevation	4153.00 ft	
Ref. Point Elevation	4153.20 ft	
Screen Depth Range	50 to 800 ft	
Screen Elevation Range	4093 to 3343 ft	
Well Period of Record		
Period-of-Record	20162021	
WS Elev-Range Min:	4126.4 ft	
Max	4139.4 ft	

Trend Analysis		
Seasonal Data Method		Max/Min
Show Trend 1		Spring Data
Date Range	Start WY:	2016
(Optional)	End WY:	2021
Extend Trend Line		No
Trend Results	Slope	0.283 ft/yr
Show Trend 2		None
Date Range	Start WY:	
(Optional)	End WY:	
Extend Trend Line		Yes
Trend Results	Slope	-

Date:

8/17/2021

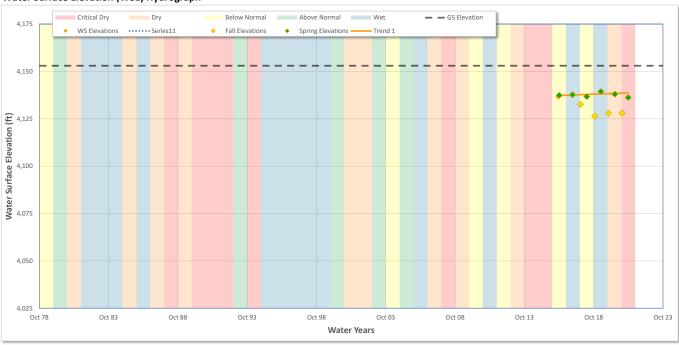


Well Information		
Well ID	051537_ACWA-3	
Well Name	ACWA-3	
State Number	39N08E28A001M	
WCR Number	0951365	
Site Code	411938N1210478W001	
Well Location		
County	Modoc	
Basin	Big Valley	
Hydrologic Region	Sacramento River	
Station Organization	Lassen County Department of Planning and Building Services	
Well Type Information		
Well Use	Irrigation	
Completion Type	Single Well	

Well Coordinates/Geometry		
Location Lat:	41.1938	
Long:	-121.0478	
Well Depth	720.00 ft	
Ground Surface Elevation	4159.00 ft	
Ref. Point Elevation	4159.83 ft	
Screen Depth Range	60 to 720 ft	
Screen Elevation Range	4075 to 3415 ft	
Well Period of Record		
Period-of-Record	20162021	
WS Elev-Range Min:	4135.9 ft	
Max	4150.6 ft	


Trend Analysis		
Seasonal Data Method		Max/Min
Show Trend 1		Spring Data
Date Range	Start WY:	1979
(Optional)	End WY:	2021
Extend Trend Line		No
Trend Results	Slope	0.821 ft/yr
Show Trend 2		None
Date Range	Start WY:	
(Optional)	End WY:	
Extend Trend Line		Yes
Trend Results	Slope	-


Date:


8/17/2021

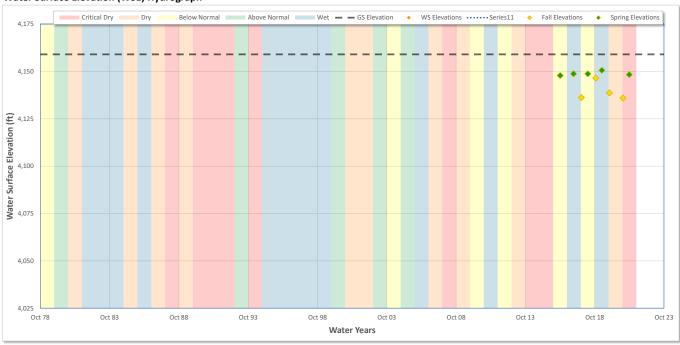



Appendix 5B Groundwater Elevation Contours 1983 to 2018

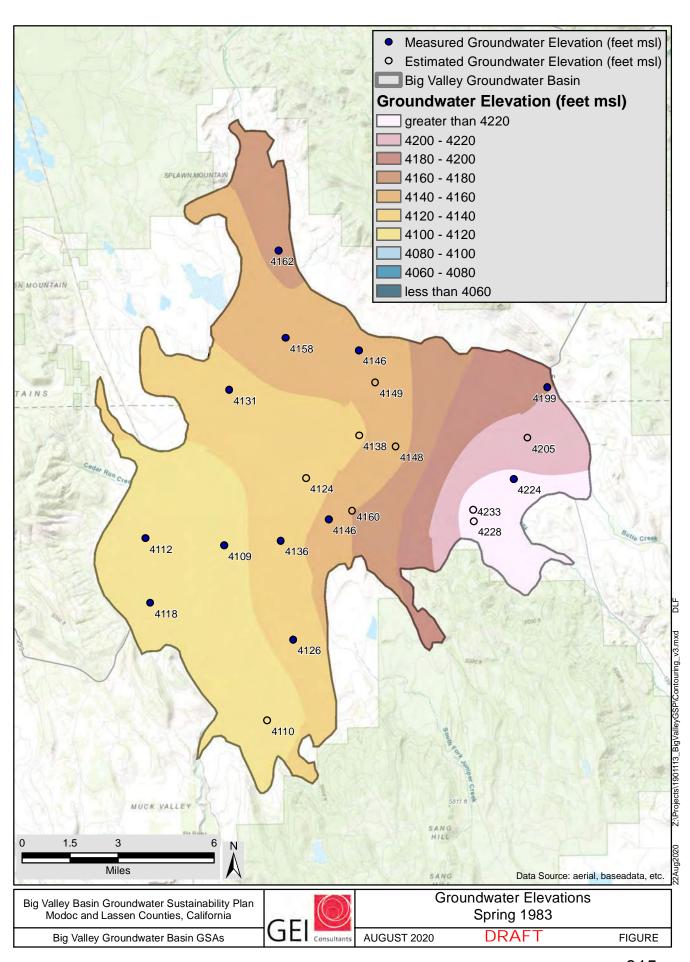


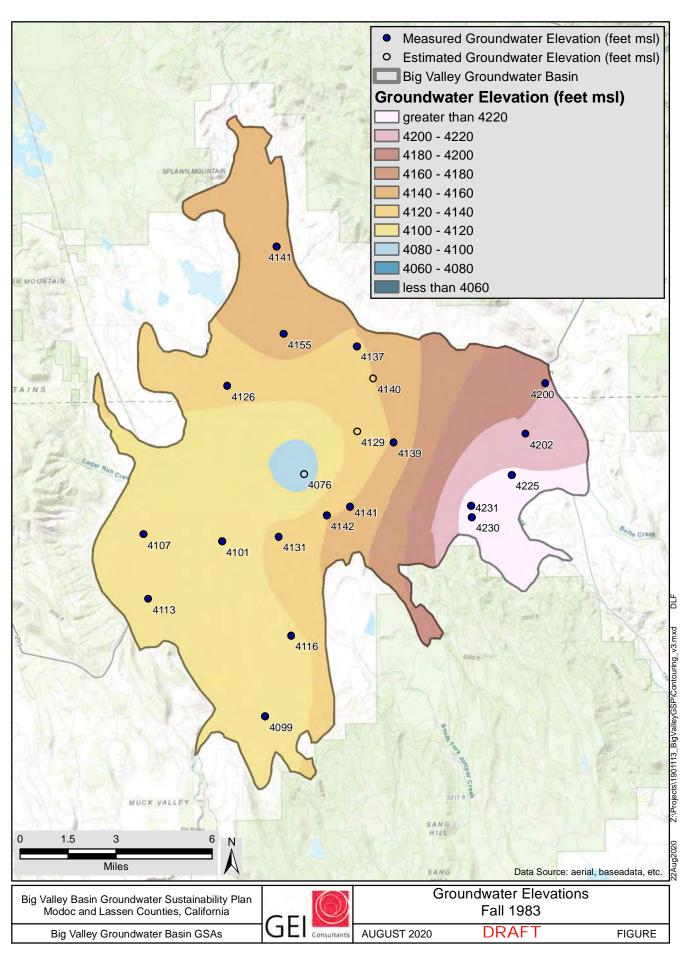


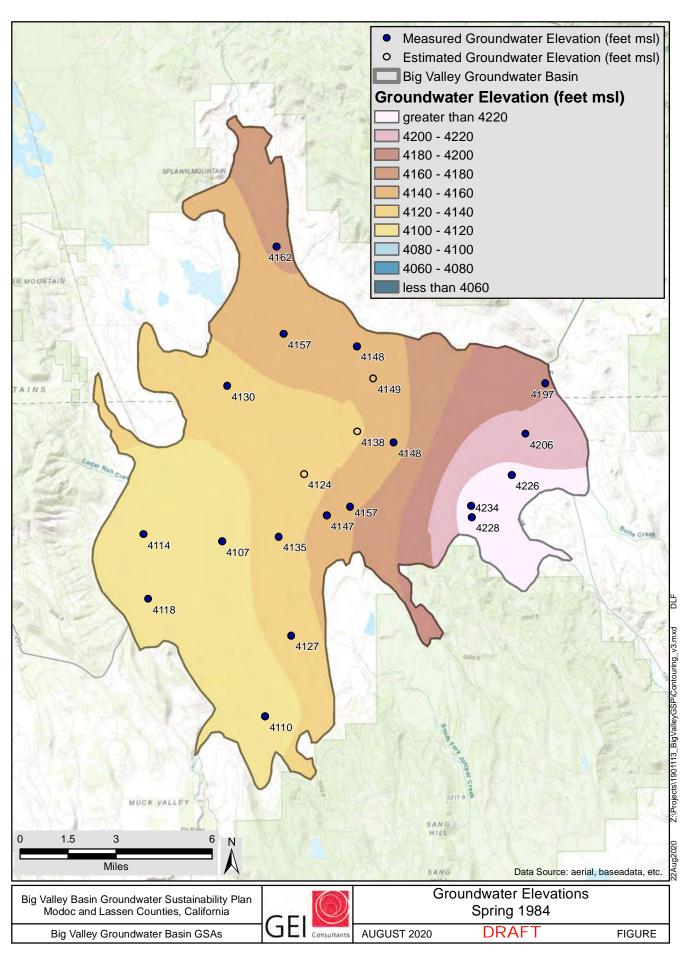


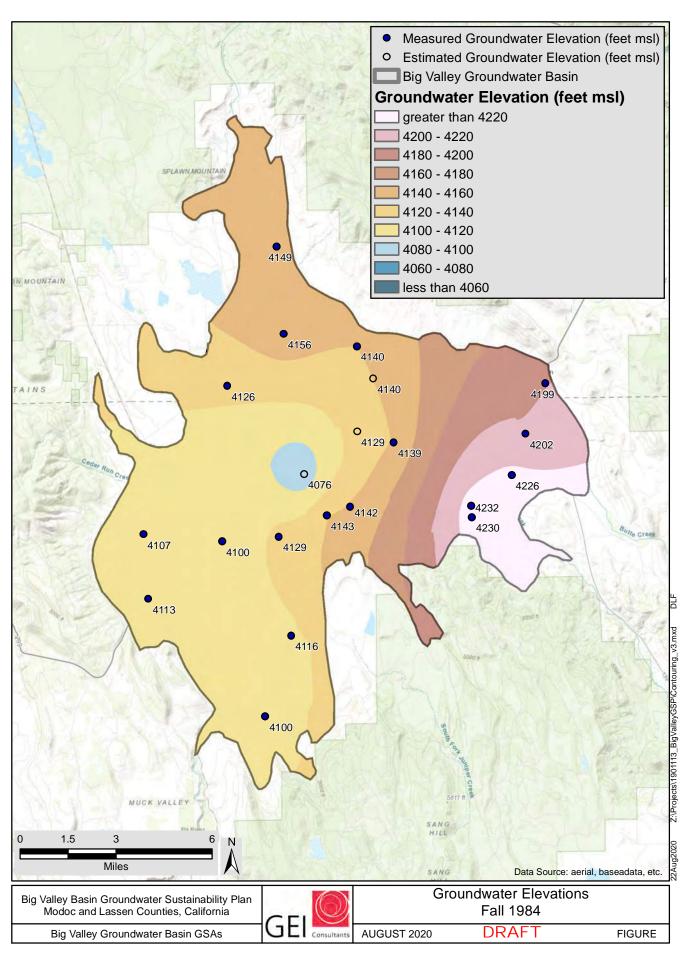


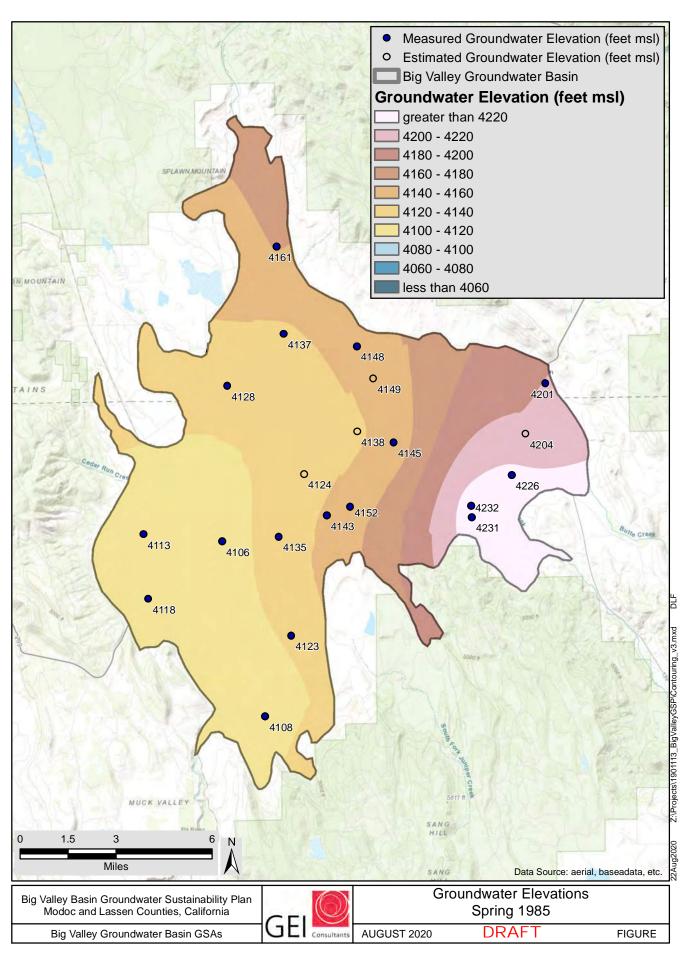


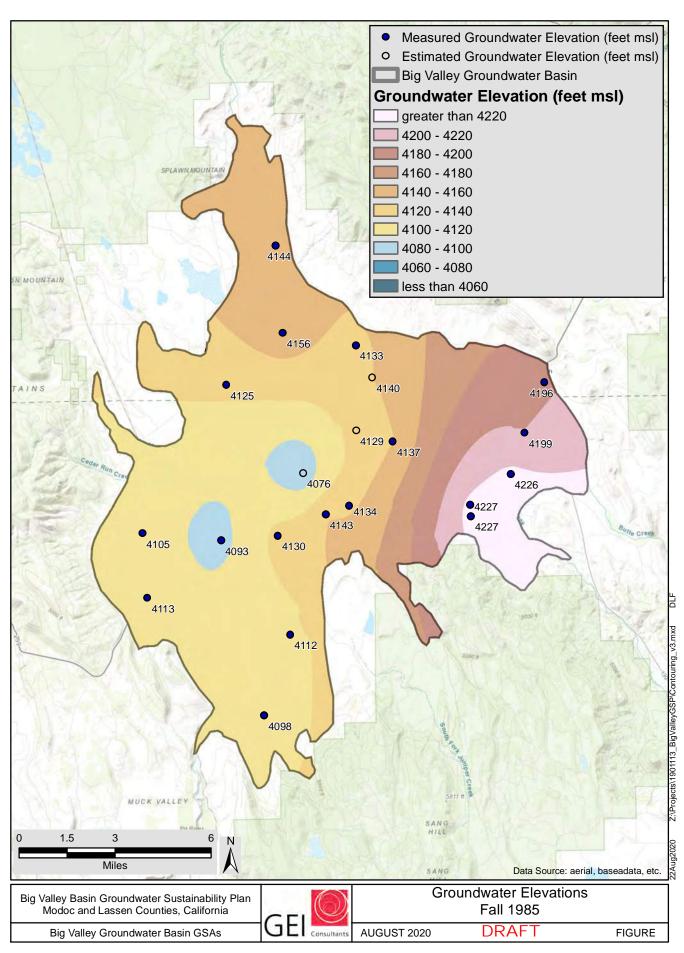


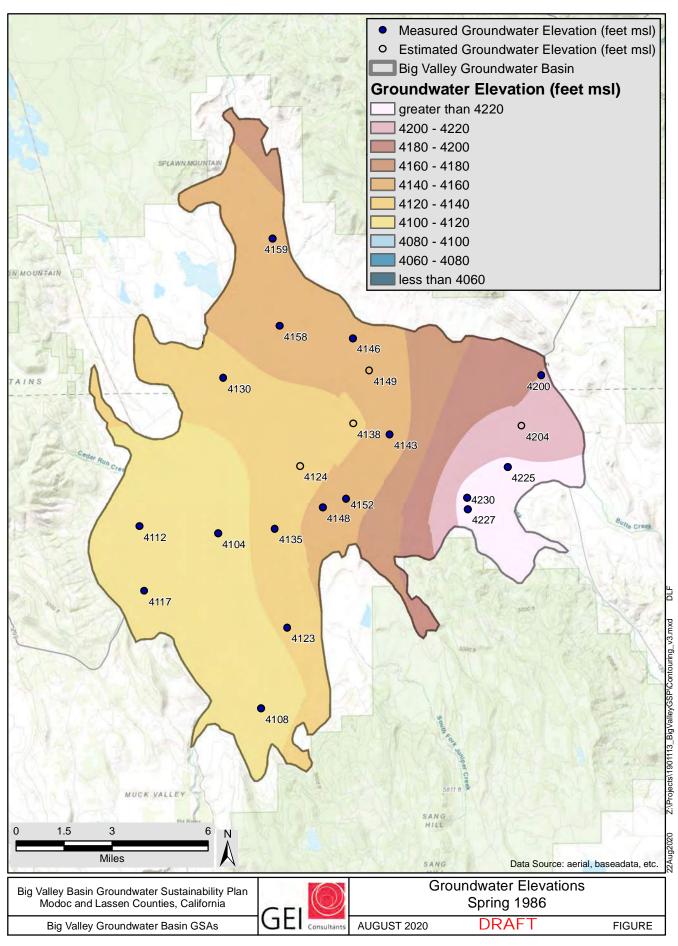


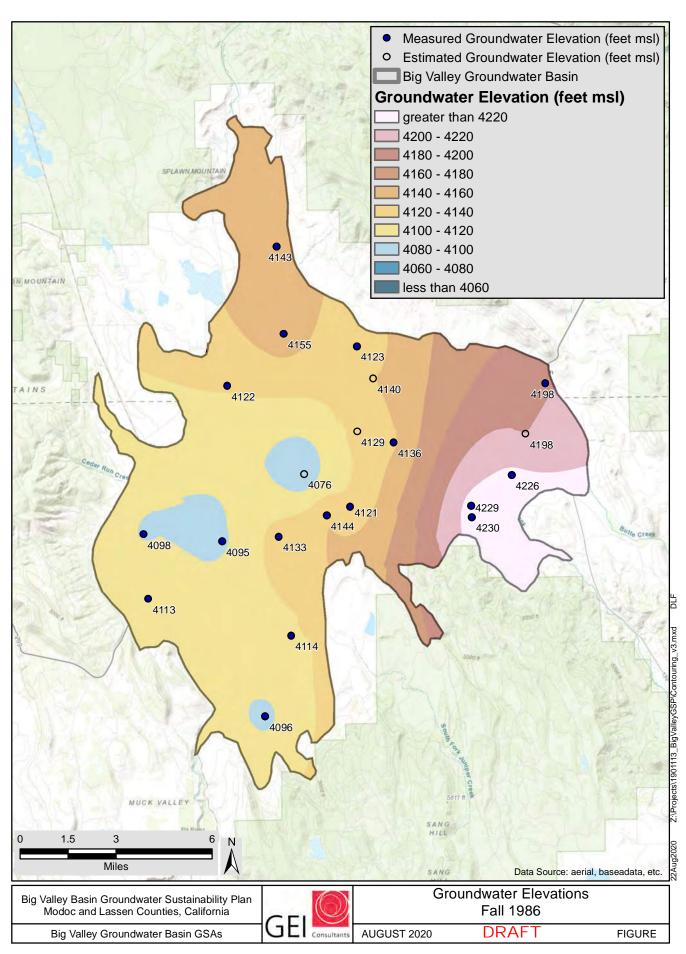


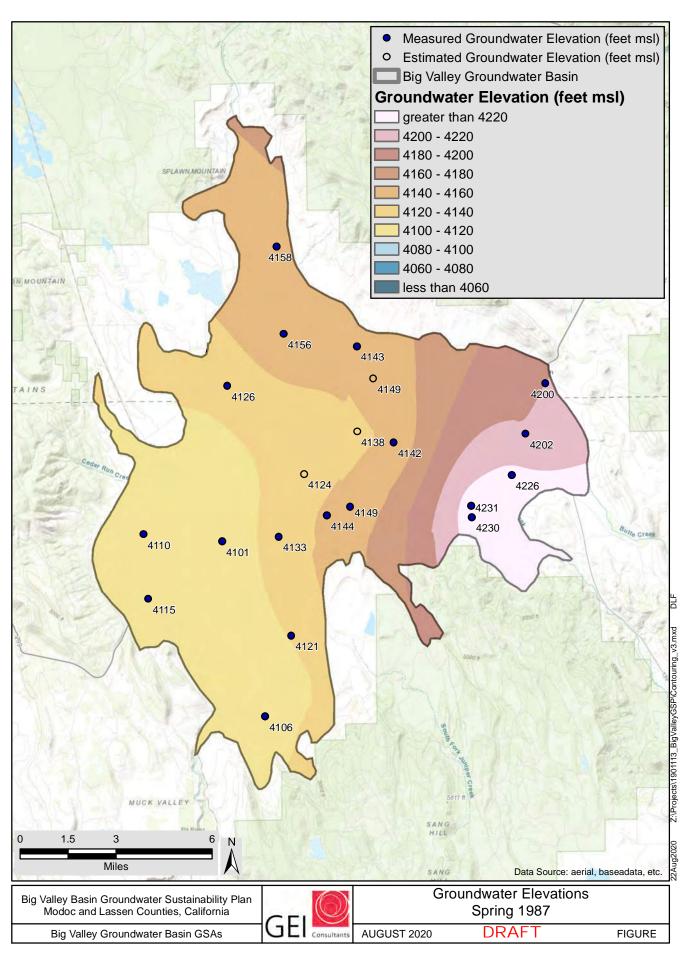


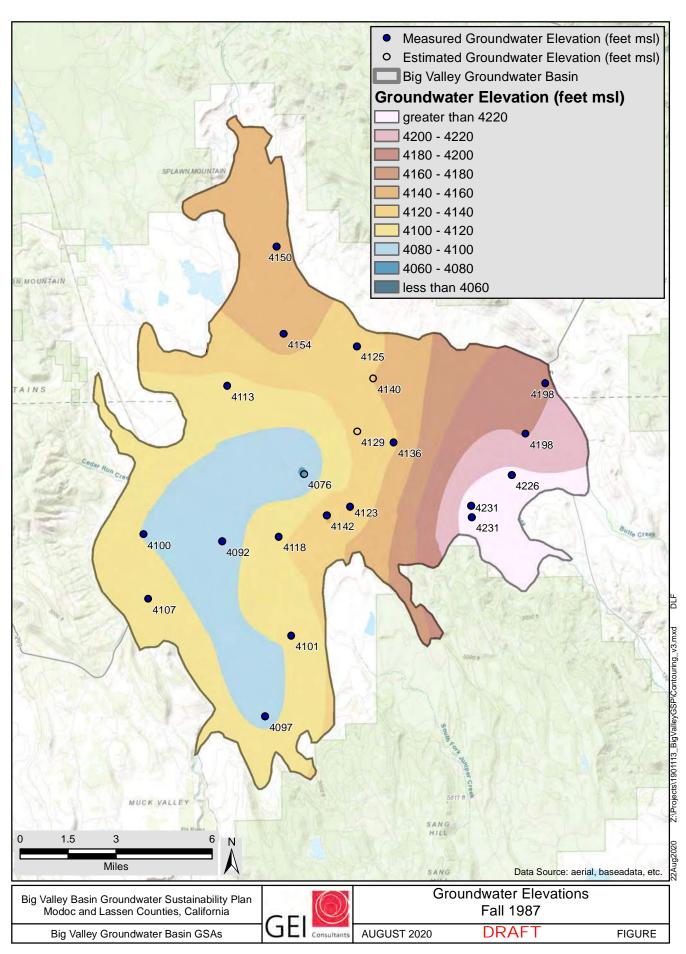


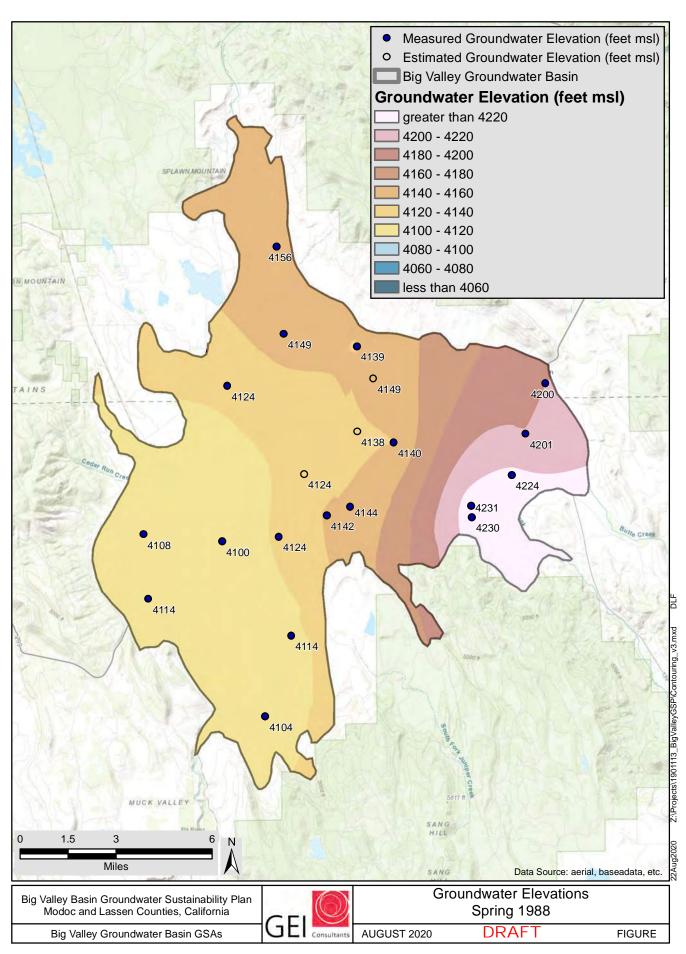


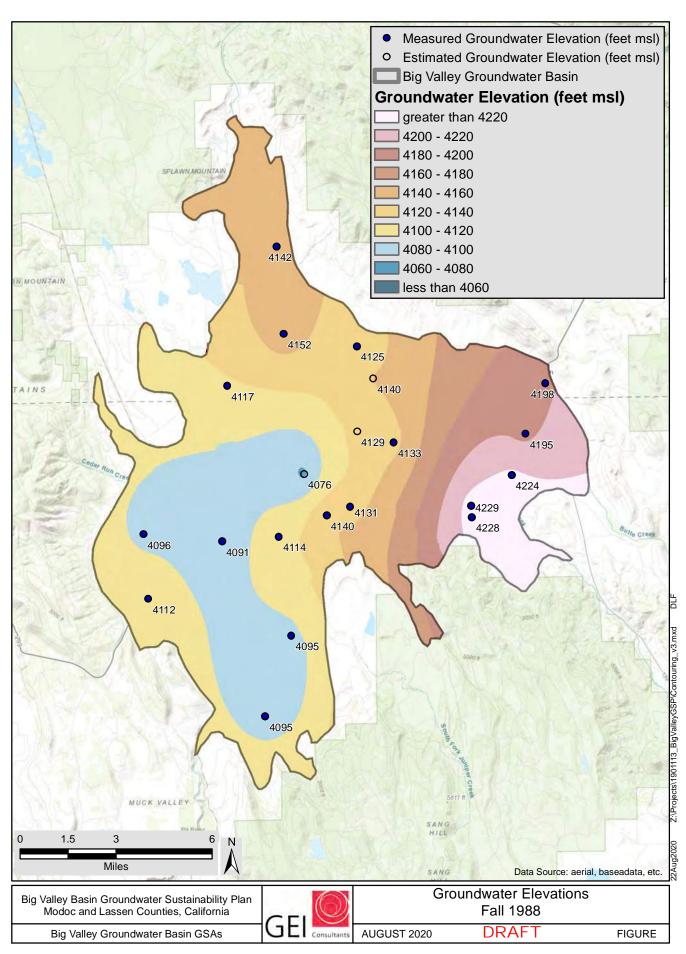


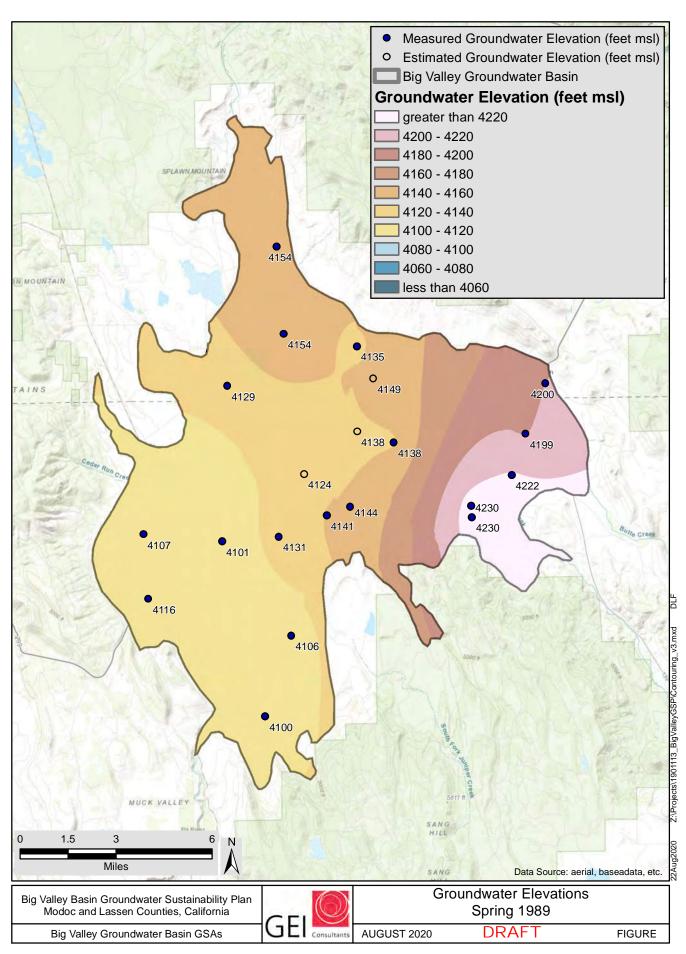


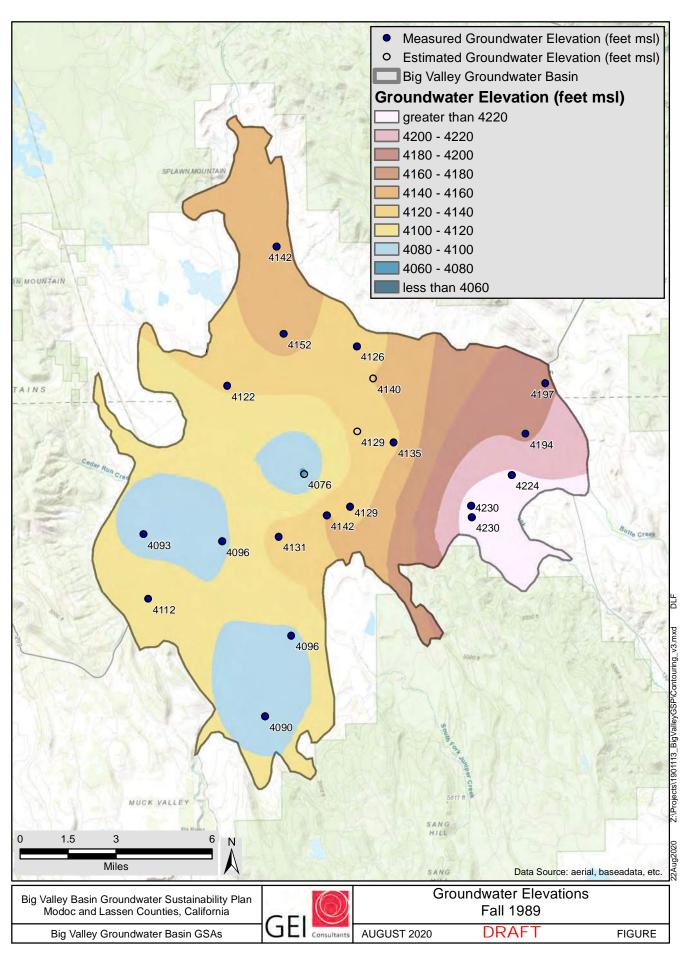


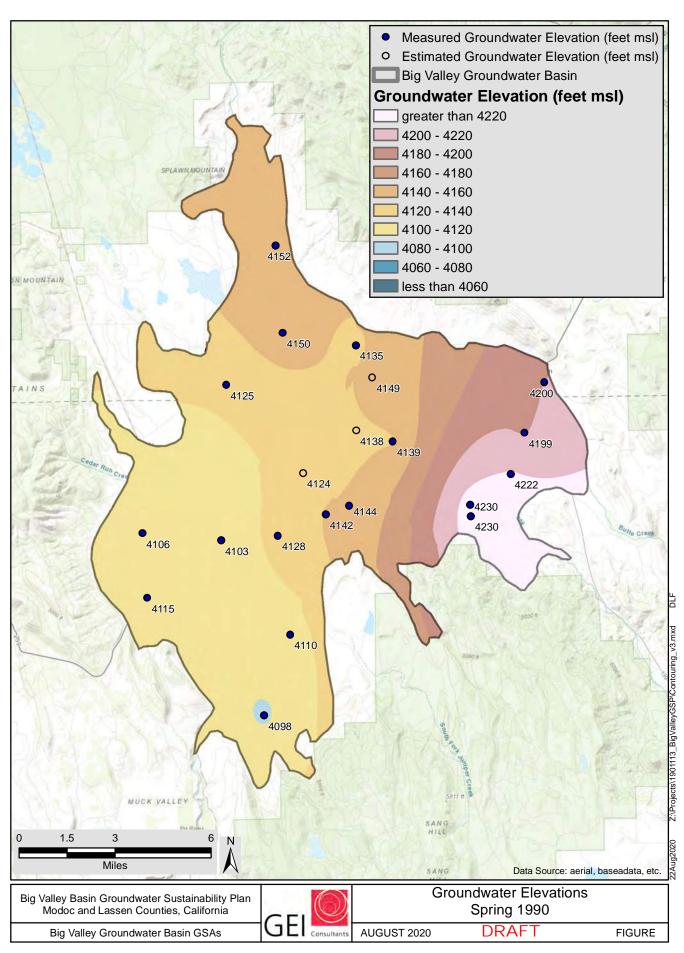


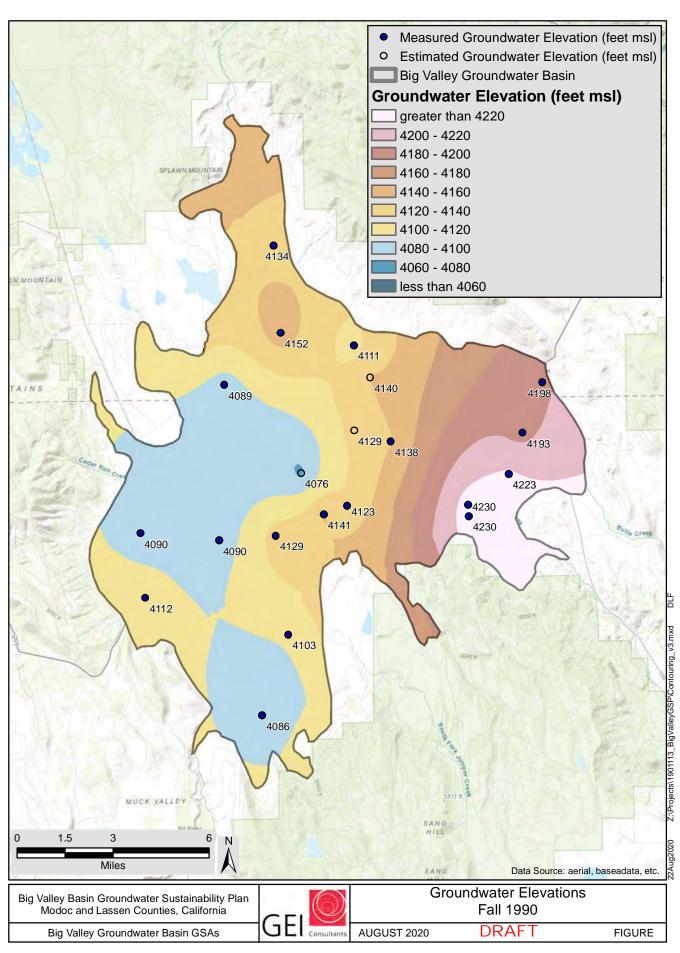


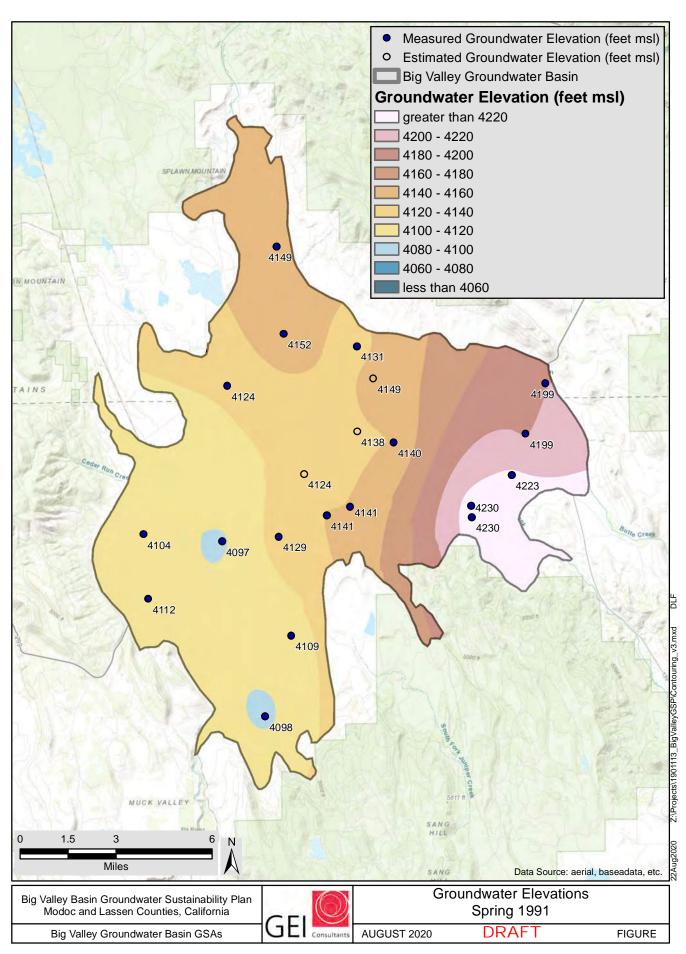


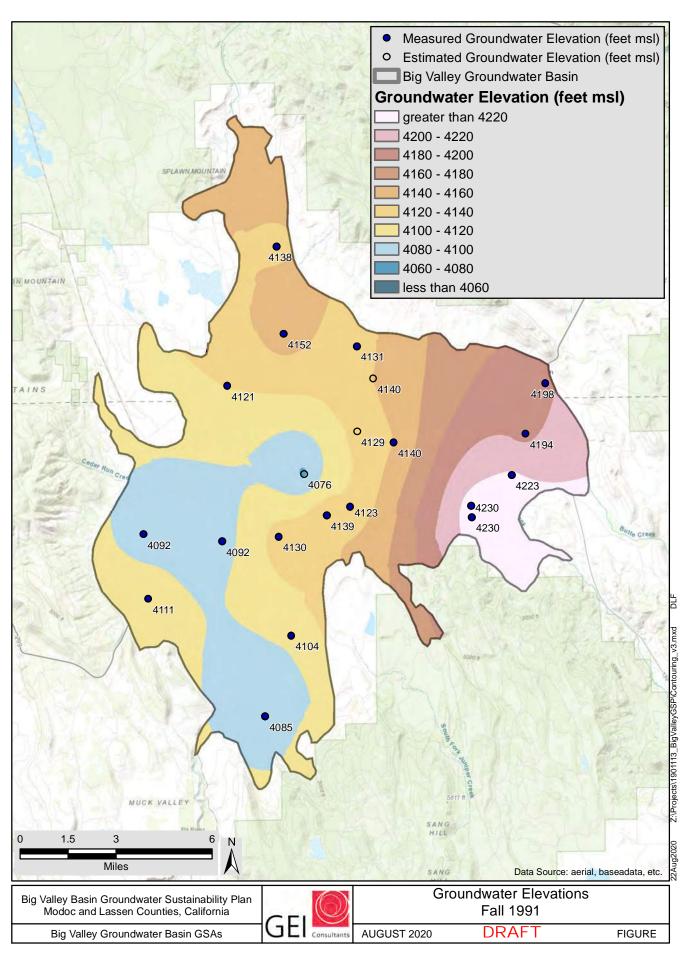


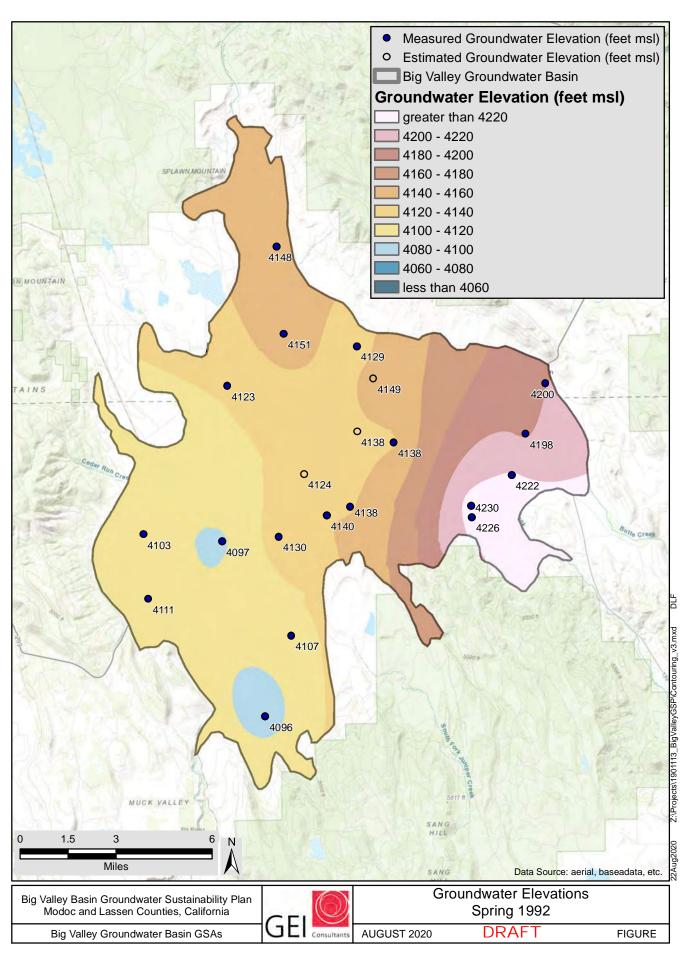


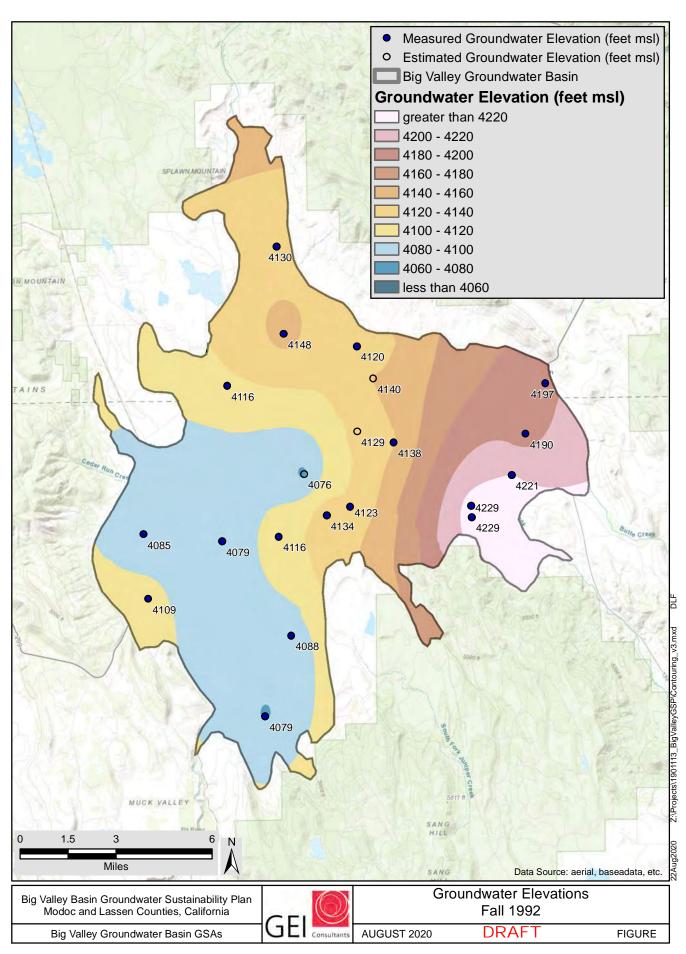


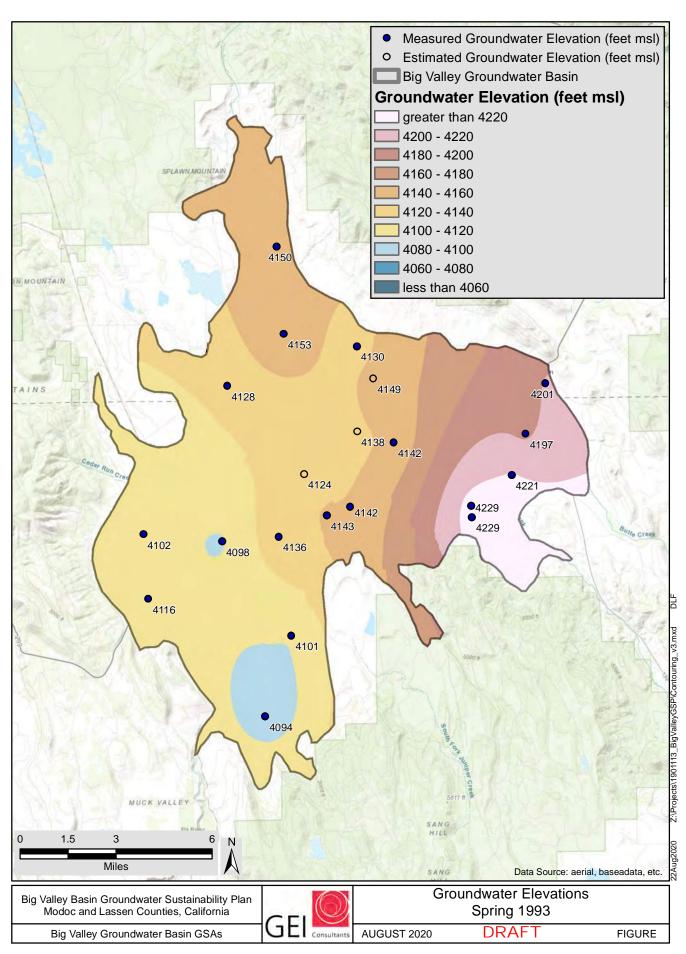


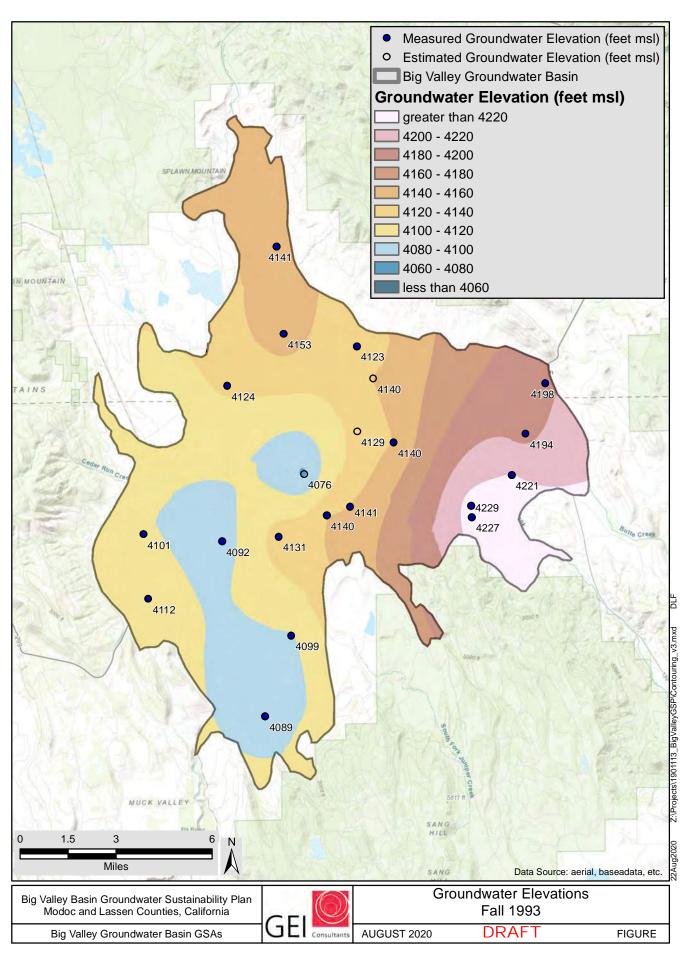


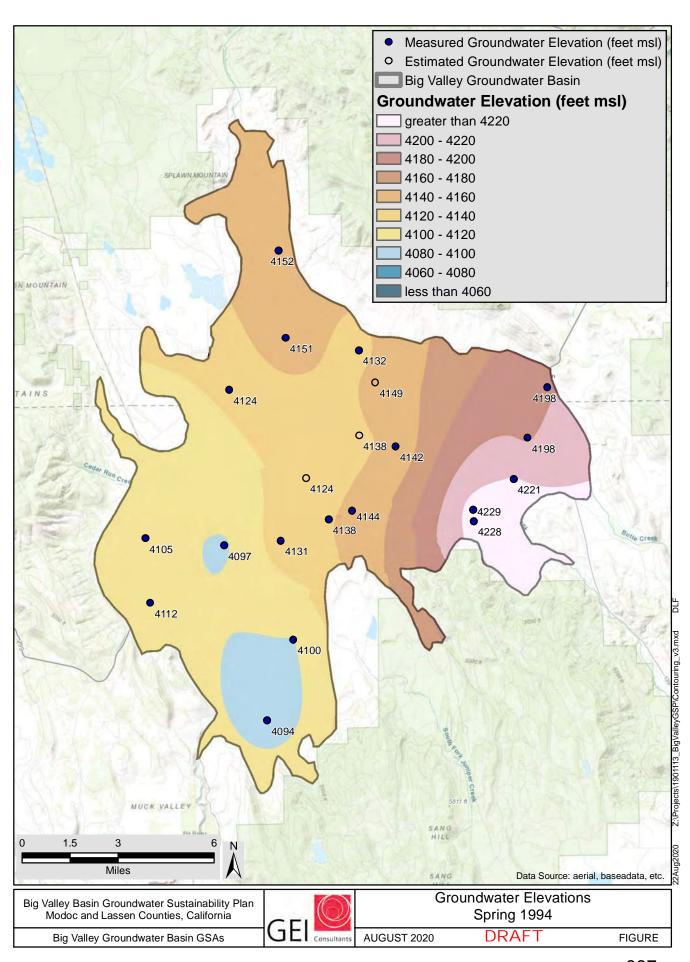


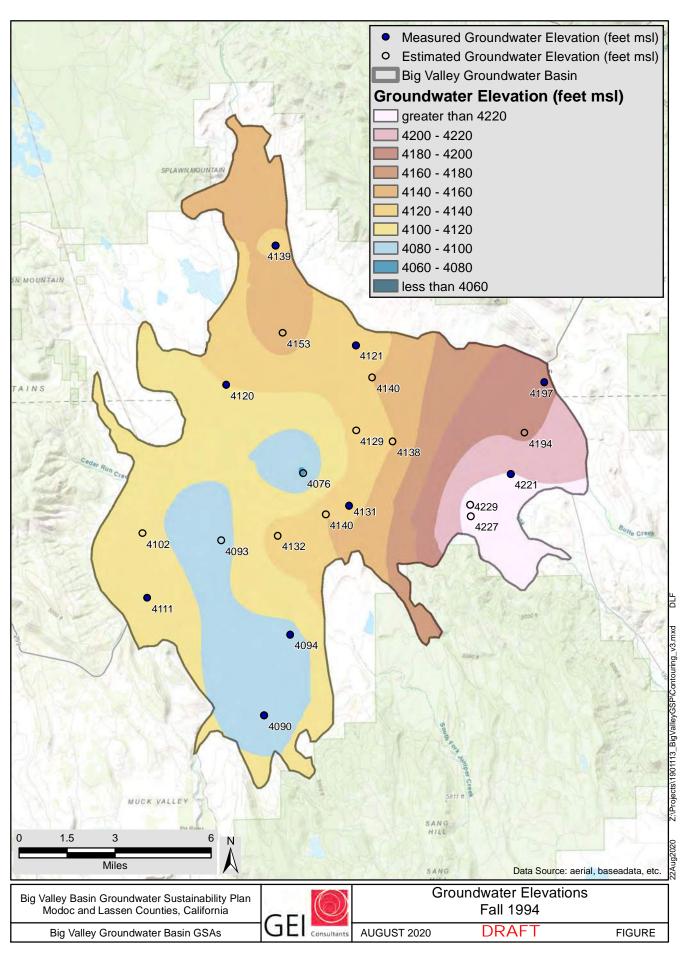


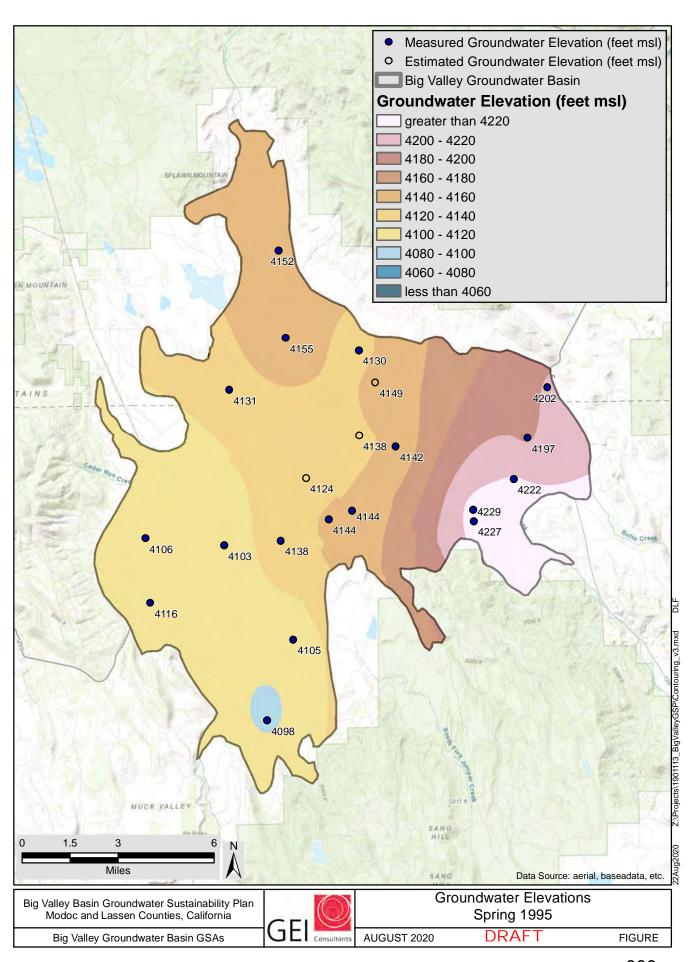


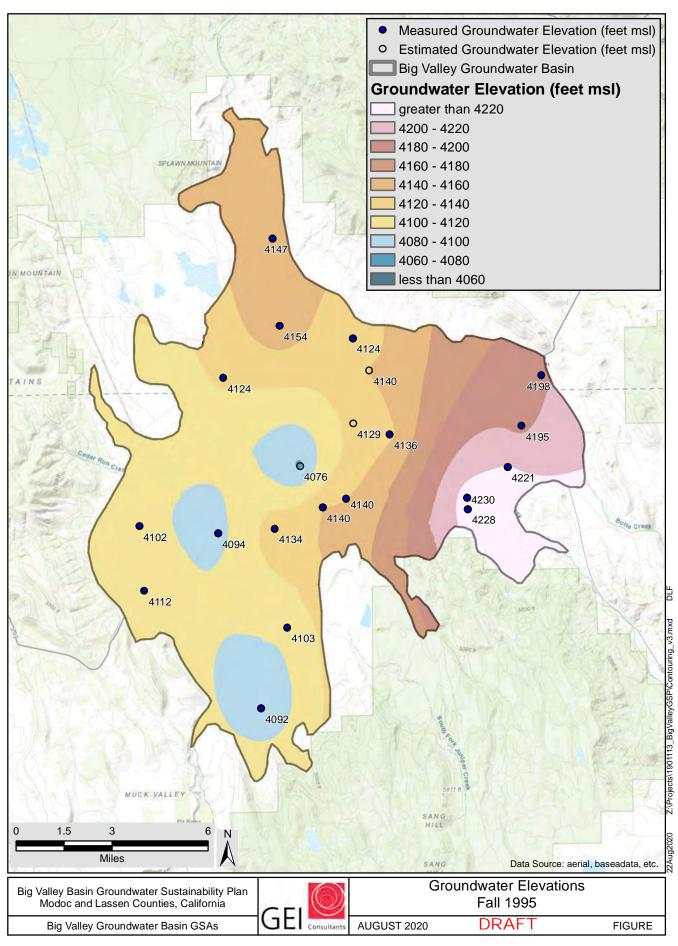


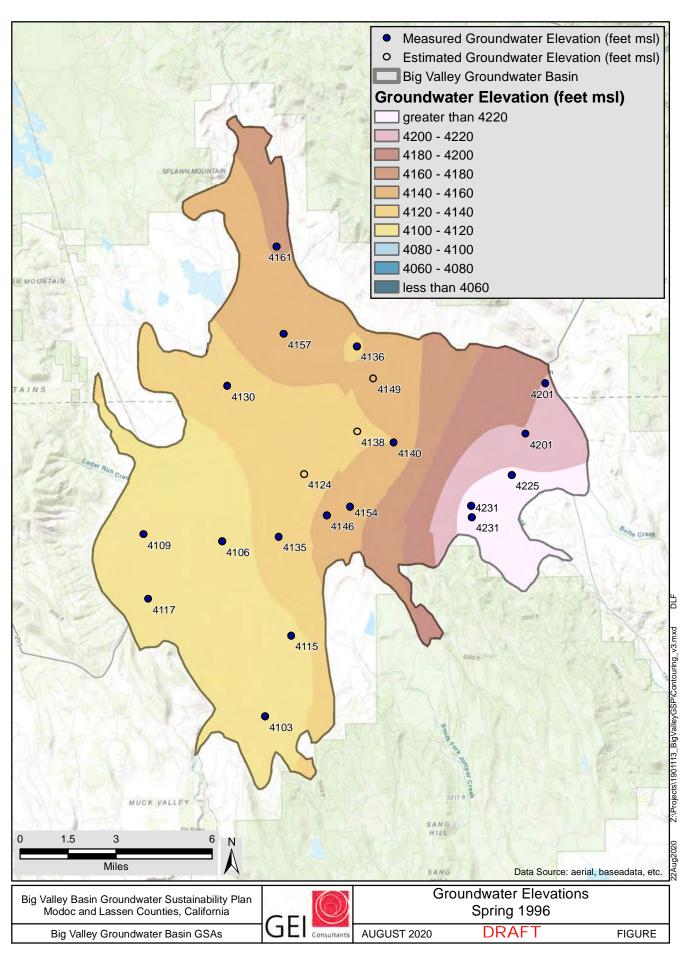


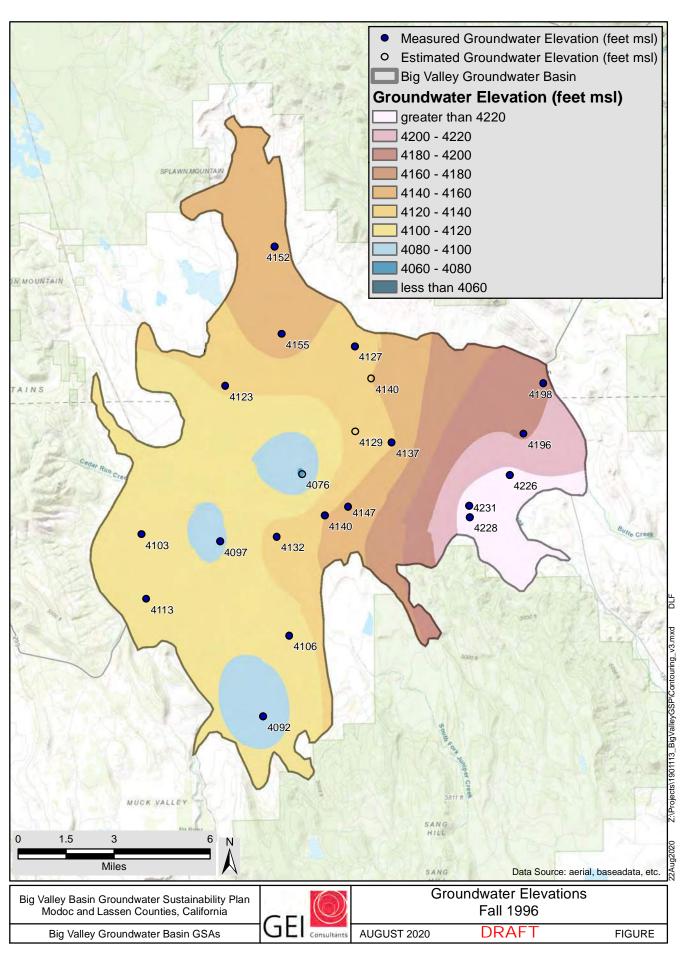


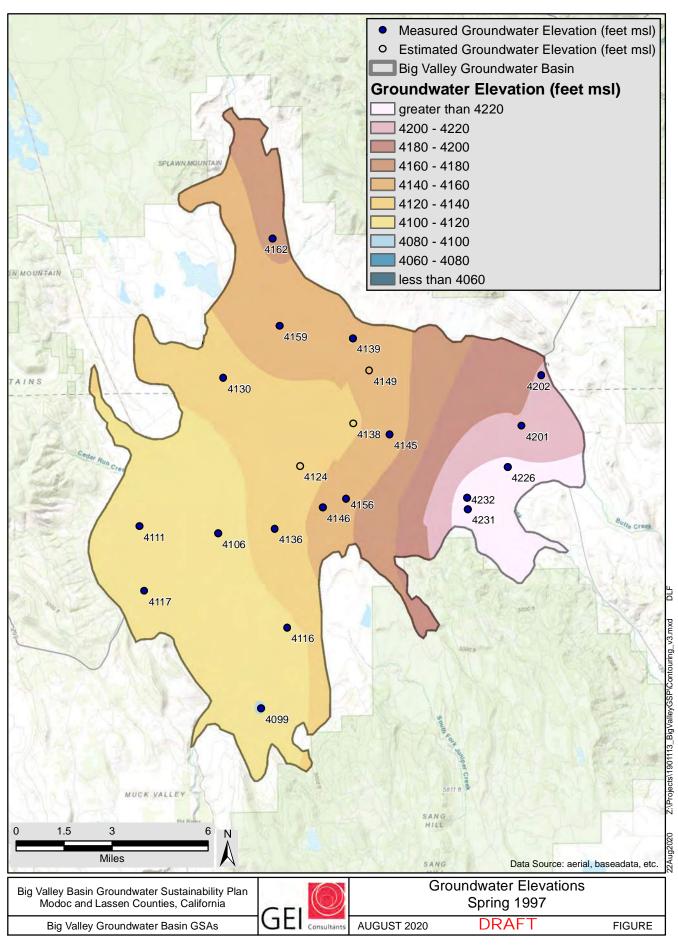


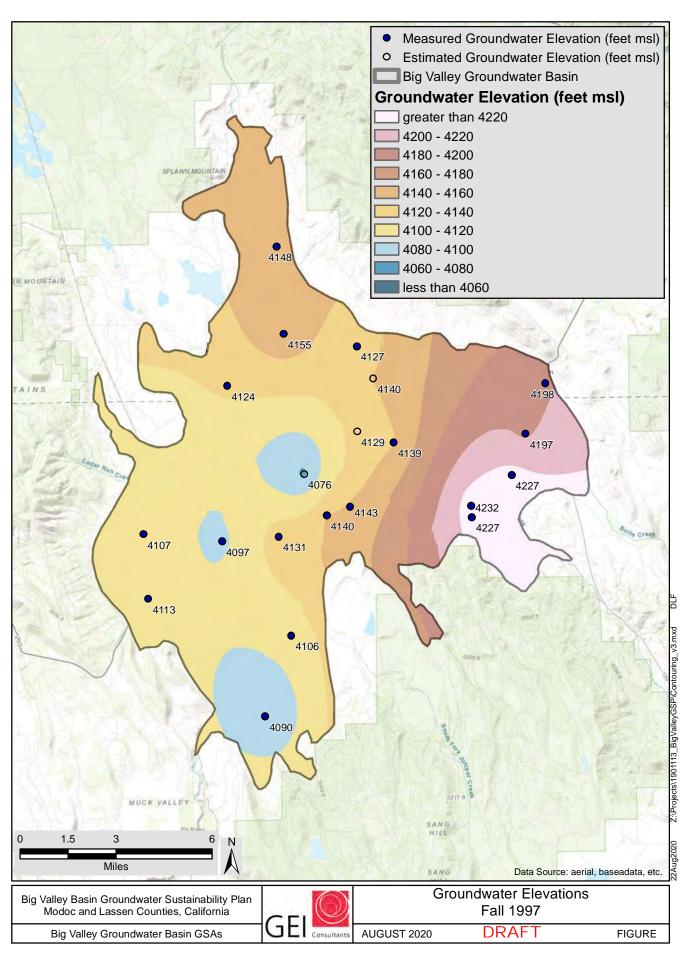


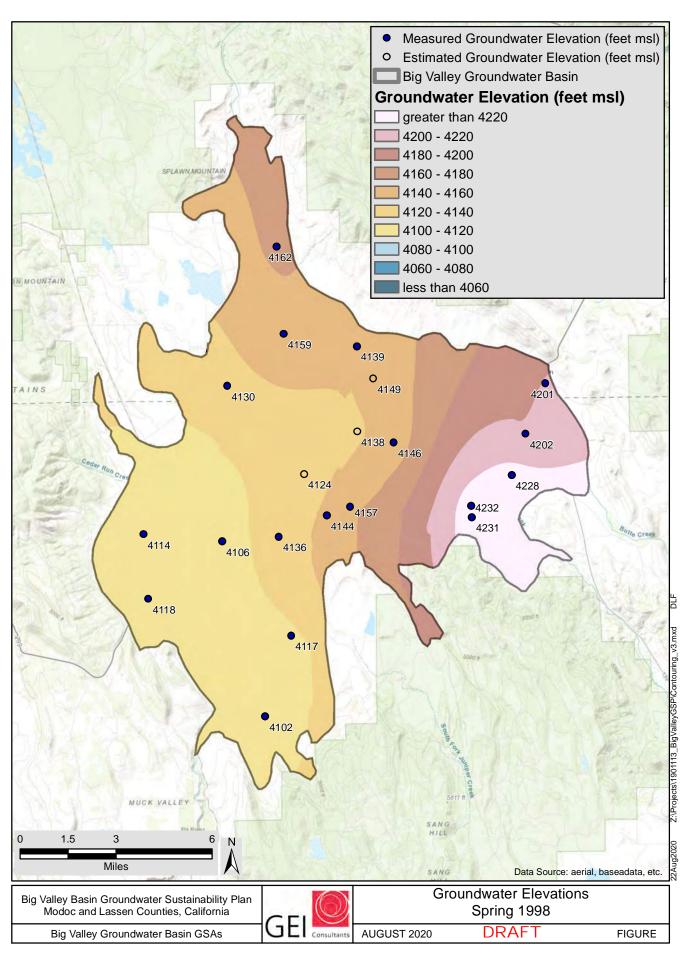


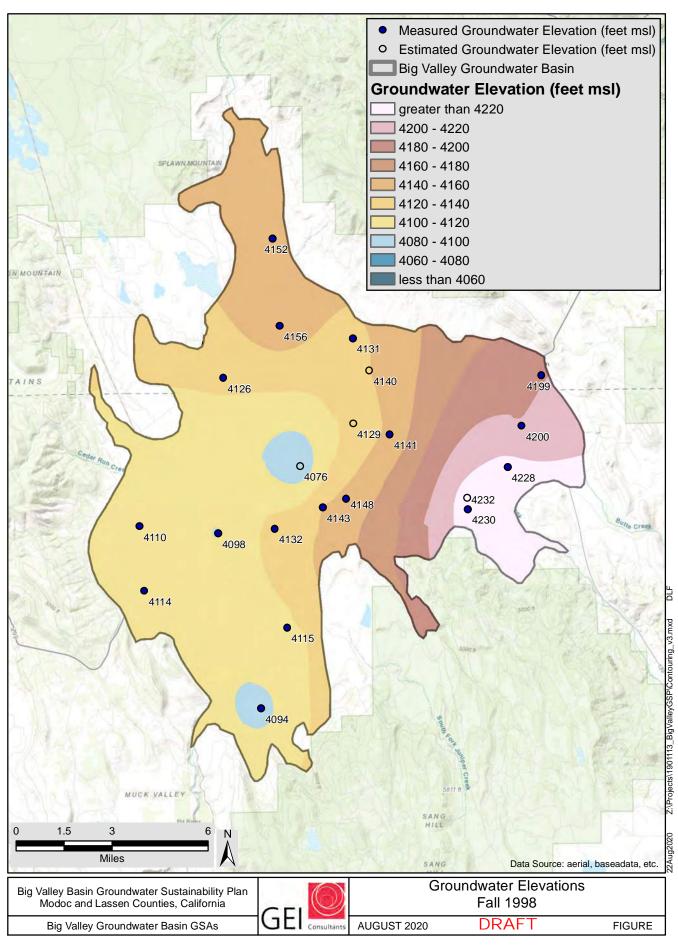


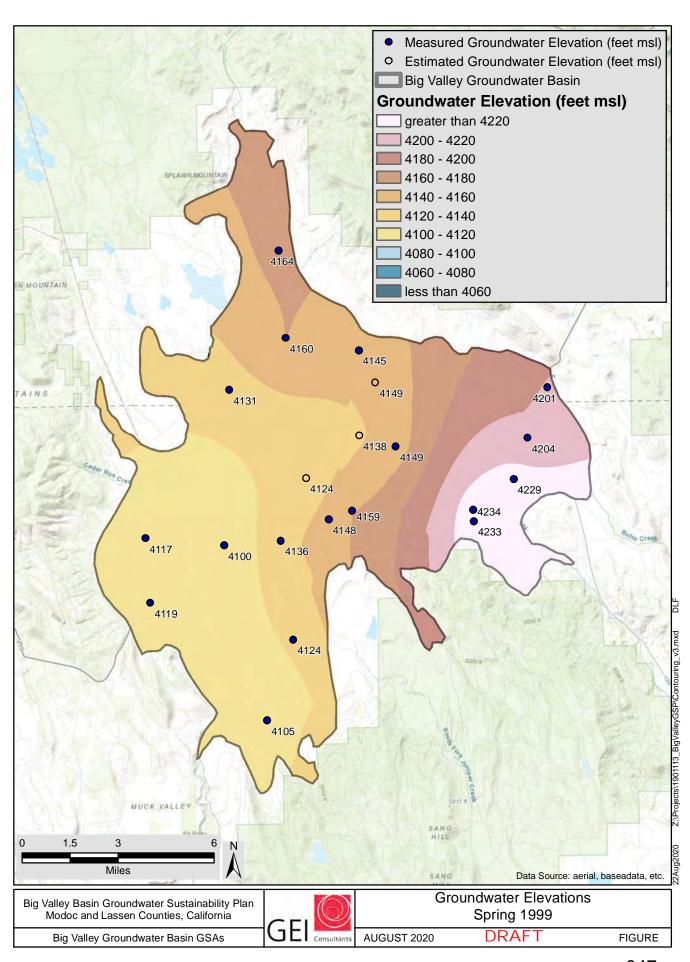


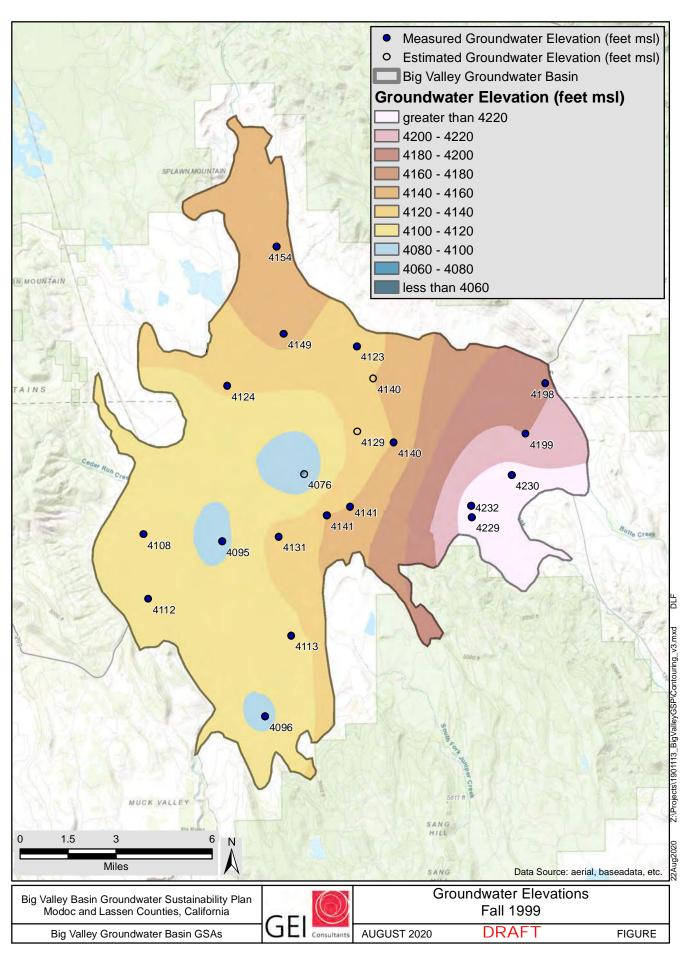


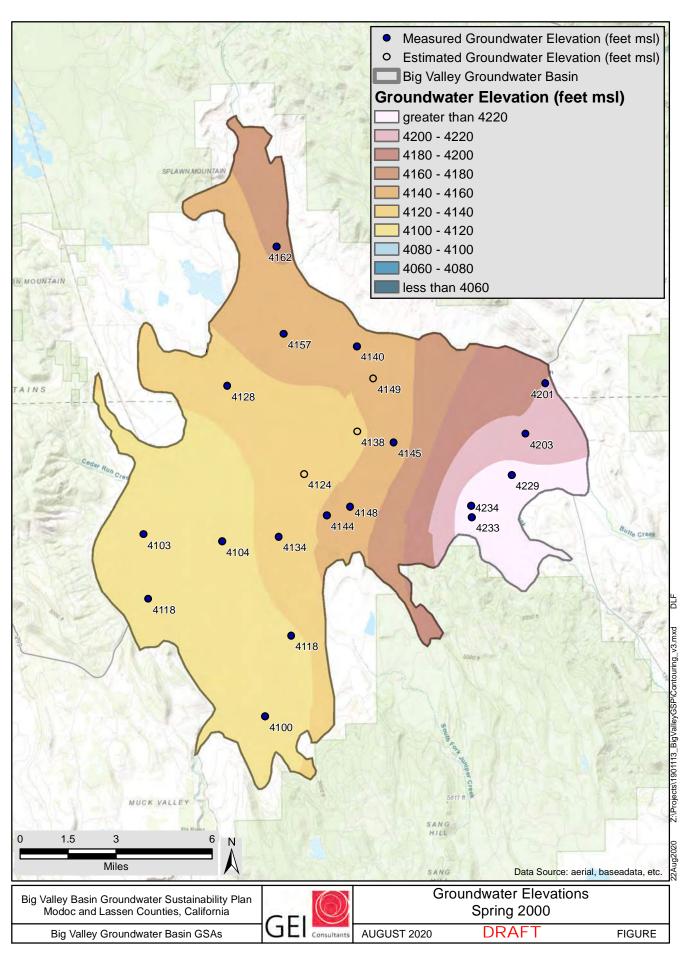


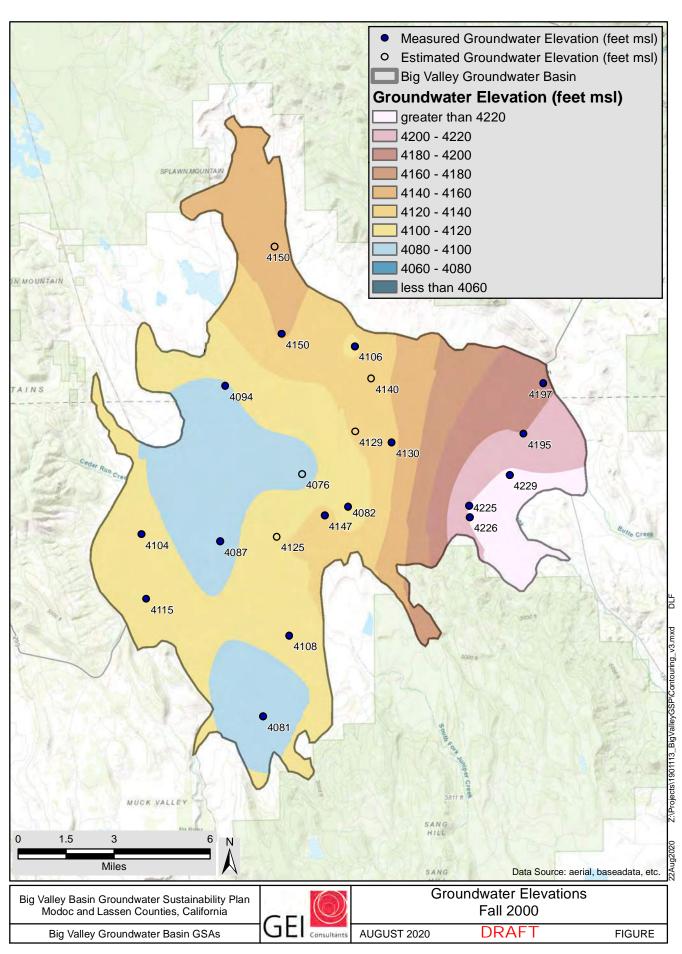


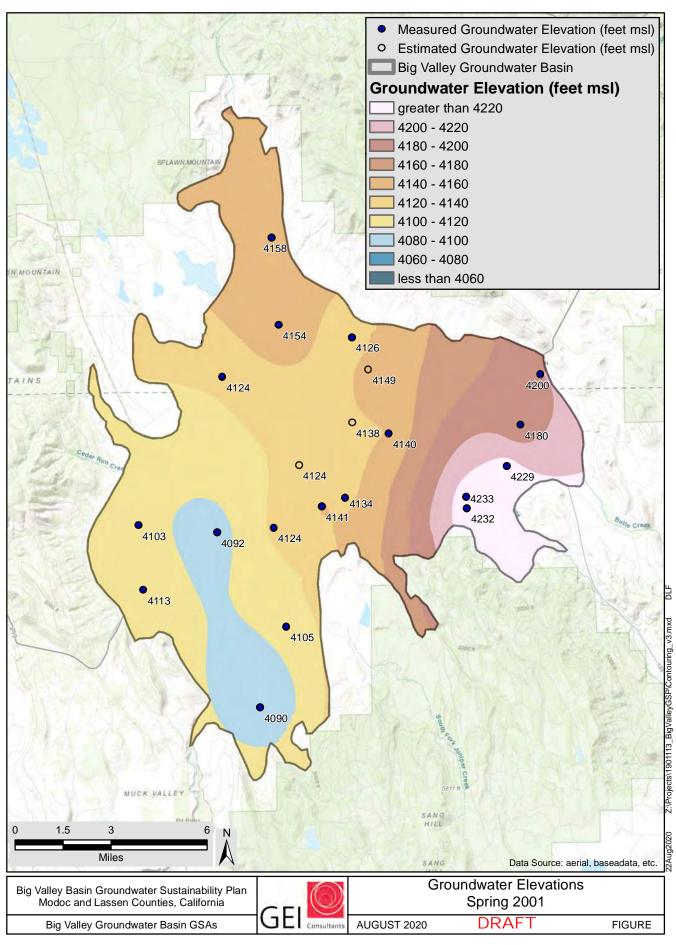


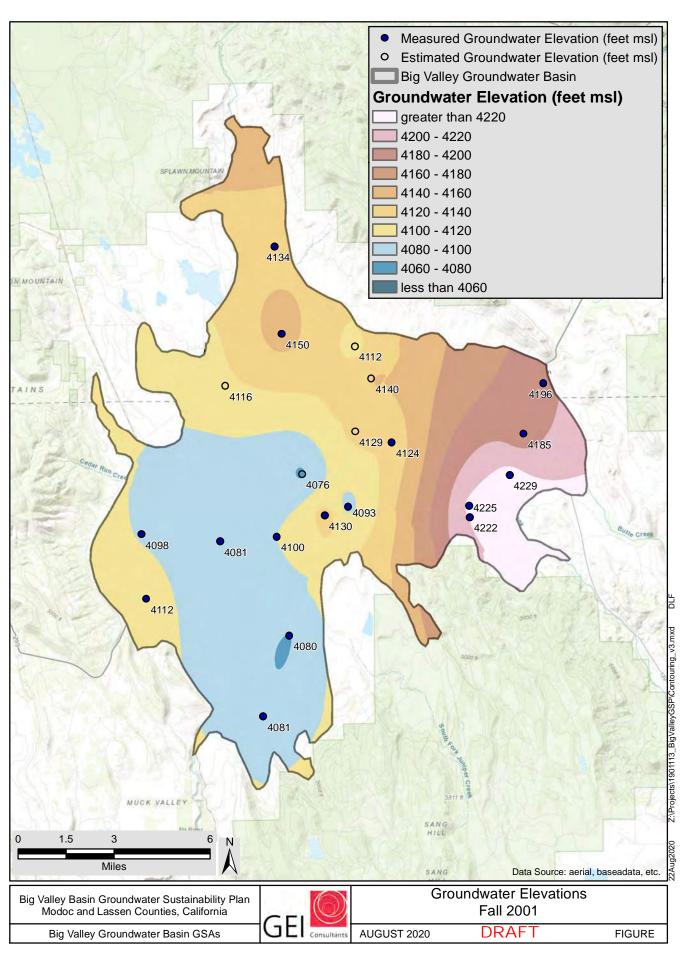


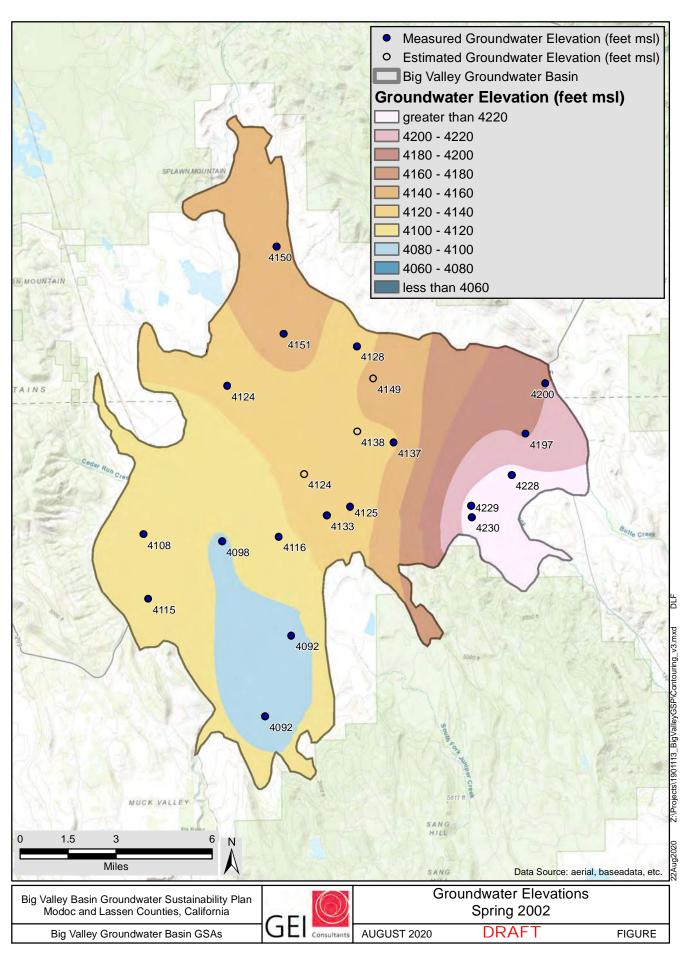


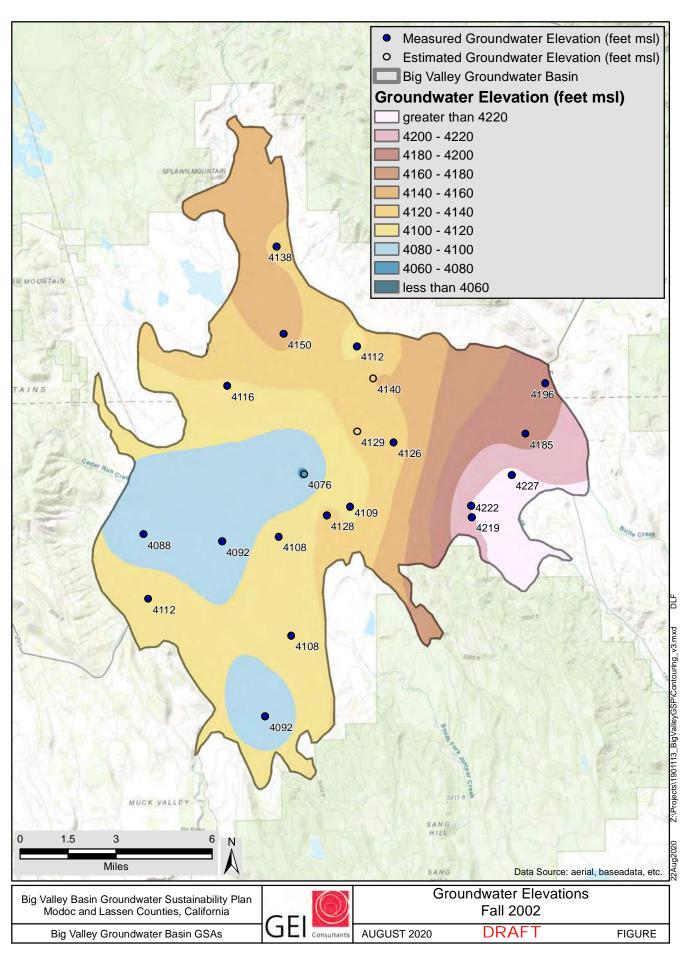


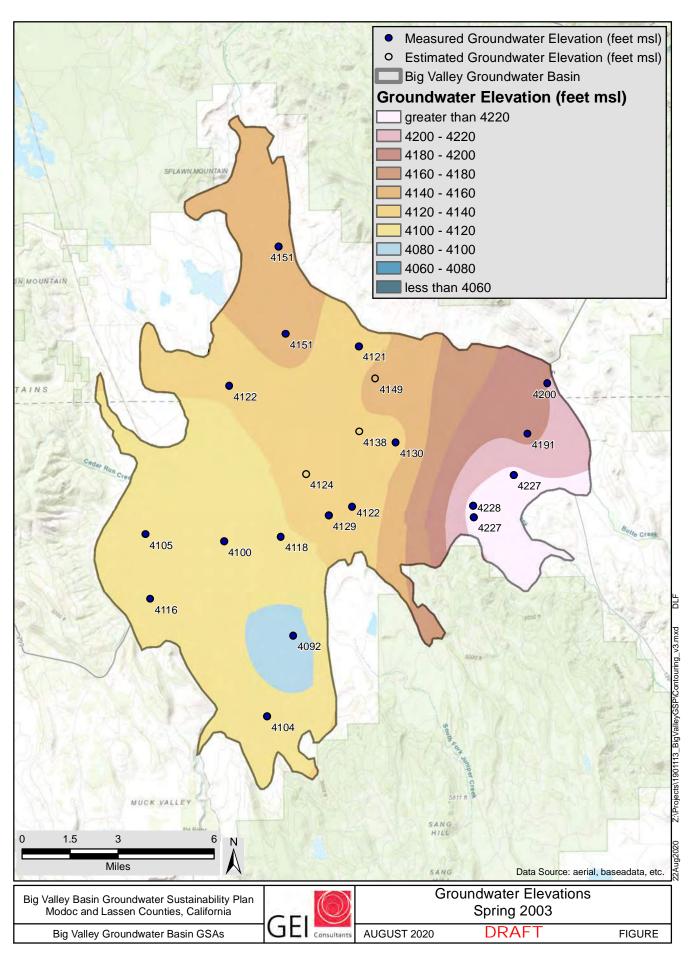


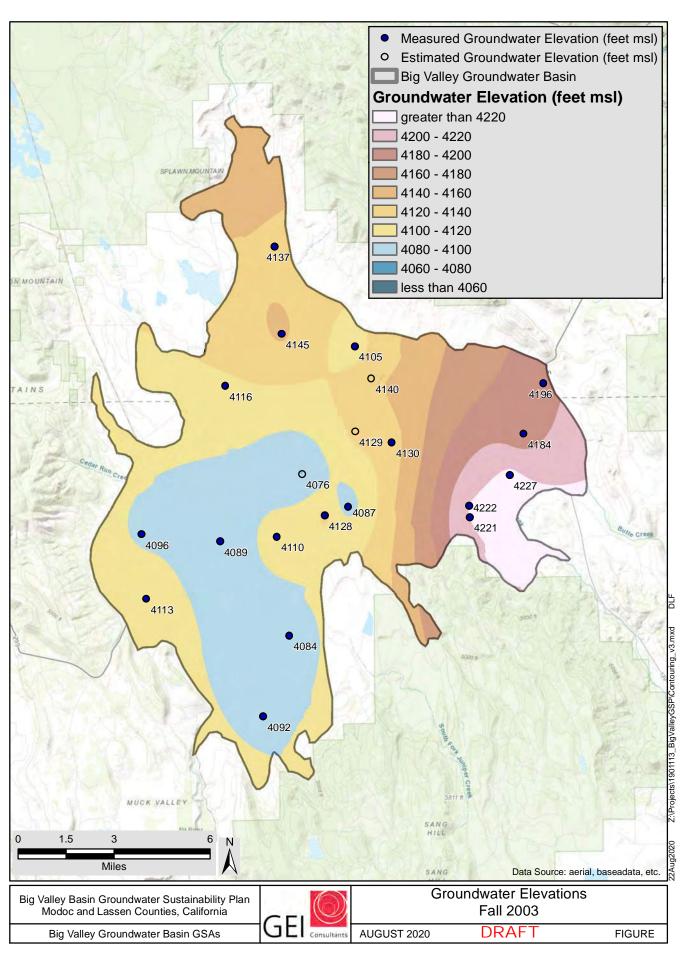


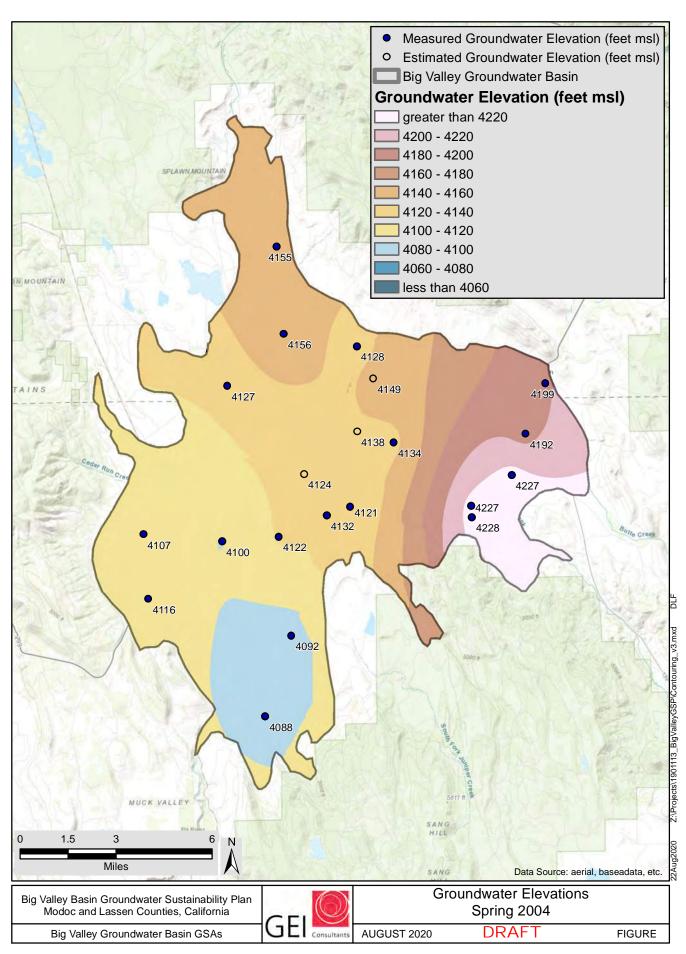


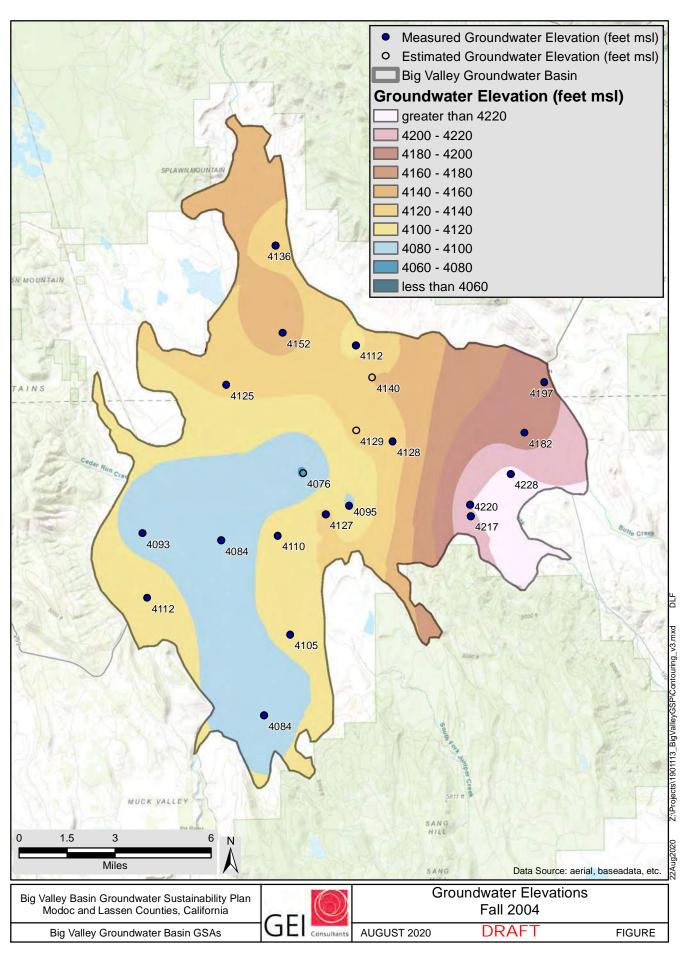


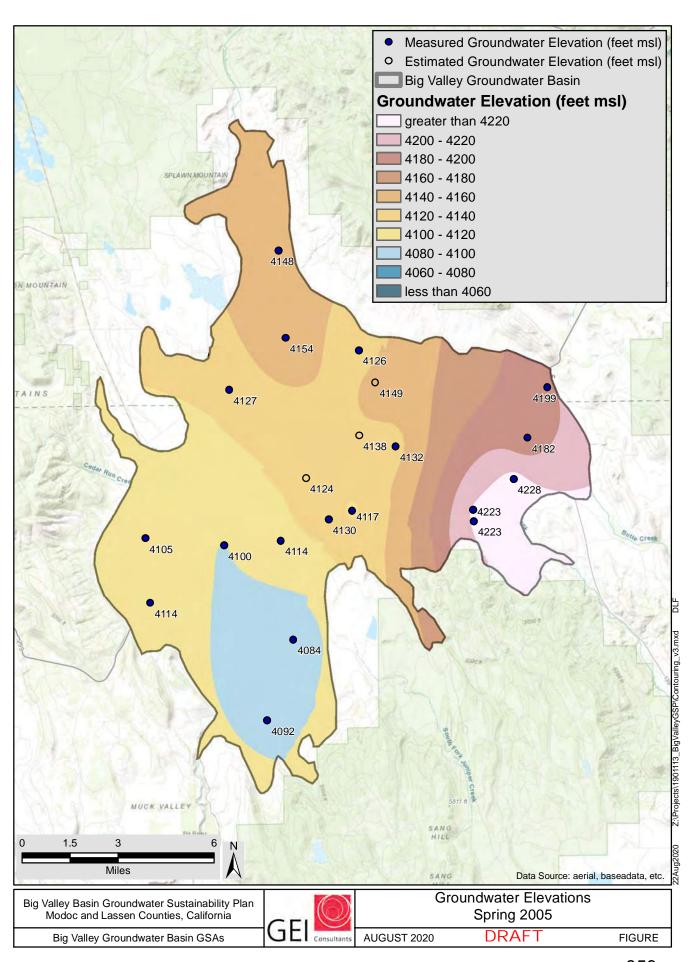


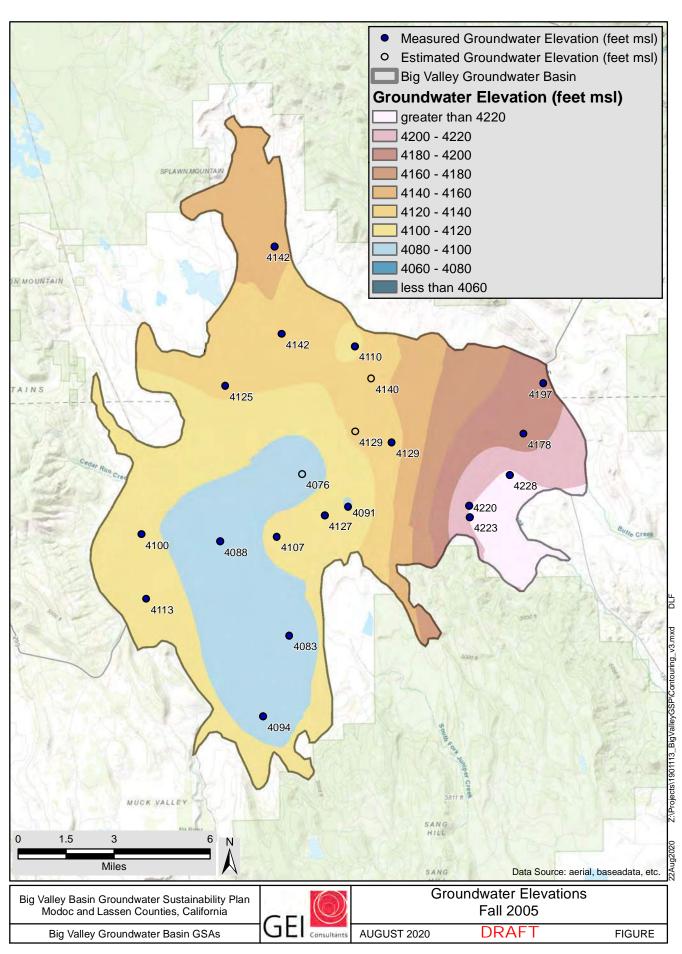


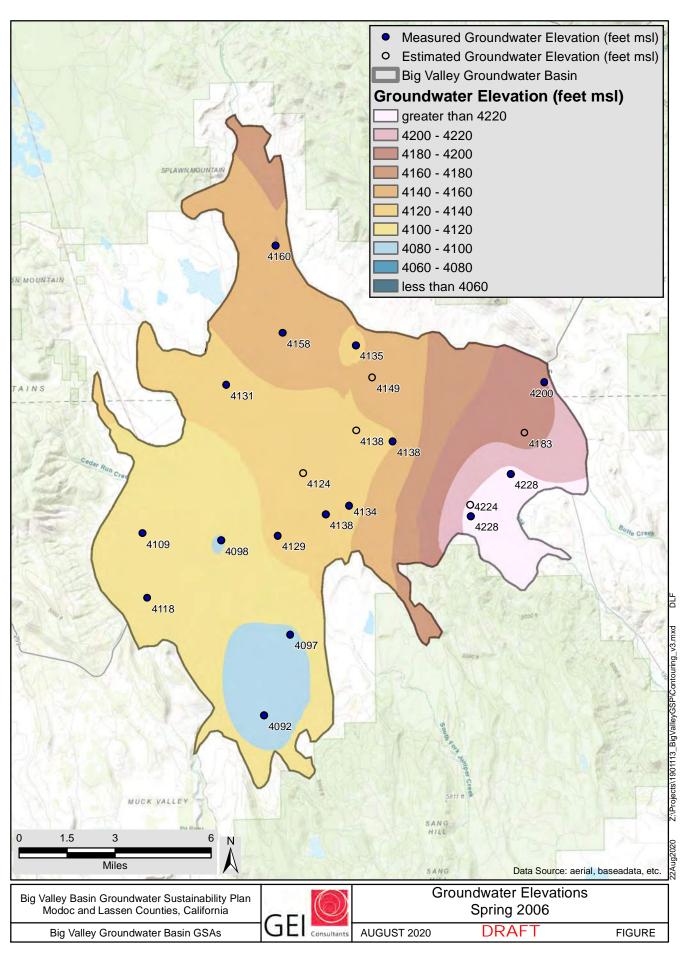


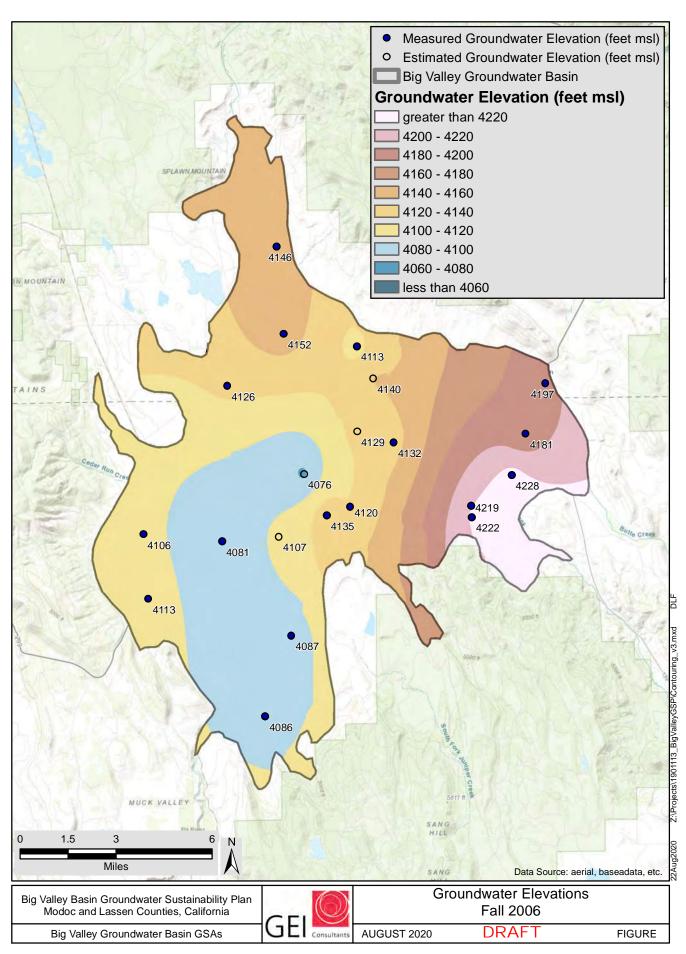


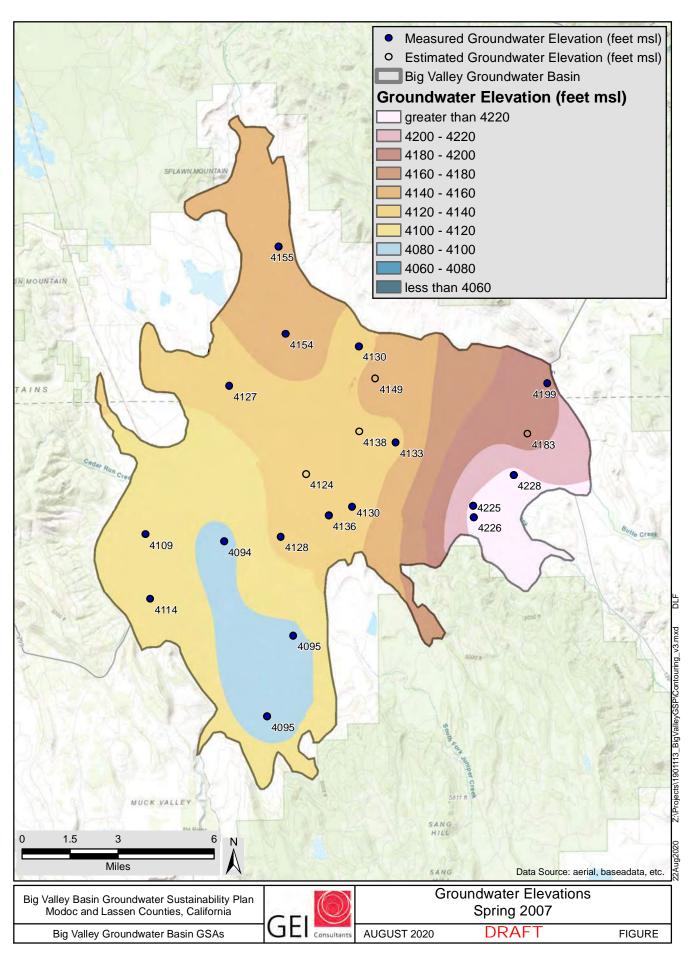


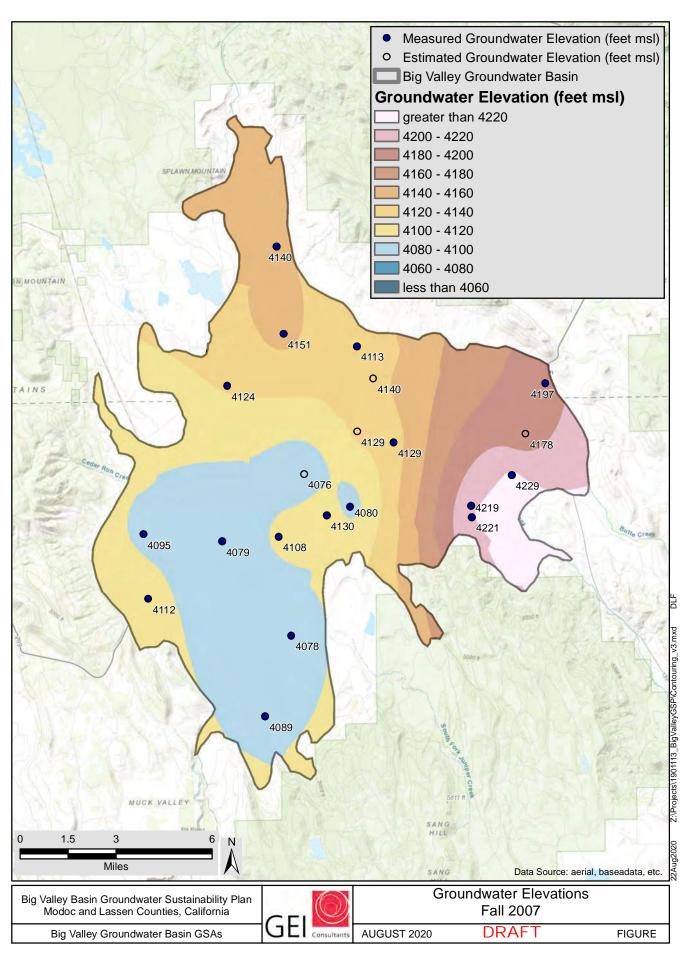


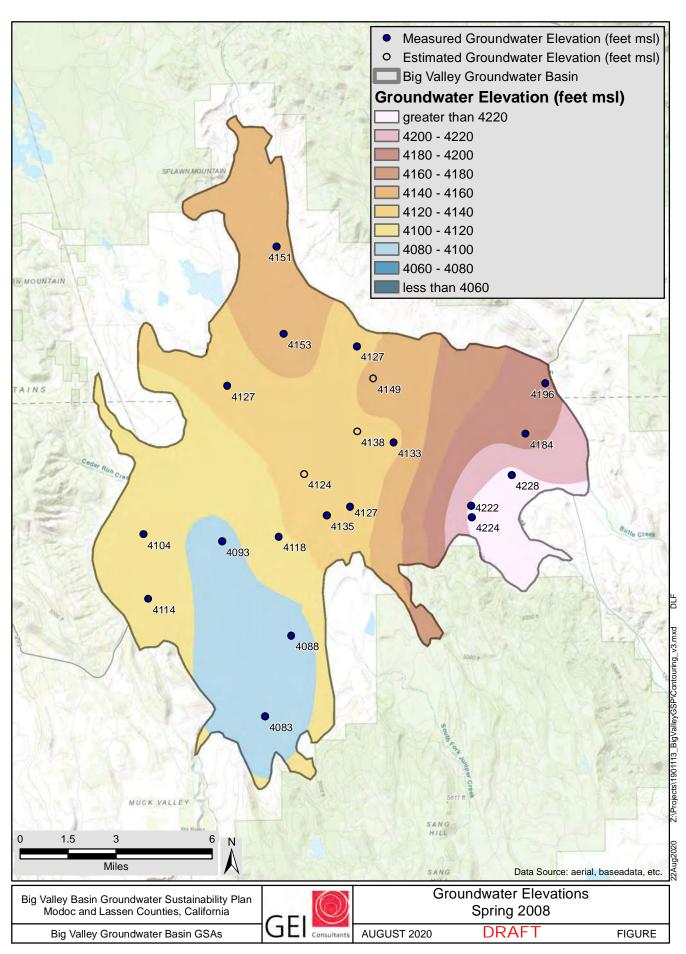


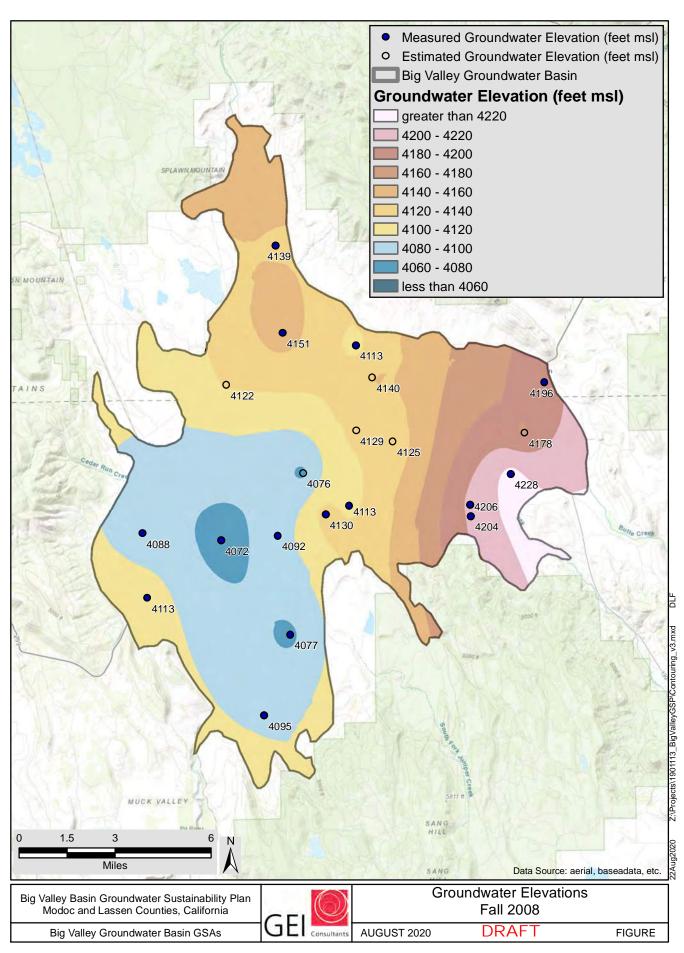


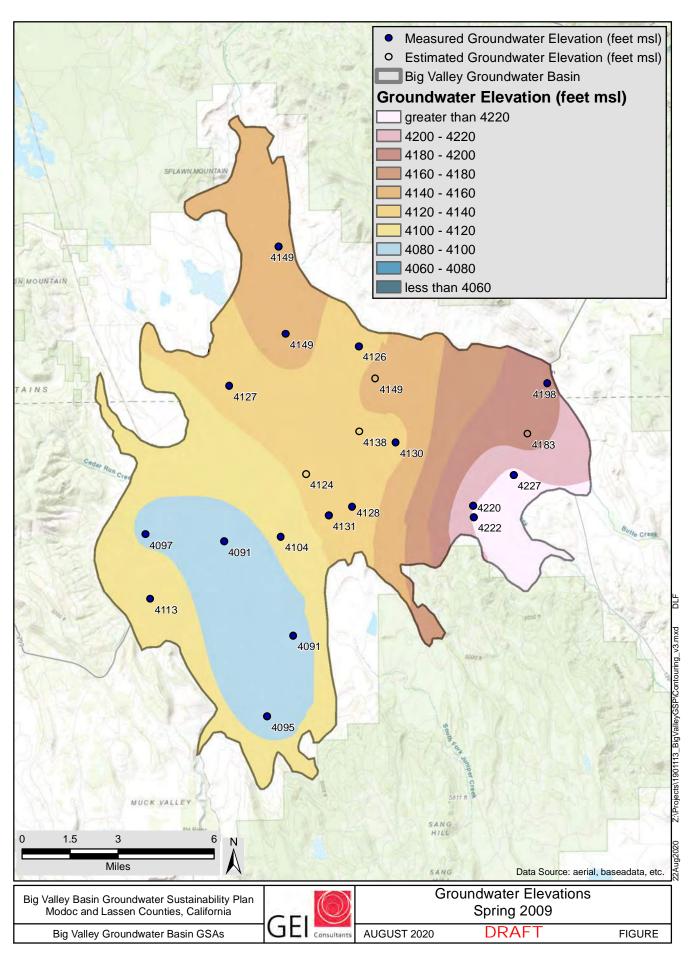


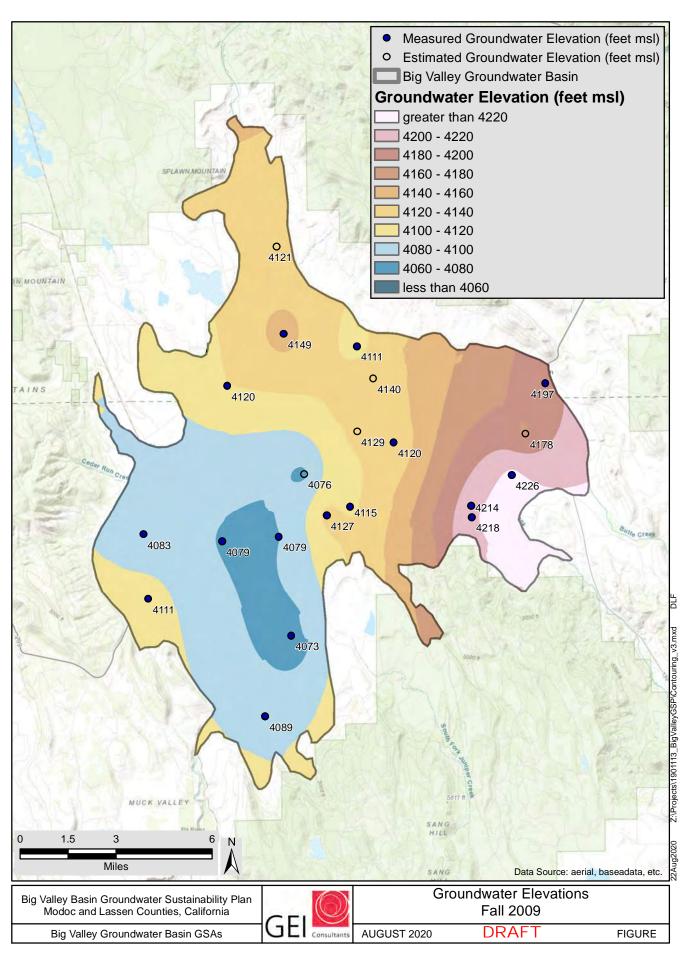


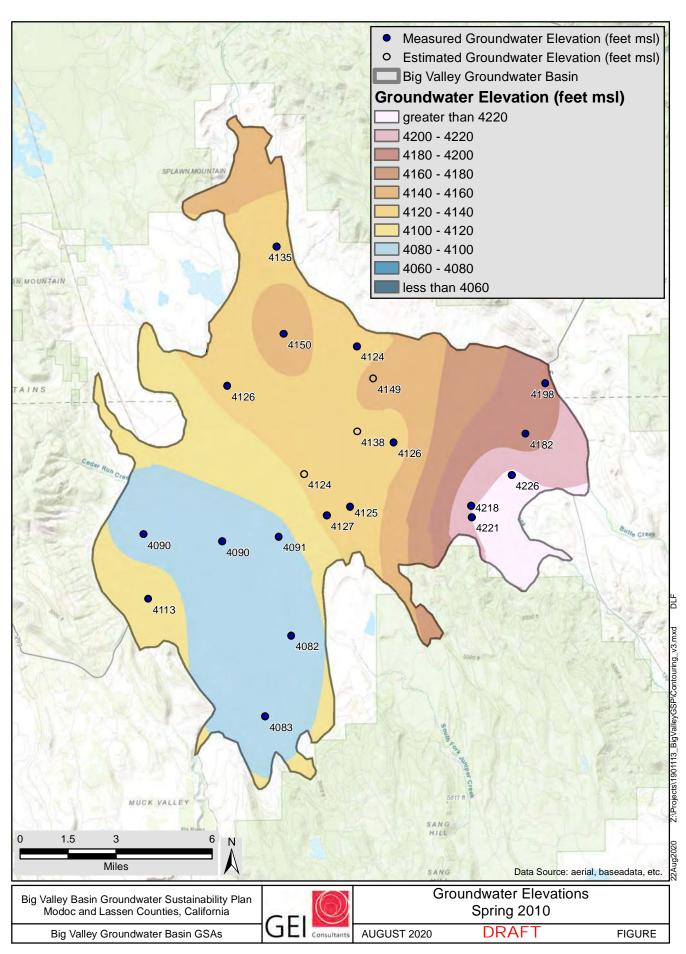


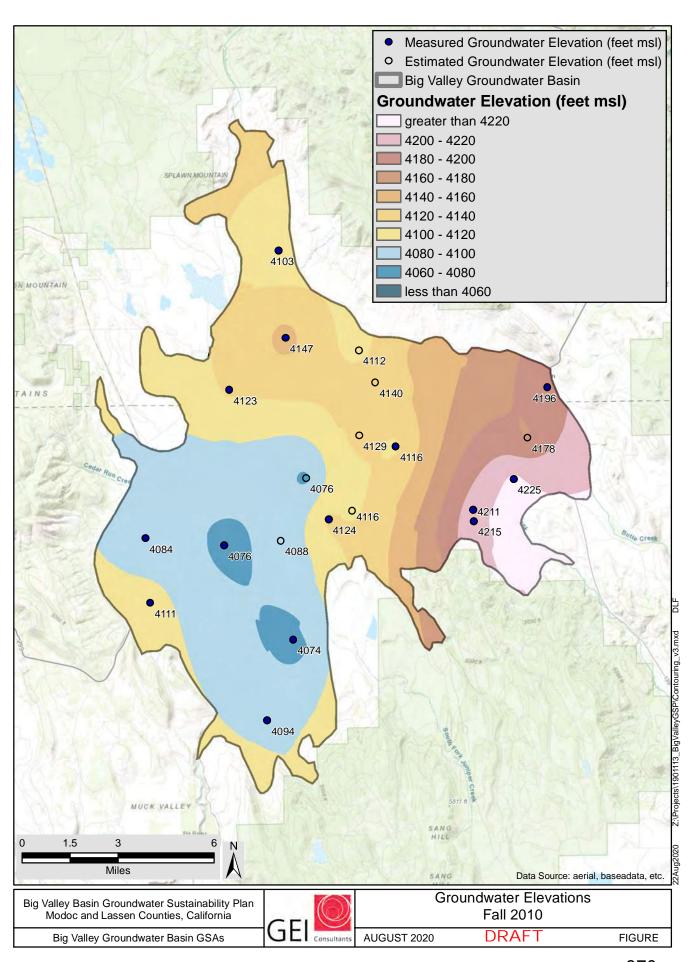


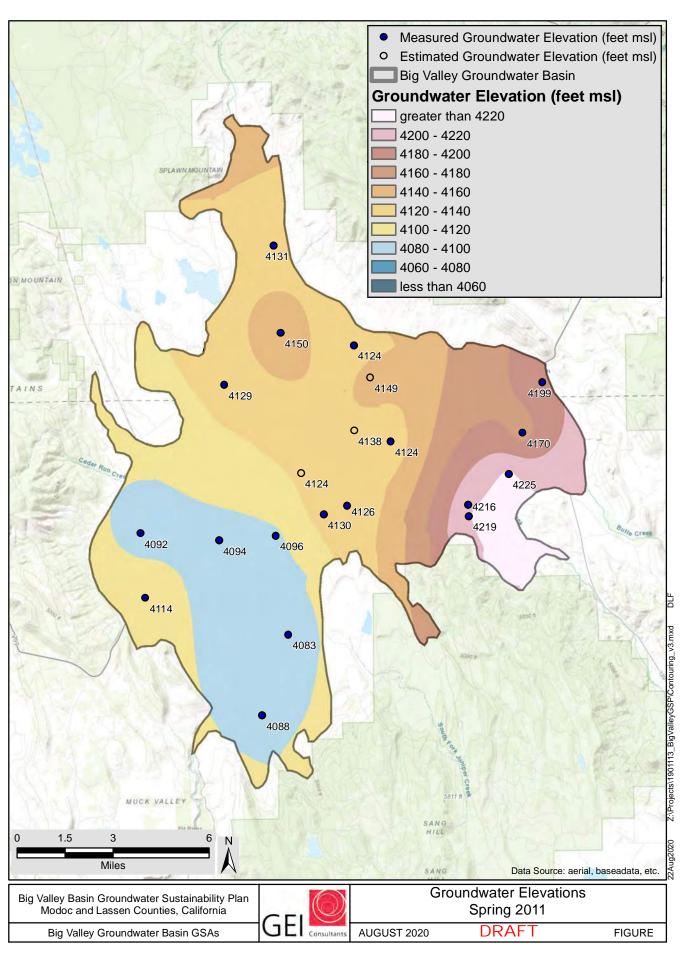


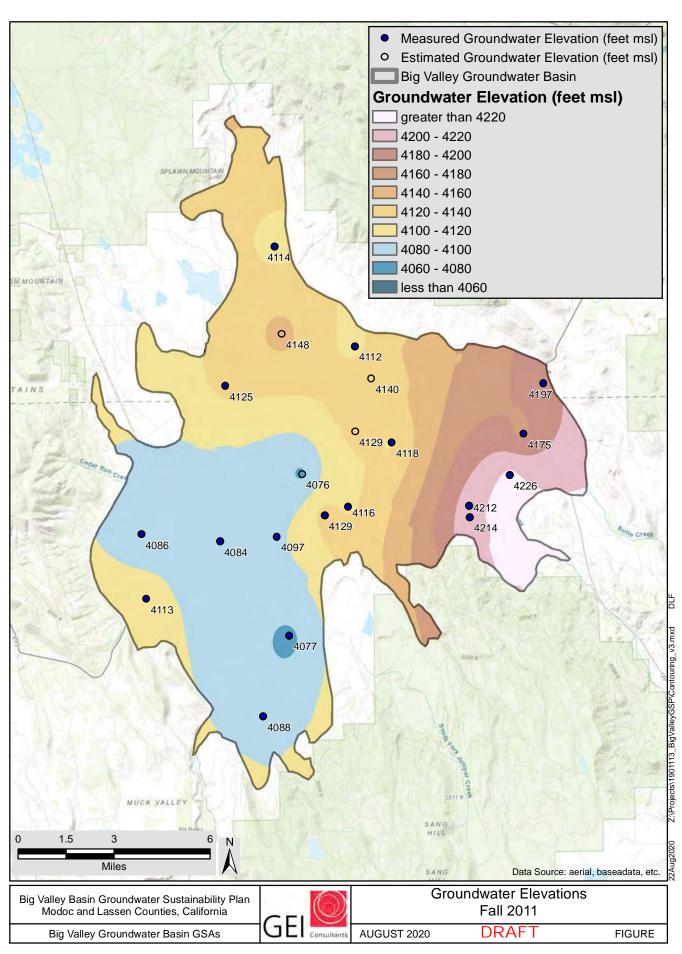


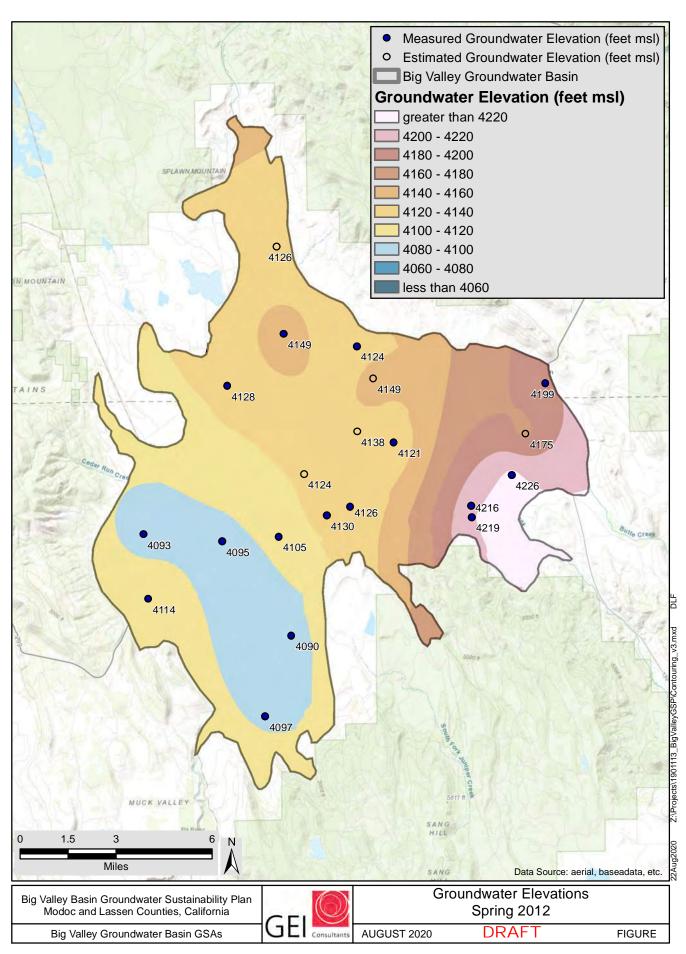


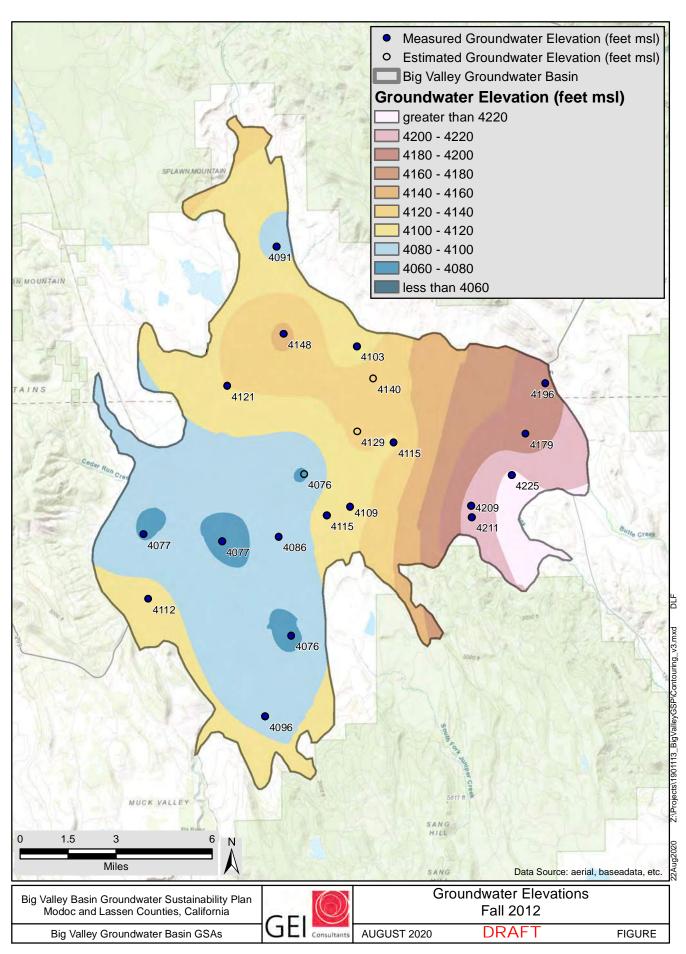


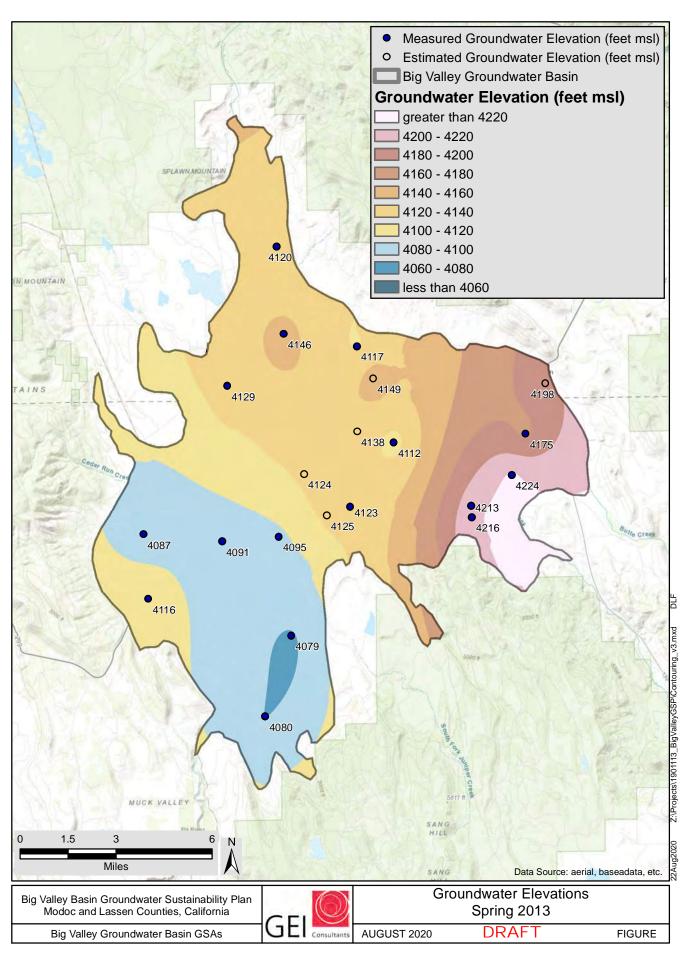


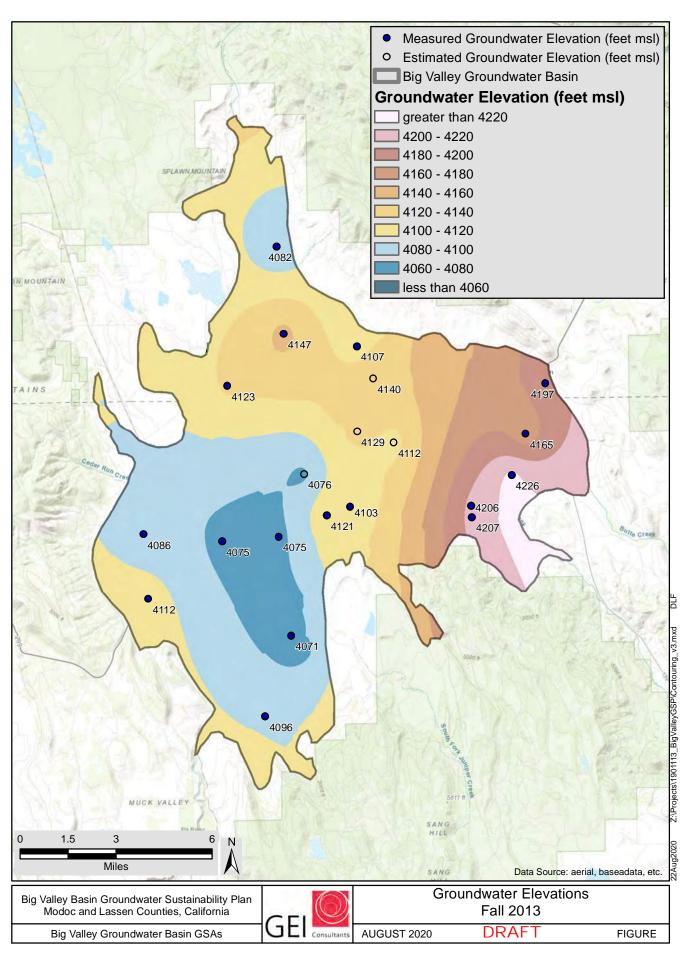


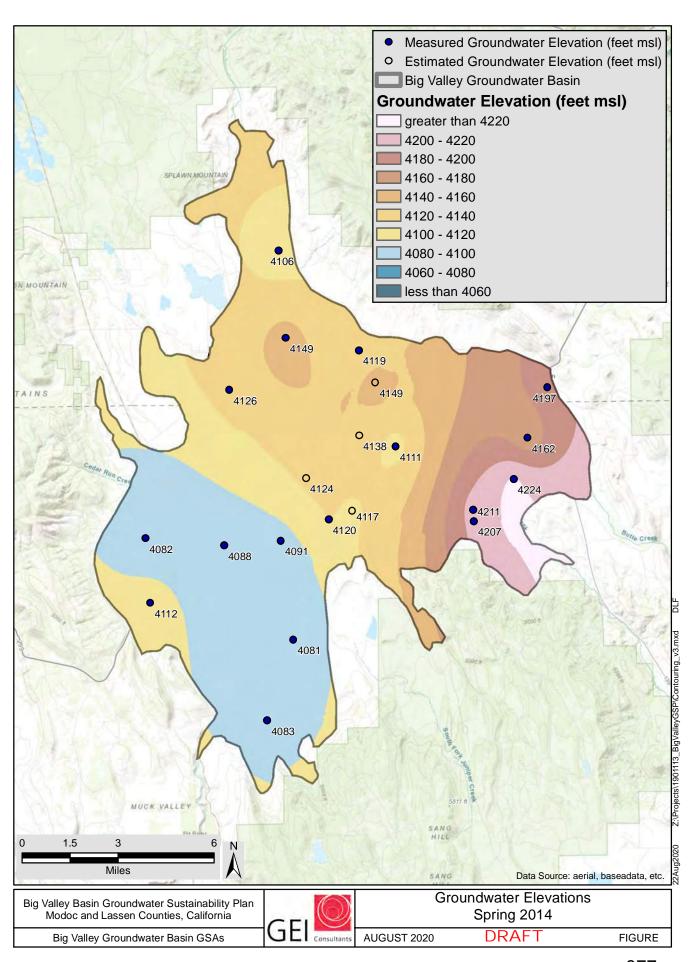


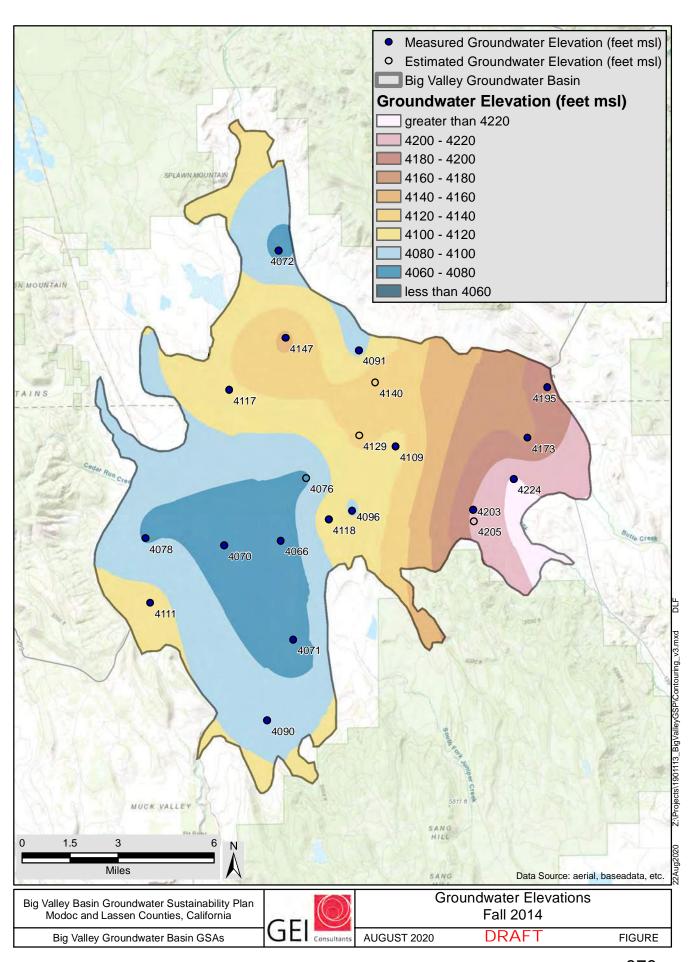


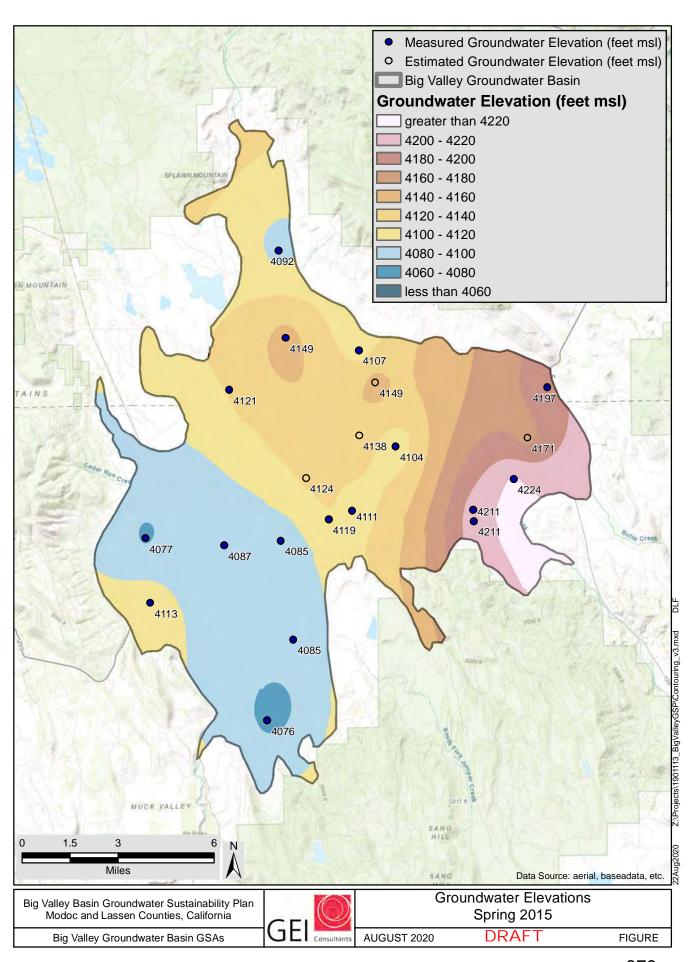


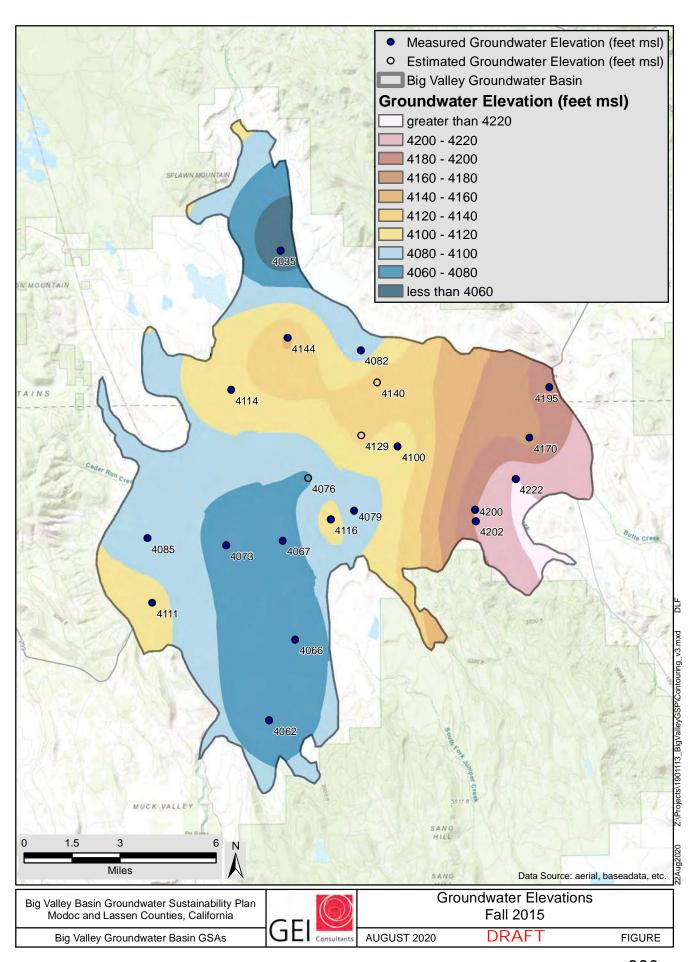


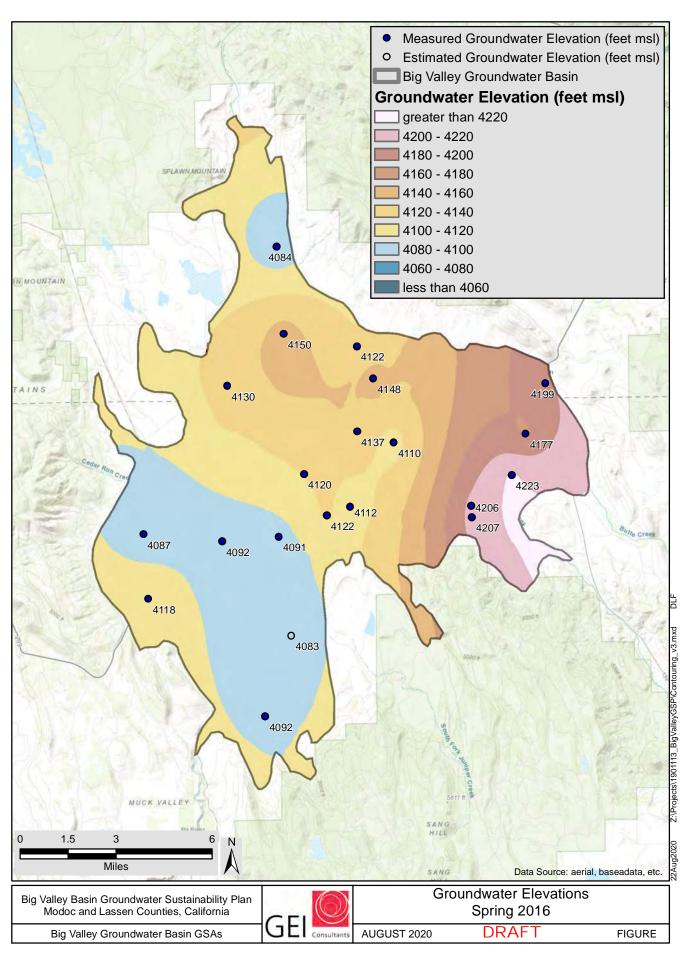


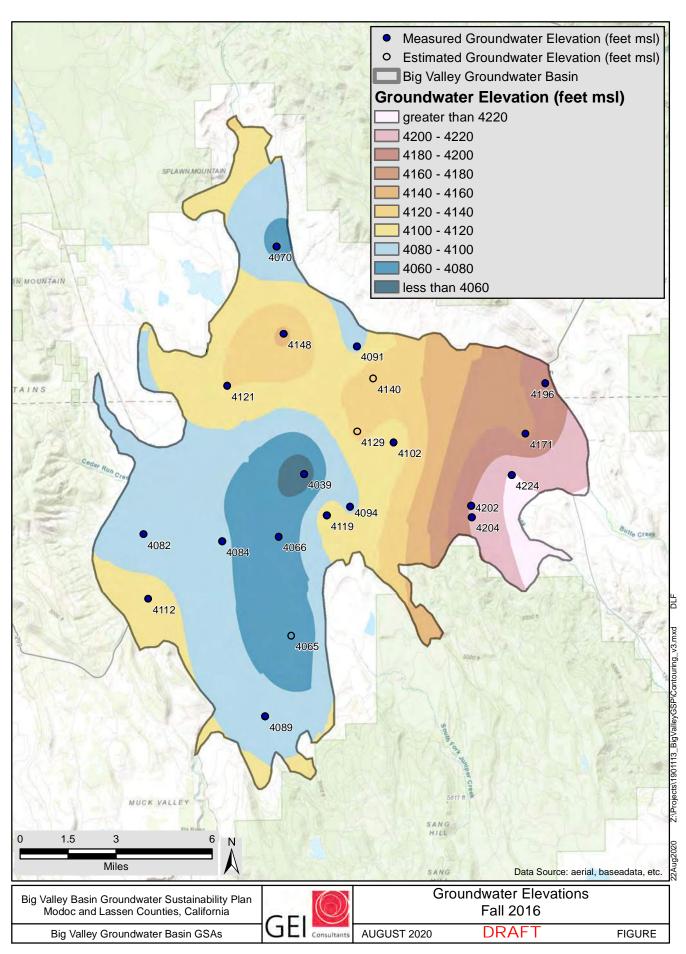


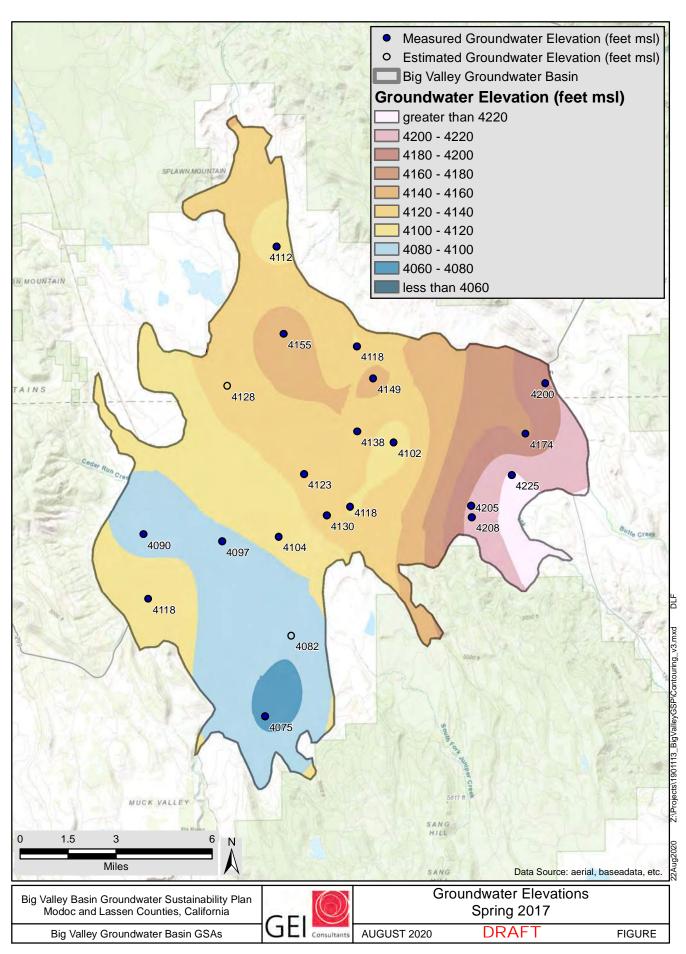


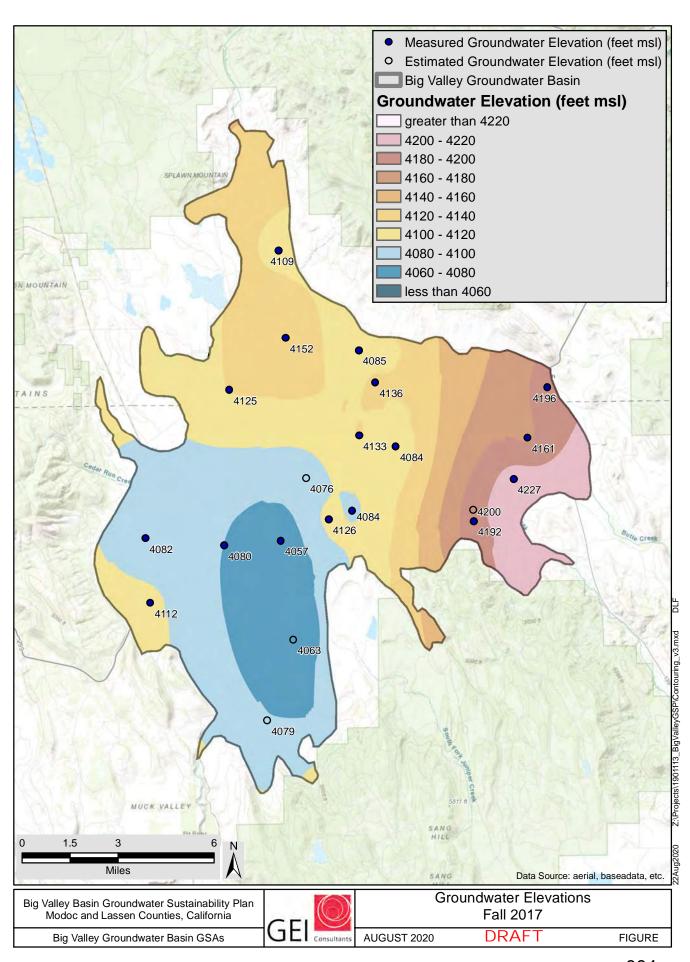

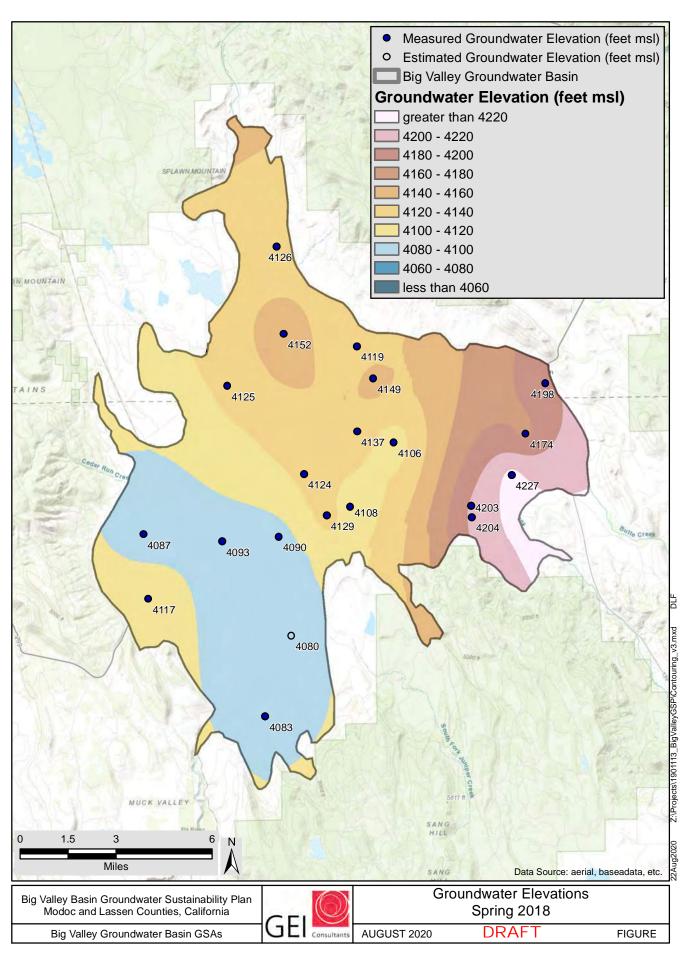


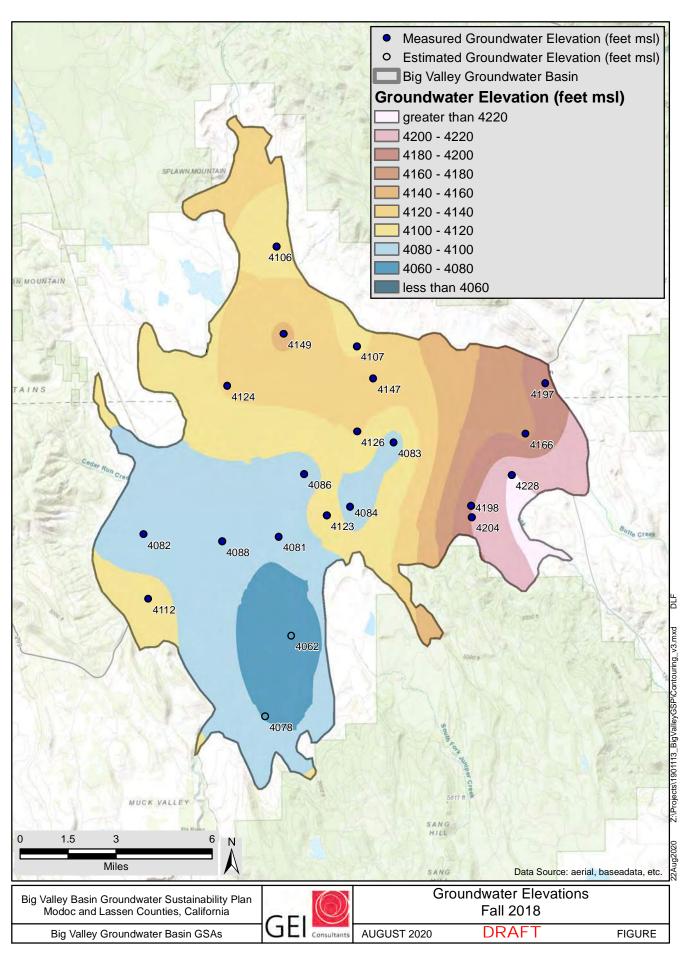


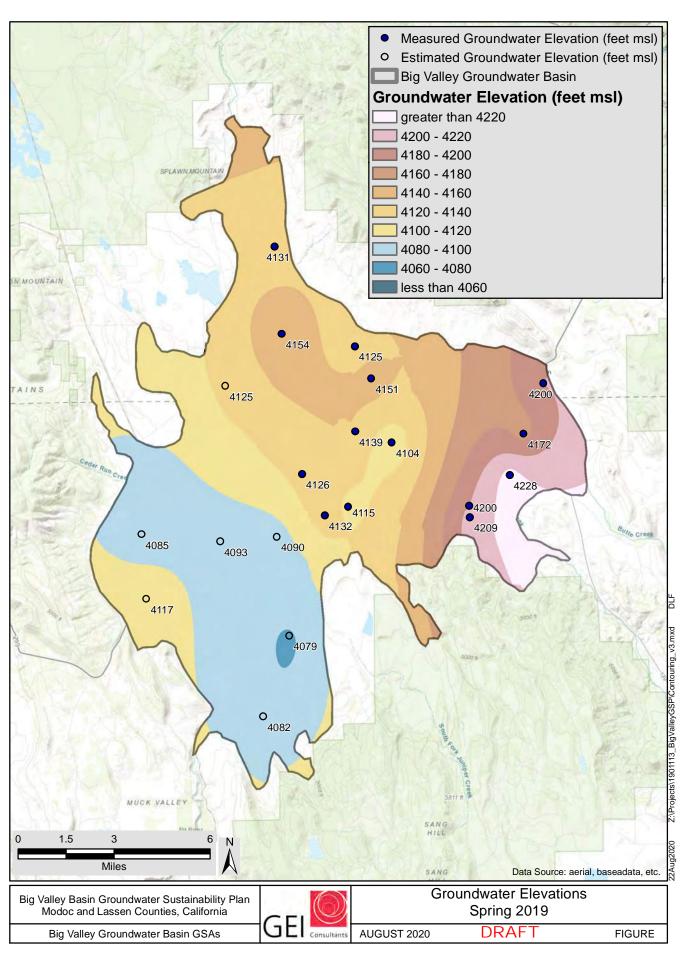

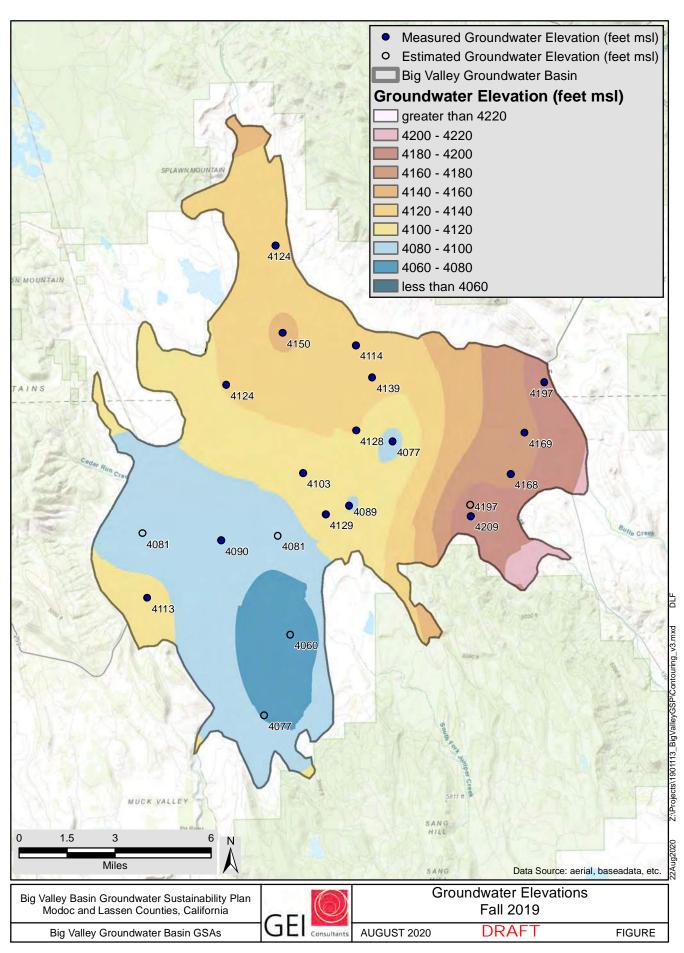

Appendix 5C Transducer Data from Monitoring Well Clusters 1 and 4

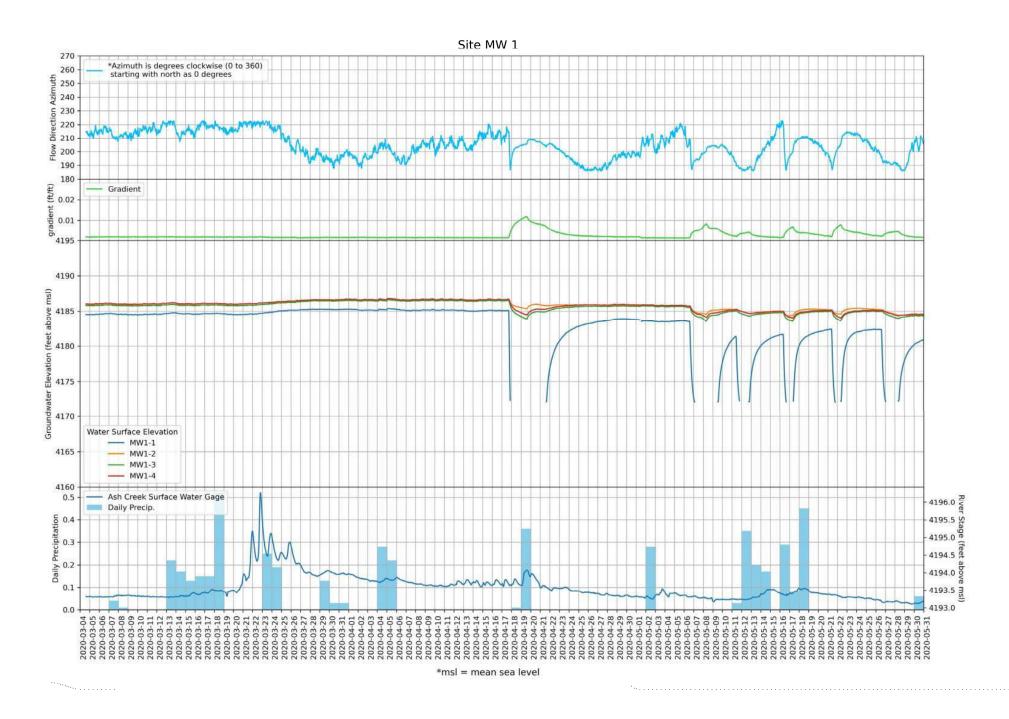

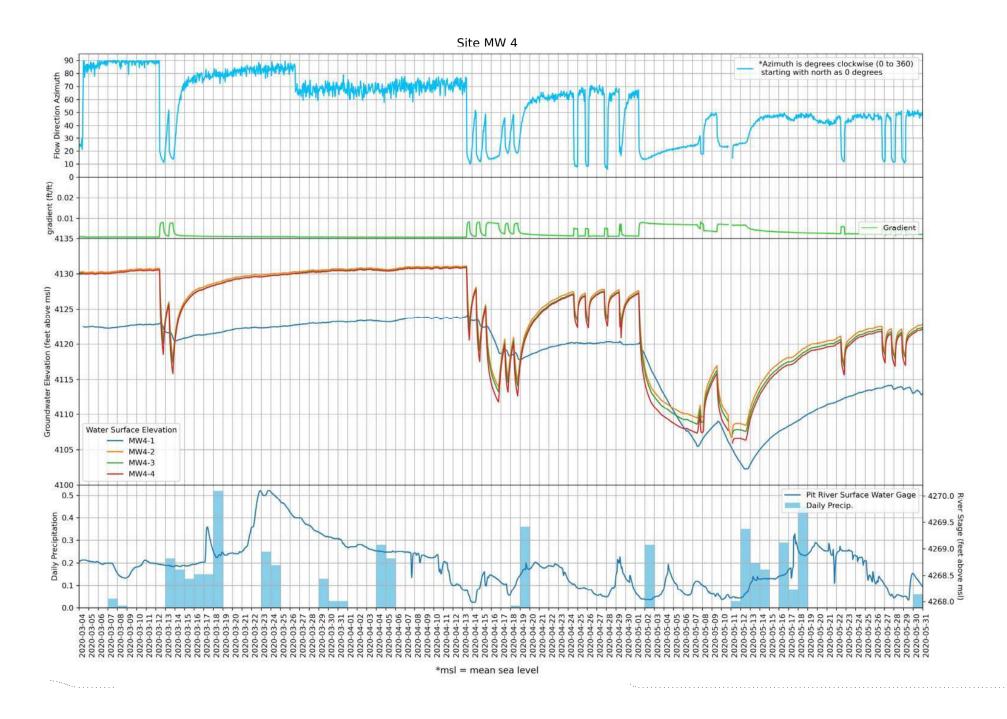

Appendix 6A Water Budget Components

LAND SYSTEM WATER BUDGET

item	Flow Type	Origin/ Destination	Component	Credit(+)/ Debit(-)	Relationship with Other Systems	Data Source(s)	Assumptions	Relative Level of Precision
(1)	Inflow	Into Basin	Precipitation on Land System	+		-Monthly precipitation from PRISM Model (NACSE 2020) evaluated at Bieber -Basin Land area from DWR (2018)Area of rivers, conveyance, and lakes from USGS (2020).	-Precipitation does not vary spatially throughout the Basin	High
(2)	Inflow	Between Systems	Surface Water Delivery	+	Equal to the <i>Surface Water Delivery</i> term in the surface water system outflow	-Reference Evapotranspiration (ETo) from CIMIS spatial data model evaluated at Bieber (DWR 2020b) -Crop Coefficients (Kc) adapted from FAO (1998) using CUP model (Orange, et al 2004) -Monthly precipitation from PRISM Model (NACSE 2020) evaluated at Bieber	-Agriculture and wetland habitats are the only sectors that use surface water. Other uses such as illegal irrigation and fire suppression may use surface water, but there is no way to quantifyIrrigation efficiency = 85% (NRCS 2020) -35% of agricultural irrigation uses surface water -98% of riparian demands are met by surface water	Low
(3)	Inflow	Between Systems	Groundwater Extraction	+	Equal to the <i>Groundwater Extraction</i> term in the groundwater system outflow	-Reference Evapotranspiration (ETo) from CIMIS spatial data model evaluated at Bieber (DWR 2020b) -Crop Coefficients (Kc) adapted from FAO (1998) using CUP model (Orange, et al 2004) -Monthly precipitation from PRISM Model (NACSE 2020) evaluated at Bieber Population of Big Valley from DWR (2018) Population of Bieber from United States Census Bureau (2020)	-Irrigation efficiency = 85% (NRCS 2020) -65% of agricultural irrigation uses groundwater -2% of riparian demands are met by groundwater -Per capita water use is 100 gallons/day/person -All domestic users use groundwater	Low
(4)	Inflow		Total Inflow		(1)+(2)+(3)			
(5)	Outflow	Out of Basin	Evapotranspiration			-Reference Evapotranspiration (ETo) from CIMIS spatial data model evaluated at Bieber (DWR 2020b) -Crop Coefficients (Kc) adapted from FAO (1998) using CUP model (Orange, et al 2004) -Land use and crop acreages from DWR (2014)	-ETo does not vary throughout the Basin -The land system remains in balance from year to year (no change in land system storage).	Moderate
(6)	Outflow	Between Systems	Runoff	-	Equal to the <i>Runoff</i> term in Surface Water System*	-Precipitation from PRISM Model (NACSE 2020) evaluated at Bieber	-Curve number method was used to estimate the amount of runoff (NRCS 1986)	Low
(7)	Outflow	Between Systems	Return Flow	-	Equal to the <i>Return Flow</i> term in Surface Water System*	-See surface water delivery and groundwater extraction above	-50% of agricultural inefficiency results in return flow (7.5% of applied water)	Low
(8)	Outflow	Between Systems	Recharge of Applied Water	-	Equal to the <i>Recharge of Applied</i> Water term in the groundwater system	-See surface water delivery and groundwater extraction above	-50% of agricultural inefficiency results in recharge of grounwater (7.5% of applied water)	Low
(9)	Outflow	Between Systems	Recharge of Precipitation	-	Equal to the <i>Recharge of</i> Precipitation term in the groundwater system	-Precipitation from PRISM Model (NACSE 2020) evaluated at Bieber	-2% of precipitation results in recharge to groundwater	Moderate
	Outflow	Between Systems	Managed Aquifer Recharge	-	Equal to the <i>Managed Aquifer</i> Recharge term in the groundwater system	No managed recharge is currently documented in the	Big Valley Groundwater basin	
(11)	Outflow		Total Outflow		(5)+(6)+(7)+(8)+(9)+(10)			
(12)	Storage Change		Change in Land System Storage		(4)-(11)			

SURFACE WATER SYSTEM WATER BUDGET

	SURFAC	WATER SYSTEM WA	TER BUDGET					
item	Flow Type	Origin/ Destination	Component	Credit(+)/ Debit(-)	Relationship with Other Systems	Data Source(s)	Assumptions	Relative Level of Precision
(13)	Inflow	Into Basin	Stream Inflow	+		-Historic and current data from Pit River gage at Canby -Historic data from gage on Pit River north of Lookout (where it enters basin), Ash Creek at Adin, Widow Valley Creek, Willow Creek	-Historic relationship between flow at Canby and flow at historic gages is the same as current. E.g. flow during winter events is about 40% higher than Canby once the Pit River reaches Big Valley -Watershed areas outside of those with historic gage measurements have same runoff per acre as the gaged watersheds	Moderate
(14)	Inflow	Into Basin	Precipitation on Lakes	+		-Monthly precipitation from PRISM Model (NACSE 2020) evaluated at Bieber -Area of rivers, conveyance, and lakes from USGS (2020).	-precipitation does not vary spatially throughout the Basin	High
(6)	Inflow	Between Systems	Runoff	+	Equal to the <i>Runoff</i> term in land system (6)	-Precipitation from PRISM Model (NACSE 2020) evaluated at Bieber	-Curve number method was used to estimate the amount of runoff (NRCS 1986)	Low
(7)	Inflow	Between Systems	Return Flow	+	Equal to the <i>Return Flow</i> term in the land system (7)	-See surface water delivery and groundwater extraction above	-50% of agricultural inefficiency results in return flow (7.5% of applied water)	Low
(15)	Inflow	Between Systems	Stream Gain from Groundwater	+	Equal to the <i>Groundwater Loss to</i> Stream term in the groundwater system	-None	-Assumed to be 0 until further analysis of transducer data from new monitoring wells	Low
(16)	Inflow	Between Systems	Lake Gain from Groundwater	+	Equal to the <i>Groundwater Loss to Lake</i> term in the groundwater system	-None	-Assumed to be 0 because most lakes are above the groundwater levels	High
(17)	Inflow		Total Inflow		(13)+(14)+(6)+(7)+(15)+(16)			
(18)	Outflow	Out of Basin	Stream Outflow	-		-Estimated based on this water budget -Estimates verified using analysis of historic gage data from Pit River south of Bieber (exit from Basin)	-The surface water system remains in balance from year to year (no change in surface water storage)	Low
(19)	Outflow	Out of Basin	Conveyance Evaporation	-		-Reference Evapotranspiration (ETo) from CIMIS spatial data model evaluated at Bieber (DWR 2020b) -Area of conveyance from USGS (2020)	-Each year, conveyance is full from May to September and empty from October to April	Moderate
(20)	Outflow	Between Systems	Conveyance Seepage	-	Equal to the <i>Conveyance Seepage</i> term in the groundwater system	-Area of conveyance from USGS (2020)	-Each year, conveyance is full from May to September and empty from October to April -Seepage rate of 0.01 ft/day	Moderate
(2)	Outflow	Between Systems	Surface Water Delivery	-	Equal to the <i>Surface Water Delivery</i> term in land system (2)	-Reference Evapotranspiration (ETo) from CIMIS spatial data model evaluated at Bieber (DWR 2020b) -Crop Coefficients (Kc) adapted from FAO (1998) using CUP model (Orange, et al 2004) -Monthly precipitation from PRISM Model (NACSE 2020) evaluated at Bieber	-Agriculture and wetland habitats are the only sectors that use surface water. Other uses such as illegal irrigation and fire suppression may use surface water, but there is no way to quantifyIrrigation efficiency = 85% (NRCS 2020) -35% of agricultural irrigation uses surface water -98% of riparian demands are met by surface water	Low
(21)	Outflow	Between Systems	Stream Loss to Groundwater	-	Equal to the <i>Gain from Stream</i> term in the groundwater system	-Historic and current data from Pit River gage at Canby -Historic data from gage on Pit River north of Lookout (where it enters Basin), Ash Creek at Adin, Widow Valley Creek, Willow Creek, Pit River at exit from Basin.	-Calculated from the historic inflow - outflow relationship.	Low
(22)	Outflow	Between Systems	Lake Loss to Groundwater	-	Equal to the <i>Groundwater Gain from</i> <i>Lake</i> term in the groundwater system	-Area of lakes from USGS (2020)	-Each year, lakes are full (100%) and surface area drops throughout summer to 10% in September, then gradually refill over the winterSeepage rate of 0.01 ft/day	Moderate

(23)	Outflow	Out of Basin	Lake Evaporation	-		,	-Each year, lakes are full (100%) and surface area drops throughout summer to 10% in September, then gradually refill over the winter.	High
(24)	Outflow	Out of Basin	Stream Evaporation	-		-Reference Evapotranspiration (ETo) from CIMIS spatial data model evaluated at Bieber (DWR 2020b) -Area of streams from USGS (2020)		High
(25)	Outflow		Total Outflow		18)+(19)+(20)+(2)+(21)+(22)+(23)+(24)			
(26)	Storage Change		Change in Surface Water Storage		(17)-(25)			

GROUNDWATER SYSTEM WATER BUDGET

item	Flow	Origin/ Destination	Component	Credit(+)/	Relationship with Other Systems	Data Source(s)	Assumptions	Relative Level
ä	Туре	Origin/ Destination	Component	Debit(-)	,	.,	·	of Precision
(8)	Inflow	Between Systems	Recharge of Applied Water	+	Equal to the <i>Recharge of Applied</i> Water term in the land system (8)	-See surface water delivery and groundwater extraction above	-50% of agricultural inefficiency results in recharge of grounwater (7.5% of applied water)	Low
					Equal to the Recharge of	-Precipitation from PRISM Model (NACSE 2020)	-2% of precipitation results in recharge to	
(9)	Inflow	Between Systems	Recharge of Precipitation	+	Precipitation term in the land system	1 '	groundwater	Moderate
					(9)			
					Equal to the Managed Aquifer	No managed recharge is currently documented in the	Big Valley Groundwater basin	
(10)	Inflow	Between Systems	Managed Aquifer Recharge	+	Recharge term in the land system			
					(10)	-Historic and current data from Pit River gage at	-Calculated from the historic inflow - outflow	
						Canby	relationship.	
					Equal to the Stream Loss to	-Historic data from gage on Pit River north of Lookout	· ·	
(21)	Inflow	Between Systems	Groundwater Gain from Stream	+	Groundwater term in the surface	(where it enters Basin), Ash Creek at Adin, Widow		Low
					water system (21)	Valley Creek, Willow Creek, Pit River at exit from		
						Basin.		
					Equal to the Lake Loss to	-Area of lakes from USGS (2020)	-Each year, lakes are full (100%) and surface area	
(22)	Inflow	Between Systems	Groundwater Gain from Lake	+	Groundwater term in the surface		drops throughout summer to 10% in September, then gradually refill over the winter.	Moderate
					water system (22)		-Seepage rate of 0.01 ft/day	
					Equal to the <i>Conveyance Seepage</i>	-Area of conveyance from USGS (2020)	-Each year, conveyance is full from May to	
(20)	Inflow	Between Systems	Conveyance Seepage	+	term in the surface water system		September and empty from October to April	Moderate
					(20)		-Seepage rate of 0.01 ft/day	
						-Water level data from wells in Round Valley and	-Other than subsurface flow from Round Valley	
(27)	Inflow	Into Basin	Subsurface Inflow	+		Adin	(about 1AFY), no subsurface inflow occurs in the	Moderate
						-Estimate of cross-sectional area of canyon between Round Valley and Big Valley	BVGB	
(28)	Inflow		Total Inflow		(8)+(9)+(10)+(21)+(22)+(20)+(27)	Thousand Takey and Dig Takey		
			,			-Reference Evapotranspiration (ETo) from CIMIS	-Irrigation efficiency = 85% (NRCS 2020)	
	Outflow	Between Systems	Groundwater Extraction			spatial data model evaluated at Bieber (DWR 2020b)	-65% of agricultural irrigation uses groundwater	Low
						-Crop Coefficients (Kc) adapted from FAO (1998)	-2% of riparian demands are met by groundwater	
				-	Equal to the <i>Groundwater Extraction</i> term in the land system (3)	using CUP model (Orange, et al 2004)	-Per capita water use is 100 gallons/day/person	
(3)						-Monthly precipitation from PRISM Model (NACSE 2020) evaluated at Bieber	-All domestic users use groundwater	
(5)						Population of Big Valley from DWR (2018)		
						Population of Bieber from United States Census		
						Bureau (2020)		
					Equal to the Stream Gain from	-None	-Assumed to be 0 until further analysis of transducer	
(15)	Outflow	Between Systems	Groundwater Loss to Stream	_	Groundwater term in the surface	- Notice	data from new monitoring wells	Low
(=3)					water system (15)		asta nominew monitoring went	2011
					Equal to the Lake Gain from	-None	-Assumed to be 0 because most lakes are above the	_
(16)	Outflow	Between Systems	Groundwater Loss to Lake	-	Groundwater term in the surface		groundwater levels	High
					water system (16)			
(29)	Outflow	Out of Basin	Subsurface Outflow	-			-No subsurface outflow occurs in the BVGB	Moderate
(30)	Outflow		Total Outflow		(3)+(15)+(16)+(29)			
(31)	Storage		Change in Groundwater Storage		(28)-(30)			
,,	Change				(20)			

TOTAL WATER BUDGET

item	Flow Type	Origin/ Destination	Component	Credit(+)/ Debit(-)	Relationship with Other Systems	Data Source(s)	Assumptions	Relative Level of Precision
(1)	Inflow	Into Basin	Precipitation on Land System	+	Equal to the <i>Precipitation</i> term in the land system	-Monthly precipitation from PRISM Model (NACSE 2020) evaluated at Bieber -Basin Land area from DWR (2018)Area of rivers, conveyance, and lakes from USGS (2020).		High
(14)	Inflow	Into Basin	Precipitation on Lakes	+	Equal to the <i>Precipitation on Lakes</i> term in the surface water system	-Monthly precipitation from PRISM Model (NACSE 2020) evaluated at Bieber -Basin Land area from DWR (2018)Area of rivers, conveyance, and lakes from USGS (2020).	-Precipitation does not vary spatially throughout the Basin	High
(13)	Inflow	Into Basin	Stream Inflow	+	Equal to the Stream Inflow term in the surface water system	-Historic and current data from Pit River gage at Canby -Historic data from gage on Pit River north of Lookout (where it enters basin), Ash Creek at Adin, Widow Valley Creek, Willow Creek	-Historic relationship between flow at Canby and flow at historic gages is the same as current. E.g. flow during winter events is about 40% higher than Canby once the Pit River reaches Big Valley -Watershed areas outside of those with historic gage measurements have same runoff per acre as the gaged watersheds	Moderate
(27)	Inflow	Into Basin	Subsurface Inflow	+	Equal to the Subsurface Inflow term in the groundwater system	-Water level data from wells in Round Valley and Adin -Estimate of cross-sectional area of canyon between Round Valley and Big Valley	-Other than subsurface flow from Round Valley (about 1AFY), no subsurface inflow occurs in the BVGB	Moderate
(32)	Inflow		Total Inflow		(1)+(14)+(13)+(27)			
(5)	Outflow	Out of Basin	Evapotranspiration	-	Equal to the <i>Evapotranspiration</i> term in the land system	-Reference Evapotranspiration (ETo) from CIMIS spatial data model evaluated at Bieber (DWR 2020b) -Crop Coefficients (Kc) adapted from FAO (1998) using CUP model (Orange, et al 2004) -Land use and crop acreages from DWR (2014)	-ETo does not vary throughout the Basin -The land system remains in balance from year to year (no change in land system storage).	Moderate
(24)	Outflow	Out of Basin	Stream Evaporation	-	Equal to the Stream Evaporation term in the surface water system	-Reference Evapotranspiration (ETo) from CIMIS spatial data model evaluated at Bieber (DWR 2020b) -Area of streams from USGS (2020)		High
(23)	Outflow	Out of Basin	Lake Evaporation	-	Equal to the <i>Lake Evaporation</i> term in the surface water system	-Reference Evapotranspiration (ETo) from CIMIS spatial data model evaluated at Bieber (DWR 2020b) -Area of lakes from USGS (2020)	-Each year, lakes are full (100%) and surface area drops throughout summer to 10% in September, then gradually refill over the winter.	High
(19)	Outflow	Out of Basin	Conveyance Evaporation	-	Equal to the <i>Conveyance</i> Evaporation term in the surface water system	-Reference Evapotranspiration (ETo) from CIMIS spatial data model evaluated at Bieber (DWR 2020b) -Area of conveyance from USGS (2020)	-Each year, conveyance is full from May to September and empty from October to April	Moderate
(18)	Outflow	Out of Basin	Stream Outflow	-	Equal to the <i>Stream Outflow</i> term in the surface water system	-Estimated based on this water budget -Estimates verified using analysis of historic gage data from Pit River south of Bieber (exit from Basin)	-The surface water system remains in balance from year to year (no change in surface water storage)	Low
	Outflow	Out of Basin	Subsurface Outflow	-	Equal to the Subsurface Outflow term in the groundwater system		-No subsurface outflow occurs in the BVGB	Moderate
(33)	Outflow		Total Outflow		(5)+(24)+(23)+(19)+(18)+(29)			
(34)	Storage Change		Change in Total System Storage		(32)-(33)			

Appendix 6B Water Budget Details

ı	Flow Type	Origin/ Destination	Component	Average (1984-2018)	1984	1985	1986	1987	1988
Γ	Inflow	Into Basin	Precipitation on Land System	136,801	148,899	132,719	193,698	96,315	88,835
	Inflow	Between Systems	Surface Water Delivery	75,811	68,516	76,750	74,262	78,850	85,952
	Inflow	Between Systems	Groundwater Extraction	44,622	39,192	45,598	41,789	47,782	53,245
I	Inflow	(1)+(2)+(3)	Total Inflow	257,234	256,607	255,067	309,749	222,946	228,032
Γ	Outflow	Out of Basin	Evapotranspiration	154,040	146,344	152,399	160,318	155,136	159,362
	Outflow	Between Systems	Runoff	83,449	92,329	82,737	130,033	47,265	46,439
	Outflow	Between Systems	Return Flow	5,012	4,396	5,123	4,685	5,373	5,994
	Outflow	Between Systems	Recharge of Applied Water	13,133	11,840	13,309	12,802	13,701	14,966
	Outflow	Between Systems	Recharge of Precipitation	1,601	1,697	1,499	1,910	1,471	1,272
	Outflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-
I	Outflow	(5)+(6)+(7)+(8)+(9)+(10)	Total Outflow	257,234	256,607	255,067	309,749	222,946	228,032
)	Storage Change	(4)-(11)	Change in Land System Storage	-	-	-	-	-	-

	SURFACE V	VATER SYSTEM WATER BUDGET							
item	Flow Type	Origin/ Destination	Component	Average (1984-2018)	1984	1985	1986	1987	1988
(13)	Inflow	Into Basin	Stream Inflow	371,148	808,462	310,960	878,565	161,807	162,980
(14)	Inflow	Into Basin	Precipitation on Reservoirs	501	546	486	710	353	326
(6)	Inflow	Between Systems	Runoff	83,449	92,329	82,737	130,033	47,265	46,439
(7)	Inflow	Between Systems	Return Flow	5,012	4,396	5,123	4,685	5,373	5,994
(15)	Inflow	Between Systems	Stream Gain from Groundwater	-	-	-	-	-	-
(16)	Inflow	Between Systems	Reservoir Gain from Groundwater	-	-	-	-	-	-
(17)	Inflow	(13)+(14)+(6)+(7)+(15)+(16)	Total Inflow	460,110	905,732	399,306	1,013,993	214,798	215,738
(18)	Outflow	Out of Basin	Stream Outflow	358,486	786,443	302,274	865,544	122,626	116,338
(19)	Outflow	Out of Basin	Conveyance Evaporation	46	44	46	45	45	50
(20)	Outflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27
(2)	Outflow	Between Systems	Surface Water Delivery	75,811	68,516	76,750	74,262	78,850	85,952
(21)	Outflow	Between Systems	Stream Loss to Groundwater	24,037	49,085	18,460	72,401	11,524	11,579
(22)	Outflow	Between Systems	Reservoir Loss to Groundwater	596	596	596	596	596	596
(23)	Outflow	Out of Basin	Reservoir Evaporation	722	667	760	727	736	777
(24)	Outflow	Out of Basin	Stream Evaporation	385	354	393	389	393	420
(25)	Outflow	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24)	Total Outflow	460,110	905,732	399,306	1,013,993	214,798	215,738
(26)	Storage Change	(17)-(25)	Change in Surface Water Storage	-	-	-	-	-	-

	GROUNDW	ATER SYSTEM WATER BUDGET							
item	Flow Type	Origin/ Destination	Component	Average (1984-2018)	1984	1985	1986	1987	1988
(8)	Inflow	Between Systems	Recharge of Applied Water	13,133	11,840	13,309	12,802	13,701	14,966
(9)	Inflow	Between Systems	Recharge of Precipitation	1,601	1,697	1,499	1,910	1,471	1,272
(10)	Inflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-
(21)	Inflow	Between Systems	Groundwater Gain from Stream	24,037	49,085	18,460	72,401	11,524	11,579
(22)	Inflow	Between Systems	Groundwater Gain from Reservoir	596	596	596	596	596	596
(20)	Inflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27
(27)	Inflow	Into Basin	Subsurface Inflow	1	1	1	1	1	1
(28)	Inflow	(8)+(9)+(10)+(21)+(22)+(20)+(27)	Total Inflow	39,395	63,247	33,892	87,738	27,321	28,441
(3)	Outflow	Between Systems	Groundwater Extraction	44,622	39,192	45,598	41,789	47,782	53,245
(15)	Outflow	Between Systems	Groundwater Loss to Stream	-	-	-	-	-	-
(16)	Outflow	Between Systems	Groundwater Loss to Reservoir	-	-	-	-	-	-
(29)	Outflow	Out of Basin	Subsurface Outflow	-	-	-	-	-	
(30)	Outflow	(3)+(15)+(16)+(29)	Total Outflow	44,622	39,192	45,598	41,789	47,782	53,245
(31)	Storage Change	(28)-(30)	Change in Groundwater Storage	(5,227)	24,055	(11,706)	45,949	(20,461)	(24,804)

	TOTAL BAS	SIN WATER BUDGET							
item	Flow Type	Origin/ Destination	Component	Average (1984-2018)	1984	1985	1986	1987	1988
(1)	Inflow	Into Basin	Precipitation on Land System	136,801	148,899	132,719	193,698	96,315	88,835
(14)	Inflow	Into Basin	Precipitation on Reservoirs	501	546	486	710	353	326
(13)	Inflow	Into Basin	Stream Inflow	371,148	808,462	310,960	878,565	161,807	162,980
(27)	Inflow	Into Basin	Subsurface Inflow	1	1	1	1	1	1
(32)	Inflow	(1)+(14)+(13)+(27)	Total Inflow	508,451	957,907	444,166	1,072,973	258,475	252,142
(5)	Outflow	Out of Basin	Evapotranspiration	154,040	146,344	152,399	160,318	155,136	159,362
(24)	Outflow	Out of Basin	Stream Evaporation	385	354	393	389	393	420
(23)	Outflow	Out of Basin	Reservoir Evaporation	722	667	760	727	736	777
(19)	Outflow	Out of Basin	Conveyance Evaporation	46	44	46	45	45	50
(18)	Outflow	Out of Basin	Stream Outflow	358,486	786,443	302,274	865,544	122,626	116,338
(29)	Outflow	Out of Basin	Subsurface Outflow	-	-	-	-	-	-
(33)	Outflow	(5)+(24)+(23)+(19)+(18)+(29)	Total Outflow	513,678	933,852	455,872	1,027,024	278,936	276,946
(34)	Storage Change	(32)-(33)	Change in Total System Storage	(5,227)	24,055	(11,706)	45,949	(20,461	994,804)

Flow Type	Origin/ Destination	Component	1989	1990	1991	1992	1993	1994
Inflow	Into Basin	Precipitation on Land System	150,654	112,418	108,526	75,556	184,082	104,48
Inflow	Between Systems	Surface Water Delivery	72,061	72,399	77,619	82,827	70,993	76,17
Inflow	Between Systems	Groundwater Extraction	41,145	42,407	46,745	52,036	38,861	45,73
Inflow	(1)+(2)+(3)	Total Inflow	263,860	227,224	232,890	210,419	293,936	226,3
Outflow	Out of Basin	Evapotranspiration	151,287	148,958	153,216	155,932	156,238	153,30
Outflow	Between Systems	Runoff	93,806	59,374	59,468	32,898	119,194	53,1
Outflow Outflow	Between Systems Between Systems	Return Flow Recharge of Applied Water	4,615 12,446	4,761 12,539	5,255 13,479	5,860 14,449	4,351 12,207	5,14 13,22
Outflow	Between Systems	Recharge of Precipitation	1,705	1,591	1,472	1,280	1,947	1,54
Outflow	Between Systems	Managed Aquifer Recharge	-	-	-, ., _	-	-	-,5
Outflow	(5)+(6)+(7)+(8)+(9)+(10)	Total Outflow	263,860	227,224	232,890	210,419	293,936	226,38
Storage Change	(4)-(11)	Change in Land System Storage	-	-	-	-	-	-
STIDENCE WA	TER SYSTEM WATER BUDGET							
Flow Type	Origin/ Destination	Component	1989	1990	1991	1992	1993	1994
Inflow	Into Basin	Stream Inflow	390,854	133,594	263,663	76,254	602,999	167,39
Inflow	Into Basin	Precipitation on Reservoirs	552	412	398	277	675	38
Inflow	Between Systems	Runoff	93,806	59,374	59,468	32,898	119,194	53,1
Inflow	Between Systems	Return Flow	4,615	4,761	5,255	5,860	4,351	5,14
Inflow	Between Systems	Stream Gain from Groundwater	-	-	-	-	-	-
Inflow	Between Systems	Reservoir Gain from Groundwater	400.027	100 142	- 220 704	- 115 200	727 240	226.0
Inflow Outflow	(13)+(14)+(6)+(7)+(15)+(16)	Stream Outflow	<i>489,827</i> 393,854	<i>198,142</i> 113,802	328,784	115,288	727,219	<i>226,0</i> 136,2
Outflow	Out of Basin Out of Basin	Conveyance Evaporation	393,854 45	113,802	233,159 47	23,084	622,453 46	136,2
Outflow	Between Systems	Conveyance Seepage	27	27	27	27	27	
Outflow	Between Systems	Surface Water Delivery	72,061	72,399	77,619	82,827	70,993	76,1
Outflow	Between Systems	Stream Loss to Groundwater	22,175	10,212	16,260	7,546	32,039	11,7
Outflow	Between Systems	Reservoir Loss to Groundwater	596	596	596	596	596	5
Outflow	Out of Basin	Reservoir Evaporation	697	693	693	754	693	7
				368	382	406	370	3
Outflow	Out of Basin	Stream Evaporation	371					
Outflow (2	Out of Basin 18)+(19)+(20)+(2)+(21)+(22)+(23)+(24)	Stream Evaporation Total Outflow	371 489,827	198,142	328,784	115,288	727,219	
Outflow (1 Storage Change								226,02
Outflow (1 Storage Change	(17)-(25)	Total Outflow	489,827					
Outflow (1 Storage Change	(17)-(25) TER SYSTEM WATER BUDGET	Total Outflow Change in Surface Water Storage	489,827 -	198,142 -	328,784 -	115,288 -	727,219 -	226,0.
Outflow (1) Storage Change GROUNDWAT Flow Type Inflow Inflow	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems	Component Recharge of Applied Water Recharge of Precipitation	489,827	198,142	328,784	115,288	727,219	226,0. - 1994 13,2:
Outflow (2 Storage Change GROUNDWAT Flow Type Inflow Inflow Inflow	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems	Total Outflow Change in Surface Water Storage Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge	1989 12,446 1,705	198,142 - 1990 12,539 1,591	1991 13,479 1,472	115,288 - 1992 14,449 1,280	727,219 - 1993 12,207 1,947 -	226,0. - 1994 13,2: 1,5:
Outflow (2) Storage Change GROUNDWAT Flow Type Inflow Inflow Inflow Inflow Inflow	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream	1989 12,446 1,705 - 22,175	198,142 - 1990 12,539 1,591 - 10,212	1991 13,479 1,472 - 16,260	115,288 - 1992 14,449 1,280 - 7,546	727,219 - 1993 12,207 1,947 - 32,039	1994 13,2 1,5,5
Outflow (a Storage Change GROUNDWAT Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Inflow Inflow	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir	1989 12,446 1,705 - 22,175 596	198,142 - 1990 12,539 1,591 - 10,212 596	1991 13,479 1,472 - 16,260 596	115,288 - 1992 14,449 1,280 - 7,546 596	727,219 - 1993 12,207 1,947 - 32,039 596	1994 13,2: 1,5: - 11,7:
Outflow (3 Storage Change GROUNDWAT Flow Type Inflow	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage	1989 12,446 1,705 - 22,175 596 27	198,142 - 1990 12,539 1,591 - 10,212 596 27	1991 13,479 1,472 - 16,260 596 27	115,288 - 1992 14,449 1,280 - 7,546 596 27	727,219 - 1993 12,207 1,947 - 32,039 596 27	1994 13,2: 1,5: - 11,7:
Outflow (a) Storage Change GROUNDWAT Flow Type Inflow Inf	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Into Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow	1989 12,446 1,705 - 22,175 596 27	198,142 - 1990 12,539 1,591 - 10,212 596 27 1	1991 13,479 1,472 - 16,260 596 27 1	115,288 - 1992 14,449 1,280 - 7,546 596 27 1	727,219 - 1993 12,207 1,947 - 32,039 596 27 1	1994 13,2 1,5 - 11,7;
Outflow (3 Storage Change GROUNDWAT Flow Type Inflow	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage	1989 12,446 1,705 - 22,175 596 27	198,142 - 1990 12,539 1,591 - 10,212 596 27	1991 13,479 1,472 - 16,260 596 27	115,288 - 1992 14,449 1,280 - 7,546 596 27	727,219 - 1993 12,207 1,947 - 32,039 596 27	1994 13,2 1,5 - 11,7; 5;
Outflow (3 Storage Change Change GROUNDWAT Flow Type Inflow	(17)-(25) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27)	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow	1989 12,446 1,705 - 22,175 596 27 1 36,950	198,142 - 1990 12,539 1,591 - 10,212 596 27 1 24,967	1991 13,479 1,472 - 16,260 596 27 1 31,836	115,288 - 1992 14,449 1,280 - 7,546 596 27 1 23,899	1993 12,207 1,947 - 32,039 596 27 1 46,817	1994 13,2 1,7 11,7 5:
Outflow (3 Storage Change Chan	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction	1989 12,446 1,705 22,175 596 27 1 36,950 41,145	198,142 - 1990 12,539 1,591 - 10,212 596 27 1 24,967 42,407	1991 13,479 1,472 - 16,260 596 27 1 31,836 46,745	115,288 - 1992 14,449 1,280 - 7,546 596 27 1 23,899 52,036	1993 12,207 1,947 - 32,039 596 27 1 46,817 38,861	1994 13,2 1,7 11,7 5: 27,1 45,7;
Outflow (2) Storage Change GROUNDWAT Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Out	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems (3)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Out of Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow	1989 12,446 1,705 22,175 596 27 1 36,950 41,145	198,142 - 1990 12,539 1,591 - 10,212 596 27 1 24,967 42,407	1991 13,479 1,472 16,260 596 27 1 31,836 46,745	115,288 - 1992 14,449 1,280 - 7,546 596 27 1 23,899 52,036	727,219 - 1993 12,207 1,947 - 32,039 596 27 1 46,817 38,861 - -	1994 13,2 1,5 - 11,7 5: - 27,1 45,7
Outflow (2) Storage Change GROUNDWAT Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir	1989 12,446 1,705 22,175 596 27 1 36,950 41,145	198,142 - 1990 12,539 1,591 - 10,212 596 27 1 24,967 42,407 -	1991 13,479 1,472 16,260 596 27 1 31,836 46,745	115,288 - 1992 14,449 1,280 - 7,546 596 27 1 23,899 52,036	1993 12,207 1,947 1,947 32,039 596 27 1 46,817 38,861	226,0 - 1994 13,2 1,5 - 11,7 5 27,1 45,7 -
Outflow (2) Storage Change GROUNDWAT Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Out	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems (3)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Out of Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow	1989 12,446 1,705 22,175 596 27 1 36,950 41,145	198,142 - 1990 12,539 1,591 - 10,212 596 27 1 24,967 42,407	1991 13,479 1,472 16,260 596 27 1 31,836 46,745	115,288 - 1992 14,449 1,280 - 7,546 596 27 1 23,899 52,036	727,219 - 1993 12,207 1,947 - 32,039 596 27 1 46,817 38,861 - -	226,0 - 1994 13,2 1,7 5 27,1 45,7
Outflow (1) Storage Change GROUNDWAT Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Storage Change	(17)-(25) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Unto Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29)	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow	1989 12,446 1,705 22,175 596 27 1 36,950 41,145 - 41,145	198,142 - 1990 12,539 1,591 - 10,212 596 27 1 24,967 42,407 42,407	1991 13,479 1,472 - 16,260 596 27 1 31,836 46,745 - - 46,745	115,288 - 1992 14,449 1,280 - 7,546 596 27 1 23,899 52,036 52,036	727,219 - 1993 12,207 1,947 - 32,039 596 27 46,817 38,861 - - 38,861	226,0 - 1994 13,2 1,7 5 27,1 45,7
Outflow (1) Storage Change GROUNDWAT Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Storage Change	(17)-(25) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems (3)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30)	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow	1989 12,446 1,705 22,175 596 27 1 36,950 41,145 - 41,145	198,142 - 1990 12,539 1,591 - 10,212 596 27 1 24,967 42,407 42,407	1991 13,479 1,472 - 16,260 596 27 1 31,836 46,745 - - 46,745	115,288 - 1992 14,449 1,280 - 7,546 596 27 1 23,899 52,036 52,036	727,219 - 1993 12,207 1,947 - 32,039 596 27 46,817 38,861 - - 38,861	226,0 - 1994 13,2 1,5 - 11,7 5 27,1 45,7 - - - - - - - - - - - - -
Outflow (2) Storage Change GROUNDWAT Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Storage Change TOTAL BASIN Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Inflow	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) WATER BUDGET Origin/ Destination Into Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System	1989 12,446 1,705 - 22,175 596 27 1 36,950 41,145 - 41,145 (4,194) 1989 150,654	198,142 - 1990 12,539 1,591 - 10,212 596 27 1 24,967 42,407 42,407 (17,440) 1990 112,418	1991 13,479 1,472 - 16,260 596 27 1 31,836 46,745 46,745 (14,909)	115,288 - 1992 14,449 1,280 - 7,546 596 27 1 23,899 52,036 52,036 (28,137)	727,219 - 1993 12,207 1,947 - 32,039 596 27 1 46,817 38,861 - - 38,861 7,956	1994 13,2: 1,5:
Outflow (2) Storage Change GROUNDWAT Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Storage Change TOTAL BASIN Flow Type Inflow In	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Into Basin (3)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Seepage Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs	1989 12,446 1,705 - 22,175 596 27 1,36,950 41,145 - 41,145 (4,194) 1989 150,654 552	198,142 - 1990 12,539 1,591 - 10,212 596 27 1 24,967 42,407 42,407 (17,440) 1990 112,418 412	1991 13,479 1,472 - 16,260 596 27 1 31,836 46,745 46,745 (14,909) 1991 108,526 398	115,288 - 1992 14,449 1,280 - 7,546 596 27 1 23,899 52,036 52,036 (28,137) 1992 75,556 277	727,219 - 1993 12,207 1,947 - 32,039 596 27 1 46,817 38,861 38,861 7,956 1993 184,082 675	226,0. - 1994 13,2: 1,5: - 11,7: 5: 45,7: (18,5: 1994 104,4: 3:
Outflow (2) Storage Change GROUNDWAT Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Storage Change TOTAL BASIN Flow Type Inflow In	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (3)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Into Basin Into Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow	1989 12,446 1,705 - 22,175 596 27 136,950 41,145 - 41,145 (4,194) 1989 150,654 552 390,854	198,142 - 1990 12,539 1,591 - 10,212 596 27 1 24,967 42,407 42,407 (17,440) 1990 112,418 412 133,594	1991 13,479 1,472 - 16,260 596 27 1 31,836 46,745 46,745 (14,909) 1991 108,526 398 263,663	115,288 - 1992 14,449 1,280 - 7,546 596 27 1992 52,036 52,036 (28,137) 1992 75,556 277 76,254	727,219 - 1993 12,207 1,947 - 32,039 596 27 1 46,817 38,861 38,861 7,956 1993 184,082 675 602,999	226,0 - 1994 13,2 1,5 - 11,7 5 27,1 45,7 (18,5
Outflow (2) Storage Change GROUNDWAT Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Storage Change TOTAL BASIN Flow Type Inflow In	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (3)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems (3)+(15)+(16)+(29) (28)-(30) WATER BUDGET Origin/ Destination Into Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Subsurface Inflow	1989 12,446 1,705 - 22,175 596 27 1 36,950 41,145 41,145 (4,194) 1989 150,654 552 390,854 1	198,142 - 1990 12,539 1,591 - 10,212 596 27 1 24,967 42,407 42,407 (17,440) 1990 112,418 412 133,594 1	1991 13,479 1,472 - 16,260 596 27 1 31,836 46,745 46,745 (14,909) 1991 108,526 398 263,663 1	115,288 - 1992 14,449 1,280 - 7,546 596 27 1 23,899 52,036 52,036 (28,137) 1992 75,556 277 76,254 1	727,219 - 1993 12,207 1,947 - 32,039 596 27 1 46,817 38,861 38,861 7,956 1993 184,082 675 602,999 1	226,0 - 1994 13,2 1,5 - 11,7 5 27,1 45,7 (18,5 1994 104,4 3 167,3
Outflow (2) Storage Change GROUNDWAT Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Storage Change TOTAL BASIN Flow Type Inflow In	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Into Basin (3)+(9)+(10)+(21)+(22)+(27) Between Systems Between Systems Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) WATER BUDGET Origin/ Destination Into Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Subsurface Inflow Total Inflow	1989 12,446 1,705 - 22,175 596 27 1 36,950 41,145 41,145 (4,194) 1989 150,654 552 390,854 1 542,060	198,142 - 1990 12,539 1,591 - 10,212 596 27 1 24,967 42,407 42,407 (17,440) 1990 112,418 412 133,594 1 246,425	1991 13,479 1,472 - 16,260 596 27 1 31,836 46,745 46,745 (14,909) 1991 108,526 398 263,663 1 372,587	115,288 - 1992 14,449 1,280 - 7,546 596 27 1 23,899 52,036 52,036 (28,137) 1992 75,556 277 76,254 1 152,087	727,219 - 1993 12,207 1,947 - 32,039 596 27 1 46,817 38,861 38,861 7,956 1993 184,082 675 602,999 1 787,756	226,0 - 1994 13,2 1,5 - 11,7 5 27,1 45,7 (18,5
Outflow (2) Storage Change GROUNDWAT Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Storage Change TOTAL BASIN Flow Type Inflow In	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Out of Basin (3)+(12)+(12)+(22)+(27) (28)-(30) WATER BUDGET Origin/ Destination Into Basin Into Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Evapotranspiration	1989 12,446 1,705 - 22,175 596 27 1 36,950 41,145 41,145 (4,194) 1989 150,654 552 390,854 1 542,060 151,287	198,142 - 1990 12,539 1,591 - 10,212 596 27 1 24,967 42,407 42,407 (17,440) 1990 112,418 412 133,594 1 246,425 148,958	1991 13,479 1,472 - 16,260 596 27 1 31,836 46,745 46,745 (14,909) 1991 108,526 398 263,663 1 372,587 153,216	115,288 - 1992 14,449 1,280 - 7,546 596 27 1 23,899 52,036 52,036 (28,137) 1992 75,556 277 76,254 1 152,087 155,932	1993 12,207 1,947 - 32,039 596 27 1 46,817 38,861 38,861 7,956 1993 184,082 675 602,999 1 787,756 156,238	226,0 1994 13,2 1,5 11,7 5 27,1 45,7 (18,5 1994 104,4 3 167,3 272,2 153,3
Outflow (12 Storage Change Cha	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Out of Basin (3)+(3)+(13)+(13)+(13)+(13)+(14)+(14)+(14)+(14)+(14)+(14)+(14)+(14	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Stream Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Subsurface Inflow Total Inflow Subsurface Inflow Total Inflow Subsurface Inflow Total Inflow Evapotranspiration Stream Evaporation	1989 12,446 1,705 - 22,175 596 27 1 36,950 41,145 - 41,145 (4,194) 1989 150,654 552 390,854 1 542,060 151,287 371	198,142 - 1990 12,539 1,591 - 10,212 596 27 1 24,967 42,407 42,407 (17,440) 1990 112,418 412 133,594 1 246,425 148,958 368	1991 13,479 1,472 - 16,260 596 27 1 31,836 46,745 46,745 (14,909) 1991 108,526 398 263,663 1 372,587 153,216 382	115,288 - 1992 14,449 1,280 - 7,546 596 27 1 23,899 52,036 52,036 (28,137) 1992 75,556 277 76,254 1 152,087 155,932 406	727,219 - 1993 12,207 1,947 - 32,039 596 27 1 46,817 38,861 38,861 7,956 1993 184,082 675 602,999 1 787,756 156,238 370	226,0 1994 13,2 1,5 - 11,7 5 27,1 45,7 (18,5 1994 104,4 3 167,3 272,2 153,3 3
Outflow (2) Storage Change GROUNDWAT Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Storage Change TOTAL BASIN Flow Type Inflow In	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Out of Basin (3)+(12)+(12)+(22)+(27) (28)-(30) WATER BUDGET Origin/ Destination Into Basin Into Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Evapotranspiration Stream Evaporation Reservoir Evaporation	1989 12,446 1,705 - 22,175 596 27 1 36,950 41,145 41,145 (4,194) 1989 150,654 552 390,854 1 542,060 151,287	198,142 - 1990 12,539 1,591 - 10,212 596 27 1 24,967 42,407 42,407 (17,440) 1990 112,418 412 133,594 1 246,425 148,958	1991 13,479 1,472 - 16,260 596 27 1 31,836 46,745 46,745 (14,909) 1991 108,526 398 263,663 1 372,587 153,216	115,288 - 1992 14,449 1,280 - 7,546 596 27 1 23,899 52,036 52,036 (28,137) 1992 75,556 277 76,254 1 152,087 155,932	1993 12,207 1,947 - 32,039 596 27 1 46,817 38,861 38,861 7,956 1993 184,082 675 602,999 1 787,756 156,238	226,0 1994 13,2 1,5 11,7 5 27,1 45,7 (18,5) 1994 104,4 167,3 167,3 272,2 153,3 7
Outflow (12 Storage Change Cha	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) WATER BUDGET Origin/ Destination Into Basin Into Basin (1)+(14)+(13)+(27) Out of Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Stream Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Subsurface Inflow Total Inflow Subsurface Inflow Subsurface Inflow Total Inflow Evapotranspiration Stream Evaporation	1989 12,446 1,705 - 22,175 596 27 1 36,950 41,145 - 41,145 (4,194) 1989 150,654 552 390,854 1 542,060 151,287 371 697	198,142 - 1990 12,539 1,591 - 10,212 596 27 1 24,967 42,407 42,407 (17,440) 1990 112,418 412 133,594 412 133,594 1 246,425 148,958 368 693	1991 13,479 1,472 - 16,260 596 27 1 31,836 46,745 46,745 (14,909) 1991 108,526 398 263,663 1 372,587 153,216 382 693	115,288 - 1992 14,449 1,280 - 7,546 596 27 1 23,899 52,036 52,036 (28,137) 1992 75,556 277 76,254 1 152,087 155,932 406 754	1993 12,207 1,947 - 32,039 596 27 1,46,817 38,861 38,861 7,956 1993 184,082 675 602,999 1 787,756 156,238 370 693	226,0 1994 13,2 1,5 11,7 5 27,1 45,7 (18,5) 1994 104,4 3 167,3 3 7
Outflow (12 Storage Change Cha	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) WATER BUDGET Origin/ Destination Into Basin Into Basin (1)+(14)+(13)+(27) Out of Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Evapotranspiration Stream Evaporation Reservoir Evaporation Conveyance Evaporation	1989 12,446 1,705 - 22,175 596 27 1 36,950 41,145 - 41,145 (4,194) 1989 150,654 552 390,854 1 542,060 151,287 371 697 45 393,854	198,142 - 1990 12,539 1,591 - 10,212 596 27 1 24,967 42,407 42,407 (17,440) 1990 112,418 412 133,594 1 246,425 148,958 368 693 44	1991 13,479 1,472 - 16,260 596 27 1 31,836 46,745 46,745 (14,909) 1991 108,526 398 263,663 1 372,587 153,216 382 693 47	115,288 - 1992 14,449 1,280 - 7,546 596 27 1 23,899 52,036 52,036 (28,137) 1992 75,556 277 76,254 1 152,087 155,932 406 754 48	1993 12,207 1,947 - 32,039 596 27 1,46,817 38,861 38,861 7,956 1993 184,082 675 602,999 1 787,756 156,238 370 693 46	226,0 1994 13,2 1,5 11,7 5 27,1 45,7 (18,5) 1994 104,4 3 167,3 3 7
Outflow (12 Storage Change Cha	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Into Basin Out of Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Subsurface Inflow Total Inflow Subsurface Inflow Total Inflow Evapotranspiration Stream Evaporation Reservoir Evaporation Conveyance Evaporation Stream Outflow Stream Outflow	1989 12,446 1,705 - 22,175 596 27 1 36,950 41,145 - 41,145 (4,194) 1989 150,654 552 390,854 1 542,060 151,287 371 697 45 393,854	198,142 - 1990 12,539 1,591 - 10,212 596 27 1 24,967 42,407 42,407 (17,440) 1990 112,418 412 133,594 1 246,425 148,958 368 693 44	1991 13,479 1,472 - 16,260 596 27 1 31,836 46,745 46,745 (14,909) 1991 108,526 398 263,663 1 372,587 153,216 382 693 47 233,159	115,288 - 1992 14,449 1,280 - 7,546 596 27 1 23,899 52,036 52,036 (28,137) 1992 75,556 277 76,254 1 152,087 155,932 406 754 48 23,084	1993 12,207 1,947 - 32,039 596 27 1,46,817 38,861 38,861 7,956 1993 184,082 675 602,999 1 787,756 156,238 370 693 46 622,453	226,0 - 1994 13,2 1,5 - 11,7 5 27,1 45,7 (18,5 1994 104,4 3 167,3

low Type	Origin/ Destination	Component	1995	1996	1997	1998	1999	200
Inflow	Into Basin	Precipitation on Land System	192,248	183,776	171,871	229,110	146,533	128,
Inflow	Between Systems	Surface Water Delivery	65,439	70,985	74,958	64,027	74,092	76
Inflow	Between Systems	Groundwater Extraction	35,592	41,037	42,916	32,854	43,259	44
Inflow	(1)+(2)+(3)	Total Inflow	293,278	295,799	289,744	325,992	263,883	249
Outflow	Out of Basin	Evapotranspiration	143,128	150,803	159,397	151,378	152,590	157
Outflow Outflow	Between Systems	Runoff Return Flow	133,143	126,391	110,752	157,864	91,975	71
Outflow	Between Systems Between Systems	Recharge of Applied Water	3,983 11,251	4,605 12,278	4,815 12,946	3,667 10,945	4,857 12,826	5 13
Outflow	Between Systems	Recharge of Precipitation	1,773	1,722	1,834	2,137	1,637	1
Outflow	Between Systems	Managed Aquifer Recharge	-	´-	-	-	-	
Outflow	(5)+(6)+(7)+(8)+(9)+(10)	Total Outflow	293,278	295,799	289,744	325,992	263,883	249
Storage Change	(4)-(11)	Change in Land System Storage	-	-	-	-	-	
low Type	Origin/ Destination	Component	1995	1996	1997	1998	1999	200
Inflow		Stream Inflow	912,444	780,720	614,680	832,300		240
Inflow	Into Basin Into Basin	Precipitation on Reservoirs	704	673	630	840	691,739 537	240
Inflow	Between Systems	Runoff	133,143	126,391	110,752	157,864	91,975	71
Inflow	Between Systems	Return Flow	3,983	4,605	4,815	3,667	4,857	5
Inflow	Between Systems	Stream Gain from Groundwater	-	-	-	-	-	
Inflow	Between Systems	Reservoir Gain from Groundwater	-	-	-	-	-	
Inflow	(13)+(14)+(6)+(7)+(15)+(16)	Total Inflow	1,050,275	912,389	730,877	994,671	789,107	316
Outflow	Out of Basin	Stream Outflow	897,057	798,101	621,549	872,733	677,081	223
Outflow	Out of Basin	Conveyance Evaporation	41	44	46	42	45	
Outflow	Between Systems	Conveyance Seepage	27	27	27	27	27	70
Outflow Outflow	Between Systems	Surface Water Delivery Stream Loss to Groundwater	65,439 86,149	70,985 41,575	74,958 32,583	64,027 56,285	74,092 36,166	76 15
Outflow	Between Systems Between Systems	Reservoir Loss to Groundwater	596	596	596	596	596	13
Outflow	Out of Basin	Reservoir Evaporation	625	692	729	619	720	
Outflow	Out of Basin	Stream Evaporation	340	369	388	340	379	
	0 0.00 0.00	Stream Evaporation	340					
	18)+(19)+(20)+(2)+(21)+(22)+(23)+(24)	Total Outflow	1,050,275	912,389	730,877	994,671	789,107	316
Outflow (Storage Change	(17)-(25)					994,671 -	789,107 -	316
Outflow (Storage Change	18)+(19)+(20)+(2)+(21)+(22)+(23)+(24)	Total Outflow	1,050,275	912,389	730,877	-		
Outflow (Storage Change	18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET	Total Outflow Change in Surface Water Storage	1,050,275 -	912,389	730,877 -	-	-	200
Outflow (Storage Change GROUNDWA	18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination	Total Outflow Change in Surface Water Storage Component	1,050,275	912,389	730,877	1998	1999	20 0
Outflow (Storage Change GROUNDWA Iow Type Inflow Inflow	18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems	Total Outflow Change in Surface Water Storage Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge	1,050,275 - 1995 11,251	912,389 - 1996 12,278	1997 12,946 1,834	1998 10,945 2,137	1999 12,826	20 0
Outflow (Storage Change GROUNDWA Iow Type Inflow	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream	1,050,275 - 1995 11,251 1,773 - 86,149	912,389 - 1996 12,278 1,722 - 41,575	1997 12,946 1,834 - 32,583	1998 10,945 2,137 - 56,285	1999 12,826 1,637 - 36,166	20 0
Outflow (Storage Change Change GROUNDWA Iow Type Inflow	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir	1,050,275 - 1995 11,251 1,773 - 86,149 596	912,389 - 1996 12,278 1,722 - 41,575 596	1997 12,946 1,834 - 32,583 596	1998 10,945 2,137 - 56,285 596	1999 12,826 1,637 - 36,166 596	20 0
Outflow (Storage Change Change GROUNDWA Iow Type Inflow	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage	1,050,275 - 1995 11,251 1,773 - 86,149 596 27	912,389 - 1996 12,278 1,722 - 41,575 596 27	1997 12,946 1,834 - 32,583 596 27	1998 10,945 2,137 - 56,285 596 27	1999 12,826 1,637 - 36,166 596 27	20 0
Outflow (Storage Change Change GROUNDWA Iow Type Inflow	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Into Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow	1,050,275 - 1995 11,251 1,773 - 86,149 596 27 1	912,389 - 1996 12,278 1,722 - 41,575 596 27 1	1997 12,946 1,834 - 32,583 596 27 1	1998 10,945 2,137 - 56,285 596 27	1999 12,826 1,637 - 36,166 596 27	200 13 1
Outflow (Storage Change	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Boundary (100) (100	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow	1,050,275 - 1995 11,251 1,773 - 86,149 596 27 1 99,798	912,389 - 1996 12,278 1,722 - 41,575 596 27 1 56,199	1997 12,946 1,834 - 32,583 596 27 1 47,987	1998 10,945 2,137 - 56,285 596 27 1	1999 12,826 1,637 - 36,166 596 27 1 51,253	200 13 1 15
Outflow (Storage Change	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow	1,050,275 - 1995 11,251 1,773 - 86,149 596 27 1	912,389 - 1996 12,278 1,722 - 41,575 596 27 1	1997 12,946 1,834 - 32,583 596 27 1	1998 10,945 2,137 - 56,285 596 27	1999 12,826 1,637 - 36,166 596 27	200 13 1 15
Outflow (Storage Change	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Boundary (100) (100	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction	1,050,275 - 1995 11,251 1,773 - 86,149 596 27 1 99,798 35,592	912,389 - 1996 12,278 1,722 41,575 596 27 1 56,199 41,037	1997 12,946 1,834 - 32,583 596 27 1 47,987 42,916	1998 10,945 2,137 - 56,285 596 27 1	1999 12,826 1,637 - 36,166 596 27 1 51,253 43,259	200 13 1 15
Outflow (Storage Change	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream	1,050,275 - 1995 11,251 1,773 - 86,149 596 27 1 99,798 35,592	912,389 - 1996 12,278 1,722 - 41,575 596 27 1 56,199 41,037 -	1997 12,946 1,834 - 32,583 596 27 1 47,987 42,916	1998 10,945 2,137 - 56,285 596 27 1	1999 12,826 1,637 - 36,166 596 27 1 51,253 43,259	200 13 1 15
Outflow (Storage Change	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir	1,050,275 - 1995 11,251 1,773 - 86,149 596 27 1 99,798 35,592	912,389 - 1996 12,278 1,722 - 41,575 596 27 1 56,199 41,037	1997 12,946 1,834 - 32,583 596 27 1 47,987 42,916 -	1998 10,945 2,137 - 56,285 596 27 1	1999 12,826 1,637 - 36,166 596 27 1 51,253 43,259	200 13 1 15 30 44
Outflow (Storage Change	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow	1,050,275 - 1995 11,251 1,73 - 86,149 596 27 1 99,798 35,592	912,389 - 1996 12,278 1,722 41,575 596 27 1 56,199 41,037 - -	1997 12,946 1,834 - 32,583 596 27 1 47,987 42,916 - -	1998 10,945 2,137 - 56,285 596 27 1 69,992 32,854 - -	1999 12,826 1,637 - 36,166 596 27 1 51,253 43,259 -	2000 133 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
Outflow / Storage Change Chang	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29)	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow	1,050,275 - 1995 11,251 1,773 - 86,149 596 27 1 99,798 35,592 35,592	912,389 - 1996 12,278 1,722 - 41,575 596 27 1 56,199 41,037 41,037	1997 12,946 1,834 - 32,583 596 27 1 47,987 42,916 42,916	1998 10,945 2,137 - 56,285 596 27 1 69,992 32,854 - - 32,854	1999 12,826 1,637 - 36,166 596 27 1 51,253 43,259 - - 43,259	200 13 1 15 30 44
Outflow / Storage Change Chang	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Between Systems Between Systems Bout of Basin (3)+(15)+(16)+(29) (28)-(30)	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow	1,050,275 - 1995 11,251 1,773 - 86,149 596 27 1 99,798 35,592 35,592	912,389 - 1996 12,278 1,722 - 41,575 596 27 1 56,199 41,037 41,037	1997 12,946 1,834 - 32,583 596 27 1 47,987 42,916 42,916	1998 10,945 2,137 - 56,285 596 27 1 69,992 32,854 - - 32,854	1999 12,826 1,637 - 36,166 596 27 1 51,253 43,259 - - 43,259	200 13 1 15 36 44 44 (14
Outflow (Storage Change) GROUNDWA Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Storage Change	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30)	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow Change in Groundwater Storage	1,050,275 - 1995 11,251 1,773 - 86,149 596 27 1 99,798 35,592 35,592 64,206	912,389 - 1996 12,278 1,722 - 41,575 596 27 1 56,199 41,037 41,037 15,162	730,877 - 1997 12,946 1,834 - 32,583 596 27 1 47,987 42,916 - - 42,916 5,071	1998 10,945 2,137 - 56,285 596 27 1 69,992 32,854 - - 32,854 37,138	1999 12,826 1,637 - 36,166 596 27 1 51,253 43,259 - - - 43,259 7,994	200 133 15 15 30 44 (14
Outflow (Storage Change	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30)	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow Change in Groundwater Storage	1,050,275 - 1995 11,251 1,773 - 86,149 596 27 1 99,798 35,592 35,592 64,206	912,389 - 1996 12,278 1,722 - 41,575 596 27 1 56,199 41,037 - - 41,037 15,162	730,877 - 1997 12,946 1,834 - 32,583 596 27 1 47,987 42,916 - - - 42,916 5,071	1998 10,945 2,137 - 56,285 596 27 1 69,992 32,854 - - - 32,854 37,138	1999 12,826 1,637 - 36,166 596 27 1 51,253 43,259 - - 43,259 7,994	200 133 1 15 36 44 (14
Outflow / Storage Change Cha	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (3)+(15)+(16)+(29) (28)-(30) I WATER BUDGET Origin/ Destination	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow	1,050,275 - 1995 11,251 1,773 - 86,149 596 27 1 99,798 35,592 35,592 64,206 1995 192,248 704 912,444	912,389 - 1996 12,278 1,722 - 41,575 596 27 1 56,199 41,037 41,037 15,162 1996 183,776 673 780,720	730,877 - 1997 12,946 1,834 - 32,583 596 27 1 47,987 42,916 - - - 42,916 5,071 1997 171,871 630 614,680	1998 10,945 2,137 - 56,285 596 27 1 69,992 32,854 - - - 32,854 37,138 1998 229,110 840 832,300	1999 12,826 1,637 - 36,166 596 27 1 51,253 43,259 43,259 7,994 1999 146,533 537 691,739	200 133 11 15 30 44 (14 200 128
Outflow Outflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow Inflow Infl	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (3)+(19)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) I WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Into Basin Into Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Subsurface Inflow	1,050,275 - 1995 11,251 1,773 - 86,149 596 27 1 99,798 35,592 35,592 64,206 1995 192,248 704 912,444 1	912,389 - 1996 12,278 1,722 - 41,575 596 27 1 56,199 41,037 41,037 15,162 1996 183,776 673 780,720 1	730,877 - 1997 12,946 1,834 - 32,583 596 27 1 47,987 42,916 - - - 42,916 5,071 1997 171,871 630 614,680 1	1998 10,945 2,137 - 56,285 596 27 1 69,992 32,854 32,854 37,138 1998 229,110 840 832,300 1	1999 12,826 1,637 - 36,166 596 27 1 51,253 43,259 43,259 7,994 1999 146,533 537 691,739	200 133 1 15 30 44 (14 200 128 240
Outflow Outflow Inflow Inflow Outflow Outflow	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (3)+(15)+(16)+(29) (28)-(30) I WATER BUDGET Origin/ Destination Into Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Subsurface Inflow	1,050,275 - 1995 11,251 1,773 - 86,149 596 27 1 99,798 35,592 35,592 64,206 1995 192,248 704 912,444 1 1,105,397	912,389 - 1996 12,278 1,722 - 41,575 596 27 1 56,199 41,037 41,037 15,162 1996 183,776 673 780,720 1 965,170	730,877 - 1997 12,946 1,834 - 32,583 596 27 1 47,987 42,916 42,916 5,071 1997 171,871 630 614,680 1 787,182	1998 10,945 2,137 - 56,285 596 27 1 69,992 32,854 32,854 37,138 1998 229,110 840 832,300 1 1,062,250	1999 12,826 1,637 - 36,166 596 27 1 51,253 43,259 43,259 7,994 1999 146,533 537 691,739 1 838,809	200 133 1 15 30 44 (14 200 128 240
Outflow Outflow Inflow Outflow Outflow	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (3)+(15)+(16)+(29) (28)-(30) I WATER BUDGET Origin/ Destination Into Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Evapotranspiration	1,050,275 - 1995 11,251 1,773 - 86,149 596 27 1 99,798 35,592 35,592 64,206 1995 192,248 704 912,444 1 1,105,397 143,128	912,389 - 1996 12,278 1,722 - 41,575 596 27 1 56,199 41,037 41,037 15,162 1996 183,776 673 780,720 1 965,170 150,803	730,877 - 1997 12,946 1,834 - 32,583 596 27 1 47,987 42,916 42,916 5,071 1997 171,871 630 614,680 1 787,182 159,397	1998 10,945 2,137 - 56,285 596 27 1 69,992 32,854 32,854 37,138 1998 229,110 840 832,300 1 1,062,250 151,378	1999 12,826 1,637 - 36,166 596 27 1 51,253 43,259 43,259 7,994 1999 146,533 537 691,739 1 838,809 152,590	200 133 1 15 30 44 (14 200 128 240
Outflow / Storage Change C	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) I WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Into Basin Into Basin Out of Basin Out of Basin Out of Basin Out of Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Frecipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Subsurface Inflow Total Inflow Evapotranspiration Stream Evaporation	1,050,275 - 1995 11,251 1,773 - 86,149 596 27 1 99,798 35,592 35,592 64,206 1995 192,248 704 912,444 1 1,105,397 143,128 340	912,389 - 1996 12,278 1,722 - 41,575 596 27 1 56,199 41,037 41,037 15,162 1996 183,776 673 780,720 1965,170 150,803 369	730,877 - 1997 12,946 1,834 - 32,583 596 27 1 47,987 42,916 42,916 5,071 1997 171,871 630 614,680 1 787,182 159,397 388	1998 10,945 2,137 - 56,285 596 27 1 69,992 32,854 32,854 37,138 1998 229,110 840 832,300 1 1,062,250 151,378 340	1999 12,826 1,637 - 36,166 596 27 1 51,253 43,259 43,259 7,994 1999 146,533 537 691,739 1 838,809 152,590 379	200 133 1 15 30 44 (14 200 128 240
Outflow / Storage Change C	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) I WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Out of Basin Out of Basin Out of Basin Out of Basin	Component Recharge of Applied Water Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Subsurface Inflow Total Inflow Subsurface Inflow Subsurface Inflow Subsurface Inflow Total Inflow Subsurface Inflow Subsurface Inflow Foral Inflow Subsurface Inflow Evapotranspiration Reservoir Evaporation	1,050,275 - 1995 11,251 1,773 - 86,149 596 27 1 99,798 35,592 35,592 64,206 1995 192,248 704 912,444 1 1,105,397 143,128 340 625	912,389 - 1996 12,278 1,722 - 41,575 596 27 1 56,199 41,037 41,037 15,162 1996 183,776 673 780,720 1 965,170 150,803 369 692	1997 12,946 1,834 - 32,583 596 27 1 47,987 42,916 42,916 5,071 1997 171,871 630 614,680 1 787,182 159,397 388 729	1998 10,945 2,137 - 56,285 596 27 1 69,992 32,854 32,854 37,138 1998 229,110 840 832,300 1 1,062,250 151,378 340 619	1999 12,826 1,637 - 36,166 596 27 1 51,253 43,259 43,259 7,994 1999 146,533 537 691,739 1 838,809 152,590 379 720	200 133 1 15 30 44 (14 200 128 240
Outflow Outflo	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) I WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin (1)+(14)+(13)+(27) Out of Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Frecipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Evapotranspiration Stream Evaporation Reservoir Evaporation Conveyance Evaporation	1,050,275 - 1995 11,251 1,773 - 86,149 596 27 1 99,798 35,592 35,592 64,206 1995 192,248 704 912,444 1 1,105,397 143,128 340 625 41	912,389 - 1996 12,278 1,722 - 41,575 596 27 1 56,199 41,037 41,037 15,162 1996 183,776 673 780,720 1 965,170 150,803 369 692 44	1997 12,946 1,834 - 32,583 596 27 1 47,987 42,916 42,916 5,071 1997 171,871 630 614,680 1 787,182 159,397 388 729 46	1998 10,945 2,137 - 56,285 596 27 1 69,992 32,854 32,854 37,138 1998 229,110 840 832,300 1 1,062,250 151,378 340 619 42	1999 12,826 1,637 - 36,166 596 27 1 51,253 43,259 43,259 7,994 1999 146,533 537 691,739 1 838,809 152,590 379 720 45	200 133 1 159 369 444 (144 200 128 240 368 157
Outflow Outflow Outflow Outflow Outflow Outflow Inflow Outflow Outflow	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) DWATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Into Basin Out of Basin	Component Recharge of Applied Water Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Evapotranspiration Stream Evaporation Reservoir Evaporation Conveyance Evaporation Stream Outflow	1,050,275 - 1995 11,251 1,773 - 86,149 596 27 1 99,798 35,592 35,592 64,206 1995 192,248 704 912,444 1 1,105,397 143,128 340 625	912,389 - 1996 12,278 1,722 - 41,575 596 27 1 56,199 41,037 41,037 15,162 1996 183,776 673 780,720 1 965,170 150,803 369 692	1997 12,946 1,834 - 32,583 596 27 1 47,987 42,916 42,916 5,071 1997 171,871 630 614,680 1 787,182 159,397 388 729	1998 10,945 2,137 - 56,285 596 27 1 69,992 32,854 32,854 37,138 1998 229,110 840 832,300 1 1,062,250 151,378 340 619	1999 12,826 1,637 - 36,166 596 27 1 51,253 43,259 43,259 7,994 1999 146,533 537 691,739 1 838,809 152,590 379 720	200 133 1 159 369 444 (144 200 128 240 368 157
Outflow / Storage Change Cha	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) I WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Out of Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Frecipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Evapotranspiration Stream Evaporation Reservoir Evaporation Conveyance Evaporation	1,050,275 - 1995 11,251 1,773 - 86,149 596 27 1 99,798 35,592 35,592 64,206 1995 192,248 704 912,444 1 1,105,397 143,128 340 625 41	912,389 - 1996 12,278 1,722 - 41,575 596 27 1 56,199 41,037 41,037 15,162 1996 183,776 673 780,720 1 965,170 150,803 369 692 44	1997 12,946 1,834 - 32,583 596 27 1 47,987 42,916 42,916 5,071 1997 171,871 630 614,680 1 787,182 159,397 388 729 46 621,549	1998 10,945 2,137 - 56,285 596 27 1 69,992 32,854 32,854 37,138 1998 229,110 840 832,300 1 1,062,250 151,378 340 619 42 872,733	1999 12,826 1,637 - 36,166 596 27 1 51,253 43,259 43,259 7,994 1999 146,533 537 691,739 1 838,809 152,590 379 720 45	200 133 1 15 30 44 (14 200 128 240 240 223 368 157
Outflow Storage Change Change GROUNDWA Clow Type Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Storage Change TOTAL BASIN Clow Type Inflow Inflow Inflow Inflow Outflow Outfl	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) DWATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Into Basin Out of Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Evapotranspiration Stream Evaporation Reservoir Evaporation Conveyance Evaporation Stream Outflow Subsurface Outflow Subsurface Outflow	1,050,275 - 1995 11,251 1,773 - 86,149 596 27 199,798 35,592 35,592 64,206 1995 192,248 704 912,444 1 1,105,397 143,128 340 625 41 897,057	912,389 - 1996 12,278 1,722 - 41,575 596 27 1 56,199 41,037 41,037 15,162 1996 183,776 673 780,720 1 965,170 150,803 369 692 44 798,101 -	1997 12,946 1,834 - 32,583 596 27 1 47,987 42,916 42,916 5,071 1997 171,871 630 614,680 1 787,182 159,397 388 729 46	1998 10,945 2,137 - 56,285 596 27 1 69,992 32,854 32,854 37,138 1998 229,110 840 832,300 1 1,062,250 151,378 340 619 42	1999 12,826 1,637 - 36,166 596 27 1 51,253 43,259 7,994 1999 146,533 537 691,739 1 838,809 152,590 45 677,081	200 133 1 15 30 44 (144 (144 240 240 223 368 157

Flow Type	Origin/ Destination	Component	2001	2002	2003	2004	2005	2006	2007
Inflow	Into Basin	Precipitation on Land System	79,296	109,976	136,611	136,687	147,525	190,721	99,29
Inflow	Between Systems	Surface Water Delivery	80,992	80,604	75,245	78,776	70,606	72,295	78,98
Inflow	Between Systems	Groundwater Extraction	49,626	48,753	44,131	47,093	40,332	40,960	48,74
Inflow	(1)+(2)+(3)	Total Inflow	209,913	239,333	255,987	262,556	258,462	303,976	227,02
Outflow	Out of Basin	Evapotranspiration	152,585	153,349	151,547	153,751	149,036	151,973	156,93
Outflow	Between Systems	Runoff	36,368	65,156	84,903	88,396	91,011	133,210	49,3
Outflow Outflow	Between Systems Between Systems	Return Flow Recharge of Applied Water	5,583 14,089	5,482 14,001	4,956 13,030	5,293 13,667	4,524 12,197	4,593 12,475	5,4 13,7
Outflow	Between Systems	Recharge of Precipitation	1,288	1,345	1,551	1,449	1,695	1,725	1,4
Outflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-	-, .
Outflow	(5)+(6)+(7)+(8)+(9)+(10)	Total Outflow	209,913	239,333	255,987	262,556	258,462	303,976	227,0.
Storage Change	(4)-(11)	Change in Land System Storage	-	-	-	-	-	-	-
SLIDEACE WA	TER SYSTEM WATER BUDGET								
Flow Type	Origin/ Destination	Component	2001	2002	2003	2004	2005	2006	2007
Inflow	Into Basin	Stream Inflow	100,742	153,035	219,963	295,581	381,347	735,770	127,7
Inflow	Into Basin	Precipitation on Reservoirs	291	403	501	501	541	699	3
Inflow	Between Systems	Runoff	36,368	65,156	84,903	88,396	91,011	133,210	49,3
Inflow	Between Systems	Return Flow	5,583	5,482	4,956	5,293	4,524	4,593	5,4
Inflow	Between Systems	Stream Gain from Groundwater	-	-	-	-	-	-	
Inflow	Between Systems	Reservoir Gain from Groundwater	-	-	-	-	-	-	-
Inflow	(13)+(14)+(6)+(7)+(15)+(16)	Total Inflow	142,983	224,076	310,322	389,772	477,422	874,271	182,9
Outflow	Out of Basin	Stream Outflow	51,472	130,528	219,088	291,439	383,378	762,028	92,1
Outflow Outflow	Out of Basin Between Systems	Conveyance Evaporation Conveyance Seepage	48 27	48 27	45 27	46 27	43 27	45 27	
Outflow	Between Systems	Surface Water Delivery	80,992	80,604	75,245	78,776	70,606	72,295	78,9
Outflow	Between Systems	Stream Loss to Groundwater	8,684	11,116	14,228	17,745	21,733	38,213	9,9
Outflow	Between Systems	Reservoir Loss to Groundwater	596	596	596	596	596	596	5
Outflow	Out of Basin	Reservoir Evaporation	763	756	711	747	675	694	7
Outflow	Out of Basin	Stream Evaporation	400	400	380	395	364	372	4
	18)+(19)+(20)+(2)+(21)+(22)+(23)+(24)		142,983	224,076	310,322	389,772	477,422	874,271	182,9
Storage Change	(17)-(25)			224,076 -	310,322	389,772 -	477,422 -	874,271 -	182,9
Storage Change		Total Outflow	142,983	224,076	-	-		-	2007
Storage Change GROUNDWA	(17)-{25) TER SYSTEM WATER BUDGET	Total Outflow Change in Surface Water Storage	142,983 -	-	-	-	-	-	2007
Storage Change GROUNDWA	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination	Component	142,983	2002	2003	2004	2005	2006	2007 13,7
Storage Change GROUNDWA Flow Type Inflow Inflow Inflow	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge	2001 14,089 1,288	2002 14,001 1,345	2003 13,030 1,551	2004 13,667 1,449	2005 12,197 1,695	2006 12,475 1,725	2007 13,7 1,4
Storage Change GROUNDWA Flow Type Inflow Inflow Inflow Inflow Inflow	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream	2001 14,089 1,288 - 8,684	2002 14,001 1,345 - 11,116	2003 13,030 1,551 - 14,228	2004 13,667 1,449 - 17,745	2005 12,197 1,695 - 21,733	2006 12,475 1,725 - 38,213	2007 13,7 1,4 -
GROUNDWATER STORMS Inflow Infl	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir	2001 14,089 1,288 - 8,684 596	2002 14,001 1,345 - 11,116 596	2003 13,030 1,551 - 14,228 596	2004 13,667 1,449 - 17,745 596	2005 12,197 1,695 - 21,733 596	2006 12,475 1,725 - 38,213 596	2007 13,7 1,4 - 9,9
GROUNDWATER STATE OF THE PROPERTY OF THE PROPE	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage	2001 14,089 1,288 - 8,684 596 27	2002 14,001 1,345 - 11,116 596 27	2003 13,030 1,551 - 14,228 596 27	2004 13,667 1,449 - 17,745 596 27	2005 12,197 1,695 - 21,733 596 27	2006 12,475 1,725 - 38,213 596 27	2007 13,7 1,4 - 9,9
GROUNDWATER STORMS INFO INFO INFO INFO INFO INFO INFO INFO	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow	2001 14,089 1,288 - 8,684 596 27 1	2002 14,001 1,345 - 11,116 596 27	2003 13,030 1,551 - 14,228 596 27	2004 13,667 1,449 - 17,745 596 27	2005 12,197 1,695 - 21,733 596 27	2006 12,475 1,725 - 38,213 596 27	2007 13,7 1,4 - 9,9 5
GROUNDWATER STORMS Inflow Infl	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27)	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow	2001 14,089 1,288 - 8,684 596 27	2002 14,001 1,345 - 11,116 596 27 1 27,086	2003 13,030 1,551 - 14,228 596 27	2004 13,667 1,449 - 17,745 596 27	2005 12,197 1,695 - 21,733 596 27 1	2006 12,475 1,725 - 38,213 596 27	2007 13,7 1,4 - 9,9 5
GROUNDWATER STORMS INFLOW	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow	2001 14,089 1,288 2,684 596 27 1 24,686	2002 14,001 1,345 - 11,116 596 27	2003 13,030 1,551 - 14,228 596 27 1 29,435	2004 13,667 1,449 - 17,745 596 27 1 33,485	2005 12,197 1,695 - 21,733 596 27	2006 12,475 1,725 - 38,213 596 27 1 53,038	2007 13,7 1,4 - 9,9 5
GROUNDWATER STORMS TO THE STOR	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction	2001 14,089 1,288 2,684 596 27 1 24,686 49,626	2002 14,001 1,345 - 11,116 596 27 1 27,086	2003 13,030 1,551 - 14,228 596 27 1 29,435 44,131	2004 13,667 1,449 - 17,745 596 27 1 33,485 47,093	2005 12,197 1,695 - 21,733 596 27 1	2006 12,475 1,725 - 38,213 596 27 1 53,038	2007 13,7 1,4 - 9,9 5 25,8 48,7
GROUNDWA' Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Unflow Outflow Outflow Outflow Outflow Outflow	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow	2001 14,089 1,288 - 8,684 596 27 1 24,686 49,626 - -	2002 14,001 1,345 - 11,116 596 27 1 27,086 48,753 -	2003 13,030 1,551 - 14,228 596 27 1 29,435 44,131 -	2004 13,667 1,449 - 17,745 596 27 1 33,485 47,093 -	2005 12,197 1,695 - 21,733 596 27 1 36,249 40,332 -	2006 12,475 1,725 - 38,213 596 27 1 53,038 40,960 -	2007 13,7 1,4 - 9,9 5 25,8 48,7
GROUNDWA Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir	2001 14,089 1,28 8,684 596 27 1 24,686 49,626	2002 14,001 1,345 - 11,116 596 27 1 27,086 48,753	2003 13,030 1,551 - 14,228 596 27 1 29,435 44,131	2004 13,667 1,449 - 17,745 596 27 1 33,485 47,093	2005 12,197 1,695 - 21,733 596 27 1 36,249 40,332	2006 12,475 1,725 - 38,213 596 27 1 53,038 40,960 -	2007 13,7 1,4 - 9,9 5 25,8 48,7
GROUNDWA' Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Unflow Unflow Outflow Outflow Outflow Outflow Outflow	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow	2001 14,089 1,288 - 8,684 596 27 1 24,686 49,626 - -	2002 14,001 1,345 - 11,116 596 27 1 27,086 48,753 -	2003 13,030 1,551 - 14,228 596 27 1 29,435 44,131 -	2004 13,667 1,449 - 17,745 596 27 1 33,485 47,093 -	2005 12,197 1,695 - 21,733 596 27 1 36,249 40,332 -	2006 12,475 1,725 - 38,213 596 27 1 53,038 40,960 -	2007 13,7 1,4 9,9 5 25,8 48,7
Storage Change GROUNDWA Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow Storage Change	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29)	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow	2001 14,089 1,288 - 8,684 596 27 1 24,686 49,626 49,626	2002 14,001 1,345 - 11,116 596 27 1 27,086 48,753 - - 48,753	2003 13,030 1,551 - 14,228 596 27 1 29,435 44,131 - - 44,131	2004 13,667 1,449 - 17,745 596 27 1 33,485 47,093 - - 47,093	2005 12,197 1,695 - 21,733 596 27 1 36,249 40,332 - - 40,332	2006 12,475 1,725 - 38,213 596 27 1 53,038 40,960 - - 40,960	2007 13,7 1,4 - 9,9 5 25,8 48,7 - - 48,7
Storage Change GROUNDWA Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Coutflow Outflow	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30)	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow	2001 14,089 1,288 - 8,684 596 27 1 24,686 49,626 49,626	2002 14,001 1,345 - 11,116 596 27 1 27,086 48,753 - - 48,753	2003 13,030 1,551 - 14,228 596 27 1 29,435 44,131 - - 44,131	2004 13,667 1,449 - 17,745 596 27 1 33,485 47,093 - - 47,093	2005 12,197 1,695 - 21,733 596 27 1 36,249 40,332 - - 40,332	2006 12,475 1,725 - 38,213 596 27 1 53,038 40,960 - - 40,960	2007 13,7 1,4 9,9 5 25,8,8 48,7 (22,9
Storage Change GROUNDWA Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Storage Change TOTAL BASIN Flow Type Inflow	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) I WATER BUDGET Origin/ Destination Into Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System	2001 14,089 1,288 - 8,684 596 27 1 24,686 49,626 49,626 (24,940) 2001 79,296	2002 14,001 1,345 - 11,116 596 27 1 27,086 48,753 - - - 48,753 (21,666)	2003 13,030 1,551 - 14,228 596 27 1 29,435 44,131 - - 44,131 (14,696)	2004 13,667 1,449 - 17,745 596 27 1 33,485 47,093 - - - 47,093 (13,608)	2005 12,197 1,695 - 21,733 596 27 1 36,249 40,332 - - - 40,332 (4,082)	2006 12,475 1,725 - 38,213 596 27 1 53,038 40,960 - - - 40,960 12,079	2007 13,7 1,4 9,9 5 25,8 48,7 (22,9 2007 99,2
Storage Change GROUNDWA Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Storage Change TOTAL BASIN Flow Type Inflow I	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) WATER BUDGET Origin/ Destination Into Basin Into Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs	2001 14,089 1,288 - 8,684 596 27 1 24,686 49,626 49,626 (24,940) 2001 79,296 291	2002 14,001 1,345 - 11,116 596 27 1 27,086 48,753 - - - 48,753 (21,666) 2002	2003 13,030 1,551 - 14,228 596 27 1 29,435 44,131 - - 44,131 (14,696) 2003 136,611 501	2004 13,667 1,449 - 17,745 596 27 1 33,485 47,093 47,093 (13,608) 2004 136,687 501	2005 12,197 1,695 - 21,733 596 27 1 36,249 40,332 - - - 40,332 (4,082) 2005 147,525 541	2006 12,475 1,725 - 38,213 596 27 1 53,038 40,960 - - 40,960 12,079 2006 190,721 699	2007 13,7 1,4 9,9 5 25,8 48,7 (22,9 2007 99,2
Storage Change GROUNDWA Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Storage Change TOTAL BASIN Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Inflow Inflo	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow	2001 14,089 1,288 - 8,684 596 27 1 24,686 49,626 49,626 (24,940) 2001 79,296 291 100,742	2002 14,001 1,345 - 11,116 596 27 1 27,086 48,753 - - - 48,753 (21,666) 2002 109,976 403 153,035	2003 13,030 1,551 - 14,228 596 27 1 29,435 44,131 - - - 44,131 (14,696) 2003 136,611 501 219,963	2004 13,667 1,449 - 17,745 596 27 1 33,485 47,093 47,093 (13,608) 2004 136,687 501 295,581	2005 12,197 1,695 - 21,733 596 27 1 36,249 40,332 40,332 (4,082) 2005 147,525 541 381,347	2006 12,475 1,725 - 38,213 596 27 1 53,038 40,960 - - - 40,960 12,079 2006 190,721 699 735,770	2007 13,7 1,4 9,9 5 25,8 48,7 (22,9 2007 99,2
Storage Change GROUNDWA Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Storage Change TOTAL BASIN Flow Type Inflow I	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Into Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow	2001 14,089 1,288 - 8,684 596 27 1 24,686 49,626 49,626 (24,940) 2001 79,296 291 100,742 1	2002 14,001 1,345 - 11,116 596 27 1 27,086 48,753 - - - - 48,753 (21,666) 2002 109,976 403 153,035	2003 13,030 1,551 - 14,228 596 27 1 29,435 44,131 - - - 44,131 (14,696) 2003 136,611 501 219,963 1	2004 13,667 1,449 - 17,745 596 27 1 33,485 47,093 47,093 (13,608) 2004 136,687 501 295,581	2005 12,197 1,695 - 21,733 596 27 1 36,249 40,332 40,332 (4,082) 2005 147,525 541 381,347 1	2006 12,475 1,725 - 38,213 596 27 1 53,038 40,960 - - - 40,960 12,079 2006 190,721 699 735,770 1	2007 13,7 1,4 9,9 5 25,8,8 48,7 (22,9 2007 99,2 3 127,7
Storage Change GROUNDWAT Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Storage Change TOTAL BASIN Flow Type Inflow	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (3)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) I WATER BUDGET Origin/ Destination Into Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Total Inflow	2001 14,089 1,288 - 8,684 596 27 1 24,686 49,626 49,626 (24,940) 2001 79,296 291 100,742 1 180,328	2002 14,001 1,345 - 11,116 596 27 1 27,086 48,753 - - - 48,753 (21,666) 2002 109,976 403 153,035 1 263,415	2003 13,030 1,551 - 14,228 596 27 1 29,435 44,131 44,131 (14,696) 2003 136,611 501 219,963 1 357,075	2004 13,667 1,449 - 17,745 596 27 1 33,485 47,093 47,093 (13,608) 2004 136,687 501 295,581 1 432,770	2005 12,197 1,695 - 21,733 596 27 1 36,249 40,332 40,332 (4,082) 2005 147,525 541 381,347 1 529,413	2006 12,475 1,725 - 38,213 596 27 1 53,038 40,960 40,960 12,079 2006 190,721 699 735,770 1 927,191	2007 13,7 1,4 9,9,9 5 25,8,8 48,7 (22,9 2007 99,2,2 217,7
Storage Change GROUNDWA Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Storage Change TOTAL BASIN Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Inflow I	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Into Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow	2001 14,089 1,288 - 8,684 596 27 1 24,686 49,626 49,626 (24,940) 2001 79,296 291 100,742 1	2002 14,001 1,345 - 11,116 596 27 1 27,086 48,753 - - - - 48,753 (21,666) 2002 109,976 403 153,035	2003 13,030 1,551 - 14,228 596 27 1 29,435 44,131 - - - 44,131 (14,696) 2003 136,611 501 219,963 1	2004 13,667 1,449 - 17,745 596 27 1 33,485 47,093 47,093 (13,608) 2004 136,687 501 295,581	2005 12,197 1,695 - 21,733 596 27 1 36,249 40,332 40,332 (4,082) 2005 147,525 541 381,347 1	2006 12,475 1,725 - 38,213 596 27 1 53,038 40,960 - - - 40,960 12,079 2006 190,721 699 735,770 1	2007 13,7 1,4 9,9,9 5 225,8,8 48,7 (22,9 2007 99,2 127,7 227,4 156,9
Storage Change GROUNDWAT Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Storage Change TOTAL BASIN Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Inflow Inflow Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Inflow Inflow Inflow Inflow Outflow Outflow	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) I WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Into Basin Out of Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Frotal Inflow Total Inflow Total Inflow Total Inflow Total Inflow Subsurface Inflow	2001 14,089 1,288 - 8,684 596 27 1 24,686 49,626 49,626 (24,940) 2001 79,296 291 100,742 1 180,328 152,585	2002 14,001 1,345 - 11,116 596 27 1 27,086 48,753 - - - 48,753 (21,666) 2002 109,976 403 153,035 1 263,415 153,349	2003 13,030 1,551 - 14,228 596 27 1 29,435 44,131 44,131 (14,696) 2003 136,611 501 219,963 1 357,075 151,547	2004 13,667 1,449 - 17,745 596 27 1 33,485 47,093 47,093 (13,608) 2004 136,687 501 295,581 1 432,770 153,751	2005 12,197 1,695 - 21,733 596 27 1 36,249 40,332 40,332 (4,082) 2005 147,525 541 381,347 1 529,413 149,036	2006 12,475 1,725 - 38,213 596 27 1 53,038 40,960 40,960 12,079 2006 190,721 699 735,770 1 927,191 151,973	2007 13,7 1,4 9,9,9 5 5 25,8,8 48,7 (22,9 2007 99,2 3 127,7 156,5
Storage Change GROUNDWA Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Storage Change TOTAL BASIN Flow Type Inflow Inflow Inflow Inflow Outflow Inflow Inflow Inflow Inflow Outflow	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) I WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin (1)+(14)+(13)+(27) Out of Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Evapotranspiration Stream Evaporation	2001 14,089 1,288 - 8,684 596 27 1 24,686 49,626 49,626 (24,940) 2001 79,296 291 100,742 1 180,328 152,585 400	2002 14,001 1,345 - 11,116 596 27 1 27,086 48,753 48,753 (21,666) 2002 109,976 403 153,035 1 263,415 153,349 400	2003 13,030 1,551 - 14,228 596 27 1 29,435 44,131 44,131 (14,696) 2003 136,611 501 219,963 1 357,075 151,547 380	2004 13,667 1,449 - 17,745 596 27 1 33,485 47,093 47,093 (13,608) 2004 136,687 501 295,581 1 432,770 153,751 395	2005 12,197 1,695 - 21,733 596 27 1 36,249 40,332 40,332 (4,082) 2005 147,525 541 381,347 1 529,413 149,036 364	2006 12,475 1,725 - 38,213 596 27 1 53,038 40,960 40,960 12,079 2006 190,721 699 735,770 1 927,191 151,973 372	2007 13,7 1,4 9,9,9 5 5 25,8,8 48,7 (22,9 2007 99,2 3 127,7 156,5
Storage Change GROUNDWA Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Type Inflow Type Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow O	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) I WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Into Basin Into Basin Out of Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Reservoir Stream Inflow Subsurface Inflow Evapotranspiration Stream Evaporation Reservoir Evaporation Conveyance Evaporation Stream Outflow	2001 14,089 1,288 - 8,684 596 27 1 24,686 49,626 49,626 (24,940) 2001 79,296 291 100,742 1 180,328 152,585 400 763	2002 14,001 1,345 - 11,116 596 27 1 27,086 48,753 48,753 (21,666) 2002 109,976 403 153,035 1 263,415 153,349 400 756	2003 13,030 1,551 - 14,228 596 27 1 29,435 44,131 44,131 (14,696) 2003 136,611 501 219,963 1 357,075 151,547 380 711 45 219,088	2004 13,667 1,449 - 17,745 596 27 1 33,485 47,093 47,093 (13,608) 2004 136,687 501 295,581 1 432,770 153,751 395 747 46 291,439	2005 12,197 1,695 - 21,733 596 27 1 36,249 40,332 40,332 (4,082) 2005 147,525 541 381,347 1 529,413 149,036 364 675	2006 12,475 1,725 - 38,213 596 27 1 53,038 40,960 40,960 12,079 2006 190,721 699 735,770 1 927,191 151,973 372 694 45 762,028	2007 13,7 1,4 - 9,9 5 25,8 48,7 - 48,7 (22,9 2007 99,2 3 127,7 227,4 156,9 4 7
Storage Change GROUNDWA Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Torage Change TOTAL BASIN Flow Type Inflow Inflow Inflow Outflow Outflow Outflow Outflow Inflow Inflow Outflow Outflow Outflow Outflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outf	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) I WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Into Basin Out of Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Reservoir Stream Inflow Subsurface Inflow Subsurface Inflow Subsurface Inflow Subsurface Inflow Subsurface Inflow Subsurface Inflow Stream Evaporation Reservoir Evaporation Stream Outflow Subsurface Outflow Subsurface Outflow	2001 14,089 1,288 - 8,684 596 27 1 24,686 49,626 49,626 (24,940) 2001 79,296 291 100,742 1 180,328 152,585 400 763 48 51,472 -	2002 14,001 1,345 - 11,116 596 27 1 27,086 48,753 48,753 (21,666) 2002 109,976 403 153,035 1 263,415 153,349 400 756 48 130,528	2003 13,030 1,551 - 14,228 596 27 1 29,435 44,131 44,131 (14,696) 2003 136,611 501 219,963 1 357,075 151,547 45 219,088	2004 13,667 1,449 - 17,745 596 27 1 33,485 47,093 47,093 (13,608) 2004 136,687 501 295,581 1 432,770 153,751 395 747 46 291,439 -	2005 12,197 1,695 - 21,733 596 27 1 36,249 40,332 40,332 (4,082) 2005 147,525 541 381,347 1 529,413 149,036 675 43 383,378	2006 12,475 1,725 - 38,213 596 27 1 53,038 40,960 40,960 12,079 2006 190,721 699 735,770 1 927,191 151,973 372 694 45 762,028	2007 13,7 1,4 9,9 5 25,8 48,7 (22,9 2007 99,2 3 127,7 227,4 156,9 92,1
Storage Change GROUNDWA Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Storage Change TOTAL BASIN Flow Type Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow Inflow Inflow Inflow Inflow Outflow	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) I WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Into Basin Into Basin Out of Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Reservoir Stream Inflow Subsurface Inflow Evapotranspiration Stream Evaporation Reservoir Evaporation Conveyance Evaporation Stream Outflow	2001 14,089 1,288 - 8,684 596 27 1 24,686 49,626 49,626 (24,940) 2001 79,296 291 100,742 1 180,328 152,585 400 763 48	2002 14,001 1,345 - 11,116 596 27 1 27,086 48,753 48,753 (21,666) 2002 109,976 403 153,035 1 263,415 153,349 400 756 48	2003 13,030 1,551 - 14,228 596 27 1 29,435 44,131 44,131 (14,696) 2003 136,611 501 219,963 1 357,075 151,547 380 711 45 219,088	2004 13,667 1,449 - 17,745 596 27 1 33,485 47,093 47,093 (13,608) 2004 136,687 501 295,581 1 432,770 153,751 395 747 46 291,439	2005 12,197 1,695 - 21,733 596 27 1 36,249 40,332 40,332 (4,082) 2005 147,525 541 381,347 1 529,413 149,036 364 675 43	2006 12,475 1,725 - 38,213 596 27 1 53,038 40,960 40,960 12,079 2006 190,721 699 735,770 1 927,191 151,973 372 694 45 762,028	2007 13,7 1,4 - 9,9 5 25,8 48,7 (22,9 2007 99,2 3 127,7 227,4 156,9 4 7
Storage Change GROUNDWA Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Storage Change TOTAL BASIN Flow Type Inflow Inflow Outflow Outflow Outflow Outflow Outflow Inflow Inflow Outflow Outflow Outflow Outflow Inflow Inflow Inflow Inflow Outflow	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) I WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Into Basin Out of Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Reservoir Stream Inflow Subsurface Inflow Subsurface Inflow Subsurface Inflow Subsurface Inflow Subsurface Inflow Subsurface Inflow Stream Evaporation Reservoir Evaporation Stream Outflow Subsurface Outflow Subsurface Outflow	2001 14,089 1,288 - 8,684 596 27 1 24,686 49,626 49,626 (24,940) 2001 79,296 291 100,742 1 180,328 152,585 400 763 48 51,472 -	2002 14,001 1,345 - 11,116 596 27 1 27,086 48,753 48,753 (21,666) 2002 109,976 403 153,035 1 263,415 153,349 400 756 48 130,528	2003 13,030 1,551 - 14,228 596 27 1 29,435 44,131 44,131 (14,696) 2003 136,611 501 219,963 1 357,075 151,547 45 219,088	2004 13,667 1,449 - 17,745 596 27 1 33,485 47,093 47,093 (13,608) 2004 136,687 501 295,581 1 432,770 153,751 395 747 46 291,439 -	2005 12,197 1,695 - 21,733 596 27 1 36,249 40,332 40,332 (4,082) 2005 147,525 541 381,347 1 529,413 149,036 675 43 383,378	2006 12,475 1,725 - 38,213 596 27 1 53,038 40,960 40,960 12,079 2006 190,721 699 735,770 1 927,191 151,973 372 694 45 762,028	2007 13,7 1,4 - 9,9 5 25,8 48,7 - - - 48,7 (22,9

Flow Type	EM WATER BUDGET Origin/ Destination	Component	2008	2009	2010	2011	2012	2013	2014
Inflow	Into Basin	Precipitation on Land System	97,459	114,173	120,660	167,215	93,491	126,995	88,759
Inflow	Between Systems	Surface Water Delivery	78,709	78,245	71,749	68,856	81,443	78,026	85,157
Inflow	Between Systems	Groundwater Extraction	47,716	46,430	41,387	38,575	49,850	46,719	54,126
Inflow	(1)+(2)+(3)	Total Inflow	223,885	238,849	233,797	274,646	224,784	251,740	228,042
Outflow Outflow	Out of Basin	Evapotranspiration Runoff	151,305	156,057	151,911	146,988	154,515	161,099	159,338
Outflow	Between Systems Between Systems	Return Flow	52,178 5,366	62,460 5,217	63,110 4,644	109,739 4,323	49,166 5,608	70,144 5,251	46,463 6,098
Outflow	Between Systems	Recharge of Applied Water	13,678	13,564	12,406	11,872	14,165	13,540	14,874
Outflow	Between Systems	Recharge of Precipitation	1,358	1,551	1,727	1,724	1,330	1,706	1,269
Outflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-	-
Outflow	(5)+(6)+(7)+(8)+(9)+(10)	Total Outflow	223,885	238,849	233,797	274,646	224,784	251,740	228,042
Storage Change	(4)-(11)	Change in Land System Storage	-	-	-	-	-	-	-
SURFACE W	ATER SYSTEM WATER BUDGET								
Flow Type	Origin/ Destination	Component	2008	2009	2010	2011	2012	2013	2014
Inflow	Into Basin	Stream Inflow	240,456	143,169	103,605	629,359	125,535	142,221	52,739
Inflow	Into Basin	Precipitation on Reservoirs	357	418	442	613	343	465	325
Inflow Inflow	Between Systems Between Systems	Runoff Return Flow	52,178 5,366	62,460 5,217	63,110 4,644	109,739 4,323	49,166 5,608	70,144 5,251	46,463 6,098
Inflow	Between Systems	Stream Gain from Groundwater				- 4,323	-		- 0,096
Inflow	Between Systems	Reservoir Gain from Groundwater	-	-	-	-	-	-	-
Inflow	(13)+(14)+(6)+(7)+(15)+(16)	Total Inflow	298,356	211,263	171,801	744,034	180,651	218,081	105,625
Outflow	Out of Basin	Stream Outflow	202,668	120,562	89,515	640,247	87,552	127,602	12,117
Outflow	Out of Basin	Conveyance Evaporation	46	46	44	42	47	47	49
Outflow Outflow	Between Systems Between Systems	Conveyance Seepage Surface Water Delivery	27 78,709	27 78,245	27 71,749	27 68,856	27 81,443	27 78,026	27 85,157
Outflow	Between Systems	Stream Loss to Groundwater	15,181	10,657	8,818	33,265	9,837	10,613	6,452
		Reservoir Loss to Groundwater	596	596	596	596	596	596	596
Outriow	Between Systems				684	648	748	766	802
_	Out of Basin	Reservoir Evaporation	737	736	00-1		7-10		
Outflow Outflow	Out of Basin Out of Basin	Stream Evaporation	391	393	368	352	401	403	423
Outflow Outflow Outflow	Out of Basin								423 105,625
Outflow Outflow Outflow Storage Change	Out of Basin Out of Basin	Stream Evaporation	391	393	368	352	401	403	
Outflow Outflow Storage Change	Out of Basin Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24)	Stream Evaporation Total Outflow	391 298,356	393	368 171,801	352 744,034	401 180,651	403 218,081	
Outflow Outflow Outflow Storage Change	Out of Basin Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET	Stream Evaporation Total Outflow Change in Surface Water Storage	391 298,356 -	393 211,263 -	368 171,801 -	352 744,034 -	401 180,651 -	403 218,081 -	105,625 -
Outflow Outflow Outflow Storage Change GROUNDW Flow Type Inflow Inflow	Out of Basin Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems	Component Recharge of Applied Water Recharge of Precipitation	391 298,356 - 2008	393 211,263 - - 2009	368 171,801 - - 2010	352 744,034 - 2011	401 180,651 - 2012	403 218,081 - 2013	105,625
Outflow Outflow Storage Change GROUNDW Inflow Infl	Out of Basin Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems	Component Recharge of Applied Water Recharge of Applied Water Managed Aquifer Recharge	298,356 - 2008 13,678 1,358	393 211,263 - 2009 13,564 1,551	368 171,801 - 2010 12,406 1,727 -	352 744,034 - 2011 11,872 1,724	401 180,651 - 2012 14,165 1,330	218,081 - 2013 13,540 1,706	2014 14,874 1,269
Outflow Outflow Storage Change GROUNDW Inflow Infl	Out of Basin Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream	298,356 - 2008 13,678 1,358 - 15,181	393 211,263 - 2009 13,564 1,551 - 10,657	368 171,801 - 2010 12,406 1,727 - 8,818	352 744,034 - 2011 11,872 1,724 - 33,265	401 180,651 - 2012 14,165 1,330 - 9,837	2013 13,540 1,706 - 10,613	2014 14,874 1,269 - 6,452
Outflow Outflow Storage Change GROUNDW low Type Inflow Inflow Inflow Inflow	Out of Basin Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir	298,356 - 2008 13,678 1,358	393 211,263 - 2009 13,564 1,551	368 171,801 - 2010 12,406 1,727 -	352 744,034 - 2011 11,872 1,724	401 180,651 - 2012 14,165 1,330	218,081 - 2013 13,540 1,706	2014 14,874 1,269
Outflow Outflow Storage Change GROUNDW Iow Type Inflow	Out of Basin Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream	298,356 - 2008 13,678 1,358 - 15,181 596	393 211,263 - 2009 13,564 1,551 - 10,657 596 27 1	368 171,801 - 2010 12,406 1,727 - 8,818 596	352 744,034 - 2011 11,872 1,724 - 33,265 596	401 180,651 - 2012 14,165 1,330 - 9,837 596	2013 13,540 1,706 - 10,613 596	2014 14,874 1,269 - 6,452 596
Outflow Outflow Storage Change GROUNDW Iow Type Inflow	Out of Basin Out of Basin Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27)	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow	298,356 - 2008 13,678 1,358 - 15,181 596 27 1 30,842	2009 13,564 1,551 10,657 596 27 1 26,398	368 171,801 - 2010 12,406 1,727 - 8,818 596 27 1 23,575	352 744,034 - 2011 11,872 1,724 - 33,265 596 27 1 47,486	401 180,651 - 2012 14,165 1,330 - 9,837 596 27 1 25,957	2013 2013 13,540 1,706 - 10,613 596 27 1 26,484	2014 14,874 1,269 - 6,452 596 27 1 23,220
Outflow Outflow Storage Change GROUNDW Clow Type Inflow Outflow Outflow	Out of Basin Out of Basin Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction	298,356 - 2008 13,678 1,358 - 15,181 596 27 1 30,842 47,716	393 211,263 - 2009 13,564 1,551 - 10,657 596 27 1	368 171,801 - 2010 12,406 1,727 - 8,818 596 27 1 23,575 41,387	352 744,034 - 2011 11,872 1,724 - 33,265 596 27 1 47,486 38,575	401 180,651 - 2012 14,165 1,330 - 9,837 596 27 1	2013 13,540 1,706 - 10,613 596 27 1	2014 14,874 1,269 - 6,452 596 27 1 23,220 54,126
Outflow Outflow Storage Change GROUNDW Flow Type Inflow Outflow Outflow Outflow	Out of Basin Out of Basin Out of Basin (18)+(19)+(20)+(21)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream	298,356 - 2008 13,678 1,358 - 15,181 596 27 1 30,842 47,716 -	2009 13,564 1,551 10,657 596 27 1 26,398	368 171,801 - 2010 12,406 1,727 - 8,818 596 27 1 23,575 41,387	352 744,034 - 2011 11,872 1,724 - 33,265 596 27 1 47,486 38,575 -	401 180,651 - 2012 14,165 1,330 - 9,837 596 27 1 25,957	2013 2013 13,540 1,706 - 10,613 596 27 1 26,484 46,719 -	2014 14,874 1,269 6,452 596 27 1 23,220 54,126
Outflow Outflow Storage Change GROUNDW Iow Type Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow	Out of Basin Out of Basin Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction	298,356 - 2008 13,678 1,358 - 15,181 596 27 1 30,842 47,716	393 211,263 - 2009 13,564 1,551 - 10,657 596 27 1 26,398 46,430	368 171,801 - 2010 12,406 1,727 - 8,818 596 27 1 23,575 41,387	352 744,034 - 2011 11,872 1,724 - 33,265 596 27 1 47,486 38,575	401 180,651 - 2012 14,165 1,330 - 9,837 596 27 1 25,957 49,850	2013 2013 13,540 1,706 - 10,613 596 27 1 26,484	2014 14,874 1,269 - 6,452 596 27 1 23,220 54,126
Outflow Outflow Storage Change GROUNDW Iow Type Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow	Out of Basin Out of Basin Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir	298,356 - 2008 13,678 1,358 - 15,181 596 27 1 30,842 47,716	393 211,263 - 2009 13,564 1,551 - 10,657 596 27 1 26,398 46,430 -	368 171,801 - 2010 12,406 1,727 - 8,818 596 27 1 23,575 41,387 -	352 744,034 - 2011 11,872 1,724 - 33,265 596 27 1 47,486 38,575 -	401 180,651 - 2012 14,165 1,330 - 9,837 596 27 1 25,957 49,850 -	2013 13,540 1,706 - 10,613 596 27 1 26,484 46,719 -	2014 14,874 1,269 6,452 596 27 1 23,220 54,126
Outflow Outflow Storage Change GROUNDW Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow	Out of Basin Out of Basin Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Out of Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow	298,356 - 2008 13,678 1,358 - 15,181 596 27 1 30,842 47,716 - -	2009 13,564 1,551 - 10,657 596 27 1 26,398 46,430 - -	368 171,801 - 2010 12,406 1,727 - 8,818 596 27 1 23,575 41,387 - -	352 744,034 - 2011 11,872 1,724 - 33,265 596 27 1 47,486 38,575 - -	401 180,651 - 2012 14,165 1,330 - 9,837 596 27 1 25,957 49,850 - -	2013 13,540 1,706 - 10,613 596 27 1 26,484 46,719	2014 14,874 1,269 - 6,452 596 27 1 23,220 54,126 - - - 54,126
Outflow Outflow Storage Change GROUNDW Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Storage Change	Out of Basin Out of Basin Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Unto Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Detween Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30)	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow	2008 13,678 1,358 - 15,181 596 27 1 30,842 47,716 - 47,716	393 211,263 - 2009 13,564 1,551 - 10,657 596 27 1 26,398 46,430 - - - 46,430	368 171,801 - 2010 12,406 1,727 - 8,818 596 27 1 23,575 41,387 - - 41,387	352 744,034 - 2011 11,872 1,724 - 33,265 596 27 1 47,486 38,575 - - 38,575	401 180,651 - 2012 14,165 1,330 - 9,837 596 27 1 25,957 49,850 - - - 49,850	2013 13,540 1,706 - 10,613 596 27 1 26,484 46,719 - 46,719	2014 14,874 1,269 - 6,452 596 27 1 23,220 54,126 54,126
Outflow Outflow Storage Change GROUNDW Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow Coutflow Outflow	Out of Basin Out of Basin Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Out of Basin (3)+(15)+(16)+(29)	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow	2008 13,678 1,358 - 15,181 596 27 1 30,842 47,716 - 47,716	393 211,263 - 2009 13,564 1,551 - 10,657 596 27 1 26,398 46,430 - - - 46,430	368 171,801 - 2010 12,406 1,727 - 8,818 596 27 1 23,575 41,387 - - 41,387	352 744,034 - 2011 11,872 1,724 - 33,265 596 27 1 47,486 38,575 - - 38,575	401 180,651 - 2012 14,165 1,330 - 9,837 596 27 1 25,957 49,850 - - - 49,850	2013 13,540 1,706 - 10,613 596 27 1 26,484 46,719 - 46,719	2014 14,874 1,269 - 6,452 596 27 1 23,220 54,126 - - - 54,126
Outflow Outflow Storage Change GROUNDW Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow Change	Out of Basin Out of Basin Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30)	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow Change in Groundwater Storage	391 298,356 - 2008 13,678 1,358 - 15,181 596 27 1 30,842 47,716 - - - 47,716 (16,874)	393 211,263 - 2009 13,564 1,551 - 10,657 596 27 1 26,398 46,430 - - 46,430 (20,033)	368 171,801 - 2010 12,406 1,727 - 8,818 596 27 1 23,575 41,387 - - 41,387 (17,812)	352 744,034 - 2011 11,872 1,724 - 33,265 596 27 1 47,486 38,575 - - - 38,575 8,910	401 180,651 - 2012 14,165 1,330 - 9,837 596 27 1 25,957 49,850 - - - 49,850 (23,893)	2013 13,540 1,706 - 10,613 596 27 1 26,484 46,719 46,719 (20,235)	2014 14,874 1,269 - 6,452 596 27 1 23,220 54,126 54,126 (30,907)
Outflow Outflow Storage Change GROUNDW Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Change Change TOTAL BASI	Out of Basin Out of Basin Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Unto Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30)	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow Change in Groundwater Storage	391 298,356 - 2008 13,678 1,358 - 15,181 596 27 1 30,842 47,716 - - - 47,716 (16,874)	393 211,263 - 2009 13,564 1,551 - 10,657 596 27 1 26,398 46,430 - - 46,430 (20,033)	368 171,801 - 2010 12,406 1,727 - 8,818 596 27 1 23,575 41,387 - - - 41,387 (17,812)	352 744,034 - 2011 11,872 1,724 - 33,265 596 27 1 47,486 38,575 - - - 38,575 8,910	401 180,651 - 2012 14,165 1,330 - 9,837 596 27 1 25,957 49,850 - - - - 49,850 (23,893)	403 218,081 - 2013 13,540 1,706 - 10,613 596 27 1 26,484 46,719 46,719 (20,235)	2014 14,874 1,269 - 6,452 596 27 1 23,220 54,126 - - - - - - - - - - - - -
Outflow Outflow Storage Change GROUNDW Iow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow Torage Change Iow Type Inflow	Out of Basin Out of Basin Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Out of Basin (3)+(19)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30)	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Seepage Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow	391 298,356 - 2008 13,678 1,358 - 15,181 596 27 1 30,842 47,716 47,716 (16,874) 2008 97,459 357 240,456	393 211,263 - 2009 13,564 1,551 - 10,657 596 27 1 26,398 46,430 46,430 (20,033) 2009 114,173 418 143,169	368 171,801 - 2010 12,406 1,727 - 8,818 596 27 1 23,575 41,387 - - 41,387 (17,812) 2010 120,660 442 103,605	352 744,034 - 2011 11,872 1,724 - 33,265 596 27 1 47,486 38,575 38,575 8,910 2011 167,215 613 629,359	401 180,651 - 2012 14,165 1,330 - 9,837 596 27 1 25,957 49,850 - - - 49,850 (23,893) 2012 93,491 343 125,535	403 218,081 - 2013 13,540 1,706 - 10,613 596 27 1 26,484 46,719 46,719 (20,235) 2013 126,995 465 142,221	2014 14,874 1,269 - 6,452 596 27 1 23,220 54,126 54,126 (30,907) 2014 88,759 325 52,739
Outflow Outflow Storage Change GROUNDW Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Storage Change TOTAL BASI Flow Type Inflow Inflow Inflow Inflow Outflow	Out of Basin Out of Basin Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Out of Basin (3)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30)	Component Recharge of Applied Water Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Storage Component Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Subsurface Inflow	391 298,356 - 2008 13,678 1,358 - 15,181 596 27 1 30,842 47,716 47,716 (16,874) 2008 97,459 357 240,456 1	393 211,263 - 2009 13,564 1,551 - 10,657 596 27 1 26,398 46,430 46,430 (20,033) 2009 114,173 418 143,169 1	368 171,801 - 2010 12,406 1,727 - 8,818 596 27 1 23,575 41,387 - - - 41,387 (17,812) 2010 120,660 442 103,605 1	352 744,034 - 2011 11,872 1,724 - 33,265 596 27 1 47,486 38,575 38,575 8,910 2011 167,215 613 629,359 1	401 180,651 - 2012 14,165 1,330 - 9,837 596 27 1 25,957 49,850 - - - 49,850 (23,893) 2012 93,491 343 125,535 1	403 218,081 - 2013 13,540 1,706 - 10,613 596 27 1 26,484 46,719 46,719 (20,235) 2013 126,995 465 142,221 1	2014 14,874 1,269 - 6,452 596 27 1 23,220 54,126 54,126 (30,907) 2014 88,759 325 52,739 1
Outflow Outflow Storage Change GROUNDW Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow TOTAL BASI Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Ou	Out of Basin Out of Basin Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) IN WATER BUDGET Origin/ Destination Into Basin	Component Recharge of Applied Water Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Seepage Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Subsurface Inflow	391 298,356 - 2008 13,678 1,358 - 15,181 596 27 1 30,842 47,716 47,716 (16,874) 2008 97,459 357 240,456 1 338,273	393 211,263 - 2009 13,564 1,551 - 10,657 596 27 1 26,398 46,430 46,430 (20,033) 2009 114,173 418 143,169 1 257,761	368 171,801 - 2010 12,406 1,727 - 8,818 596 27 1 23,575 41,387 - - - 41,387 (17,812) 2010 120,660 442 103,605 1 224,709	352 744,034 - 2011 11,872 1,724 - 33,265 596 27 1 47,486 38,575 38,575 8,910 2011 167,215 613 629,359 1 797,188	401 180,651 - 2012 14,165 1,330 - 9,837 596 27 1 25,957 49,850 - - - 49,850 (23,893) 2012 93,491 343 125,535 1 219,369	403 218,081 - 2013 13,540 1,706 - 10,613 596 27 1 26,484 46,719 46,719 (20,235) 2013 126,995 465 142,221 1 269,682	2014 14,874 1,269 - 6,452 596 27 1 23,220 54,126 54,126 (30,907) 2014 88,759 325 52,739 1 141,824
Outflow Outflow Storage Change GROUNDW Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Storage Change TOTAL BASI Flow Type Inflow Inflow Inflow Outflow Inflow Inflow Inflow Inflow Inflow Outflow	Out of Basin Out of Basin Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) IN WATER BUDGET Origin/ Destination Into Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Set of Stream Groundwater Set of Stream Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Evapotranspiration	391 298,356 - 2008 13,678 1,358 - 15,181 596 27 1 30,842 47,716 47,716 (16,874) 2008 97,459 357 240,456 1 338,273 151,305	393 211,263 - 2009 13,564 1,551 - 10,657 596 27 1 26,398 46,430 46,430 (20,033) 2009 114,173 418 143,169 1 257,761 156,057	368 171,801 - 2010 12,406 1,727 - 8,818 596 27 1 23,575 41,387 41,387 (17,812) 2010 120,660 442 103,605 1 224,709 151,911	352 744,034 - 2011 11,872 1,724 - 33,265 596 27 1 47,486 38,575 38,575 8,910 2011 167,215 613 629,359 1 797,188 146,988	401 180,651 - 2012 14,165 1,330 - 9,837 596 27 1 25,957 49,850 49,850 (23,893) 2012 93,491 343 125,535 1 219,369 154,515	403 218,081 - 2013 13,540 1,706 - 10,613 596 27 1 26,484 46,719 46,719 (20,235) 2013 126,995 465 142,221 1 269,682 161,099	2014 14,874 1,269 - 6,452 596 27 1 23,220 54,126 54,126 (30,907) 2014 88,759 325 52,739 1 141,824 159,338
Outflow Outflow Storage Change GROUNDW Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow TOTAL BASI Flow Type Inflow Inflow Inflow Outflow Inflow Inflow Inflow Outflow	Out of Basin Out of Basin Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) IN WATER BUDGET Origin/ Destination Into Basin	Component Recharge of Applied Water Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Seepage Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Subsurface Inflow	391 298,356 - 2008 13,678 1,358 - 15,181 596 27 1 30,842 47,716 47,716 (16,874) 2008 97,459 357 240,456 1 338,273	393 211,263 - 2009 13,564 1,551 - 10,657 596 27 1 26,398 46,430 46,430 (20,033) 2009 114,173 418 143,169 1 257,761	368 171,801 - 2010 12,406 1,727 - 8,818 596 27 1 23,575 41,387 - - - 41,387 (17,812) 2010 120,660 442 103,605 1 224,709	352 744,034 - 2011 11,872 1,724 - 33,265 596 27 1 47,486 38,575 38,575 8,910 2011 167,215 613 629,359 1 797,188	401 180,651 - 2012 14,165 1,330 - 9,837 596 27 1 25,957 49,850 - - - 49,850 (23,893) 2012 93,491 343 125,535 1 219,369	403 218,081 - 2013 13,540 1,706 - 10,613 596 27 1 26,484 46,719 46,719 (20,235) 2013 126,995 465 142,221 1 269,682	2014 14,874 1,269 - 6,452 596 27 1 23,220 54,126 54,126 (30,907) 2014 88,759 325 52,739 1 141,824
Outflow Outflow Storage Change GROUNDW Inflow Outflow Outflow Outflow Outflow Outflow Inflow	Out of Basin Out of Basin Out of Basin Out of Basin (18)+(19)+(20)+(21)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Out of Basin (3)+(19)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) IN WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Out of Basin Out of Basin Out of Basin	Component Recharge of Applied Water Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Evapotranspiration Stream Evaporation	391 298,356 - 2008 13,678 1,358 - 15,181 596 27 1 30,842 47,716 47,716 (16,874) 2008 97,459 357 240,456 1 338,273 151,305 391	393 211,263 - 2009 13,564 1,551 - 10,657 596 27 1 26,398 46,430 46,430 (20,033) 2009 114,173 418 143,169 1 257,761 156,057 393	368 171,801 - 2010 12,406 1,727 - 8,818 596 27 1 23,575 41,387 41,387 (17,812) 2010 120,660 442 103,605 1 224,709 151,911 368	352 744,034 - 2011 11,872 1,724 - 33,265 596 27 1 47,486 38,575 38,575 8,910 2011 167,215 613 629,359 1 797,188 146,988 352	401 180,651 - 2012 14,165 1,330 - 9,837 596 27 1 25,957 49,850 49,850 (23,893) 2012 93,491 343 125,535 1 219,369 154,515 401	403 218,081 - 2013 13,540 1,706 - 10,613 596 27 1 26,484 46,719 46,719 (20,235) 2013 126,995 465 142,221 1 269,682 161,099 403	2014 14,874 1,269 - 6,452 596 27 1 23,220 54,126 54,126 (30,907) 2014 88,759 325 52,739 1 141,824 159,338 423
Outflow Outflow Storage Change GROUNDW Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow TOTAL BASI Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow Inflow Outflow	Out of Basin Out of Basin Out of Basin Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Out of Basin (3)+(10)+(21)+(21)+(20)+(27) Between Systems Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) IN WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Out of Basin	Component Recharge of Applied Water Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Outflow Change in Groundwater Storage	391 298,356 - 2008 13,678 1,358 - 15,181 596 27 1 30,842 47,716 47,716 (16,874) 2008 97,459 357 240,456 1 338,273 151,305 391 737 46 202,668	393 211,263 - 2009 13,564 1,551 - 10,657 596 27 1 26,398 46,430 46,430 (20,033) 2009 114,173 418 143,169 1 257,761 156,057 393 736	368 171,801 - 2010 12,406 1,727 - 8,818 596 27 1 23,575 41,387 41,387 (17,812) 2010 120,660 442 103,605 1 224,709 151,911 368 684 44 89,515	352 744,034 2011 11,872 1,724 - 33,265 596 27 1 47,486 38,575 38,575 8,910 2011 167,215 613 629,359 1 797,188 146,988 352 648 42 640,247	401 180,651 - 2012 14,165 1,330 - 9,837 596 27 1 25,957 49,850 49,850 (23,893) 2012 93,491 343 125,535 1 219,369 154,515 401 748	403 218,081 - 2013 13,540 1,706 - 10,613 596 27 1 26,484 46,719 (20,235) 2013 126,995 465 142,221 1 269,682 161,099 403 766 47 127,602	2014 14,874 1,269 - 6,452 596 27 1 23,220 54,126 54,126 (30,907) 2014 88,759 325 52,739 1 141,824 159,338 423 802
Outflow Outflow Storage Change GROUNDW Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Total Basi Flow Type Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow Inflow Outflow	Out of Basin Out of Basin Out of Basin Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Out of Basin (3)+(19)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) IN WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Out of Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Change in Groundwater Storage	391 298,356 - 2008 13,678 1,358 - 15,181 596 27 1 30,842 47,716 47,716 (16,874) 2008 97,459 357 240,456 1 338,273 151,305 391 737 46 202,668	393 211,263 - 2009 13,564 1,551 - 10,657 596 27 1 26,398 46,430 (20,033) 2009 114,173 418 143,169 1 257,761 156,057 393 736 46 120,562	368 171,801 - 2010 12,406 1,727 - 8,818 596 27 1 23,575 41,387 41,387 (17,812) 2010 120,660 442 103,605 1 224,709 151,911 368 684 44 89,515 -	352 744,034 2011 11,872 1,724 - 33,265 596 27 1 47,486 38,575 38,575 8,910 2011 167,215 613 629,359 1 797,188 146,988 352 648 42 640,247 -	401 180,651 - 2012 14,165 1,330 - 9,837 596 27 1 25,957 49,850 49,850 (23,893) 2012 93,491 343 125,535 1 219,369 154,515 401 748 47 87,552	403 218,081 - 2013 13,540 1,706 - 10,613 596 27 1 26,484 46,719 46,719 (20,235) 2013 126,995 465 142,221 1 269,682 161,099 403 766 47 127,602	2014 14,874 1,269 - 6,452 596 27 1 23,220 54,126 54,126 (30,907) 2014 88,759 325 52,739 1 141,824 159,338 423 802 49 12,117
Outflow Outflow Storage Change GROUNDW Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow TOTAL BASI Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow	Out of Basin Out of Basin Out of Basin Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Out of Basin (3)+(10)+(21)+(21)+(20)+(27) Between Systems Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) IN WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Out of Basin	Component Recharge of Applied Water Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Outflow Change in Groundwater Storage	391 298,356 - 2008 13,678 1,358 - 15,181 596 27 1 30,842 47,716 47,716 (16,874) 2008 97,459 357 240,456 1 338,273 151,305 391 737 46 202,668	393 211,263 - 2009 13,564 1,551 - 10,657 596 27 1 26,398 46,430 (20,033) 2009 114,173 418 143,169 1 257,761 156,057 393 736 46	368 171,801 - 2010 12,406 1,727 - 8,818 596 27 1 23,575 41,387 41,387 (17,812) 2010 120,660 442 103,605 1 224,709 151,911 368 684 44 89,515	352 744,034 2011 11,872 1,724 - 33,265 596 27 1 47,486 38,575 38,575 8,910 2011 167,215 613 629,359 1 797,188 146,988 352 648 42 640,247	401 180,651 - 2012 14,165 1,330 - 9,837 596 27 1 25,957 49,850 (23,893) 2012 93,491 343 125,535 1 219,369 154,515 401 748 47	403 218,081 - 2013 13,540 1,706 - 10,613 596 27 1 26,484 46,719 (20,235) 2013 126,995 465 142,221 1 269,682 161,099 403 766 47 127,602	2014 14,874 1,269 - 6,452 596 27 1 23,220 54,126 54,126 (30,907) 2014 88,759 325 52,739 1 141,824 159,338 423 802 49

Inflition	LAND SYSTI	EM WATER BUDGET					
Inflow	low Type	Origin/ Destination	Component	2015	2016	2017	2018
Inflow Setween Systems Groundwater Estratution 47,485 45,590 42,392 46,00 0.014 19,104 19,1				-,			139,9
Inflow			 				
Outflow Outflow Extreme Pyterns Runnif 14,278 136,384 139,988 139,000 139,400 140,000							
Outflow Outflow Outflow Outflow Outflow Detween Systems Return Flow 15,336 5,118 4,778 1,35 3,50 00tflow Detween Systems Recharge of Applied Water 13,872 1,358 12,939 13,3 13,645 1,464 1,46				•		•	
Settlemen Systems					,		
Outflow Between Systems Recharge of Applied Water 13,872 13,868 12,939 13,80 Outflow Between Systems Recharge of Precipitation 1,637 1,648 31,80 12,939 13,50 2016 2017 264,8 318,977 264,8 378,977 264,8 378,977 264,8 378,977 264,8 378,977 264,8 378,977 264,8 378,978 264,8 378,978 264,8 378,978 264,8 378,978 388,73				•			,
Outflow Outflow Outflow (1946) Between Systems (Managed Aguifer Recharge 1946) 1,637 1,645 1,864 1,864 1,60 Outflow (1946) Between Systems (Managed Aguifer Recharge 1946) Total Outflow (1946) 256,881 284,463 318,977 264,88 Storage (Change 1941) Change in Land System Storage (1941)		·		•			
Dutflow Between Systems Managed Aquifer Recharge 19-11 264,8 318,977 264,977	Outflow						1,4
Total Outflow Ost-Rev Prince Ost-R							-
Change (4)(11) Change in Land System Storage	Outflow			256,881	284,465	318,977	264,8
Inflow	-	(4)-(11)	Change in Land System Storage	-	-	-	-
Inflow	SURFACE W	VATER SYSTEM WATER RUDGET					
Infinow Infinow Retween Systems Return Flow Stream Care Stre			Component	2015	2016	2017	2018
Inflow Between Systems Reservoir Flow 5,336 5,118 4,753 39,10	Inflow	Into Basin	Stream Inflow	82,881	374,311	809,028	243,1
Inflow Between Systems Rumoff 74,778 105,600 139,423 9.1.1 Inflow Between Systems Reservoir Gain from Groundwater							5
Inflow Between Systems Steum Flow 5,336 5,118 4,753 5,2		*****					91,1
Inflow Between Systems Stream Cain from Groundwater	Inflow		Return Flow		5,118		5,2
Inflow (13)H14)H(6)H7PH15]H(16)	Inflow	Between Systems	Stream Gain from Groundwater	-	-	-	-
Outflow Out of Basin Stream Outflow 73,721 383,946 827,869 244,9 Outflow Out of Basin Conveyance Sepage 27 27 27 27 Outflow Between Systems Conveyance Sepage 27 27 27 27 Outflow Between Systems Surface Water Delivery 80,035 78,452 75,027 77,90 Outflow Between Systems Surface Mater Delivery 80,035 78,452 75,027 77,70 Outflow Out of Basin Reservoir Consolidation 1,784 21,405 49,248 13,3 Outflow Out of Basin Stream Exaporation 409 398 391 3 Outflow Out of Basin Stream Exaporation 409 398 391 3 Outflow Out of Basin Stream Exaporation 163,468 485,618 953,943 340,0 Groundater Gain Surface Water Storage Change 17,210 160 2017 2018 GROUNDWATER SYSTEM	Inflow	Between Systems	Reservoir Gain from Groundwater	-	-	-	-
Outflow Out of Basin Conveyance Sepagae 27 47 48 Outflow Between Systems Conveyance Seepage 27 27 27 Outflow Between Systems Surface Water Delivery 80,035 78,452 75,027 77,9 Outflow Between Systems Serson Ioss to Groundwater 7,854 21,405 49,248 13,0 Outflow Out of Basin Reservoir Loss to Groundwater 596 593 34 340,00 340,00 38 391 3 340,00 34,00 34,00 34,00 34,00 34,00 34,00 34,00 34,00 34,00 34,00 34,00 34,00 34,00 34,00 34,00 34,00 34,00 3	Inflow	(13)+(14)+(6)+(7)+(15)+(16)	Total Inflow	163,468	485,618	953,943	340,0
Outflow Between Systems Conveyance Seepage 27 27 27 Outflow Between Systems Surface Water Delivery 80,035 78,452 75,027 77,9 Outflow Between Systems Stream Loss to Groundwater 7,854 21,405 49,248 15,3 Outflow Out of Basin Reservoir Exporation 78 596	Outflow	Out of Basin	Stream Outflow	73,721	383,946	827,869	244,9
Outflow Outflow Outflow Between Systems Surface Water Delivery 80,035 78,452 75,027 77,90 77,90 77,90 77,90 77,90 77,90 77,90 77,90 77,90 77,90 77,90 77,90 77,90 78,90 596	Outflow	Out of Basin	Conveyance Evaporation	47	47	48	
Outflow Outflow Outflow Between Systems Stream Loss to Groundwater 7,854 21,405 49,248 15,36 Outflow Out of Basin Outflow Sistem Sistem Outflow Outflow Outflow Outflow Outflow Sistem Outflow Outflo	Outflow	Between Systems	Conveyance Seepage	27	27	27	
Outflow Between Systems Reservoir Evaporation 7596 797 70	Outflow	Between Systems	Surface Water Delivery	80,035	78,452	75,027	77,9
Outflow Out of Basin Reservoir Evaporation 778 746 737 77 Outflow Out of Basin Stream Evaporation 409 398 391 3 Outflow Storage Change (139H19H20)H201H21/21/21/21)H21H21 Total Outflow 163,468 485,618 953,943 340,0 GROUNDWATER SYSTEM WATER BUDGET Change in Surface Water Storage GROUNDWATER SYSTEM WATER BUDGET Component 2015 2016 2017 2018 Inflow Inflow Between Systems Recharge of Applied Water 13,872 13,568 12,939 13,518 Inflow Between Systems Recharge of Precipitation 1,637 1,645 1,864 1,4 Inflow Between Systems Groundwater Gain from Stream 7,854 21,405 49,248 15,3 Inflow Between Systems Groundwater Gain from Reservoir 596 596 596 596 596 596 596 596 596 596 596 596 596 596 596 596 596 596 596 <t< td=""><td></td><td>Between Systems</td><td>Stream Loss to Groundwater</td><td>7,854</td><td>21,405</td><td>49,248</td><td>15,3</td></t<>		Between Systems	Stream Loss to Groundwater	7,854	21,405	49,248	15,3
Outflow Out of Basin Stream Evaporation 409 398 391 3 Outflow (18)+(19)+(20)+(21)+(21)+(22)+(23)+(24) Total Outflow 163,468 485,618 953,943 340,0 Storage Change (17)-(25) Change in Surface Water Storage - - - - GROUNDWATER SYSTEM WATER BUDGET Change in Surface Water Storage -	Outflow	Between Systems	Reservoir Loss to Groundwater	596	596	596	5
Outflow (18)+(19)+(20)+(2)+(21)+(22)+(24)	Outflow	Out of Basin	Reservoir Evaporation	778	746	737	7.
Change Change Change Change in Surface Water Storage -	Outflow	Out of Basin	Stream Evaporation	409	398	391	3
Change Change in Surface Water Storage	Outflow	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24)	Total Outflow	163,468	485,618	953,943	340,0.
Inflow Between Systems Recharge of Applied Water 13,872 13,568 12,939 13,5	-	(17)-(25)	Change in Surface Water Storage	-	-	-	-
Inflow Between Systems Recharge of Applied Water 13,872 13,568 12,939 13,5 Inflow Between Systems Recharge of Precipitation 1,637 1,645 1,864 1,4 Inflow Between Systems Managed Aquifer Recharge -	GROUNDW	ATER SYSTEM WATER BUDGET					
Inflow Between Systems Recharge of Precipitation 1,637 1,645 1,864 1,45 Inflow Between Systems Managed Aquifer Recharge -	Flow Type	Origin/ Destination					
Inflow		g, 2 com	Component	2015	2016	2017	2018
Inflow Between Systems Groundwater Gain from Stream 7,854 21,405 49,248 15,3 Inflow Between Systems Groundwater Gain from Reservoir 596 596 596 596 596 Inflow Into Basin Subsurface Inflow 1	Inflow		,				
Inflow		Between Systems	Recharge of Applied Water	13,872	13,568	12,939	13,5
Inflow	Inflow	Between Systems Between Systems	Recharge of Applied Water Recharge of Precipitation	13,872	13,568 1,645	12,939	13,5
Inflow	Inflow Inflow Inflow	Between Systems Between Systems Between Systems Between Systems	Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream	13,872 1,637 - 7,854	13,568 1,645	12,939 1,864 - 49,248	13,5 1,4 - 15,3
Inflow (8)+(9)+(10)+(21)+(22)+(20)+(27) Total Inflow 23,988 37,242 64,675 30,9	Inflow Inflow Inflow Inflow	Between Systems Between Systems Between Systems Between Systems Between Systems	Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir	13,872 1,637 - 7,854 596	13,568 1,645 - 21,405 596	12,939 1,864 - 49,248 596	13,5 1,4 - 15,3 5
Outflow Between Systems Groundwater Extraction 47,485 45,590 42,392 46,9 Outflow Between Systems Groundwater Loss to Stream -	Inflow Inflow Inflow Inflow Inflow	Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems	Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage	13,872 1,637 - 7,854 596 27	13,568 1,645 - 21,405 596 27	12,939 1,864 - 49,248 596 27	13,5 1,4 - 15,3 5
Outflow Outflow Between Systems Groundwater Loss to Stream -	Inflow Inflow Inflow Inflow Inflow Inflow	Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin	Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow	13,872 1,637 - 7,854 596 27	13,568 1,645 - 21,405 596 27 1	12,939 1,864 - 49,248 596 27	13,5 1,4 - 15,3 5
Outflow Out of Basin Groundwater Loss to Reservoir -	Inflow Inflow Inflow Inflow Inflow Inflow Inflow	Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27)	Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow	13,872 1,637 - 7,854 596 27 1 23,988	13,568 1,645 - 21,405 596 27 1	12,939 1,864 - 49,248 596 27 1	13,5 1,4 - 15,3 5
Outflow Out of Basin Subsurface Outflow	Inflow Inflow Inflow Inflow Inflow Inflow Outflow	Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems	Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction	13,872 1,637 - 7,854 596 27 1 23,988 47,485	13,568 1,645 - 21,405 596 27 1 37,242 45,590	12,939 1,864 - 49,248 596 27 1 64,675 42,392	13,5 1,4 - 15,3 5 30,9 46,9
Outflow (3)+(15)+(16)+(29) Total Outflow 47,485 45,590 42,392 46,9 Storage Change (28)-(30) Change in Groundwater Storage (23,497) (8,348) 22,283 (15,9 TOTAL BASIN WATER BUDGET Flow Type Origin/ Destination Component 2015 2016 2017 2018 Inflow Into Basin Precipitation on Land System 129,361 160,423 201,559 139,9 Inflow Into Basin Precipitation on Reservoirs 474 588 739 5 Inflow Into Basin Stream Inflow 82,881 374,311 809,028 243,1 Inflow Into Basin Subsurface Inflow 1 1 1 1 Inflow Out of Basin Evapotranspiration 161,258 158,534 159,998 153,4 Outflow Out of Basin Stream Evaporation 409 398 391 3 Outflow Out of Basin Reservoir Evaporation 778 746 737 7 Outflow Out of Basin Stream Outflow <td>Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow</td> <td>Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems</td> <td>Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream</td> <td>13,872 1,637 - 7,854 596 27 1 23,988 47,485</td> <td>13,568 1,645 - 21,405 596 27 1 37,242 45,590</td> <td>12,939 1,864 - 49,248 596 27 1 64,675 42,392</td> <td>13,5 1,4 - 15,3 5 30,9 46,9</td>	Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow	Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems	Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream	13,872 1,637 - 7,854 596 27 1 23,988 47,485	13,568 1,645 - 21,405 596 27 1 37,242 45,590	12,939 1,864 - 49,248 596 27 1 64,675 42,392	13,5 1,4 - 15,3 5 30,9 46,9
Change (28)-(30) Change in Groundwater Storage (23,497) (8,348) 22,283 (15,9)	Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow	Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems	Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir	13,872 1,637 - 7,854 596 27 1 23,988 47,485	13,568 1,645 - 21,405 596 27 1 37,242 45,590	12,939 1,864 - 49,248 596 27 1 64,675 42,392	13,5 1,4 - 15,3 5 30,9 46,9
Change (28)-(30) Change in Groundwater Storage (23,497) (8,348) 22,283 (15,9)	Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow	Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin	Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow	13,872 1,637 - 7,854 596 27 1 23,988 47,485 - -	13,568 1,645 - 21,405 596 27 1 37,242 45,590 - -	12,939 1,864 - 49,248 596 27 1 64,675 42,392 - -	13,5 1,4 - 15,3 5 30,9 46,9
Inflow	Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow	Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin	Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow	13,872 1,637 - 7,854 596 27 1 23,988 47,485 - -	13,568 1,645 - 21,405 596 27 1 37,242 45,590 - -	12,939 1,864 - 49,248 596 27 1 64,675 42,392 - -	13,5 1,4 - 15,3 5 30,9 46,9
Inflow	Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Storage	Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29)	Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow	13,872 1,637 - 7,854 596 27 1 23,988 47,485 - - 47,485	13,568 1,645 - 21,405 596 27 1 37,242 45,590 - - 45,590	12,939 1,864 - 49,248 596 27 1 64,675 42,392 - - 42,392	13,5 1,4 - 15,3 5 30,9 46,9
Inflow	Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Storage Change	Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30)	Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow	13,872 1,637 - 7,854 596 27 1 23,988 47,485 - - 47,485	13,568 1,645 - 21,405 596 27 1 37,242 45,590 - - 45,590	12,939 1,864 - 49,248 596 27 1 64,675 42,392 - - 42,392	13,5 1,4 15,3 5 30,9 46,9
Info Info Into Basin Stream Inflow 82,881 374,311 809,028 243,11 Inflow Into Basin Subsurface Inflow 1 1 1 1 1 1 1 1 1	Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow Storage Change	Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30)	Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow Change in Groundwater Storage	13,872 1,637 - 7,854 596 27 1 23,988 47,485 - - 47,485 (23,497)	13,568 1,645 - 21,405 596 27 1 37,242 45,590 - - 45,590 (8,348)	12,939 1,864 - 49,248 596 27 1 64,675 42,392 - - - 42,392 22,283	13,5 1,4 15,3 5 30,9 46,9
Inflow Into Basin Subsurface Inflow 1 1 1 Inflow (1)+(14)+(13)+(27) Total Inflow 212,717 535,323 1,011,326 383,6 Outflow Out of Basin Evapotranspiration 161,258 158,534 159,998 153,4 Outflow Out of Basin Stream Evaporation 409 398 391 3 Outflow Out of Basin Reservoir Evaporation 778 746 737 7 Outflow Out of Basin Conveyance Evaporation 47 47 48 Outflow Out of Basin Stream Outflow 73,721 383,946 827,869 244,9 Outflow (5)+(24)+(23)+(19)+(18)+(29) Total Outflow 236,214 543,670 989,042 399,64 Storage (32)-(33) Change in Total System Storage (23,497) (8,348) 22,283 (15,9	Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Storage Change TOTAL BAS	Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30)	Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System	13,872 1,637 - 7,854 596 27 1 23,988 47,485 - - 47,485 (23,497)	13,568 1,645 - 21,405 596 27 1 37,242 45,590 45,590 (8,348) 2016	12,939 1,864 - 49,248 596 27 1 64,675 42,392 - - - 42,392 22,283	13,5 1,4 15,3 5 30,9 46,9 46,9 (15,9
Inflow (1)+(14)+(13)+(27) Total Inflow 212,717 535,323 1,011,326 383,6 Outflow Out of Basin Evapotranspiration 161,258 158,534 159,998 153,4 Outflow Out of Basin Stream Evaporation 409 398 391 3 Outflow Out of Basin Reservoir Evaporation 778 746 737 7 Outflow Out of Basin Conveyance Evaporation 47 47 48 Outflow Out of Basin Stream Outflow 73,721 383,946 827,869 244,9 Outflow Out of Basin Subsurface Outflow - - - - Outflow (5)+(24)+(23)+(19)+(18)+(29) Total Outflow 236,214 543,670 989,042 399,64 Storage (32)-(33) Change in Total System Storage (23,497) (8,348) 22,283 (15,9	Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Storage Change TOTAL BAS Flow Type Inflow Inflow	Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) IN WATER BUDGET Origin/ Destination Into Basin Into Basin	Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs	13,872 1,637 - 7,854 596 27 1 23,988 47,485 - - 47,485 (23,497) 2015 129,361 474	13,568 1,645 - 21,405 596 27 1 37,242 45,590 45,590 (8,348) 2016 160,423 588	12,939 1,864 - 49,248 596 27 1 64,675 42,392 42,392 22,283 2017 201,559 739	13,5 1,4 - 15,3 5 30,9 46,9 - - - - - (15,9 2018 139,9 5
Outflow Out of Basin Evapotranspiration 161,258 158,534 159,998 153,4 Outflow Out of Basin Stream Evaporation 409 398 391 3 Outflow Out of Basin Reservoir Evaporation 778 746 737 7 Outflow Out of Basin Conveyance Evaporation 47 47 48 Outflow Out of Basin Stream Outflow 73,721 383,946 827,869 244,9 Outflow Out of Basin Subsurface Outflow - - - - Outflow (5)+(24)+(23)+(19)+(18)+(29) Total Outflow 236,214 543,670 989,042 399,64 Storage (32)-(33) Change in Total System Storage (23,497) (8,348) 22,283 (15,9	Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Ottlow Outflow Storage Change TOTAL BAS Flow Type Inflow	Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) IN WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin	Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow	13,872 1,637 - 7,854 596 27 1 23,988 47,485 47,485 (23,497) 2015 129,361 474 82,881	13,568 1,645 - 21,405 596 27 1 37,242 45,590 45,590 (8,348) 2016 160,423 588 374,311	12,939 1,864 - 49,248 596 27 1 64,675 42,392 42,392 22,283 2017 201,559 739 809,028	13,5 1,4 - 15,3 5 30,9 46,9 - - - - - (15,9 2018 139,9 5
Outflow Out of Basin Stream Evaporation 409 398 391 3 Outflow Out of Basin Reservoir Evaporation 778 746 737 7 Outflow Out of Basin Conveyance Evaporation 47 47 48 Outflow Out of Basin Stream Outflow 73,721 383,946 827,869 244,9 Outflow Out of Basin Subsurface Outflow - - - - Outflow (5)+(24)+(23)+(19)+(18)+(29) Total Outflow 236,214 543,670 989,042 399,64 Storage (32)-(33) Change in Total System Storage (23,497) (8,348) 22,283 (15,9	Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Ottlow Outflow Storage Change TOTAL BAS Flow Type Inflow	Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) IN WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin	Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow	13,872 1,637 - 7,854 596 27 1 23,988 47,485 47,485 (23,497) 2015 129,361 474 82,881 1	13,568 1,645 - 21,405 596 27 1 37,242 45,590 45,590 (8,348) 2016 160,423 588 374,311 1	12,939 1,864 - 49,248 596 27 1 64,675 42,392 2017 201,559 739 809,028 1	13,5 1,4 - 15,3 5 30,9 46,9 - 46,9 (15,9 2018 139,9 5 243,1
Outflow Out of Basin Reservoir Evaporation 778 746 737 7 Outflow Out of Basin Conveyance Evaporation 47 47 48 Outflow Out of Basin Stream Outflow 73,721 383,946 827,869 244,9 Outflow Out of Basin Subsurface Outflow - - - - Outflow (5)+(24)+(23)+(19)+(18)+(29) Total Outflow 236,214 543,670 989,042 399,64 Storage (32)-(33) Change in Total System Storage (23,497) (8,348) 22,283 (15,9)	Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Storage Change TOTAL BAS Flow Type Inflow	Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) IN WATER BUDGET Origin/ Destination Into Basin	Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow	13,872 1,637 - 7,854 596 27 1 23,988 47,485 - 47,485 (23,497) 2015 129,361 474 82,881 1 212,717	13,568 1,645 - 21,405 596 27 1 37,242 45,590 45,590 (8,348) 2016 160,423 588 374,311 1 535,323	12,939 1,864 - 49,248 596 27 1 64,675 42,392 2017 201,559 739 809,028 1 1,011,326	13,5 1,4 15,3 5 30,9 46,9 46,9 (15,9 2018 139,9 5 243,1
Outflow Out of Basin Conveyance Evaporation 47 47 48 Outflow Out of Basin Stream Outflow 73,721 383,946 827,869 244,9 Outflow Out of Basin Subsurface Outflow - - - - Outflow (5)+(24)+(23)+(19)+(18)+(29) Total Outflow 236,214 543,670 989,042 399,64 Storage (32)-(33) Change in Total System Storage (23,497) (8,348) 22,283 (15,9	Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Storage Change TOTAL BAS Flow Type Inflow Outflow Outflow	Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) IN WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Into Basin Into Basin Out of Basin Out of Basin Out of Basin	Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Evapotranspiration	13,872 1,637 - 7,854 596 27 1 23,988 47,485 47,485 (23,497) 2015 129,361 474 82,881 1 212,717 161,258	13,568 1,645 - 21,405 596 27 1 37,242 45,590 45,590 (8,348) 2016 160,423 588 374,311 1 535,323 158,534	12,939 1,864 - 49,248 596 27 1 64,675 42,392 2017 201,559 739 809,028 1 1,011,326 159,998	13,5 1,4 15,3 5 30,9 46,9 (15,9 2018 139,9 5 243,1 383,6 153,4
Outflow Out of Basin Stream Outflow 73,721 383,946 827,869 244,9 Outflow Out of Basin Subsurface Outflow - - - - - Outflow (5)+(24)+(23)+(19)+(18)+(29) Total Outflow 236,214 543,670 989,042 399,64 Storage (32)-(33) Change in Total System Storage (23,497) (8,348) 22,283 (15,9	Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Storage Change TOTAL BAS Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow Inflow Inflow Outflow Outflow Outflow Outflow	Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) IN WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Out of Basin Out of Basin Out of Basin	Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Evapotranspiration Stream Evaporation	13,872 1,637 - 7,854 596 27 1 23,988 47,485 47,485 (23,497) 2015 129,361 474 82,881 1 212,717 161,258 409	13,568 1,645 - 21,405 596 27 1 37,242 45,590 45,590 (8,348) 2016 160,423 588 374,311 1 535,323 158,534 398	12,939 1,864 - 49,248 596 27 1 64,675 42,392 2017 201,559 739 809,028 1 1,011,326 159,998 391	13,5 1,4 15,3 5 30,9 46,9 46,9 (15,9 2018 139,9 5 243,1 383,6 153,4
Outflow Out of Basin Subsurface Outflow -	Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Storage Change TOTAL BAS Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow	Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) IN WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Out of Basin Out of Basin Out of Basin	Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Evapotranspiration Stream Evaporation Reservoir Evaporation	13,872 1,637 - 7,854 596 27 1 23,988 47,485 - 47,485 (23,497) 2015 129,361 474 82,881 1 212,717 161,258 409 778	13,568 1,645 - 21,405 596 27 1 37,242 45,590 45,590 (8,348) 2016 160,423 588 374,311 1 535,323 158,534 398 746	12,939 1,864 - 49,248 596 27 1 64,675 42,392 42,392 22,283 2017 201,559 739 809,028 1 1,011,326 159,998 391 737	13,5 1,4 1,4 15,3 5 30,9 46,9 46,9 (15,9 2018 139,9 5 243,1 383,6 153,4
Outflow (5)+(24)+(23)+(19)+(18)+(29) Total Outflow 236,214 543,670 989,042 399,6 Storage (32)-(33) Change in Total System Storage (23,497) (8,348) 22,283 (15,9	Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Storage Change TOTAL BAS Flow Type Inflow Inflow Inflow Unflow Outflow	Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) IN WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Out of Basin Out of Basin Out of Basin Out of Basin	Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Evapotranspiration Stream Evaporation Reservoir Evaporation Conveyance Evaporation	13,872 1,637 - 7,854 596 27 1 23,988 47,485 - 47,485 (23,497) 2015 129,361 474 82,881 1 212,717 161,258 409 778 47	13,568 1,645 - 21,405 596 27 1 37,242 45,590 45,590 (8,348) 2016 160,423 588 374,311 1 535,323 158,534 398 746 47	12,939 1,864 - 49,248 596 27 1 64,675 42,392 42,392 22,283 2017 201,559 739 809,028 1 1,011,326 159,998 391 737 48	13,5 1,4 1,4 15,3 5 30,9 46,9 46,9 (15,9 2018 139,9 5 243,1 383,6 153,4 3
Storage (32)-(33) Change in Total System Storage (23,497) (8,348) 22,283 (15,9	Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Total Bas Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow Inflow Inflow Inflow Outflow	Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) IN WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Out of Basin	Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Evapotranspiration Stream Evaporation Reservoir Evaporation Conveyance Evaporation Stream Outflow	13,872 1,637 - 7,854 596 27 1 23,988 47,485 - 47,485 (23,497) 2015 129,361 474 82,881 1 212,717 161,258 409 778 47 73,721	13,568 1,645 - 21,405 596 27 1 37,242 45,590 45,590 (8,348) 2016 160,423 588 374,311 1 535,323 158,534 398 746 47	12,939 1,864 - 49,248 596 27 1 64,675 42,392 42,392 22,283 2017 201,559 739 809,028 1 1,011,326 159,998 391 737 48	13,5 1,4 1,4 15,3 5 30,9 46,9 46,9 (15,9 2018 139,9 5 243,1 383,6 153,4 3
1 (32)-(33) Change in Total System Storage (23,497) (8,348) 22,283 (15,9	Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Total Bas Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow Inflow Inflow Inflow Outflow	Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) IN WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Out of Basin	Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Evapotranspiration Stream Evaporation Reservoir Evaporation Conveyance Evaporation Stream Outflow Subsurface Outflow Subsurface Outflow	13,872 1,637 - 7,854 596 27 1 23,988 47,485 47,485 (23,497) 2015 129,361 474 82,881 1 212,717 161,258 409 778 47 73,721	13,568 1,645 - 21,405 596 27 1 37,242 45,590 45,590 (8,348) 2016 160,423 588 374,311 1 535,323 158,534 398 746 47 383,946	12,939 1,864 - 49,248 596 27 1 64,675 42,392 42,392 22,283 2017 201,559 739 809,028 1 1,011,326 159,998 391 737 48 827,869 -	13,5 1,4 15,3 5 30,9 46,9 46,9 (15,9 2018 139,9 5 243,1 383,6 153,4 3 7
	Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Storage Change TOTAL BAS Flow Type Inflow Inflow Inflow Inflow Outflow	Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) IN WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Out of Basin	Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Evapotranspiration Stream Evaporation Reservoir Evaporation Conveyance Evaporation Stream Outflow Subsurface Outflow Subsurface Outflow	13,872 1,637 - 7,854 596 27 1 23,988 47,485 47,485 (23,497) 2015 129,361 474 82,881 1 212,717 161,258 409 778 47 73,721	13,568 1,645 - 21,405 596 27 1 37,242 45,590 45,590 (8,348) 2016 160,423 588 374,311 1 535,323 158,534 398 746 47 383,946	12,939 1,864 - 49,248 596 27 1 64,675 42,392 42,392 22,283 2017 201,559 739 809,028 1 1,011,326 159,998 391 737 48 827,869 -	2018 13,5 1,4 - 15,3 30,9 46,9 46,9 (15,9) 2018 139,9 5 243,1 383,6 153,4 7 244,9 - 399,6

Flow Type	Origin/ Destination	Component	Average (2019-2068)
Inflow	Into Basin	Precipitation on Land System	143,208
Inflow	Between Systems	Surface Water Delivery	77,048
Inflow	Between Systems	Groundwater Extraction	45,162
Inflow	(1)+(2)+(3)	Total Inflow	265,418
Outflow	Out of Basin	Evapotranspiration	156,873
Outflow	Between Systems	Runoff	88,493
Outflow	Between Systems	Return Flow	5,072
Outflow	Between Systems	Recharge of Applied Water	13,339
Outflow	Between Systems	Recharge of Precipitation	1,641
Outflow	Between Systems	Managed Aquifer Recharge	-
Outflow	(5)+(6)+(7)+(8)+(9)+(10)	Total Outflow	265,418
Storage Change	(4)-(11)	Change in Land System Storage	-

SURFACE V	VATER SYSTEM WATER BUDGET		
Flow Type	Origin/ Destination	Component	Average (2019-2068)
Inflow	Into Basin	Stream Inflow	430,242
Inflow	Into Basin	Precipitation on Reservoirs	525
Inflow	Between Systems	Runoff	88,493
Inflow	Between Systems	Return Flow	5,072
Inflow	Between Systems	Stream Gain from Groundwater	-
Inflow	Between Systems	Reservoir Gain from Groundwater	-
Inflow	(13)+(14)+(6)+(7)+(15)+(16)	Total Inflow	524,331
Outflow	Out of Basin	Stream Outflow	418,003
Outflow	Out of Basin	Conveyance Evaporation	47
Outflow	Between Systems	Conveyance Seepage	27
Outflow	Between Systems	Surface Water Delivery	77,048
Outflow	Between Systems	Stream Loss to Groundwater	27,476
Outflow	Between Systems	Reservoir Loss to Groundwater	596
Outflow	Out of Basin	Reservoir Evaporation	741
Outflow	Out of Basin	Stream Evaporation	393
Outflow	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24)	Total Outflow	524,331
Storage Change	(17)-(25)	Change in Surface Water Storage	-

GROUNDW	ATER SYSTEM WATER BUDGET		
Flow Type	Origin/ Destination	Component	Average (2019-2068)
Inflow	Between Systems	Recharge of Applied Water	13,339
Inflow	Between Systems	Recharge of Precipitation	1,641
Inflow	Between Systems	Managed Aquifer Recharge	-
Inflow	Between Systems	Groundwater Gain from Stream	27,476
Inflow	Between Systems	Groundwater Gain from Reservoir	596
Inflow	Between Systems	Conveyance Seepage	27
Inflow	Into Basin	Subsurface Inflow	1
Inflow	(8)+(9)+(10)+(21)+(22)+(20)+(27)	Total Inflow	43,081
Outflow	Between Systems	Groundwater Extraction	45,162
Outflow	Between Systems	Groundwater Loss to Stream	-
Outflow	Between Systems	Groundwater Loss to Reservoir s	-
Outflow	Out of Basin	Subsurface Outflow	-
Outflow	(3)+(15)+(16)+(29)	Total Outflow	45,162
Storage Change	(28)-(30)	Change in Groundwater Storage	(2,080)

TOTAL BAS	SIN WATER BUDGET		
Flow Type	Origin/ Destination	Component	Average (2019-2068)
Inflow	Into Basin	Precipitation on Land System	143,208
Inflow	Into Basin	Precipitation on Reservoirs	525
Inflow	Into Basin	Stream Inflow	430,242
Inflow	Into Basin	Subsurface Inflow	1
Inflow	(1)+(14)+(13)+(27)	Total Inflow	573,975
Outflow	Out of Basin	Evapotranspiration	156,873
Outflow	Out of Basin	Stream Evaporation	393
Outflow	Out of Basin	Reservoir Evaporation	741
Outflow	Out of Basin	Conveyance Evaporation	47
Outflow	Out of Basin	Stream Outflow	418,003
Outflow	Out of Basin	Subsurface Outflow	-
Outflow	(5)+(24)+(23)+(19)+(18)+(29)	Total Outflow	576,056
Storage Change	(32)-(33)	Change in Total System Storage	(2,080)

Flow Type	Origin/ Destination	Component	2019	2020	2021	2022	2023	2024
Inflow	Into Basin	Precipitation on Land System	124,782	214,533	111,731	190,645	87,538	177,442
Inflow	Between Systems	Surface Water Delivery	82,510	73,612	82,236	77,699	85,805	79,223
Inflow	Between Systems	Groundwater Extraction	49,372	40,325	49,679	45,952	53,502	46,213
Inflow	(1)+(2)+(3)	Total Inflow	256,664	328,470	243,646	314,297	226,845	302,878
Outflow	Out of Basin	Evapotranspiration	161,959	157,895	160,313	160,477	160,427	158,375
Outflow	Between Systems	Runoff	73,298	151,514	61,974	133,477	44,140	124,005
Outflow	Between Systems	Return Flow	5,550	4,516	5,586	5,162	6,024	5,189
Outflow	Between Systems	Recharge of Applied Water	14,312	12,655	14,281	13,465	14,952	13,706
Outflow	Between Systems	Recharge of Precipitation	1,545	1,891	1,493	1,715	1,302	1,603
Outflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-
Outflow	(5)+(6)+(7)+(8)+(9)+(10)	Total Outflow	256,664	328,470	243,646	314,297	226,845	302,878
Storage Change	(4)-(11)	Change in Land System Storage	-	-	-	-	-	-

SURFACE V	NATER SYSTEM WATER BUDGET							
Flow Type	Origin/ Destination	Component	2019	2020	2021	2022	2023	2024
Inflow	Into Basin	Stream Inflow	218,123	697,723	307,955	767,905	183,806	502,177
Inflow	Into Basin	Precipitation on Reservoirs	457	786	409	699	321	650
Inflow	Between Systems	Runoff	73,298	151,514	61,974	133,477	44,140	124,005
Inflow	Between Systems	Return Flow	5,550	4,516	5,586	5,162	6,024	5,189
Inflow	Between Systems	Stream Gain from Groundwater	-	-	-	-	-	-
Inflow	Between Systems	Reservoir Gain from Groundwater	-	-	-	-	-	-
Inflow	(13)+(14)+(6)+(7)+(15)+(16)	Total Inflow	297,429	854,539	375,924	907,243	234,290	632,021
Outflow	Out of Basin	Stream Outflow	198,898	742,701	273,501	787,992	134,030	523,627
Outflow	Out of Basin	Conveyance Evaporation	49	48	48	47	50	49
Outflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27
Outflow	Between Systems	Surface Water Delivery	82,510	73,612	82,236	77,699	85,805	79,223
Outflow	Between Systems	Stream Loss to Groundwater	14,143	36,444	18,320	39,708	12,547	27,351
Outflow	Between Systems	Reservoir Loss to Groundwater	596	596	596	596	596	596
Outflow	Out of Basin	Reservoir Evaporation	790	727	782	770	809	747
Outflow	Out of Basin	Stream Evaporation	416	383	414	403	426	400
Outflow	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24)	Total Outflow	297,429	854,539	375,924	907,243	234,290	632,021
Storage Change	(17)-(25)	Change in Surface Water Storage	-	-	-	-	-	-

Flow Type	Origin/ Destination	Component	2019	2020	2021	2022	2023	2024
Inflow	Between Systems	Recharge of Applied Water	14,312	12,655	14,281	13,465	14,952	13,706
Inflow	Between Systems	Recharge of Precipitation	1,545	1,891	1,493	1,715	1,302	1,603
Inflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-
Inflow	Between Systems	Groundwater Gain from Stream	14,143	36,444	18,320	39,708	12,547	27,351
Inflow	Between Systems	Groundwater Gain from Reservoir	596	596	596	596	596	596
Inflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27
Inflow	Into Basin	Subsurface Inflow	1	1	1	1	1	1
Inflow	(8)+(9)+(10)+(21)+(22)+(20)+(27)	Total Inflow	30,624	51,614	34,718	55,512	29,425	43,285
Outflow	Between Systems	Groundwater Extraction	49,372	40,325	49,679	45,952	53,502	46,213
Outflow	Between Systems	Groundwater Loss to Stream	-	-	-	-	-	-
Outflow	Between Systems	Groundwater Loss to Reservoir s	-	-	-	-	-	-
Outflow	Out of Basin	Subsurface Outflow	-	-	-	-	-	-
Outflow	(3)+(15)+(16)+(29)	Total Outflow	49,372	40,325	49,679	45,952	53,502	46,213
Storage Change	(28)-(30)	Change in Groundwater Storage	(18,748)	11,289	(14,961)	9,560	(24,077)	(2,928)

Flow Type	Origin/ Destination	Component	2019	2020	2021	2022	2023	2024
Inflow	Into Basin	Precipitation on Land System	124,782	214,533	111,731	190,645	87,538	177,442
Inflow	Into Basin	Precipitation on Reservoirs	457	786	409	699	321	650
Inflow	Into Basin	Stream Inflow	218,123	697,723	307,955	767,905	183,806	502,177
Inflow	Into Basin	Subsurface Inflow	1	1	1	1	1	1
Inflow	(1)+(14)+(13)+(27)	Total Inflow	343,363	913,043	420,096	959,249	271,665	680,269
Outflow	Out of Basin	Evapotranspiration	161,959	157,895	160,313	160,477	160,427	158,375
Outflow	Out of Basin	Stream Evaporation	416	383	414	403	426	400
Outflow	Out of Basin	Reservoir Evaporation	790	727	782	770	809	747
Outflow	Out of Basin	Conveyance Evaporation	49	48	48	47	50	49
Outflow	Out of Basin	Stream Outflow	198,898	742,701	273,501	787,992	134,030	523,627
Outflow	Out of Basin	Subsurface Outflow	-	-	-	-	-	_
Outflow	(5)+(24)+(23)+(19)+(18)+(29)	Total Outflow	362,111	901,754	435,058	949,689	295,742	683,197
Storage Change	(32)-(33)	Change in Total System Storage	(18,748)	11,289	(14,961)	9,560	(24,077)	(2,928)4

Flow Type	Origin/ Destination	Component	2025	2026	2027	2028	2029	2030	2031
Inflow	Into Basin	Precipitation on Land System	133,558	164,010	182,632	204,764	123,866	115,700	185,913
Inflow	Between Systems	Surface Water Delivery	79,192	82,117	81,376	74,115	82,207	83,257	79,490
Inflow	Between Systems	Groundwater Extraction	46,615	48,324	47,544	41,095	48,483	49,808	45,707
Inflow	(1)+(2)+(3)	Total Inflow	259,366	294,451	311,552	319,974	254,556	248,765	311,111
Outflow	Out of Basin	Evapotranspiration	160,592	163,111	162,673	161,164	164,323	164,927	162,327
Outflow	Between Systems	Runoff	78,161	110,076	127,816	139,490	68,901	62,194	128,193
Outflow	Between Systems	Return Flow	5,236	5,429	5,339	4,604	5,447	5,599	5,130
Outflow	Between Systems	Recharge of Applied Water	13,715	14,217	14,078	12,757	14,236	14,440	13,730
Outflow	Between Systems	Recharge of Precipitation	1,662	1,618	1,644	1,958	1,649	1,605	1,732
Outflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-	-
Outflow	(5)+(6)+(7)+(8)+(9)+(10)	Total Outflow	259,366	294,451	311,552	319,974	254,556	248,765	311,111
Storage Change	(4)-(11)	Change in Land System Storage	-	-	-	-	-	-	-

SURFACE V	WATER SYSTEM WATER BUDGET								
Flow Type	Origin/ Destination	Component	2025	2026	2027	2028	2029	2030	2031
Inflow	Into Basin	Stream Inflow	255,335	637,275	624,047	1,007,609	667,874	318,068	592,563
Inflow	Into Basin	Precipitation on Reservoirs	489	601	669	750	454	424	681
Inflow	Between Systems	Runoff	78,161	110,076	127,816	139,490	68,901	62,194	128,193
Inflow	Between Systems	Return Flow	5,236	5,429	5,339	4,604	5,447	5,599	5,130
Inflow	Between Systems	Stream Gain from Groundwater	-	-	-	-	-	-	-
Inflow	Between Systems	Reservoir Gain from Groundwater	-	-	-	-	-	-	-
Inflow	(13)+(14)+(6)+(7)+(15)+(16)	Total Inflow	339,222	753,380	757,872	1,152,454	742,676	386,285	726,567
Outflow	Out of Basin	Stream Outflow	242,296	635,748	641,606	941,819	623,530	282,329	613,664
Outflow	Out of Basin	Conveyance Evaporation	46	49	49	46	49	49	49
Outflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27	27
Outflow	Between Systems	Surface Water Delivery	79,192	82,117	81,376	74,115	82,207	83,257	79,490
Outflow	Between Systems	Stream Loss to Groundwater	15,873	33,633	33,018	134,726	35,056	18,790	31,554
Outflow	Between Systems	Reservoir Loss to Groundwater	596	596	596	596	596	596	596
Outflow	Out of Basin	Reservoir Evaporation	783	792	785	733	793	811	778
Outflow	Out of Basin	Stream Evaporation	408	417	413	390	417	423	407
Outflow	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24)	Total Outflow	339,222	753,380	757,872	1,152,454	742,676	386,285	726,567
Storage Change	(17)-(25)	Change in Surface Water Storage	-	-	-	-	-	-	-

Flow Type	Origin/ Destination	Component	2025	2026	2027	2028	2029	2030	2031
Inflow	Between Systems	Recharge of Applied Water	13,715	14,217	14,078	12,757	14,236	14,440	13,730
Inflow	Between Systems	Recharge of Precipitation	1,662	1,618	1,644	1,958	1,649	1,605	1,732
Inflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-	-
Inflow	Between Systems	Groundwater Gain from Stream	15,873	33,633	33,018	134,726	35,056	18,790	31,554
Inflow	Between Systems	Groundwater Gain from Reservoir	596	596	596	596	596	596	596
Inflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27	27
Inflow	Into Basin	Subsurface Inflow	1	1	1	1	1	1	1
Inflow	(8)+(9)+(10)+(21)+(22)+(20)+(27)	Total Inflow	31,874	50,093	49,366	150,066	51,566	35,460	47,640
Outflow	Between Systems	Groundwater Extraction	46,615	48,324	47,544	41,095	48,483	49,808	45,707
Outflow	Between Systems	Groundwater Loss to Stream	-	-	-	-	-	-	-
Outflow	Between Systems	Groundwater Loss to Reservoir s	-	-	-	-	-	-	-
Outflow	Out of Basin	Subsurface Outflow	-	-	-	-	-	-	-
Outflow	(3)+(15)+(16)+(29)	Total Outflow	46,615	48,324	47,544	41,095	48,483	49,808	45,707
Storage Change	(28)-(30)	Change in Groundwater Storage	(14,741)	1,769	1,822	108,971	3,083	(14,348)	1,933

Flow Type	Origin/ Destination	Component	2025	2026	2027	2028	2029	2030	2031
Inflow	Into Basin	Precipitation on Land System	133,558	164,010	182,632	204,764	123,866	115,700	185,913
Inflow	Into Basin	Precipitation on Reservoirs	489	601	669	750	454	424	681
Inflow	Into Basin	Stream Inflow	255,335	637,275	624,047	1,007,609	667,874	318,068	592,563
Inflow	Into Basin	Subsurface Inflow	1	1	1	1	1	1	1
Inflow	(1)+(14)+(13)+(27)	Total Inflow	389,384	801,886	807,348	1,213,124	792,195	434,193	779,158
Outflow	Out of Basin	Evapotranspiration	160,592	163,111	162,673	161,164	164,323	164,927	162,327
Outflow	Out of Basin	Stream Evaporation	408	417	413	390	417	423	407
Outflow	Out of Basin	Reservoir Evaporation	783	792	785	733	793	811	778
Outflow	Out of Basin	Conveyance Evaporation	46	49	49	46	49	49	49
Outflow	Out of Basin	Stream Outflow	242,296	635,748	641,606	941,819	623,530	282,329	613,664
Outflow	Out of Basin	Subsurface Outflow	-	-	-	-	-	-	-
Outflow	(5)+(24)+(23)+(19)+(18)+(29)	Total Outflow	404,125	800,117	805,527	1,104,153	789,112	448,540	777,226
Storage Change	(32)-(33)	Change in Total System Storage	(14,741)	1,769	1,822	108,971	3,083	(14,348)	071,933

Flow Type	Origin/ Destination	Component	2032	2033	2034	2035	2036	2037	2038	2039
Inflow	Into Basin	Precipitation on Land System	139,206	110,510	85,325	164,468	106,923	179,197	114,326	204,535
Inflow	Between Systems	Surface Water Delivery	79,545	79,582	82,522	77,244	81,768	78,012	81,900	76,749
Inflow	Between Systems	Groundwater Extraction	46,907	48,100	51,806	43,861	49,645	43,934	48,901	42,492
Inflow	(1)+(2)+(3)	Total Inflow	265,658	238,192	219,653	285,573	238,337	301,143	245,127	323,776
Outflow	Out of Basin	Evapotranspiration	162,112	159,554	157,350	163,976	159,997	166,332	163,172	165,607
Outflow	Between Systems	Runoff	82,807	57,826	40,736	101,461	57,051	114,498	60,644	138,214
Outflow	Between Systems	Return Flow	5,269	5,409	5,834	4,920	5,584	4,926	5,496	4,761
Outflow	Between Systems	Recharge of Applied Water	13,778	13,823	14,395	13,326	14,208	13,445	14,203	13,205
Outflow	Between Systems	Recharge of Precipitation	1,692	1,581	1,338	1,890	1,496	1,941	1,610	1,990
Outflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-	-	-
Outflow	(5)+(6)+(7)+(8)+(9)+(10)	Total Outflow	265,658	238,192	219,653	285,573	238,337	301,143	245,127	323,776
Storage	(4) (44)	Channel in Land Contain Stance								
Change	(4)-(11)	Change in Land System Storage	-	-	-	-	-	-	-	-

SURFACE V	WATER SYSTEM WATER BUDGET									
Flow Type	Origin/ Destination	Component	2032	2033	2034	2035	2036	2037	2038	2039
Inflow	Into Basin	Stream Inflow	557,523	196,081	110,187	299,161	236,541	547,651	165,958	760,457
Inflow	Into Basin	Precipitation on Reservoirs	510	405	313	603	392	657	419	749
Inflow	Between Systems	Runoff	82,807	57,826	40,736	101,461	57,051	114,498	60,644	138,214
Inflow	Between Systems	Return Flow	5,269	5,409	5,834	4,920	5,584	4,926	5,496	4,761
Inflow	Between Systems	Stream Gain from Groundwater	-	-	-	-	-	-	-	-
Inflow	Between Systems	Reservoir Gain from Groundwater	-	-	-	-	-	-	-	-
Inflow	(13)+(14)+(6)+(7)+(15)+(16)	Total Inflow	646,109	259,720	157,070	406,144	299,568	667,733	232,517	904,181
Outflow	Out of Basin	Stream Outflow	534,796	165,138	63,542	309,163	200,936	558,396	137,030	786,222
Outflow	Out of Basin	Conveyance Evaporation	48	46	47	48	48	48	49	49
Outflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27	27	27
Outflow	Between Systems	Surface Water Delivery	79,545	79,582	82,522	77,244	81,768	78,012	81,900	76,749
Outflow	Between Systems	Stream Loss to Groundwater	29,925	13,118	9,124	17,911	14,999	29,466	11,717	39,361
Outflow	Between Systems	Reservoir Loss to Groundwater	596	596	596	596	596	596	596	596
Outflow	Out of Basin	Reservoir Evaporation	766	802	794	754	781	779	783	773
Outflow	Out of Basin	Stream Evaporation	404	411	416	400	412	408	414	403
Outflow	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24)	Total Outflow	646,109	259,720	157,070	406,144	299,568	667,733	232,517	904,181
Storage Change	(17)-(25)	Change in Surface Water Storage	-	-	-	-	-	-	-	-

Flow Type	Origin/ Destination	Component	2032	2033	2034	2035	2036	2037	2038	2039
Inflow	Between Systems	Recharge of Applied Water	13,778	13,823	14,395	13,326	14,208	13,445	14,203	13,205
Inflow	Between Systems	Recharge of Precipitation	1,692	1,581	1,338	1,890	1,496	1,941	1,610	1,990
Inflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-	-	-
Inflow	Between Systems	Groundwater Gain from Stream	29,925	13,118	9,124	17,911	14,999	29,466	11,717	39,361
Inflow	Between Systems	Groundwater Gain from Reservoir	596	596	596	596	596	596	596	596
Inflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27	27	27
Inflow	Into Basin	Subsurface Inflow	1	1	1	1	1	1	1	1
Inflow	(8)+(9)+(10)+(21)+(22)+(20)+(27)	Total Inflow	46,020	29,146	25,481	33,752	31,328	45,477	28,156	55,180
Outflow	Between Systems	Groundwater Extraction	46,907	48,100	51,806	43,861	49,645	43,934	48,901	42,492
Outflow	Between Systems	Groundwater Loss to Stream	-	-	-	-	-	-	-	-
Outflow	Between Systems	Groundwater Loss to Reservoir s	-	-	-	-	-	-	-	-
Outflow	Out of Basin	Subsurface Outflow	-	-	-	-	-	-	-	-
Outflow	(3)+(15)+(16)+(29)	Total Outflow	46,907	48,100	51,806	43,861	49,645	43,934	48,901	42,492
Storage Change	(28)-(30)	Change in Groundwater Storage	(888)	(18,954)	(26,325)	(10,109)	(18,317)	1,543	(20,745)	12,688

Flow Type	Origin/ Destination	Component	2032	2033	2034	2035	2036	2037	2038	2039
Inflow	Into Basin	Precipitation on Land System	139,206	110,510	85,325	164,468	106,923	179,197	114,326	204,535
Inflow	Into Basin	Precipitation on Reservoirs	510	405	313	603	392	657	419	749
Inflow	Into Basin	Stream Inflow	557,523	196,081	110,187	299,161	236,541	547,651	165,958	760,457
Inflow	Into Basin	Subsurface Inflow	1	1	1	1	1	1	1	1
Inflow	(1)+(14)+(13)+(27)	Total Inflow	697,240	306,996	195,825	464,232	343,856	727,506	280,703	965,743
Outflow	Out of Basin	Evapotranspiration	162,112	159,554	157,350	163,976	159,997	166,332	163,172	165,607
Outflow	Out of Basin	Stream Evaporation	404	411	416	400	412	408	414	403
Outflow	Out of Basin	Reservoir Evaporation	766	802	794	754	781	779	783	773
Outflow	Out of Basin	Conveyance Evaporation	48	46	47	48	48	48	49	49
Outflow	Out of Basin	Stream Outflow	534,796	165,138	63,542	309,163	200,936	558,396	137,030	786,222
Outflow	Out of Basin	Subsurface Outflow	-	-	-	-	-	-	-	-
Outflow	(5)+(24)+(23)+(19)+(18)+(29)	Total Outflow	698,127	325,950	222,150	474,341	362,174	725,963	301,449	953,054
Storage Change	(32)-(33)	Change in Total System Storage	(888)	(18,954)	(26,325)	(10,109)	(18,317)	1,543	(20, 4 0)	8 12,688

Flow Type	Origin/ Destination	Component	2040	2041	2042	2043	2044	2045	2046	2047
Inflow	Into Basin	Precipitation on Land System	191,332	148,899	132,719	193,698	96,315	88,835	150,654	112,418
Inflow	Between Systems	Surface Water Delivery	74,947	68,516	76,750	74,262	78,850	85,952	72,061	72,399
Inflow	Between Systems	Groundwater Extraction	41,152	39,192	45,598	41,789	47,782	53,245	41,145	42,407
Inflow	(1)+(2)+(3)	Total Inflow	307,432	256,607	255,067	309,749	222,946	228,032	263,860	227,224
Outflow	Out of Basin	Evapotranspiration	163,789	146,344	152,399	160,318	155,136	159,362	151,287	148,958
Outflow	Between Systems	Runoff	124,132	92,329	82,737	130,033	47,265	46,439	93,806	59,374
Outflow	Between Systems	Return Flow	4,609	4,396	5,123	4,685	5,373	5,994	4,615	4,761
Outflow	Between Systems	Recharge of Applied Water	12,886	11,840	13,309	12,802	13,701	14,966	12,446	12,539
Outflow	Between Systems	Recharge of Precipitation	2,016	1,697	1,499	1,910	1,471	1,272	1,705	1,591
Outflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-	-	-
Outflow	(5)+(6)+(7)+(8)+(9)+(10)	Total Outflow	307,432	256,607	255,067	309,749	222,946	228,032	263,860	227,224
Storage Change	(4)-(11)	Change in Land System Storage	-	-	-	-	-	-	-	-

SURFACE V	NATER SYSTEM WATER BUDGET									
Flow Type	Origin/ Destination	Component	2040	2041	2042	2043	2044	2045	2046	2047
Inflow	Into Basin	Stream Inflow	697,741	808,462	310,960	878,565	161,807	162,980	390,854	133,594
Inflow	Into Basin	Precipitation on Reservoirs	701	546	486	710	353	326	552	412
Inflow	Between Systems	Runoff	124,132	92,329	82,737	130,033	47,265	46,439	93,806	59,374
Inflow	Between Systems	Return Flow	4,609	4,396	5,123	4,685	5,373	5,994	4,615	4,761
Inflow	Between Systems	Stream Gain from Groundwater	-	-	-	-	-	-	-	-
Inflow	Between Systems	Reservoir Gain from Groundwater	-	-	-	-	-	-	-	-
Inflow	(13)+(14)+(6)+(7)+(15)+(16)	Total Inflow	827,183	905,732	399,306	######	214,798	215,738	489,827	198,142
Outflow	Out of Basin	Stream Outflow	713,968	786,443	302,274	865,544	122,626	116,338	393,854	113,802
Outflow	Out of Basin	Conveyance Evaporation	47	44	46	45	45	50	45	44
Outflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27	27	27
Outflow	Between Systems	Surface Water Delivery	74,947	68,516	76,750	74,262	78,850	85,952	72,061	72,399
Outflow	Between Systems	Stream Loss to Groundwater	36,445	49,085	18,460	72,401	11,524	11,579	22,175	10,212
Outflow	Between Systems	Reservoir Loss to Groundwater	596	596	596	596	596	596	596	596
Outflow	Out of Basin	Reservoir Evaporation	757	667	760	727	736	777	697	693
Outflow	Out of Basin	Stream Evaporation	395	354	393	389	393	420	371	368
Outflow	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24)	Total Outflow	827,183	905,732	399,306	######	214,798	215,738	489,827	198,142
Storage Change	(17)-(25)	Change in Surface Water Storage	-	-	-	-	-	-	-	-

Flow Type	Origin/ Destination	Component	2040	2041	2042	2043	2044	2045	2046	2047
Inflow	Between Systems	Recharge of Applied Water	12,886	11,840	13,309	12,802	13,701	14,966	12,446	12,539
Inflow	Between Systems	Recharge of Precipitation	2,016	1,697	1,499	1,910	1,471	1,272	1,705	1,591
Inflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-	-	-
Inflow	Between Systems	Groundwater Gain from Stream	36,445	49,085	18,460	72,401	11,524	11,579	22,175	10,212
Inflow	Between Systems	Groundwater Gain from Reservoir	596	596	596	596	596	596	596	596
Inflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27	27	27
Inflow	Into Basin	Subsurface Inflow	1	1	1	1	1	1	1	1
Inflow	(8)+(9)+(10)+(21)+(22)+(20)+(27)	Total Inflow	51,971	63,247	33,892	87,738	27,321	28,441	36,950	24,967
Outflow	Between Systems	Groundwater Extraction	41,152	39,192	45,598	41,789	47,782	53,245	41,145	42,407
Outflow	Between Systems	Groundwater Loss to Stream	-	-	-	-	-	-	-	-
Outflow	Between Systems	Groundwater Loss to Reservoir s	-	-	-	-	-	-	-	-
Outflow	Out of Basin	Subsurface Outflow	-	-	-	-	-	-	-	-
Outflow	(3)+(15)+(16)+(29)	Total Outflow	41,152	39,192	45,598	41,789	47,782	53,245	41,145	42,407
Storage Change	(28)-(30)	Change in Groundwater Storage	10,819	24,055	(11,706)	45,949	(20,461)	(24,804)	(4,194)	(17,440)

Flow Type	Origin/ Destination	Component	2040	2041	2042	2043	2044	2045	2046	2047
Inflow	Into Basin	Precipitation on Land System	191,332	148,899	132,719	193,698	96,315	88,835	150,654	112,418
Inflow	Into Basin	Precipitation on Reservoirs	701	546	486	710	353	326	552	412
Inflow	Into Basin	Stream Inflow	697,741	808,462	310,960	878,565	161,807	162,980	390,854	133,594
Inflow	Into Basin	Subsurface Inflow	1	1	1	1	1	1	1	1
Inflow	(1)+(14)+(13)+(27)	Total Inflow	889,774	957,907	444,166	#######	258,475	252,142	542,060	246,425
Outflow	Out of Basin	Evapotranspiration	163,789	146,344	152,399	160,318	155,136	159,362	151,287	148,958
Outflow	Out of Basin	Stream Evaporation	395	354	393	389	393	420	371	368
Outflow	Out of Basin	Reservoir Evaporation	757	667	760	727	736	777	697	693
Outflow	Out of Basin	Conveyance Evaporation	47	44	46	45	45	50	45	44
Outflow	Out of Basin	Stream Outflow	713,968	786,443	302,274	865,544	122,626	116,338	393,854	113,802
Outflow	Out of Basin	Subsurface Outflow	-	-	-	-	-	-	-	-
Outflow	(5)+(24)+(23)+(19)+(18)+(29)	Total Outflow	878,956	933,852	455,872	#######	278,936	276,946	546,255	263,865
Storage Change	(32)-(33)	Change in Total System Storage	10,819	24,055	(11,706)	45,949	(20,461)	(24,804)	(4 ,4 10)	9 (17,440)

Flow Type	Origin/ Destination	Component	2048	2049	2050	2051	2052	2053	2054	2055
Inflow	Into Basin	Precipitation on Land System	108,526	75,556	184,082	104,481	192,248	183,776	171,871	229,110
Inflow	Between Systems	Surface Water Delivery	77,619	82,827	70,993	76,177	65,439	70,985	74,958	64,027
Inflow	Between Systems	Groundwater Extraction	46,745	52,036	38,861	45,730	35,592	41,037	42,916	32,854
Inflow	(1)+(2)+(3)	Total Inflow	232,890	210,419	293,936	226,387	293,278	295,799	289,744	325,992
Outflow	Out of Basin	Evapotranspiration	153,216	155,932	156,238	153,369	143,128	150,803	159,397	151,378
Outflow	Between Systems	Runoff	59,468	32,898	119,194	53,112	133,143	126,391	110,752	157,864
Outflow	Between Systems	Return Flow	5,255	5,860	4,351	5,140	3,983	4,605	4,815	3,667
Outflow	Between Systems	Recharge of Applied Water	13,479	14,449	12,207	13,226	11,251	12,278	12,946	10,945
Outflow	Between Systems	Recharge of Precipitation	1,472	1,280	1,947	1,541	1,773	1,722	1,834	2,137
Outflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-	-	-
Outflow	(5)+(6)+(7)+(8)+(9)+(10)	Total Outflow	232,890	210,419	293,936	226,387	293,278	295,799	289,744	325,992
Storage Change	(4)-(11)	Change in Land System Storage	-	-	-	-	-	-	-	-

SURFACE V	WATER SYSTEM WATER BUDGET									
Flow Type	Origin/ Destination	Component	2048	2049	2050	2051	2052	2053	2054	2055
Inflow	Into Basin	Stream Inflow	263,663	76,254	602,999	167,393	912,444	780,720	614,680	832,300
Inflow	Into Basin	Precipitation on Reservoirs	398	277	675	383	704	673	630	840
Inflow	Between Systems	Runoff	59,468	32,898	119,194	53,112	133,143	126,391	110,752	157,864
Inflow	Between Systems	Return Flow	5,255	5,860	4,351	5,140	3,983	4,605	4,815	3,667
Inflow	Between Systems	Stream Gain from Groundwater	-	-	-	-	-	-	-	-
Inflow	Between Systems	Reservoir Gain from Groundwater	-	-	-	-	-	-	-	-
Inflow	(13)+(14)+(6)+(7)+(15)+(16)	Total Inflow	328,784	115,288	727,219	226,028	1,050,275	912,389	730,877	994,671
Outflow	Out of Basin	Stream Outflow	233,159	23,084	622,453	136,286	897,057	798,101	621,549	872,733
Outflow	Out of Basin	Conveyance Evaporation	47	48	46	46	41	44	46	42
Outflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27	27	27
Outflow	Between Systems	Surface Water Delivery	77,619	82,827	70,993	76,177	65,439	70,985	74,958	64,027
Outflow	Between Systems	Stream Loss to Groundwater	16,260	7,546	32,039	11,784	86,149	41,575	32,583	56,285
Outflow	Between Systems	Reservoir Loss to Groundwater	596	596	596	596	596	596	596	596
Outflow	Out of Basin	Reservoir Evaporation	693	754	693	726	625	692	729	619
Outflow	Out of Basin	Stream Evaporation	382	406	370	386	340	369	388	340
Outflow	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24)	Total Outflow	328,784	115,288	727,219	226,028	1,050,275	912,389	730,877	994,671
Storage Change	(17)-(25)	Change in Surface Water Storage	-	-	-	-	-	-	-	-

Flow Type	Origin/ Destination	Component	2048	2049	2050	2051	2052	2053	2054	2055
Inflow	Between Systems	Recharge of Applied Water	13,479	14,449	12,207	13,226	11,251	12,278	12,946	10,945
Inflow	Between Systems	Recharge of Precipitation	1,472	1,280	1,947	1,541	1,773	1,722	1,834	2,137
Inflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-	-	-
Inflow	Between Systems	Groundwater Gain from Stream	16,260	7,546	32,039	11,784	86,149	41,575	32,583	56,285
Inflow	Between Systems	Groundwater Gain from Reservoir	596	596	596	596	596	596	596	596
Inflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27	27	27
Inflow	Into Basin	Subsurface Inflow	1	1	1	1	1	1	1	1
Inflow	(8)+(9)+(10)+(21)+(22)+(20)+(27)	Total Inflow	31,836	23,899	46,817	27,175	99,798	56,199	47,987	69,992
Outflow	Between Systems	Groundwater Extraction	46,745	52,036	38,861	45,730	35,592	41,037	42,916	32,854
Outflow	Between Systems	Groundwater Loss to Stream	-	-	-	-	-	-	-	-
Outflow	Between Systems	Groundwater Loss to Reservoir s	-	-	-	-	-	-	-	-
Outflow	Out of Basin	Subsurface Outflow	-	-	-	-	-	-	-	-
Outflow	(3)+(15)+(16)+(29)	Total Outflow	46,745	52,036	38,861	45,730	35,592	41,037	42,916	32,854
Storage Change	(28)-(30)	Change in Groundwater Storage	(14,909)	(28,137)	7,956	(18,555)	64,206	15,162	5,071	37,138

Flow Type	Origin/ Destination	Component	2048	2049	2050	2051	2052	2053	2054	2055
Inflow	Into Basin	Precipitation on Land System	108,526	75,556	184,082	104,481	192,248	183,776	171,871	229,110
Inflow	Into Basin	Precipitation on Reservoirs	398	277	675	383	704	673	630	840
Inflow	Into Basin	Stream Inflow	263,663	76,254	602,999	167,393	912,444	780,720	614,680	832,300
Inflow	Into Basin	Subsurface Inflow	1	1	1	1	1	1	1	1
Inflow	(1)+(14)+(13)+(27)	Total Inflow	372,587	152,087	787,756	272,257	1,105,397	965,170	787,182	#######
Outflow	Out of Basin	Evapotranspiration	153,216	155,932	156,238	153,369	143,128	150,803	159,397	151,378
Outflow	Out of Basin	Stream Evaporation	382	406	370	386	340	369	388	340
Outflow	Out of Basin	Reservoir Evaporation	693	754	693	726	625	692	729	619
Outflow	Out of Basin	Conveyance Evaporation	47	48	46	46	41	44	46	42
Outflow	Out of Basin	Stream Outflow	233,159	23,084	622,453	136,286	897,057	798,101	621,549	872,733
Outflow	Out of Basin	Subsurface Outflow	-	-	-	-	-	-	-	-
Outflow	(5)+(24)+(23)+(19)+(18)+(29)	Total Outflow	387,496	180,224	779,799	290,812	1,041,192	950,008	782,111	######
Storage Change	(32)-(33)	Change in Total System Storage	(14,909)	(28,137)	7,956	(18,555)	64,206	15,162	5 4 7 1 (0 37,138

low Type	Origin/ Destination	Component	2056	2057	2058	2059	2060	2061	2062	2063
Inflow	Into Basin	Precipitation on Land System	146,533	128,140	79,296	109,976	136,611	136,687	147,525	190,721
Inflow	Between Systems	Surface Water Delivery	74,092	76,327	80,992	80,604	75,245	78,776	70,606	72,295
Inflow	Between Systems	Groundwater Extraction	43,259	44,735	49,626	48,753	44,131	47,093	40,332	40,960
Inflow	(1)+(2)+(3)	Total Inflow	263,883	249,201	209,913	239,333	255,987	262,556	258,462	303,976
Outflow	Out of Basin	Evapotranspiration	152,590	157,889	152,585	153,349	151,547	153,751	149,036	151,973
Outflow	Between Systems	Runoff	91,975	71,370	36,368	65,156	84,903	88,396	91,011	133,210
Outflow	Between Systems	Return Flow	4,857	5,024	5,583	5,482	4,956	5,293	4,524	4,593
Outflow	Between Systems	Recharge of Applied Water	12,826	13,215	14,089	14,001	13,030	13,667	12,197	12,475
Outflow	Between Systems	Recharge of Precipitation	1,637	1,703	1,288	1,345	1,551	1,449	1,695	1,725
Outflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-	-	-
Outflow	(5)+(6)+(7)+(8)+(9)+(10)	Total Outflow	263,883	249,201	209,913	239,333	255,987	262,556	258,462	303,976
Storage	(4) (44)	Charactic Land Contain Stances								
Change	(4)-(11)	Change in Land System Storage	-	-	-	-	-	-	-	-

SURFACE V	VATER SYSTEM WATER BUDGET									
Flow Type	Origin/ Destination	Component	2056	2057	2058	2059	2060	2061	2062	2063
Inflow	Into Basin	Stream Inflow	691,739	240,124	100,742	153,035	219,963	295,581	381,347	735,770
Inflow	Into Basin	Precipitation on Reservoirs	537	470	291	403	501	501	541	699
Inflow	Between Systems	Runoff	91,975	71,370	36,368	65,156	84,903	88,396	91,011	133,210
Inflow	Between Systems	Return Flow	4,857	5,024	5,583	5,482	4,956	5,293	4,524	4,593
Inflow	Between Systems	Stream Gain from Groundwater	-	-	-	-	-	-	-	-
Inflow	Between Systems	Reservoir Gain from Groundwater	-	-	-	-	-	-	-	-
Inflow	(13)+(14)+(6)+(7)+(15)+(16)	Total Inflow	789,107	316,987	142,983	224,076	310,322	389,772	477,422	874,271
Outflow	Out of Basin	Stream Outflow	677,081	223,698	51,472	130,528	219,088	291,439	383,378	762,028
Outflow	Out of Basin	Conveyance Evaporation	45	47	48	48	45	46	43	45
Outflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27	27	27
Outflow	Between Systems	Surface Water Delivery	74,092	76,327	80,992	80,604	75,245	78,776	70,606	72,295
Outflow	Between Systems	Stream Loss to Groundwater	36,166	15,166	8,684	11,116	14,228	17,745	21,733	38,213
Outflow	Between Systems	Reservoir Loss to Groundwater	596	596	596	596	596	596	596	596
Outflow	Out of Basin	Reservoir Evaporation	720	736	763	756	711	747	675	694
Outflow	Out of Basin	Stream Evaporation	379	390	400	400	380	395	364	372
Outflow	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24)	Total Outflow	789,107	316,987	142,983	224,076	310,322	389,772	477,422	874,271
Storage Change	(17)-(25)	Change in Surface Water Storage	-	-	-	-	-	-	-	-

Flow Type	Origin/ Destination	Component	2056	2057	2058	2059	2060	2061	2062	2063
Inflow	Between Systems	Recharge of Applied Water	12,826	13,215	14,089	14,001	13,030	13,667	12,197	12,475
Inflow	Between Systems	Recharge of Precipitation	1,637	1,703	1,288	1,345	1,551	1,449	1,695	1,725
Inflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-	-	-
Inflow	Between Systems	Groundwater Gain from Stream	36,166	15,166	8,684	11,116	14,228	17,745	21,733	38,213
Inflow	Between Systems	Groundwater Gain from Reservoir	596	596	596	596	596	596	596	596
Inflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27	27	27
Inflow	Into Basin	Subsurface Inflow	1	1	1	1	1	1	1	1
Inflow	(8)+(9)+(10)+(21)+(22)+(20)+(27)	Total Inflow	51,253	30,709	24,686	27,086	29,435	33,485	36,249	53,038
Outflow	Between Systems	Groundwater Extraction	43,259	44,735	49,626	48,753	44,131	47,093	40,332	40,960
Outflow	Between Systems	Groundwater Loss to Stream	-	-	-	-	-	-	-	-
Outflow	Between Systems	Groundwater Loss to Reservoir s	-	-	-	-	-	-	-	-
Outflow	Out of Basin	Subsurface Outflow	-	-	-	-	-	-	-	-
Outflow	(3)+(15)+(16)+(29)	Total Outflow	43,259	44,735	49,626	48,753	44,131	47,093	40,332	40,960
Storage Change	(28)-(30)	Change in Groundwater Storage	7,994	(14,026)	(24,940)	(21,666)	(14,696)	(13,608)	(4,082)	12,079

Flow Type	Origin/ Destination	Component	2056	2057	2058	2059	2060	2061	2062	2063
Inflow	Into Basin	Precipitation on Land System	146,533	128,140	79,296	109,976	136,611	136,687	147,525	190,721
Inflow	Into Basin	Precipitation on Reservoirs	537	470	291	403	501	501	541	699
Inflow	Into Basin	Stream Inflow	691,739	240,124	100,742	153,035	219,963	295,581	381,347	735,770
Inflow	Into Basin	Subsurface Inflow	1	1	1	1	1	1	1	1
Inflow	(1)+(14)+(13)+(27)	Total Inflow	838,809	368,734	180,328	263,415	357,075	432,770	529,413	927,191
Outflow	Out of Basin	Evapotranspiration	152,590	157,889	152,585	153,349	151,547	153,751	149,036	151,973
Outflow	Out of Basin	Stream Evaporation	379	390	400	400	380	395	364	372
Outflow	Out of Basin	Reservoir Evaporation	720	736	763	756	711	747	675	694
Outflow	Out of Basin	Conveyance Evaporation	45	47	48	48	45	46	43	45
Outflow	Out of Basin	Stream Outflow	677,081	223,698	51,472	130,528	219,088	291,439	383,378	762,028
Outflow	Out of Basin	Subsurface Outflow	-	-	-	-	-	-	-	-
Outflow	(5)+(24)+(23)+(19)+(18)+(29)	Total Outflow	830,815	382,760	205,269	285,081	371,772	446,379	533,495	915,112
Storage Change	(32)-(33)	Change in Total System Storage	7,994	(14,026)	(24,940)	(21,666)	(14,696)	(13,608)	(4, 21 821)	1 12,079

Flow Type	Origin/ Destination	Component	2064	2065	2066	2067	2068
Inflow	Into Basin	Precipitation on Land System	99,291	97,459	114,173	120,660	167,215
Inflow	Between Systems	Surface Water Delivery	78,989	78,709	78,245	71,749	68,856
Inflow	Between Systems	Groundwater Extraction	48,745	47,716	46,430	41,387	38,575
Inflow	(1)+(2)+(3)	Total Inflow	227,025	223,885	238,849	233,797	274,646
Outflow	Out of Basin	Evapotranspiration	156,935	151,305	156,057	151,911	146,988
Outflow	Between Systems	Runoff	49,352	52,178	62,460	63,110	109,739
Outflow	Between Systems	Return Flow	5,485	5,366	5,217	4,644	4,323
Outflow	Between Systems	Recharge of Applied Water	13,755	13,678	13,564	12,406	11,872
Outflow	Between Systems	Recharge of Precipitation	1,498	1,358	1,551	1,727	1,724
Outflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-
Outflow	(5)+(6)+(7)+(8)+(9)+(10)	Total Outflow	227,025	223,885	238,849	233,797	274,646
Storage Change	(4)-(11)	Change in Land System Storage	-	-	-	-	-

	NATER SYSTEM WATER BUDGET						
Flow Type	Origin/ Destination	Component	2064	2065	2066	2067	2068
Inflow	Into Basin	Stream Inflow	127,762	240,456	143,169	103,605	629,359
Inflow	Into Basin	Precipitation on Reservoirs	364	357	418	442	613
Inflow	Between Systems	Runoff	49,352	52,178	62,460	63,110	109,739
Inflow	Between Systems	Return Flow	5,485	5,366	5,217	4,644	4,323
Inflow	Between Systems	Stream Gain from Groundwater	-	-	-	-	-
Inflow	Between Systems	Reservoir Gain from Groundwater	-	-	-	-	-
Inflow	(13)+(14)+(6)+(7)+(15)+(16)	Total Inflow	182,963	298,356	211,263	171,801	744,034
Outflow	Out of Basin	Stream Outflow	92,199	202,668	120,562	89,515	640,247
Outflow	Out of Basin	Conveyance Evaporation	47	46	46	44	42
Outflow	Between Systems	Conveyance Seepage	27	27	27	27	27
Outflow	Between Systems	Surface Water Delivery	78,989	78,709	78,245	71,749	68,856
Outflow	Between Systems	Stream Loss to Groundwater	9,941	15,181	10,657	8,818	33,265
Outflow	Between Systems	Reservoir Loss to Groundwater	596	596	596	596	596
Outflow	Out of Basin	Reservoir Evaporation	762	737	736	684	648
Outflow	Out of Basin	Stream Evaporation	402	391	393	368	352
Outflow	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24)	Total Outflow	182,963	298,356	211,263	171,801	744,034
Storage Change	(17)-(25)	Change in Surface Water Storage	-	-	-	-	-

GROUNDW	ATER SYSTEM WATER BUDGET						
Flow Type	Origin/ Destination	Component	2064	2065	2066	2067	2068
Inflow	Between Systems	Recharge of Applied Water	13,755	13,678	13,564	12,406	11,872
Inflow	Between Systems	Recharge of Precipitation	1,498	1,358	1,551	1,727	1,724
Inflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-
Inflow	Between Systems	Groundwater Gain from Stream	9,941	15,181	10,657	8,818	33,265
Inflow	Between Systems	Groundwater Gain from Reservoir	596	596	596	596	596
Inflow	Between Systems	Conveyance Seepage	27	27	27	27	27
Inflow	Into Basin	Subsurface Inflow	1	1	1	1	1
Inflow	(8)+(9)+(10)+(21)+(22)+(20)+(27)	Total Inflow	25,818	30,842	26,398	23,575	47,486
Outflow	Between Systems	Groundwater Extraction	48,745	47,716	46,430	41,387	38,575
Outflow	Between Systems	Groundwater Loss to Stream	-	-	-	-	-
Outflow	Between Systems	Groundwater Loss to Reservoir s	-	-	-	-	-
Outflow	Out of Basin	Subsurface Outflow	-	-	-	-	-
Outflow	(3)+(15)+(16)+(29)	Total Outflow	48,745	47,716	46,430	41,387	38,575
Storage Change	(28)-(30)	Change in Groundwater Storage	(22,927)	(16,874)	(20,033)	(17,812)	8,910

TOTAL BASII	N WATER BUDGET						
Flow Type	Origin/ Destination	Component	2064	2065	2066	2067	2068
Inflow	Into Basin	Precipitation on Land System	99,291	97,459	114,173	120,660	167,215
Inflow	Into Basin	Precipitation on Reservoirs	364	357	418	442	613
Inflow	Into Basin	Stream Inflow	127,762	240,456	143,169	103,605	629,359
Inflow	Into Basin	Subsurface Inflow	1	1	1	1	1
Inflow	(1)+(14)+(13)+(27)	Total Inflow	227,418	338,273	257,761	224,709	797,188
Outflow	Out of Basin	Evapotranspiration	156,935	151,305	156,057	151,911	146,988
Outflow	Out of Basin	Stream Evaporation	402	391	393	368	352
Outflow	Out of Basin	Reservoir Evaporation	762	737	736	684	648
Outflow	Out of Basin	Conveyance Evaporation	47	46	46	44	42
Outflow	Out of Basin	Stream Outflow	92,199	202,668	120,562	89,515	640,247
Outflow	Out of Basin	Subsurface Outflow	-	-	-	-	-
Outflow	(5)+(24)+(23)+(19)+(18)+(29)	Total Outflow	250,345	355,147	277,794	242,521	788,277
Storage Change	(32)-(33)	Change in Total System Storage	(22,927)	(16,874)	(20,033)	(17,812)	8,910

Flow Type	Origin/ Destination	Component	Average (2019-2068)
Inflow	Into Basin	Precipitation on Land System	152,224
Inflow	Between Systems	Surface Water Delivery	81,23
Inflow	Between Systems	Groundwater Extraction	47,50
Inflow	(1)+(2)+(3)	Total Inflow	280,96
Outflow	Out of Basin	Evapotranspiration	165,79
Outflow	Between Systems	Runoff	94,03
Outflow	Between Systems	Return Flow	5,33
Outflow	Between Systems	Recharge of Applied Water	14,05
Outflow	Between Systems	Recharge of Precipitation	1,74
Outflow	Between Systems	Managed Aquifer Recharge	-
Outflow	(5)+(6)+(7)+(8)+(9)+(10)	Total Outflow	280,96
Storage Change	(4)-(11)	Change in Land System Storage	-

	SURFACE \	WATER SYSTEM WATER BUDGET		
item	Flow Type	Origin/ Destination	Component	Average (2019-2068)
(13)	Inflow	Into Basin	Stream Inflow	450,360
(14)	Inflow	Into Basin	Precipitation on Reservoirs	558
(6)	Inflow	Between Systems	Runoff	94,032
(7)	Inflow	Between Systems	Return Flow	5,335
(15)	Inflow	Between Systems	Stream Gain from Groundwater	-
(16)	Inflow	Between Systems	Reservoir Gain from Groundwater	-
(17)	Inflow	(13)+(14)+(6)+(7)+(15)+(16)	Total Inflow	550,284
(18)	Outflow	Out of Basin	Stream Outflow	436,663
(19)	Outflow	Out of Basin	Conveyance Evaporation	50
(20)	Outflow	Between Systems	Conveyance Seepage	27
(2)	Outflow	Between Systems	Surface Water Delivery	81,239
(21)	Outflow	Between Systems	Stream Loss to Groundwater	30,515
(22)	Outflow	Between Systems	Reservoir Loss to Groundwater	596
(23)	Outflow	Out of Basin	Reservoir Evaporation	780
(24)	Outflow	Out of Basin	Stream Evaporation	414
(25)	Outflow	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24)	Total Outflow	550,284
(26)	Storage Change	(17)-(25)	Change in Surface Water Storage	-

	GROUNDW	ATER SYSTEM WATER BUDGET		
item	Flow Type	Origin/ Destination	Component	Average (2019-2068)
8)	Inflow	Between Systems	Recharge of Applied Water	14,056
9)	Inflow	Between Systems	Recharge of Precipitation	1,746
0)	Inflow	Between Systems	Managed Aquifer Recharge	-
1)	Inflow	Between Systems	Groundwater Gain from Stream	30,515
2)	Inflow	Between Systems	Groundwater Gain from Reservoir	596
0)	Inflow	Between Systems	Conveyance Seepage	27
7)	Inflow	Into Basin	Subsurface Inflow	1
8)	Inflow	(8)+(9)+(10)+(21)+(22)+(20)+(27)	Total Inflow	46,942
3)	Outflow	Between Systems	Groundwater Extraction	47,500
5)	Outflow	Between Systems	Groundwater Loss to Stream	-
5)	Outflow	Between Systems	Groundwater Loss to Reservoir s	-
9)	Outflow	Out of Basin	Subsurface Outflow	-
0)	Outflow	(3)+(15)+(16)+(29)	Total Outflow	47,500
L)	Storage Change	(28)-(30)	Change in Groundwater Storage	(558

Flow Type	Origin/ Destination	Component	Average (2019-2068)
Inflow	Into Basin	Precipitation on Land System	152,22
Inflow	Into Basin	Precipitation on Reservoirs	55
Inflow	Into Basin	Stream Inflow	450,36
Inflow	Into Basin	Subsurface Inflow	
Inflow	(1)+(14)+(13)+(27)	Total Inflow	603,14
Outflow	Out of Basin	Evapotranspiration	165,79
Outflow	Out of Basin	Stream Evaporation	41
Outflow	Out of Basin	Reservoir Evaporation	78
Outflow	Out of Basin	Conveyance Evaporation	5
Outflow	Out of Basin	Stream Outflow	436,66
Outflow	Out of Basin	Subsurface Outflow	-
Outflow	(5)+(24)+(23)+(19)+(18)+(29)	Total Outflow	603,70
Storage Change	(32)-(33)	Change in Total System Storage	(55

Flow Type	Origin/ Destination	Component	2019	2020	2021	2022	2023	2024	2025
Inflow	Into Basin	Precipitation on Land System	129,500	222,333	117,416	190,878	86,735	178,276	131,7
Inflow	Between Systems	Surface Water Delivery	85,796	76,976	85,067	81,416	89,423	82,756	83,0
Inflow	Between Systems	Groundwater Extraction	51,348	42,198	51,204	48,394	55,962	48,513	49,3
Outflow	(1)+(2)+(3)	Total Inflow	266,644	341,507	253,687	320,687	232,119	309,545	264,
Outflow	Out of Basin Between Systems	Evapotranspiration Runoff	168,320 76,070	164,569 157,023	166,471 65,127	165,779 133,640	165,207 43,735	163,577 124,588	165,-
Outflow	Between Systems	Return Flow	5,773	4,726	5,758	5,438	6,302	5,449	5,
Outflow	Between Systems	Recharge of Applied Water	14,879	13,230	14,763	14,113	15,585	14,321	14,
Outflow	Between Systems	Recharge of Precipitation	1,603	1,959	1,569	1,717	1,290	1,611	1,
Outflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-	201
Outflow Storage	(5)+(6)+(7)+(8)+(9)+(10)	Total Outflow	266,644	341,507	253,687	320,687	232,119	309,545	264,
Change	(4)-(11)	Change in Land System Storage	-	-	-	-	-	-	
SURFACE W	ATER SYSTEM WATER BUDGET								
Flow Type	Origin/ Destination	Component	2019	2020	2021	2022	2023	2024	202
Inflow	Into Basin	Stream Inflow	231,125	772,605	313,116	811,978	194,478	508,919	263,
Inflow	Into Basin	Precipitation on Reservoirs	475	815	430	699	318	653	
Inflow	Between Systems	Runoff Return Flow	76,070 5 773	157,023	65,127	133,640	43,735	124,588	77,
Inflow Inflow	Between Systems Between Systems	Stream Gain from Groundwater	5,773	4,726	5,758 -	5,438	6,302	5,449	5,
Inflow	Between Systems	Reservoir Gain from Groundwater	-	-	-	-	-	-	
Inflow	(13)+(14)+(6)+(7)+(15)+(16)	Total Inflow	313,442	935,169	384,431	951,756	244,833	639,609	346,
Outflow	Out of Basin	Stream Outflow	210,973	816,434	278,896	818,346	140,411	527,323	245,
Outflow	Out of Basin	Conveyance Evaporation	51	50	50	49	52	51	
Outflow Outflow	Between Systems Between Systems	Conveyance Seepage Surface Water Delivery	27 85,796	76,976	27 85,067	27 81,416	27 89,423	27 82,756	83,
Outflow	Between Systems	Stream Loss to Groundwater	14,747	39,926	18,560	50,102	13,043	27,665	16,
Outflow	Between Systems	Reservoir Loss to Groundwater	596	596	596	596	596	596	
Outflow	Out of Basin	Reservoir Evaporation	818	759	807	799	839	775	
		'							
Outflow	Out of Basin	Stream Evaporation	432	400	428	419	442	415	
Outflow Outflow Storage Change	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25)	'		935,169 -	428 384,431 -	951,756 -	442 244,833 -	415 639,609 -	346,
Outflow Outflow Storage Change	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET	Stream Evaporation Total Outflow Change in Surface Water Storage	432 313,442 -	935,169	384,431	951,756 -	244,833	639,609	346,
Outflow Outflow Storage Change GROUNDWA	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination	Stream Evaporation Total Outflow Change in Surface Water Storage Component	432 313,442 - 2019	935,169	384,431	951,756	244,833	639,609	346,
Outflow Outflow Storage Change	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET	Stream Evaporation Total Outflow Change in Surface Water Storage	432 313,442 -	935,169	384,431	951,756 -	244,833	639,609	202
Outflow Outflow Storage Change GROUNDWA	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems	Component Recharge of Applied Water	432 313,442 - 2019 14,879	935,169 - 2020 13,230	384,431 - 2021 14,763	951,756 - 2022 14,113	244,833 - 2023 15,585	639,609 - 2024 14,321	202
Outflow Outflow Storage Change GROUNDWA Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Inflow Inflow	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream	2019 14,879 1,603 - 14,747	2020 13,230 1,959 - 39,926	2021 14,763 1,569 - 18,560	2022 14,113 1,717 - 50,102	244,833 - 2023 15,585 1,290 - 13,043	2024 14,321 1,611 - 27,665	202 14,
Outflow Outflow Storage Change GROUNDWA Flow Type Inflow	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir	2019 14,879 1,603 - 14,747 596	2020 13,230 1,959 - 39,926 596	2021 14,763 1,569 - 18,560 596	2022 14,113 1,717 - 50,102 596	244,833 - 2023 15,585 1,290 - 13,043 596	2024 14,321 1,611 - 27,665 596	202 14,
Outflow Outflow Storage Change GROUNDWA Flow Type Inflow	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage	2019 14,879 1,603 - 14,747 596 27	2020 13,230 1,959 - 39,926 596 27	2021 14,763 1,569 - 18,560 596 27	2022 14,113 1,717 - 50,102 596 27	244,833 - 2023 15,585 1,290 - 13,043 596 27	2024 14,321 1,611 - 27,665 596 27	202 14,
Outflow Outflow Storage Change GROUNDWA Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Inflow Inflow Inflow	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir	2019 14,879 1,603 - 14,747 596	2020 13,230 1,959 - 39,926 596	2021 14,763 1,569 - 18,560 596	2022 14,113 1,717 - 50,102 596	244,833 - 2023 15,585 1,290 - 13,043 596	2024 14,321 1,611 - 27,665 596	202 14 1,
Outflow Outflow Storage Change GROUNDWA Flow Type Inflow	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow	2019 14,879 1,603 - 14,747 596 27	2020 13,230 1,959 - 39,926 596 27 1	2021 14,763 1,569 - 18,560 596 27	2022 14,113 1,717 - 50,102 596 27 1	244,833 - 2023 15,585 1,290 - 13,043 596 27 1	2024 14,321 1,611 - 27,665 596 27	202 14 1, 16
Outflow Outflow Storage Change GROUNDWA Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream	2019 14,879 1,603 - 14,747 596 27 1 31,854 51,348	2020 13,230 1,959 - 39,926 596 27 1 55,740 42,198	2021 14,763 1,569 - 18,560 596 27 1 35,516 51,204	2022 14,113 1,717 - 50,102 596 27 1 66,557 48,394	244,833 - 2023 15,585 1,290 - 13,043 596 27 1 30,543	2024 14,321 1,611 27,665 596 27 1 44,221 48,513	202 14 1, 16
Outflow Outflow Storage Change GROUNDWA Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir s	2019 14,879 1,603 - 14,747 596 27 1 31,854 51,348	2020 13,230 1,259 27 1 55,740 42,198	2021 14,763 1,569 - 18,560 596 27 1 35,516 51,204	2022 14,113 1,717 - 50,102 596 27 1 66,557 48,394 -	2023 15,585 1,290 - 13,043 596 27 1 30,543 55,962	2024 14,321 1,611 - 27,665 596 27 1 44,221 48,513	202 14 1, 16
Outflow Outflow Storage Change GROUNDWA Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream	2019 14,879 1,603 - 14,747 596 27 1 31,854 51,348	2020 13,230 1,959 - 39,926 596 27 1 55,740 42,198	2021 14,763 1,569 - 18,560 596 27 1 35,516 51,204	2022 14,113 1,717 - 50,102 596 27 1 66,557 48,394	2023 15,585 1,290 - 13,043 596 27 1 30,543 55,962	2024 14,321 1,611 27,665 596 27 1 44,221 48,513	202 14, 1, 16, 32, 49,
Outflow Outflow Storage Change GROUNDWA Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow	2019 14,879 1,603 - 14,747 596 27 1 31,854 51,348	2020 13,230 1,959 - 39,926 596 27 1 55,740 42,198 -	2021 14,763 1,569 - 18,560 596 27 1 35,516 51,204	2022 14,113 1,717 - 50,102 596 27 1 66,557 48,394 -	2023 15,585 1,290 - 13,043 596 27 1 30,543 55,962 - -	2024 14,321 1,611 - 27,665 596 27 1 44,221 48,513 -	203 144 1 16 32 49
Outflow Outflow Storage Change GROUNDWA Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Coutflow Outflow Coutflow Outflow Outflow Coutflow Outflow Outflow Outflow Coutflow Outflow Outflow Outflow	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30)	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow	2019 14,879 1,603 - 14,747 596 27 1 31,854 51,348 51,348	2020 13,230 1,959 - 39,926 596 27 1 55,740 42,198 - - 42,198	2021 14,763 1,569 - 18,560 596 27 1 35,516 51,204 - - - 51,204	2022 14,113 1,717 - 50,102 596 27 1 66,557 48,394 - - 48,394	244,833 - 2023 15,585 1,290 - 13,043 596 27 1 30,543 55,962 55,962	2024 14,321 1,611 - 27,665 596 27 1 44,221 48,513 - - - 48,513	202 14 1 16 32,49
Outflow Outflow Storage Change GROUNDWA Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Coutflow Outflow Coutflow Outflow Outflow Coutflow Outflow Outflow Outflow Coutflow Outflow Outflow Outflow	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (3)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29)	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow	2019 14,879 1,603 - 14,747 596 27 1 31,854 51,348 51,348	2020 13,230 1,959 - 39,926 596 27 1 55,740 42,198 - - 42,198	2021 14,763 1,569 - 18,560 596 27 1 35,516 51,204 - - - 51,204	2022 14,113 1,717 - 50,102 596 27 1 66,557 48,394 - - 48,394	244,833 - 2023 15,585 1,290 - 13,043 596 27 1 30,543 55,962 55,962	2024 14,321 1,611 - 27,665 596 27 1 44,221 48,513 - - - 48,513	200 144 1 16 32 49 (16)
Outflow Outflow Storage Change GROUNDWA Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow Coutflow Outflow	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30)	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage	2019 14,879 1,603 - 14,747 596 27 1 31,854 51,348 51,348 (19,494)	2020 13,230 1,959 - 39,926 596 27 1 55,740 42,198 - - - 42,198 13,542	2021 14,763 1,569 - 18,560 596 27 1 35,516 51,204 - - - - (15,688)	2022 14,113 1,717 - 50,102 596 27 1 66,557 48,394 - - 48,394 18,163	2023 15,585 1,290 - 13,043 596 27 1 30,543 55,962 - - - - - - - - - - - - -	2024 14,321 1,611 - 27,665 596 27 1 44,221 48,513 - - - - - - - - - - - - -	202 14, 1, 16, 32, 49, (16,
Outflow Outflow Storage Change GROUNDWA Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow Flow Outflow Out	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Gut of Basin (3)+(15)+(16)+(29) (28)-(30)	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component	2019 14,879 1,603 - 14,747 596 27 1 31,854 51,348 (19,494)	2020 13,230 1,959 - 39,926 596 27 1 55,740 42,198 - - 42,198 13,542	2021 14,763 1,569 - 18,560 596 27 1 35,516 51,204 - - - 51,204 (15,688)	2022 14,113 1,717 - 50,102 596 27 1 66,557 48,394 - - - 48,394 18,163	244,833 - 2023 15,585 1,290 - 13,043 596 27 1 30,543 55,962 55,962 (25,419)	2024 14,321 1,611 - 27,665 596 27 1 44,221 48,513 - - 48,513 (4,292)	
Outflow Outflow Storage Change GROUNDWA Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow TOTAL BASII Flow Type Inflow Inflow Inflow Inflow Outflow Outflo	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) WWATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Into Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow	432 313,442 - 2019 14,879 1,603 - 14,747 596 27 1 31,854 51,348 (19,494) 2019 129,500 475 231,125	2020 13,230 1,959 - 39,926 596 27 1 55,740 42,198 42,198 13,542 2020 222,333 815 772,605	2021 14,763 1,569 - 18,560 596 27 1 35,516 51,204 51,204 (15,688) 2021 117,416 430 313,116	2022 14,113 1,717 - 50,102 596 27 1 66,557 48,394 - - - 48,394 18,163 2022 190,878 699 811,978	244,833 - 2023 15,585 1,290 - 13,043 596 27 1 30,543 55,962 55,962 (25,419) 2023 86,735 318 194,478	2024 14,321 1,611 - 27,665 596 27 1 44,221 48,513 48,513 (4,292) 2024 178,276 653 508,919	202 14, 1, 16, 32, 49, (16,
Outflow Outflow Storage Change GROUNDWA Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow TOTAL BASII Flow Type Inflow Inflow Inflow Inflow Inflow Outflow	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) N WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Into Basin Into Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow	432 313,442 - 2019 14,879 1,603 - 14,747 596 27 1 31,854 51,348 (19,494) 2019 129,500 475 231,125 1	2020 13,230 1,959 - 39,926 596 27 1 55,740 42,198 42,198 13,542 2020 222,333 815 772,605 1	2021 14,763 1,569 - 18,560 596 27 1 35,516 51,204 51,204 (15,688) 2021 117,416 430 313,116 1	2022 14,113 1,717 - 50,102 596 27 1 66,557 48,394 - - - 48,394 18,163 2022 190,878 699 811,978	244,833 - 2023 15,585 1,290 - 13,043 596 27 1 30,543 55,962 55,962 (25,419) 2023 86,735 318 194,478 1	2024 14,321 1,611 - 27,665 596 27 1 44,221 48,513 48,513 (4,292) 2024 178,276 653 508,919 1	202 14, 1, 16, 322, 49, (16, 202 131, 263,
Outflow Outflow Storage Change GROUNDWA Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Storage Change TOTAL BASII Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Inflow Inflow Inflow Inflow Inflow Inflow Inflow	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (3)+(15)+(16)+(29) (28)-(30) WATER BUDGET Origin/ Destination	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Subsurface Inflow Total Inflow	2019 14,879 1,603 - 14,747 596 27 1 31,854 51,348 (19,494) 2019 129,500 475 231,125 1 361,100	2020 13,230 1,959 - 39,926 596 27 1 55,740 42,198 42,198 13,542 2020 222,333 815 772,605 1 995,753	2021 14,763 1,569 - 18,560 596 27 1 35,516 51,204 51,204 (15,688) 2021 117,416 430 313,116 1 430,963	2022 14,113 1,717 - 50,102 596 27 1 66,557 48,394 48,394 18,163 2022 190,878 699 811,978 1 1,003,556	2023 15,585 1,290 - 13,043 596 27 1 30,543 55,962 55,962 (25,419) 2023 86,735 318 194,478 1 281,532	2024 14,321 1,611 - 27,665 596 27 1 44,221 48,513 48,513 (4,292) 2024 178,276 653 508,919 1 687,849	2022 14, 1, 16, 32, 49, (16, 202 131, 263, 395,
Outflow Outflow Storage Change GROUNDWA Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Storage Change TOTAL BASI Flow Type Inflow Inflow Inflow Outflow Inflow Inflow Inflow Inflow Outflow	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Into Basin (3)+(15)+(16)+(29) (28)-(30) N WATER BUDGET Origin/ Destination Into Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Evapotranspiration	2019 14,879 1,603 - 14,747 596 27 1 31,854 51,348 (19,494) 2019 129,500 475 231,125 1 361,100 168,320	2020 13,230 1,959 - 39,926 596 27 1 55,740 42,198 42,198 13,542 2020 222,333 815 772,605 1 995,753 164,569	2021 14,763 1,569 - 18,560 596 27 1 35,516 51,204 51,204 (15,688) 2021 117,416 430 313,116 1 430,963 166,471	951,756	2023 15,585 1,290 - 13,043 596 27 1 30,543 55,962 55,962 (25,419) 2023 86,735 318 194,478 1 281,532 165,207	2024 14,321 1,611 - 27,665 596 27 1 44,221 48,513 48,513 (4,292) 2024 178,276 653 508,919 1 687,849 163,577	202 14, 1, 16, 32, 49, (16, 202 131, 263, 395, 165,
Outflow Outflow Storage Change GROUNDWA Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Storage Change TOTAL BASI Flow Type Inflow Inflow Inflow Outflow Inflow Inflow Inflow Outflow	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems (3)+(15)+(16)+(29) (28)-(30) N WATER BUDGET Origin/ Destination Into Basin Out of Basin Out of Basin Out of Basin Out of Basin	Component Recharge of Applied Water Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Evapotranspiration Stream Evaporation	2019 14,879 1,603 - 14,747 596 27 1 31,854 51,348 51,348 (19,494) 2019 129,500 475 231,125 1 361,100 168,320 432	2020 13,230 1,959 - 39,926 596 27 1 55,740 42,198 42,198 13,542 2020 222,333 815 772,605 1 995,753 164,569 400	2021 14,763 1,569 - 18,560 596 27 1 35,516 51,204 51,204 (15,688) 2021 117,416 430 313,116 1 430,963 166,471 428	951,756	2023 15,585 1,290 - 13,043 596 27 1 30,543 55,962 55,962 (25,419) 2023 86,735 318 194,478 1 281,532 165,207 442	2024 14,321 1,611 - 27,665 596 27 1 44,221 48,513 48,513 (4,292) 2024 178,276 653 508,919 1 687,849 163,577 415	2022 14, 1, 16, 49, (16, 2022 131, 263, 395, 165,
Outflow Outflow Storage Change GROUNDWA Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Storage Change TOTAL BASI Flow Type Inflow Inflow Inflow Outflow Inflow Inflow Inflow Inflow Outflow	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Into Basin (3)+(15)+(16)+(29) (28)-(30) N WATER BUDGET Origin/ Destination Into Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Evapotranspiration	2019 14,879 1,603 - 14,747 596 27 1 31,854 51,348 (19,494) 2019 129,500 475 231,125 1 361,100 168,320	2020 13,230 1,959 - 39,926 596 27 1 55,740 42,198 42,198 13,542 2020 222,333 815 772,605 1 995,753 164,569	2021 14,763 1,569 - 18,560 596 27 1 35,516 51,204 51,204 (15,688) 2021 117,416 430 313,116 1 430,963 166,471	951,756	2023 15,585 1,290 - 13,043 596 27 1 30,543 55,962 55,962 (25,419) 2023 86,735 318 194,478 1 281,532 165,207	2024 14,321 1,611 - 27,665 596 27 1 44,221 48,513 48,513 (4,292) 2024 178,276 653 508,919 1 687,849 163,577	202 14, 1, 16, 49, (16, 202 131, 263, 395, 165,
Outflow Outflow Storage Change GROUNDWA Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Flow Type Inflow Outflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) N WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Out of Basin	Component Groundwater Gain from Stream Groundwater Storage Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Subsurface Inflow Frecipitation on Reservoirs Stream Inflow Subsurface Inflow Conveyance Evaporation Conveyance Evaporation Stream Outflow	2019 14,879 1,603 - 14,747 596 27 1 31,854 51,348 51,348 (19,494) 2019 129,500 475 231,125 1 361,100 168,320 432 818	2020 13,230 1,959 - 39,926 596 27 1 55,740 42,198 42,198 13,542 2020 222,333 815 772,605 1 995,753 164,569 400 759	2021 14,763 1,569 - 18,560 596 27 1 35,516 51,204 51,204 (15,688) 2021 117,416 430 313,116 1 430,963 166,471 428 807	951,756 14,113 1,717 - 50,102 596 27 1 66,557 48,394 48,394 18,163 2022 190,878 699 811,978 11 1,003,556 165,779 419 799	244,833 - 2023 15,585 1,290 - 13,043 596 27 1 30,543 55,962 55,962 (25,419) 2023 86,735 318 194,478 1 281,532 165,207 442 839	2024 14,321 1,611 - 27,665 596 27 1 44,221 48,513 48,513 (4,292) 2024 178,276 653 508,919 1 687,849 163,577 415 775	202 144 16 16 49 (16) 202 131 263 395, 165
Outflow Outflow Storage Change GROUNDWA Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Storage Change TOTAL BASII Flow Type Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) N WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Out of Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Subsurface Inflow Frecipitation on Reservoirs Stream Inflow Subsurface Outflow	2019 14,879 1,603 - 14,747 596 27 1 31,854 51,348 (19,494) 2019 129,500 475 231,125 1 361,100 168,320 432 818 51 210,973	2020 13,230 1,959 - 39,926 596 27 1 55,740 42,198 42,198 13,542 2020 222,333 815 772,605 1 995,753 164,569 400 759 50 816,434	2021 14,763 1,569 - 18,560 596 27 1 35,516 51,204 (15,688) 2021 117,416 430 313,116 1 430,963 166,471 428 807 50 278,896	2022 14,113 1,717 - 50,102 596 27 1 66,557 48,394 48,394 18,163 2022 190,878 699 811,978 1 1,003,556 165,779 419 799 49 818,346	244,833 - 2023 15,585 1,290 - 13,043 596 27 1 30,543 55,962 55,962 (25,419) 2023 86,735 318 194,478 1 281,532 165,207 442 839 52 140,411 -	2024 14,321 1,611 - 27,665 596 27 1 44,221 48,513 48,513 (4,292) 2024 178,276 653 508,919 1 687,849 163,577 415 775 51 527,323	202 14, 1, 16, 32, 49, (16, 202 131, 263, 395, 165,
Outflow Outflow Storage Change GROUNDWA Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Flow Type Inflow Outflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) N WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Out of Basin	Component Groundwater Gain from Stream Groundwater Storage Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Subsurface Inflow Frecipitation on Reservoirs Stream Inflow Subsurface Inflow Conveyance Evaporation Conveyance Evaporation Stream Outflow	2019 14,879 1,603 - 14,747 596 27 1 31,854 51,348 (19,494) 2019 129,500 475 231,125 1 361,100 168,320 432 818 51	2020 13,230 1,959 - 39,926 596 27 1 55,740 42,198 42,198 13,542 2020 222,333 815 772,605 1 995,753 164,569 400 759 50	2021 14,763 1,569 - 18,560 596 27 1 35,516 51,204 (15,688) 2021 117,416 430 313,116 1 430,963 166,471 428 807 50	951,756 14,113 1,717 - 50,102 596 27 1 66,557 48,394 48,394 18,163 2022 190,878 699 811,978 1 1,003,556 165,779 419 799 49	244,833 - 2023 15,585 1,290 - 13,043 596 27 1 30,543 55,962 55,962 (25,419) 2023 86,735 318 194,478 1 281,532 165,207 442 839 52	2024 14,321 1,611 - 27,665 596 27 1 44,221 48,513 48,513 (4,292) 2024 178,276 653 508,919 1 687,849 163,577 415 775 51	2022 144, 1, 166, 49, (166, 2022 1311, 263, 395, 165,

Flow Type	Origin/ Destination	Component	2026	2027	2028	2029	2030	2031	2032
Inflow	Into Basin	Precipitation on Land System	169,078	181,223	223,561	122,811	117,302	187,191	133,62
Inflow	Between Systems	Surface Water Delivery	85,585	85,130	76,120	85,600	86,677	82,850	83,90
Inflow	Between Systems	Groundwater Extraction	50,419	50,097	41,580	50,791	52,010	47,910	50,10
Inflow	(1)+(2)+(3)	Total Inflow	305,082	316,450	341,260	259,201	255,989	317,951	267,63
Outflow Outflow	Out of Basin Between Systems	Evapotranspiration Runoff	169,456	167,624	169,093	168,714	170,424	167,439 129,075	166,33 79,48
Outflow	Between Systems	Return Flow	113,477 5,665	126,831 5,628	152,295 4,656	68,314 5,708	63,055 5,848	5,379	5,6
Outflow	Between Systems	Recharge of Applied Water	14,816	14,735	13,079	14,830	15,035	14,315	14,5
Outflow	Between Systems	Recharge of Precipitation	1,668	1,632	2,138	1,635	1,627	1,743	1,6
Outflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-	-
Outflow	(5)+(6)+(7)+(8)+(9)+(10)	Total Outflow	305,082	316,450	341,260	259,201	255,989	317,951	267,6
Storage Change	(4)-(11)	Change in Land System Storage	-	-	-	-	-	-	-
SURFACE W	/ATER SYSTEM WATER BUDGET								
Flow Type	Origin/ Destination	Component	2026	2027	2028	2029	2030	2031	2032
Inflow	Into Basin	Stream Inflow	657,649	631,029	1,061,564	701,971	332,242	627,237	588,2
Inflow	Into Basin	Precipitation on Reservoirs	620	664	819	450	430	686	70.4
Inflow Inflow	Between Systems Between Systems	Runoff Return Flow	113,477 5,665	126,831 5,628	152,295 4,656	68,314 5,708	63,055 5,848	129,075 5,379	79,4 5,6
Inflow	Between Systems	Stream Gain from Groundwater		- 3,020	- 4,030				-
Inflow	Between Systems	Reservoir Gain from Groundwater	-	-	-	-	-	-	-
Inflow	(13)+(14)+(6)+(7)+(15)+(16)	Total Inflow	777,411	764,153	1,219,334	776,443	401,574	762,376	673,8
Outflow	Out of Basin	Stream Outflow	655,315	643,761	971,790	652,274	293,494	644,456	556,7
Outflow	Out of Basin	Conveyance Evaporation	52	51	48	51	52	51	
Outflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27	
Outflow Outflow	Between Systems Between Systems	Surface Water Delivery Stream Loss to Groundwater	85,585 34,581	85,130 33,343	76,120 169,590	85,600 36,642	86,677 19,449	82,850 33,167	83,9 31,3
Outflow	Between Systems	Reservoir Loss to Groundwater	596	596	596	596	596	596	51,5
Outflow	Out of Basin	Reservoir Evaporation	822	814	759	820	840	806	7
Outflow	Out of Basin	Stream Evaporation	433	429	404	432	439	423	4
-		Stream Evaporation Total Outflow	433 777,411	429 764,153	404 1,219,334	776,443	439 401,574	762,376	
Outflow Outflow Storage Change	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25)								673,83
Outflow Outflow Storage Change	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24)	Total Outflow							
Outflow Outflow Storage Change GROUNDW Flow Type Inflow	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems	Total Outflow Change in Surface Water Storage Component Recharge of Applied Water	777,411 - 2026 14,816	764,153 - 2027 14,735	1,219,334 - 2028 13,079	776,443 - 2029 14,830	401,574 - 2030 15,035	762,376 - 2031 14,315	2032 14,5
Outflow Outflow Storage Change GROUNDW Flow Type Inflow Inflow	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems	Total Outflow Change in Surface Water Storage Component Recharge of Applied Water Recharge of Precipitation	777,411 - 2026	764,153	1,219,334 - 2028	776,443 - 2029	401,574	762,376	2032 14,5
Outflow Outflow Storage Change GROUNDW Flow Type Inflow Inflow Inflow	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems	Total Outflow Change in Surface Water Storage Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge	777,411 - 2026 14,816 1,668	2027 14,735 1,632	2028 13,079 2,138	2029 14,830 1,635	2030 15,035 1,627	762,376 - 2031 14,315 1,743 -	2032 14,5 1,6
Outflow Outflow Storage Change GROUNDW Flow Type Inflow Inflow Inflow Inflow Inflow	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream	777,411 - 2026 14,816 1,668 - 34,581	2027 14,735 1,632 - 33,343	2028 13,079 2,138 - 169,590	2029 14,830 1,635 - 36,642	2030 15,035 1,627 - 19,449	762,376 - 2031 14,315 1,743 - 33,167	2032 14,5 1,6
Outflow Outflow Storage Change GROUNDW Flow Type Inflow Inflow Inflow	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems	Total Outflow Change in Surface Water Storage Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge	777,411 - 2026 14,816 1,668	2027 14,735 1,632	2028 13,079 2,138	2029 14,830 1,635	2030 15,035 1,627	762,376 - 2031 14,315 1,743 -	2032 14,5 1,6 - 31,3
Outflow Outflow Storage Change GROUNDW Flow Type Inflow Inflow Inflow Inflow Inflow Inflow	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir	777,411 - 2026 14,816 1,668 - 34,581 596 27 1	2027 14,735 1,632 - 33,343 596 27 1	1,219,334 - 2028 13,079 2,138 - 169,590 596 27 1	776,443 - 2029 14,830 1,635 - 36,642 596 27 1	2030 15,035 1,627 - 19,449 596 27	762,376 - 2031 14,315 1,743 - 33,167 596 27 1	2032 14,5 1,6 - 31,3 5
Outflow Outflow Storage Change GROUNDW Flow Type Inflow	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27)	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow	777,411 - 2026 14,816 1,668 - 34,581 596 27 1 51,689	2027 14,735 1,632 -33,343 596 27 1 50,335	1,219,334 - 2028 13,079 2,138 - 169,590 596 27 1 185,432	2029 14,830 1,635 - 36,642 596 27 1 53,731	2030 15,035 1,627 - 19,449 596 27 1 36,736	762,376 - 2031 14,315 1,743 - 33,167 596 27 1 49,850	2032 14,5 1,6 - 31,3 5
Outflow Outflow Storage Change GROUNDW Flow Type Inflow Outflow	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction	2026 14,816 1,668 - 34,581 596 27 1 51,689 50,419	2027 14,735 1,632 - 33,343 596 27 1 50,335 50,097	1,219,334 - 2028 13,079 2,138 - 169,590 596 27 1	776,443 - 2029 14,830 1,635 - 36,642 596 27 1 53,731 50,791	2030 15,035 1,627 - 19,449 596 27	762,376 - 2031 14,315 1,743 - 33,167 596 27 1	673,8
Outflow Outflow Storage Change GROUNDW Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) CATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream	2026 14,816 1,668 - 34,581 596 27 1 51,689 50,419	2027 14,735 1,632 2,33,343 596 27 1 50,335 50,097	1,219,334 - 2028 13,079 2,138 - 169,590 596 27 1 185,432 41,580	776,443 - 2029 14,830 1,635 - 36,642 596 27 1 53,731 50,791	2030 15,035 1,627 - 19,449 596 27 1 36,736 52,010	762,376 - 2031 14,315 1,743 - 33,167 596 27 1 49,850 47,910 -	2032 14,5 1,6 31,3 5 48,1
Outflow Outflow Storage Change GROUNDW Flow Type Inflow Outflow	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction	2026 14,816 1,668 - 34,581 596 27 1 51,689 50,419	2027 14,735 1,632 - 33,343 596 27 1 50,335 50,097	1,219,334 - 2028 13,079 2,138 - 169,590 596 27 1 185,432	776,443 - 2029 14,830 1,635 - 36,642 596 27 1 53,731 50,791	2030 15,035 1,627 - 19,449 596 27 1 36,736	762,376 - 2031 14,315 1,743 - 33,167 596 27 1 49,850	2032 14,5 1,6 - 31,3 5
Outflow Outflow Storage Change GROUNDW Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) CATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir s	2026 14,816 1,668 - 34,581 596 27 1 51,689 50,419	2027 14,735 1,632 2,33,343 596 27 1 50,335 50,097	1,219,334 - 2028 13,079 2,138 - 169,590 596 27 1 185,432 41,580	776,443 - 2029 14,830 1,635 - 36,642 596 27 1 53,731 50,791	2030 15,035 1,627 - 19,449 596 27 1 36,736 52,010	762,376 - 2031 14,315 1,743 - 33,167 596 27 1 49,850 47,910 -	2032 14,5 1,6 31,3 5 48,1
Outflow Outflow Storage Change GROUNDW Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Out of Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow	777,411 - 2026 14,816 1,668 - 34,581 596 27 1 51,689 50,419	764,153 - 2027 14,735 1,632 - 33,343 596 27 1 50,335 50,097 - -	1,219,334 - 2028 13,079 2,138 - 169,590 596 27 1 185,432 41,580 	2029 14,830 1,635 - 36,642 596 27 1 53,731 50,791	2030 15,035 1,627 - 19,449 596 27 1 36,736 52,010	762,376 - 2031 14,315 1,743 - 33,167 596 27 1 49,850 47,910 - -	2032 14,5 1,6 31,3 5 48,1
Outflow Storage Change GROUNDW Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Coutflow Outflow Outflow Coutflow Coutfl	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) CATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Out of Basin (3)+(15)+(16)+(29)	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow	2026 14,816 1,668 - 34,581 596 27 1 51,689 50,419 50,419	2027 14,735 1,632 - 33,343 596 27 1 50,335 50,097 - - - 50,097	1,219,334 - 2028 13,079 2,138 - 169,590 596 27 1 185,432 41,580 41,580	776,443 - 2029 14,830 1,635 - 36,642 596 27 1 53,731 50,791 50,791	2030 15,035 1,627 - 19,449 596 27 1 36,736 52,010 - - 52,010	762,376 - 2031 14,315 1,743 - 33,167 596 27 1 49,850 47,910 - - 47,910	2032 14,5 1,6 31,3 5 48,1
Outflow Storage Change GROUNDW Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Coutflow Outflow Outflow Coutflow Coutfl	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30)	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow	2026 14,816 1,668 - 34,581 596 27 1 51,689 50,419 50,419	2027 14,735 1,632 - 33,343 596 27 1 50,335 50,097 - - - 50,097	1,219,334 - 2028 13,079 2,138 - 169,590 596 27 1 185,432 41,580 41,580	776,443 - 2029 14,830 1,635 - 36,642 596 27 1 53,731 50,791 50,791	2030 15,035 1,627 - 19,449 596 27 1 36,736 52,010 - - 52,010	762,376 - 2031 14,315 1,743 - 33,167 596 27 1 49,850 47,910 - - 47,910	2032 14,5 1,6 31,3 5 48,1 50,1 (1,9
Outflow Outflow Storage Change GROUNDW Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Storage Change TOTAL BAS Flow Type	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) IN WATER BUDGET Origin/ Destination Into Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System	777,411 - 2026 14,816 1,668 - 34,581 596 27 1 51,689 50,419 50,419 1,270 2026 169,078	764,153 - 2027 14,735 1,632 - 33,343 596 27 1 50,335 50,097 50,097 238 2027	1,219,334 - 2028 13,079 2,138 - 169,590 596 27 1 185,432 41,580 41,580 143,851 2028 223,561	776,443 - 2029 14,830 1,635 - 36,642 596 27 1 53,731 50,791 50,791 2,941 2029 122,811	2030 15,035 1,627 - 19,449 596 27 1 36,736 52,010 - - - 52,010 (15,273) 2030 117,302	762,376 - 2031 14,315 1,743 - 33,167 596 27 1 49,850 47,910 - - 47,910 1,939 2031 187,191	2032 14,5 1,6 31,3 5 48,1 50,1 (1,9
Outflow Outflow Storage Change GROUNDW Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Storage Change TOTAL BAS Flow Type Inflow Inflow Inflow	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) IN WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs	777,411 - 2026 14,816 1,668 - 34,581 596 27 1 51,689 50,419 2026 169,078 620	764,153 - 2027 14,735 1,632 - 33,343 596 27 1 50,335 50,097 50,097 238 2027 181,223 664	1,219,334 - 2028 13,079 2,138 - 169,590 596 27 1 185,432 41,580 41,580 143,851 2028 223,561 819	776,443 - 2029 14,830 1,635 - 36,642 596 27 1 53,731 50,791 50,791 2,941 2029 122,811 450	2030 15,035 1,627 - 19,449 596 27 1 36,736 52,010 - - - 52,010 (15,273) 2030 117,302 430	762,376 - 2031 14,315 1,743 - 33,167 596 27 1 49,850 47,910 - - 47,910 1,939 2031 187,191 686	2032 14,5 1,6 31,3 5 48,1 50,1 (1,9 2032 133,6
Outflow Outflow Storage Change GROUNDW Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Storage Change TOTAL BAS Flow Type Inflow Inflow Inflow Inflow Outflow Outf	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) IN WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Into Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow	777,411 - 2026 14,816 1,668 - 34,581 596 27 1 51,689 50,419 2026 169,078 620 657,649	764,153 - 2027 14,735 1,632 - 33,343 596 27 1 50,335 50,097 50,097 238 2027 181,223 664 631,029	1,219,334 - 2028 13,079 2,138 - 169,590 596 27 1 185,432 41,580 41,580 143,851 2028 223,561 819 1,061,564	2029 14,830 1,635 - 36,642 596 27 1 53,731 50,791 50,791 2,941 2029 122,811 450 701,971	2030 15,035 1,627 - 19,449 596 27 1 36,736 52,010 - - - 52,010 (15,273) 2030 117,302 430 332,242	762,376 - 2031 14,315 1,743 - 33,167 596 27 1 49,850 47,910 - - 47,910 1,939 2031 187,191 686 627,237	2032 14,5 1,6 31,3 5 48,1 50,1 (1,9 2032 133,6
Outflow Outflow Storage Change GROUNDW Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Storage Change TOTAL BAS Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Outfl	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) IN WATER BUDGET Origin/ Destination Into Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow	777,411 - 2026 14,816 1,668 - 34,581 596 27 1 51,689 50,419 50,419 1,270 2026 169,078 620 657,649 1	764,153 - 2027 14,735 1,632 - 33,343 596 27 1 50,335 50,097 50,097 238 2027 181,223 664 631,029 1	1,219,334 - 2028 13,079 2,138 - 169,590 596 27 1 185,432 41,580 41,580 143,851 2028 223,561 819 1,061,564 1	776,443 - 2029 14,830 1,635 - 36,642 596 27 1 53,731 50,791 50,791 2,941 2029 122,811 450 701,971 1	2030 15,035 1,627 - 19,449 596 27 1 36,736 52,010 52,010 (15,273) 2030 117,302 430 332,242 1	762,376 - 2031 14,315 1,743 - 33,167 596 27 1 49,850 47,910 47,910 1,939 2031 187,191 686 627,237 1	2032 14,5 1,6 31,3 5 48,1 50,1 (1,9 2032 133,6 4 588,2
Outflow Outflow Storage Change GROUNDW Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Storage Change TOTAL BAS Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Outfl	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) IN WATER BUDGET Origin/ Destination Into Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Subsurface Inflow	777,411 - 2026 14,816 1,668 - 34,581 596 27 1 51,689 50,419 50,419 1,270 2026 169,078 620 657,649 1 827,348	764,153 - 2027 14,735 1,632 - 33,343 596 27 1 50,335 50,097 50,097 238 2027 181,223 664 631,029 1 812,918	1,219,334 - 2028 13,079 2,138 - 169,590 596 27 1 185,432 41,580 41,580 143,851 2028 223,561 819 1,061,564 1 1,285,945	776,443 - 2029 14,830 1,635 - 36,642 596 27 1 53,731 50,791 50,791 2,941 2029 122,811 450 701,971 1 825,232	2030 15,035 1,627 - 19,449 596 27 1 36,736 52,010 52,010 (15,273) 2030 117,302 430 332,242 1 449,974	762,376 - 2031 14,315 1,743 - 33,167 596 27 1 49,850 47,910 47,910 1,939 2031 187,191 686 627,237 1 815,115	2032 14,5 1,6 31,3 5 48,1 50,1 (1,9 2032 133,6 4 588,2
Outflow Outflow Storage Change GROUNDW Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Storage Change TOTAL BAS Flow Type Inflow Inflow Inflow Inflow Outflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) IN WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Into Basin Into Basin Out of Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Evapotranspiration	2026 14,816 1,668 - 34,581 596 27 1 51,689 50,419 50,419 1,270 2026 169,078 620 657,649 1 827,348 169,456	764,153 - 2027 14,735 1,632 - 33,343 596 27 1 50,335 50,097 50,097 238 2027 181,223 664 631,029 1 812,918 167,624	1,219,334	2029 14,830 1,635 - 36,642 596 27 1 53,731 50,791 50,791 2,941 2029 122,811 450 701,971 1 825,232 168,714	2030 15,035 1,627 - 19,449 596 27 1 36,736 52,010 52,010 (15,273) 2030 117,302 430 332,242 1 449,974 170,424	762,376 - 2031 14,315 1,743 - 33,167 596 27 1 49,850 47,910 47,910 1,939 2031 187,191 686 627,237 1 815,115 167,439	2032 14,5 1,6 31,3 5 48,1 50,1 (1,9 2032 133,6 4 588,2
Outflow Outflow Storage Change GROUNDW Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Storage Change TOTAL BAS Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Outfl	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) IN WATER BUDGET Origin/ Destination Into Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Subsurface Inflow	777,411 - 2026 14,816 1,668 - 34,581 596 27 1 51,689 50,419 50,419 1,270 2026 169,078 620 657,649 1 827,348	764,153 - 2027 14,735 1,632 - 33,343 596 27 1 50,335 50,097 50,097 238 2027 181,223 664 631,029 1 812,918	1,219,334 - 2028 13,079 2,138 - 169,590 596 27 1 185,432 41,580 41,580 143,851 2028 223,561 819 1,061,564 1 1,285,945	776,443 - 2029 14,830 1,635 - 36,642 596 27 1 53,731 50,791 50,791 2,941 2029 122,811 450 701,971 1 825,232	2030 15,035 1,627 - 19,449 596 27 1 36,736 52,010 52,010 (15,273) 2030 117,302 430 332,242 1 449,974	762,376 - 2031 14,315 1,743 - 33,167 596 27 1 49,850 47,910 47,910 1,939 2031 187,191 686 627,237 1 815,115	2032 14,5 1,6 31,3 5 48,1 50,1 (1,9 2032 133,6 4 588,2
Outflow Outflow Storage Change GROUNDW Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Storage Change TOTAL BAS Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) IN WATER BUDGET Origin/ Destination Into Basin Out of Basin Out of Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Evapotranspiration Stream Evaporation	777,411 - 2026 14,816 1,668 - 34,581 596 27 1 51,689 50,419	764,153 - 2027 14,735 1,632 - 33,343 596 27 1 50,335 50,097 50,097 238 2027 181,223 664 631,029 1 812,918 167,624 429	1,219,334 - 2028 13,079 2,138 - 169,590 596 27 1 185,432 41,580 41,580 143,851 2028 223,561 819 1,061,564 1 1,285,945 169,093 404 759 48	776,443 - 2029 14,830 1,635 - 36,642 596 27 1 53,731 50,791 50,791 2,941 2029 122,811 450 701,971 1 825,232 168,714 432	2030 15,035 1,627 - 19,449 596 27 1 36,736 52,010 52,010 (15,273) 2030 117,302 430 332,242 449,974 170,424 439 840 52	762,376 - 2031 14,315 1,743 - 33,167 596 27 1 49,850 47,910 47,910 1,939 2031 187,191 686 627,237 1 815,115 167,439 423	2032 14,5 1,6 31,3 5 48,1 50,1 (1,9 2032 133,6 4 588,2 722,3 166,3
Outflow Outflow Storage Change GROUNDW Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Storage Change TOTAL BAS Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) IN WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Out of Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Subsurface Inflow Total Inflow Subsurface Inflow Total Inflow Evapotranspiration Reservoir Evaporation Conveyance Evaporation Stream Outflow Stream Outflow	777,411 - 2026 14,816 1,668 - 34,581 596 27 1 51,689 50,419 50,419 1,270 2026 169,078 620 657,649 1 827,348 169,456 433 822	764,153 - 2027 14,735 1,632 - 33,343 596 27 1 50,335 50,097 50,097 238 2027 181,223 664 631,029 1 812,918 167,624 429 814	1,219,334 2028 13,079 2,138 169,590 596 27 1 185,432 41,580 41,580 143,851 2028 223,561 819 1,061,564 1 1,285,945 169,093 404 759	2029 14,830 1,635 - 36,642 596 27 1 53,731 50,791 50,791 2,941 2029 122,811 450 701,971 1 825,232 168,714 432 820	2030 15,035 1,627 - 19,449 596 27 1 36,736 52,010 52,010 (15,273) 2030 117,302 430 332,242 1 449,974 170,424 439 840	762,376 - 2031 14,315 1,743 - 33,167 596 27 1 49,850 47,910 47,910 1,939 2031 187,191 686 627,237 1 815,115 167,439 423 806	2032 14,5 1,6 31,3 5 48,1 50,1 (1,9 2032 133,6 4 588,2 722,3 166,3
Outflow Outflow Storage Change GROUNDW Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Storage Change TOTAL BAS Flow Type Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow Inflow Inflow Inflow Inflow Inflow Outflow	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) IN WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Out of Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Subsurface Outflow Subsurface Outflow Subsurface Outflow	2026 14,816 1,668 - 34,581 596 27 1 51,689 50,419 50,419 1,270 2026 169,078 620 657,649 1 827,348 169,456 433 822 52 655,315	2027 14,735 1,632 - 33,343 596 27 1 50,335 50,097 50,097 238 2027 181,223 664 631,029 1 812,918 167,624 429 814 51 643,761	1,219,334 - 2028 13,079 2,138 - 169,590 596 27 1 185,432 41,580 41,580 143,851 2028 223,561 819 1,061,564 1 1,285,945 169,093 404 759 48 971,790	2029 14,830 1,635 - 36,642 596 27 1 53,731 50,791 50,791 2,941 2029 122,811 450 701,971 1 825,232 168,714 432 820 51 652,274	2030 15,035 1,627 - 19,449 596 27 1 36,736 52,010 52,010 (15,273) 2030 117,302 430 332,242 1 449,974 170,424 439 840 52 293,494 -	762,376 - 2031 14,315 1,743 - 33,167 596 27 1 49,850 47,910 - - 47,910 1,939 2031 187,191 686 627,237 1 815,115 167,439 423 806 51 644,456 -	2032 14,5 1,6 31,3 5 48,1 50,1 (1,9 2032 133,6 4 588,2 722,3 166,3
Outflow Outflow Storage Change GROUNDW Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Storage Change TOTAL BAS Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow	Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ATER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) IN WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Out of Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Subsurface Inflow Total Inflow Subsurface Inflow Total Inflow Evapotranspiration Reservoir Evaporation Conveyance Evaporation Stream Outflow Stream Outflow	777,411 - 2026 14,816 1,668 - 34,581 596 27 1 51,689 50,419	764,153 - 2027 14,735 1,632 - 33,343 596 27 1 50,335 50,097 50,097 238 2027 181,223 664 631,029 1812,918 167,624 429 814 51	1,219,334 - 2028 13,079 2,138 - 169,590 596 27 1 185,432 41,580 41,580 143,851 2028 223,561 819 1,061,564 1 1,285,945 169,093 404 759 48	2029 14,830 1,635 - 36,642 596 27 1 53,731 50,791 50,791 2,941 2029 122,811 450 701,971 1 825,232 168,714 432 820 51	2030 15,035 1,627 - 19,449 596 27 1 36,736 52,010 52,010 (15,273) 2030 117,302 430 332,242 449,974 170,424 439 840 52	762,376 - 2031 14,315 1,743 - 33,167 596 27 1 49,850 47,910 47,910 1,939 2031 187,191 686 627,237 1 815,115 167,439 423 806 51	2032 14,5 1,6 31,3 5 48,1

low Type	Origin/ Destination	Component	2033	2034	2035	2036	2037	2038	2039
Inflow	Into Basin	Precipitation on Land System	112,985	87,563	166,097	108,662	182,240	116,838	212,359
Inflow	Between Systems	Surface Water Delivery	82,916	85,651	80,321	84,772	81,197	84,997	79,509
Inflow	Between Systems	Groundwater Extraction	50,186	53,811	45,810	51,508	45,858	50,845	43,90
Inflow Outflow	(1)+(2)+(3) Out of Basin	Total Inflow Evapotranspiration	<i>246,087</i> 165,305	<i>227,025</i> 162,848	<i>292,228</i> 168,854	<i>244,942</i> 164,920	<i>309,296</i> 171,741	252,680 168,601	<i>335,77</i> 0
Outflow	Between Systems	Runoff	59,121	41,805	102,466	57,979	116,443	61,977	143,50
Outflow	Between Systems	Return Flow	5,644	6,060	5,140	5,794	5,143	5,716	4,91
Outflow	Between Systems	Recharge of Applied Water	14,401	14,939	13,860	14,728	13,995	14,740	13,67
Outflow	Between Systems	Recharge of Precipitation	1,616	1,373	1,909	1,520	1,974	1,646	2,066
Outflow Outflow	Between Systems (5)+(6)+(7)+(8)+(9)+(10)	Managed Aquifer Recharge Total Outflow	246,087	227,025	292,228	- 244,942	309,296	252,680	335,77
Storage	(4)-(11)	Change in Land System Storage	240,007	-	-	-	-	-	333,77
Change	(- / (/	change in Land System Storage							
SURFACE WAT	ER SYSTEM WATER BUDGET	1							
low Type	Origin/ Destination	Component	2033	2034	2035	2036	2037	2038	2039
Inflow	Into Basin	Stream Inflow	207,813	116,791	312,968	249,739	560,602	170,483	840,53
Inflow	Into Basin	Precipitation on Reservoirs	414 50 121	321	609	398	116 443	428 61 977	1/12 50
Inflow Inflow	Between Systems Between Systems	Runoff Return Flow	59,121 5,644	41,805 6,060	102,466 5,140	57,979 5,794	116,443 5,143	61,977 5,716	143,50 4,91
Inflow	Between Systems	Stream Gain from Groundwater	-	-	-	-	-	-	- 4,31
Inflow	Between Systems	Reservoir Gain from Groundwater	-	-	-	-	-	-	-
Inflow	(13)+(14)+(6)+(7)+(15)+(16)	Total Inflow	272,991	164,977	421,182	313,910	682,856	238,603	989,73
Outflow	Out of Basin	Stream Outflow	174,482	67,971	320,441	211,623	569,687	139,767	849,39
Outflow	Out of Basin	Conveyance Evaporation	49 27	49	50	50	51	51	5
Outflow Outflow	Between Systems Between Systems	Conveyance Seepage Surface Water Delivery	82,916	27 85,651	27 80,321	27 84,772	27 81,197	27 84,997	79,50
Outflow	Between Systems	Stream Loss to Groundwater	13,663	9,431	18,553	15,613	30,068	11,927	58,94
Outflow	Between Systems	Reservoir Loss to Groundwater	596	596	596	596	596	596	59
		Barrier of the Control of the Control	004	821	779	804	807	809	79
Outflow	Out of Basin	Reservoir Evaporation	831						
Outflow	Out of Basin	Stream Evaporation	427	431	413	425	422	429	
Outflow (18 Storage Change	Out of Basin 8)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25)	'				425 313,910 -	422 682,856 -	429 238,603 -	989,735 -
Outflow (18 Storage Change	Out of Basin 8)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ER SYSTEM WATER BUDGET	Stream Evaporation Total Outflow Change in Surface Water Storage	427 272,991 -	431 164,977	413 421,182 -	313,910	682,856 -	238,603 -	989,73.
Outflow (12 Storage Change GROUNDWAT	Out of Basin 8)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ER SYSTEM WATER BUDGET Origin/ Destination	Component	427 272,991 - 2033	431 164,977 - 2034	413 421,182 - 2035	313,910 - 2036	682,856	238,603	989,73. - 2039
Outflow (18 Storage Change	Out of Basin 8)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ER SYSTEM WATER BUDGET	Stream Evaporation Total Outflow Change in Surface Water Storage	427 272,991 -	431 164,977	413 421,182 -	313,910	682,856 -	238,603 -	989,73 - 2039 13,67
Outflow Outflow (18 Storage Change GROUNDWAT Flow Type Inflow Inflow Inflow Inflow	Out of Basin 8)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge	272,991 - 2033 14,401 1,616	2034 14,939 1,373	413 421,182 - 2035 13,860 1,909	2036 14,728 1,520	2037 13,995 1,974	238,603 - 2038 14,740 1,646	2039 13,67 2,06
Outflow Outflow Outflow Storage Change Change GROUNDWAT Flow Type Inflow Inflow Inflow Inflow Inflow	Out of Basin 8)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream	272,991 - 2033 14,401 1,616 - 13,663	2034 14,939 1,373 - 9,431	413 421,182 - 2035 13,860 1,909 - 18,553	2036 14,728 1,520 - 15,613	2037 13,995 1,974 - 30,068	238,603 - 2038 14,740 1,646 - 11,927	2039 13,67 2,06 - 58,94
Outflow Outflow Change Change GROUNDWAT Clow Type Inflow Inflow Inflow Inflow Inflow Inflow Inflow Inflow Inflow	Out of Basin 8)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ER SYSTEM WATER BUDGET Origin/ Destination Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir	272,991 - 2033 14,401 1,616 - 13,663 596	2034 14,939 1,373 - 9,431 596	413 421,182 - 2035 13,860 1,909 - 18,553 596	2036 14,728 1,520 - 15,613 596	2037 13,995 1,974 - 30,068 596	238,603 - 2038 14,740 1,646 - 11,927 596	2039 13,67 2,06 - 58,94 59
Outflow Outflow Outflow Storage Change Change GROUNDWAT Flow Type Inflow Inflow Inflow Inflow Inflow	Out of Basin 8)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream	272,991 - 2033 14,401 1,616 - 13,663	2034 14,939 1,373 - 9,431	413 421,182 - 2035 13,860 1,909 - 18,553	2036 14,728 1,520 - 15,613	2037 13,995 1,974 - 30,068	238,603 - 2038 14,740 1,646 - 11,927	2039 13,67 2,06 - 58,94 59 2
Outflow Outflow Change Change Change GROUNDWAT Flow Type Inflow	Out of Basin 8)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ER SYSTEM WATER BUDGET Origin/ Destination Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage	272,991 - 2033 14,401 1,616 - 13,663 596 27	2034 14,939 1,373 - 9,431 596 27	413 421,182 - 2035 13,860 1,909 - 18,553 596 27	2036 14,728 1,520 - 15,613 596 27	2037 13,995 1,974 - 30,068 596 27	238,603 - 2038 14,740 1,646 - 11,927 596 27	2039 13,67 2,06 - 58,94 59 2
Outflow Outflow Change Change Change GROUNDWAT Clow Type Inflow Outflow Outflow	Out of Basin 8)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Groundwater Extraction	2033 14,401 1,616 - 13,663 596 27 1 30,305 50,186	2034 14,939 1,373 - 9,431 596 27 1 26,367 53,811	413 421,182 - 2035 13,860 1,909 - 18,553 596 27 1 34,946 45,810	2036 14,728 1,520 - 15,613 596 27 1 32,486 51,508	2037 13,995 1,974 - 30,068 596 27 1 46,661 45,858	238,603 - 2038 14,740 1,646 - 11,927 596 27 1 28,938 50,845	2039 13,67 2,06 - 58,94 59 2 75,30 43,90
Outflow Outflow Change Change Change GROUNDWAT Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow	Out of Basin 8)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream	2033 14,401 1,616 - 13,663 596 27 1 30,305 50,186	2034 14,939 1,373 - 9,431 596 27 1 26,367 53,811	413 421,182 - 2035 13,860 1,909 - 18,553 596 27 1 34,946	2036 14,728 1,520 - 15,613 596 27 1 32,486 51,508	2037 13,995 1,974 - 30,068 596 27 1 46,661	238,603 - 2038 14,740 1,646 - 11,927 596 27 1 28,938	2039 13,67 2,06 5,94 59 2 75,30 43,90
Outflow Outflow Change Change Change GROUNDWAT Clow Type Inflow Outflow Outflow	Out of Basin 8)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir s	2033 14,401 1,616 - 13,663 596 27 1 30,305 50,186	2034 14,939 1,373 - 9,431 596 27 1 26,367 53,811	413 421,182 - 2035 13,860 1,909 - 18,553 596 27 1 34,946 45,810	2036 14,728 1,520 - 15,613 596 27 1 32,486 51,508	2037 13,995 1,974 - 30,068 596 27 1 46,661 45,858	238,603 - 2038 14,740 1,646 - 11,927 596 27 1 28,938 50,845	2039 13,67 2,06 - 58,94 59 2 75,30 43,90
Outflow Outflow Change Change GROUNDWAT Clow Type Inflow Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow	Out of Basin 8)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ER SYSTEM WATER BUDGET Origin/ Destination Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream	272,991 2033 14,401 1,616 - 13,663 596 27 1 30,305 50,186	2034 14,939 1,373 - 9,431 596 27 1 26,367 53,811 	413 421,182 - 2035 13,860 1,909 - 18,553 596 27 1 34,946 45,810	2036 14,728 1,520 - 15,613 596 27 1 32,486 51,508 -	2037 13,995 1,974 - 30,068 596 27 1 46,661 45,858	238,603 - 2038 14,740 1,646 - 11,927 596 27 1 28,938 50,845	2039 13,67 - 58,94 - 75,30 43,90
Outflow Outflow Outflow Change Change GROUNDWAT Clow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow	Out of Basin 8)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow	272,991 - 2033 14,401 1,616 - 13,663 596 27 1 30,305 50,186	2034 14,939 1,373 - 9,431 596 27 1 26,367 53,811	413 421,182 - 2035 13,860 1,909 - 18,553 596 27 1 34,946 45,810 - -	2036 14,728 1,520 - 15,613 596 27 1 32,486 51,508 - -	2037 13,995 1,974 - 30,068 596 27 1 46,661 45,858 - -	2038 14,740 1,646 - 11,927 596 27 1 28,938 50,845 -	2039 13,67 2,06 5,94 59 2 75,30 43,90
Outflow Outflow Change Change Change GROUNDWAT Clow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Storage Change	Out of Basin 8)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30)	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow	2033 14,401 1,616 - 13,663 596 27 1 30,305 50,186 50,186	2034 14,939 1,373 - 9,431 596 27 1 26,367 53,811 53,811	413 421,182 - 2035 13,860 1,909 - 18,553 596 27 1 34,946 45,810 - - 45,810	2036 14,728 1,520 - 15,613 596 27 1 32,486 51,508 - - - - 51,508	2037 13,995 1,974 - 30,068 596 27 1 46,661 45,858 45,858	238,603 - 2038 14,740 1,646 - 11,927 596 27 1 28,938 50,845 50,845	2039 13,67 2,06 58,94 59 2 75,30 43,90
Outflow Outflow Change Change Change GROUNDWAT Clow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Storage Change	Out of Basin 8)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29)	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow	2033 14,401 1,616 - 13,663 596 27 1 30,305 50,186 50,186	2034 14,939 1,373 - 9,431 596 27 1 26,367 53,811 53,811	413 421,182 - 2035 13,860 1,909 - 18,553 596 27 1 34,946 45,810 - - 45,810	2036 14,728 1,520 - 15,613 596 27 1 32,486 51,508 - - - - 51,508	2037 13,995 1,974 - 30,068 596 27 1 46,661 45,858 45,858	238,603 - 2038 14,740 1,646 - 11,927 596 27 1 28,938 50,845 50,845	2039 13,67 2,06 58,94 59 2 75,30 43,90
Outflow Outflow Outflow Storage Change GROUNDWAT Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow Coutflow Outflow Outflo	Out of Basin 8)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30)	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage	272,991 2033 14,401 1,616 - 13,663 596 27 1 30,305 50,186 - - 50,186 (19,881)	2034 14,939 1,373 - 9,431 596 27 1 26,367 53,811 53,811 (27,444)	413 421,182 - 2035 13,860 1,909 - 18,553 596 27 1 34,946 45,810 45,810 (10,864)	2036 14,728 1,520 - 15,613 596 27 1 32,486 51,508 - - - 51,508 (19,022)	2037 13,995 1,974 - 30,068 596 27 1 46,661 45,858 45,858 803	238,603 - 2038 14,740 1,646 - 11,927 596 27 1 28,938 50,845 50,845 (21,907)	2039 13,67 2,06 - 58,94 59 2 75,30 43,90 - - - 43,90 31,40
Outflow Outflow Outflow Storage Change GROUNDWAT Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Storage Change TOTAL BASIN V Inflow Inflow Inflow Inflow Inflow Outflow	Out of Basin 8)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ER SYSTEM WATER BUDGET Origin/ Destination Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs	272,991 2033 14,401 1,616 - 13,663 596 27 1 30,305 50,186 50,186 (19,881) 2033 112,985 414	2034 14,939 1,373 - 9,431 596 27 1 26,367 53,811 (27,444) 2034 87,563 321	413 421,182 - 2035 13,860 1,909 - 18,553 596 27 1 34,946 45,810 45,810 (10,864) 2035 166,097 609	2036 14,728 1,520 - 15,613 596 27 1 32,486 51,508 - - - 51,508 (19,022) 2036 108,662 398	2037 13,995 1,974 - 30,068 596 27 1 46,661 45,858 45,858 803 2037 182,240 668	238,603 - 2038 14,740 1,646 - 11,927 596 27 1 28,938 50,845 50,845 (21,907) 2038 116,838 428	2039 13,67 2,06 - 58,94 59 2 75,30 43,90 31,40 2039 212,35
Outflow Outflow Outflow Storage Change GROUNDWAT Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Storage Change TOTAL BASIN Inflow Inflow Inflow Inflow Inflow Outflow	Out of Basin 8)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ER SYSTEM WATER BUDGET Origin/ Destination Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Into Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow	272,991 2033 14,401 1,616 - 13,663 596 27 1 30,305 50,186 50,186 (19,881) 2033 112,985 414 207,813	2034 14,939 1,373 - 9,431 596 27 1 26,367 53,811 53,811 (27,444) 2034 87,563 321 116,791	413 421,182 - 2035 13,860 1,909 - 18,553 596 27 1 34,946 45,810 45,810 (10,864) 2035 166,097 609 312,968	2036 14,728 1,520 - 15,613 596 27 1 32,486 51,508 - - - 51,508 (19,022) 2036 108,662 398 249,739	2037 13,995 1,974 - 30,068 596 27 1 46,661 45,858 45,858 803 2037 182,240 668 560,602	238,603 - 2038 14,740 1,646 - 11,927 596 27 1 28,938 50,845 50,845 (21,907) 2038 116,838 428 170,483	2039 13,67 2,06 - 58,94 59 2 75,30 43,90 31,40 2039 212,35 77 840,53
Outflow Outflow Change Change Change GROUNDWAT Clow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Coutflow Outflow Outflow Storage Change TOTAL BASIN Inflow Inflow Inflow Inflow Inflow Outflow O	Out of Basin 8)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ER SYSTEM WATER BUDGET Origin/ Destination Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) WATER BUDGET Origin/ Destination Into Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Sain Groundwater Storage Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow	2033 14,401 1,616 - 13,663 596 27 1 30,305 50,186 50,186 (19,881) 2033 112,985 414 207,813 1	431 164,977 - 2034 14,939 1,373 - 9,431 596 27 1 26,367 53,811 53,811 (27,444) 2034 87,563 321 116,791 1	413 421,182 2035 13,860 1,909 - 18,553 596 27 1 34,946 45,810 45,810 (10,864) 2035 166,097 609 312,968 1	2036 14,728 1,520 - 15,613 596 27 1 32,486 51,508 51,508 (19,022) 2036 108,662 398 249,739 1	2037 13,995 1,974 - 30,068 596 27 1 46,661 45,858 45,858 803 2037 182,240 668 560,602 1	238,603 - 2038 14,740 1,646 - 11,927 596 27 1 28,938 50,845 50,845 (21,907) 2038 116,838 428 170,483 1	2039 13,67 2,06 - 58,94 59 2 75,30 43,90 43,90 31,40 2039 212,35 77 840,53
Outflow Outflow Change Change Change GROUNDWAT Clow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Coutflow Outflow Outflow Storage Change TOTAL BASIN Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow Inflow	Out of Basin 8)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ER SYSTEM WATER BUDGET Origin/ Destination Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) WATER BUDGET Origin/ Destination Into Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow	2033 14,401 1,616 - 13,663 596 27 1 30,305 50,186 50,186 (19,881) 2033 112,985 414 207,813 1 321,212	2034 14,939 1,373 - 9,431 596 27 1 26,367 53,811 53,811 (27,444) 2034 87,563 321 116,791 1 204,676	413 421,182 2035 13,860 1,909 - 18,553 596 27 1 34,946 45,810 45,810 (10,864) 2035 166,097 609 312,968 1 479,674	2036 14,728 1,520 - 15,613 596 27 1 32,486 51,508 51,508 (19,022) 2036 108,662 398 249,739 1 358,800	2037 13,995 1,974 - 30,068 596 27 1 46,661 45,858 45,858 803 2037 182,240 668 560,602 1 743,511	238,603 - 2038 14,740 1,646 - 11,927 596 27 1 28,938 50,845 50,845 (21,907) 2038 116,838 428 170,483 1 287,749	2039 13,67 2,06 - 58,94 59 2 75,30 43,90 43,90 31,40 2039 212,35 77 840,53
Outflow Outflow Change Change Change GROUNDWAT Clow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Coutflow Outflow Outflow Storage Change TOTAL BASIN Inflow Inflow Inflow Inflow Inflow Outflow O	Out of Basin 8)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ER SYSTEM WATER BUDGET Origin/ Destination Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) WATER BUDGET Origin/ Destination Into Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Frecipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Evapotranspiration	2033 14,401 1,616 - 13,663 596 27 1 30,305 50,186 50,186 (19,881) 2033 112,985 414 207,813 1	431 164,977 - 2034 14,939 1,373 - 9,431 596 27 1 26,367 53,811 53,811 (27,444) 2034 87,563 321 116,791 1	413 421,182 2035 13,860 1,909 - 18,553 596 27 1 34,946 45,810 45,810 (10,864) 2035 166,097 609 312,968 1	2036 14,728 1,520 - 15,613 596 27 1 32,486 51,508 51,508 (19,022) 2036 108,662 398 249,739 1	2037 13,995 1,974 - 30,068 596 27 1 46,661 45,858 45,858 803 2037 182,240 668 560,602 1	238,603 - 2038 14,740 1,646 - 11,927 596 27 1 28,938 50,845 50,845 (21,907) 2038 116,838 428 170,483 1	2039 13,67 2,06 - 58,94 59 2 75,30 43,90 43,90 31,40 2039 212,35 77 840,53
Outflow Outflow Change Change Change Change GROUNDWAT Clow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Change Change TOTAL BASIN N Clow Type Inflow Inflow Inflow Outflow Inflow Inflow Inflow Outflow Outflow	Out of Basin 8)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) WATER BUDGET Origin/ Destination Into Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow	2033 14,401 1,616 - 13,663 596 27 1 30,305 50,186 50,186 (19,881) 2033 112,985 414 207,813 1 321,212 165,305	431 164,977 - 2034 14,939 1,373 - 9,431 596 27 1 26,367 53,811 53,811 (27,444) 2034 87,563 321 116,791 1 204,676 162,848	413 421,182 2035 13,860 1,909 - 18,553 596 27 1 34,946 45,810 45,810 (10,864) 2035 166,097 609 312,968 1 479,674 168,854	2036 14,728 1,520 - 15,613 596 27 1 32,486 51,508 51,508 (19,022) 2036 108,662 398 249,739 1 358,800 164,920	2037 13,995 1,974 - 30,068 596 27 1 46,661 45,858 45,858 803 2037 182,240 668 560,602 1 743,511 171,741	238,603 - 2038 14,740 1,646 - 11,927 596 27 1 28,938 50,845 50,845 (21,907) 2038 116,838 428 170,483 1 287,749 168,601	2039 13,67 2,06 58,94 59 2 75,30 43,90 43,90 31,40 2039 212,35 77 840,53
Outflow Outflow Outflow Outflow Storage Change GROUNDWAT Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Inflow Inflow Inflow Inflow Outflow	Out of Basin 8)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (3)+(9)+(10)+(21)+(2)+(20)+(27) Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Out of Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Evapotranspiration Stream Evaporation Reservoir Evaporation Conveyance Evaporation	2033 14,401 1,616 - 13,663 596 27 1 30,305 50,186 50,186 (19,881) 2033 112,985 414 207,813 1 321,212 165,305 427 831 49	431 164,977 - 2034 14,939 1,373 - 9,431 596 27 1 26,367 53,811 53,811 (27,444) 2034 87,563 321 116,791 1 204,676 162,848 431 821 49	413 421,182 2035 13,860 1,909 - 18,553 596 27 1 34,946 45,810 45,810 (10,864) 2035 166,097 609 312,968 1 479,674 168,854 413 779 50	2036 14,728 1,520 - 15,613 596 27 1 32,486 51,508 51,508 (19,022) 2036 108,662 398 249,739 1 358,800 164,920 425 804 50	2037 13,995 1,974 - 30,068 596 27 1 46,661 45,858 803 2037 182,240 668 560,602 1 743,511 171,741 422 807 51	238,603 - 2038 14,740 1,646 - 11,927 596 27 1 28,938 50,845 50,845 (21,907) 2038 116,838 428 170,483 1 287,749 168,601 429 809 51	2039 13,67 2,06 58,94 59 2 75,30 43,90 43,90 31,40 2039 212,35 840,53
Outflow Outflow Outflow Outflow Storage Change GROUNDWAT Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow	Out of Basin 8)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Out of Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Subsurface Inflow Precipitation on Reservoirs Stream Inflow Subsurface Inflow Subsurface Inflow Fotal Inflow Subsurface Inflow Subsurface Inflow Subsurface Inflow Subsurface Inflow Evapotranspiration Stream Evaporation Conveyance Evaporation Stream Outflow	2033 14,401 1,616 - 13,663 596 27 1 30,305 50,186 50,186 (19,881) 2033 112,985 414 207,813 1 321,212 165,305 427 831	431 164,977 - 2034 14,939 1,373 - 9,431 596 27 1 26,367 53,811 - - 53,811 (27,444) 2034 87,563 321 116,791 1 204,676 162,848 431 821	413 421,182 2035 13,860 1,909 - 18,553 596 27 1 34,946 45,810 45,810 (10,864) 2035 166,097 609 312,968 1 479,674 168,854 413 779	2036 14,728 1,520 - 15,613 596 27 1 32,486 51,508 51,508 (19,022) 2036 108,662 398 249,739 1 358,800 164,920 425 804	2037 13,995 1,974 - 30,068 596 27 1 46,661 45,858 45,858 803 2037 182,240 668 560,602 1 743,511 171,741 422 807	238,603 - 2038 14,740 1,646 - 11,927 596 27 1 28,938 50,845 50,845 (21,907) 2038 116,838 428 170,483 1 287,749 168,601 429 809	2039 13,67 2,06 - 58,94 59 2 75,30 43,90 31,40 2039 212,35
Outflow Outflow Outflow Outflow Storage Change GROUNDWAT Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Inflow Inflow Inflow Inflow Outflow	Out of Basin 8)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) ER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (3)+(9)+(10)+(21)+(2)+(20)+(27) Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Out of Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Evapotranspiration Stream Evaporation Reservoir Evaporation Conveyance Evaporation	2033 14,401 1,616 - 13,663 596 27 1 30,305 50,186 50,186 (19,881) 2033 112,985 414 207,813 1 321,212 165,305 427 831 49	431 164,977 - 2034 14,939 1,373 - 9,431 596 27 1 26,367 53,811 53,811 (27,444) 2034 87,563 321 116,791 1 204,676 162,848 431 821 49	413 421,182 2035 13,860 1,909 - 18,553 596 27 1 34,946 45,810 45,810 (10,864) 2035 166,097 609 312,968 1 479,674 168,854 413 779 50	2036 14,728 1,520 - 15,613 596 27 1 32,486 51,508 51,508 (19,022) 2036 108,662 398 249,739 1 358,800 164,920 425 804 50	2037 13,995 1,974 - 30,068 596 27 1 46,661 45,858 803 2037 182,240 668 560,602 1 743,511 171,741 422 807 51	238,603 - 2038 14,740 1,646 - 11,927 596 27 1 28,938 50,845 50,845 (21,907) 2038 116,838 428 170,483 1 287,749 168,601 429 809 51	2039 13,67 2,06 58,94 59 2 75,30 43,90 43,90 31,40 2039 212,35 7840,53

Flow Type	Origin/ Destination	Component	2040	2041	2042	2043	2044	2045	2046
Inflow	Into Basin	Precipitation on Land System	194,896	150,631	141,993	197,252	96,916	93,605	146,583
Inflow	Between Systems	Surface Water Delivery	78,633	71,640	78,677	77,256	81,529	88,716	75,392
Inflow Inflow	Between Systems (1)+(2)+(3)	Groundwater Extraction Total Inflow	43,464 316,993	41,156 263,426	46,349 267,019	43,597 318,105	49,524 227,969	54,803 237,125	43,509 265,484
Outflow	Out of Basin	Evapotranspiration	170,100	151,307	158,063	165,533	159,191	165,244	154,639
Outflow	Between Systems	Runoff	126,445	93,403	88,518	132,419	47,560	48,932	91,271
Outflow	Between Systems	Return Flow	4,870	4,617	5,206	4,889	5,570	6,169	4,883
Outflow Outflow	Between Systems Between Systems	Recharge of Applied Water Recharge of Precipitation	13,524 2,054	12,382 1,717	13,627 1,604	13,319 1,945	14,168 1,481	15,439 1,340	13,032 1,659
Outflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-	-
Outflow	(5)+(6)+(7)+(8)+(9)+(10)	Total Outflow	316,993	263,426	267,019	318,105	227,969	237,125	265,484
Storage Change	(4)-(11)	Change in Land System Storage	-	-	-	-	-	-	-
SURFACE W	/ATER SYSTEM WATER BUDGET								
Flow Type	Origin/ Destination	Component	2040	2041	2042	2043	2044	2045	2046
Inflow	Into Basin	Stream Inflow	727,089	878,808	337,563	890,868	170,896	171,875	421,974
Inflow	Into Basin	Precipitation on Reservoirs	714	552	520	723	355	343	537
Inflow Inflow	Between Systems Between Systems	Runoff Return Flow	126,445 4,870	93,403 4,617	88,518 5,206	132,419 4,889	47,560 5,570	48,932 6,169	91,271 4,883
Inflow	Between Systems	Stream Gain from Groundwater	-	-	-	-	-	-	-,003
Inflow	Between Systems	Reservoir Gain from Groundwater	-	-	-	-	-	-	-
Inflow Outflow	(13)+(14)+(6)+(7)+(15)+(16) Out of Basin	Total Inflow Stream Outflow	859,118 740,802	<i>977,381</i> 831,518	<i>431,808</i> 331,578	###### 872,619	224,381 129,071	<i>227,319</i> 124,699	518,665 417,877
Outflow	Out of Basin	Conveyance Evaporation	49	46	48	47	47	52	417,877
Outflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27	27
Outflow	Between Systems	Surface Water Delivery	78,633	71,640	78,677	77,256	81,529	88,716	75,392
Outflow Dutflow	Between Systems Between Systems	Stream Loss to Groundwater Reservoir Loss to Groundwater	37,810 596	72,494 596	19,697 596	77,195 596	11,947 596	11,992 596	23,622 596
Outflow	Out of Basin	Reservoir Evaporation	789	691	781	754	758	802	720
Outflow	Out of Basin	Stream Evaporation	412	368	404	403	405	433	384
Outflow Storage	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24)	Total Outflow	859,118	977,381	431,808	#######	224,381	227,319	518,665
Change	(17)-(25)	Change in Surface Water Storage	-	-	-	-	-	-	-
GROUNDW	ATER SYSTEM WATER BUDGET								
Flow Type	Origin/ Destination	Component	2040	2041	2042	2043	2044	2045	2046
Inflow	Between Systems	Recharge of Applied Water	13,524	12,382	13,627	13,319	14,168	15,439	13,032
Inflow Inflow	Between Systems Between Systems	Recharge of Applied Water Recharge of Precipitation							
Inflow	Between Systems	Recharge of Applied Water	13,524 2,054	12,382	13,627 1,604	13,319 1,945	14,168 1,481	15,439	13,032 1,659
Inflow Inflow Inflow Inflow	Between Systems Between Systems Between Systems Between Systems Between Systems	Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir	13,524 2,054 - 37,810 596	12,382 1,717 - 72,494 596	13,627 1,604 - 19,697 596	13,319 1,945 - 77,195 596	14,168 1,481 - 11,947 596	15,439 1,340 - 11,992 596	13,032 1,659 - 23,622 596
Inflow Inflow Inflow Inflow Inflow	Between Systems	Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage	13,524 2,054 - 37,810 596 27	12,382 1,717 - 72,494 596 27	13,627 1,604 - 19,697 596 27	13,319 1,945 - 77,195 596 27	14,168 1,481 - 11,947 596 27	15,439 1,340 - 11,992 596 27	13,032 1,659 - 23,622 596 27
Inflow Inflow Inflow Inflow	Between Systems Between Systems Between Systems Between Systems Between Systems	Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir	13,524 2,054 - 37,810 596	12,382 1,717 - 72,494 596	13,627 1,604 - 19,697 596	13,319 1,945 - 77,195 596	14,168 1,481 - 11,947 596	15,439 1,340 - 11,992 596	13,032 1,659 - 23,622 596 27
Inflow Inflow Inflow Inflow Inflow Inflow Inflow Inflow	Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin	Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow	13,524 2,054 - 37,810 596 27	12,382 1,717 - 72,494 596 27	13,627 1,604 - 19,697 596 27	13,319 1,945 - 77,195 596 27	14,168 1,481 - 11,947 596 27	15,439 1,340 - 11,992 596 27	13,032 1,659 - 23,622 596
Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow	Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems	Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream	13,524 2,054 - 37,810 596 27 1 54,012 43,464	12,382 1,717 - 72,494 596 27 1 87,217 41,156	13,627 1,604 - 19,697 596 27 1 35,553 46,349	13,319 1,945 - 77,195 596 27 1 93,084 43,597	14,168 1,481 - 11,947 596 27 1 28,220 49,524	15,439 1,340 - 11,992 596 27 1 29,396 54,803	13,032 1,659 - 23,622 596 27 1 38,938 43,509
Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow	Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems	Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir s	13,524 2,054 - 37,810 596 27 1 54,012 43,464	12,382 1,717 - 72,494 596 27 1 87,217 41,156	13,627 1,604 - 19,697 596 27 1 35,553 46,349	13,319 1,945 - 77,195 596 27 1 93,084 43,597	14,168 1,481 - 11,947 596 27 1 28,220 49,524	15,439 1,340 - 11,992 596 27 1 29,396 54,803	13,032 1,659 - 23,622 596 27 1 38,938 43,509
Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow	Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems	Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream	13,524 2,054 - 37,810 596 27 1 54,012 43,464 -	12,382 1,717 - 72,494 596 27 1 87,217 41,156 -	13,627 1,604 - 19,697 596 27 1 35,553 46,349 -	13,319 1,945 - 77,195 596 27 1 93,084 43,597 -	14,168 1,481 - 11,947 596 27 1 28,220 49,524	15,439 1,340 - 11,992 596 27 1 29,396 54,803	13,032 1,659 - 23,622 596 27 1 38,938 43,509 -
Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow	Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin	Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow	13,524 2,054 - 37,810 596 27 1 54,012 43,464 - -	12,382 1,717 - 72,494 596 27 1 87,217 41,156 - -	13,627 1,604 - 19,697 596 27 1 35,553 46,349 - -	13,319 1,945 - 77,195 596 27 1 93,084 43,597 - -	14,168 1,481 - 11,947 596 27 1 28,220 49,524 - -	15,439 1,340 - 11,992 596 27 1 29,396 54,803 - -	13,032 1,659 - 23,622 596 27 1 38,938 43,509 - -
Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Coutflow Outflow Outflow Coutflow Outflow Outflow	Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29)	Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow	13,524 2,054 - 37,810 596 27 1 54,012 43,464 43,464	12,382 1,717 - 72,494 596 27 1 87,217 41,156 - - 41,156	13,627 1,604 - 19,697 596 27 1 35,553 46,349 - - 46,349	13,319 1,945 - 77,195 596 27 1 93,084 43,597 43,597	14,168 1,481 - 11,947 596 27 1 28,220 49,524 - - - 49,524	15,439 1,340 - 11,992 596 27 1 29,396 54,803 - - 54,803	13,032 1,659 - 23,622 596 27 1 38,938 43,509 - - 43,509
Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Coutflow Outflow	Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30)	Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow	13,524 2,054 - 37,810 596 27 1 54,012 43,464 43,464	12,382 1,717 - 72,494 596 27 1 87,217 41,156 - - 41,156	13,627 1,604 - 19,697 596 27 1 35,553 46,349 - - 46,349	13,319 1,945 - 77,195 596 27 1 93,084 43,597 43,597	14,168 1,481 - 11,947 596 27 1 28,220 49,524 - - - 49,524	15,439 1,340 - 11,992 596 27 1 29,396 54,803 - - 54,803	13,032 1,659 - 23,622 596 27 1 38,938 43,509
Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow Storage Change TOTAL BAS	Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) IN WATER BUDGET Origin/ Destination Into Basin	Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System	13,524 2,054 - 37,810 596 27 1 54,012 43,464 43,464 10,548	12,382 1,717 - 72,494 596 27 1 87,217 41,156 - - 41,156 46,061	13,627 1,604 - 19,697 596 27 1 35,553 46,349 - - 46,349 (10,796)	13,319 1,945 - 77,195 596 27 1 93,084 43,597 43,597 49,487	14,168 1,481 - 11,947 596 27 1 28,220 49,524 49,524 (21,304)	15,439 1,340 - 11,992 596 27 1 29,396 54,803 - - 54,803 (25,407)	13,032 1,659 - 23,622 596 27 1 38,938 43,509 - - 43,509 (4,571)
Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Storage Change TOTAL BAS Flow Type Inflow Inflow	Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) IN WATER BUDGET Origin/ Destination Into Basin Into Basin	Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs	13,524 2,054 - 37,810 596 27 1 54,012 43,464 43,464 10,548 2040 194,896 714	12,382 1,717 - 72,494 596 27 1 87,217 41,156 - - 41,156 46,061 2041 150,631 552	13,627 1,604 - 19,697 596 27 1 35,553 46,349 - - 46,349 (10,796)	13,319 1,945 - 77,195 596 27 1 93,084 43,597 43,597 49,487	14,168 1,481 - 11,947 596 27 1 28,220 49,524 49,524 (21,304) 2044 96,916 355	15,439 1,340 - 11,992 596 27 1 29,396 54,803 - - 54,803 (25,407) 2045 93,605 343	13,032 1,659 - 23,622 596 27 1 38,938 43,509 - - - 43,509 (4,571) 2046 146,583 537
Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow Ottlow Outflow Ottlow Outflow	Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) IN WATER BUDGET Origin/ Destination Into Basin	Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System	13,524 2,054 - 37,810 596 27 1 54,012 43,464 43,464 10,548	12,382 1,717 - 72,494 596 27 1 87,217 41,156 - - 41,156 46,061	13,627 1,604 - 19,697 596 27 1 35,553 46,349 - - 46,349 (10,796)	13,319 1,945 - 77,195 596 27 1 93,084 43,597 43,597 49,487	14,168 1,481 - 11,947 596 27 1 28,220 49,524 49,524 (21,304)	15,439 1,340 - 11,992 596 27 1 29,396 54,803 - - 54,803 (25,407)	13,032 1,659 - 23,622 596 27 1 38,938 43,509 - - 43,509 (4,571)
Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Storage Change IOTAL BAS Iow Type Inflow	Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) IN WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin	Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow	13,524 2,054 - 37,810 596 27 1 54,012 43,464 43,464 10,548 2040 194,896 714 727,089	12,382 1,717 - 72,494 596 27 1 87,217 41,156 - - - 41,156 46,061 2041 150,631 552 878,808	13,627 1,604 - 19,697 596 27 1 35,553 46,349 - - - 46,349 (10,796) 2042 141,993 520 337,563	13,319 1,945 - 77,195 596 27 1 93,084 43,597 43,597 49,487 2043 197,252 723 890,868	14,168 1,481 - 11,947 596 27 1 28,220 49,524 49,524 (21,304) 2044 96,916 355 170,896	15,439 1,340 - 11,992 596 27 1 29,396 54,803 54,803 (25,407) 2045 93,605 343 171,875	13,032 1,659 - 23,622 596 27 1 38,938 43,509 - - - 43,509 (4,571) 2046 146,583 537 421,974
Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Storage Change Inflow Inflow Inflow Outflow Inflow Inflow Outflow Outflow	Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) IN WATER BUDGET Origin/ Destination Into Basin Out of Basin Into Basin	Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Evapotranspiration	13,524 2,054 - 37,810 596 27 1 54,012 43,464 43,464 10,548 2040 194,896 714 727,089 1 922,700 170,100	12,382 1,717 - 72,494 596 27 1 87,217 41,156 41,156 46,061 2041 150,631 552 878,808 1 ####### 151,307	13,627 1,604 - 19,697 596 27 1 35,553 46,349 46,349 (10,796) 2042 141,993 520 337,563 1 480,077 158,063	13,319 1,945 - 77,195 596 27 1 93,084 43,597 43,597 49,487 2043 197,252 723 890,868 1 ####### 165,533	14,168 1,481 - 11,947 596 27 1 28,220 49,524 49,524 (21,304) 2044 96,916 355 170,896 1 268,168 159,191	15,439 1,340 - 11,992 596 27 1 29,396 54,803 54,803 (25,407) 2045 93,605 343 171,875 1 265,823 165,244	13,032 1,659 - 23,622 596 27 1 38,938 43,509 - - - 43,509 (4,571) 2046 146,583 537 421,974 1 569,095 154,639
Inflow Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Storage Change TOTAL BAS Flow Type Inflow Outflow	Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) IN WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Into Basin Out of Basin Out of Basin	Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Evapotranspiration Stream Evaporation	13,524 2,054 - 37,810 596 27 1 54,012 43,464 43,464 10,548 2040 194,896 714 727,089 1 922,700 170,100 412	12,382 1,717 - 72,494 596 27 1 87,217 41,156 41,156 46,061 2041 150,631 552 878,808 1 ####### 151,307 368	13,627 1,604 - 19,697 596 27 1 35,553 46,349 46,349 (10,796) 2042 141,993 520 337,563 1 480,077 158,063 404	13,319 1,945 - 77,195 596 27 1 93,084 43,597 43,597 49,487 2043 197,252 723 890,868 1 ####### 165,533 403	14,168 1,481 - 11,947 596 27 1 28,220 49,524 49,524 (21,304) 2044 96,916 355 170,896 1 268,168 159,191 405	15,439 1,340 - 11,992 596 27 1 29,396 54,803 54,803 (25,407) 2045 93,605 343 171,875 1 265,823 165,244 433	13,032 1,659 - 23,622 596 27 1 38,938 43,509 - - - 43,509 (4,571) 2046 146,583 537 421,974 1 569,095 154,639 384
Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Total BAS Flow Type Inflow	Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) IN WATER BUDGET Origin/ Destination Into Basin Out of Basin Into Basin	Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Evapotranspiration	13,524 2,054 - 37,810 596 27 1 54,012 43,464 43,464 10,548 2040 194,896 714 727,089 1 922,700 170,100	12,382 1,717 - 72,494 596 27 1 87,217 41,156 41,156 46,061 2041 150,631 552 878,808 1 ####### 151,307	13,627 1,604 - 19,697 596 27 1 35,553 46,349 46,349 (10,796) 2042 141,993 520 337,563 1 480,077 158,063	13,319 1,945 - 77,195 596 27 1 93,084 43,597 43,597 49,487 2043 197,252 723 890,868 1 ####### 165,533	14,168 1,481 - 11,947 596 27 1 28,220 49,524 49,524 (21,304) 2044 96,916 355 170,896 1 268,168 159,191	15,439 1,340 - 11,992 596 27 1 29,396 54,803 54,803 (25,407) 2045 93,605 343 171,875 1 265,823 165,244	13,032 1,659 - 23,622 596 27 1 38,938 43,509 - - - 43,509 (4,571) 2046 146,583 537 421,974 1 569,095
Inflow Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Storage Change TOTAL BAS Inflow Inflow Inflow Inflow Inflow Inflow Outflow	Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) IN WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Out of Basin	Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Evapotranspiration Stream Evaporation Reservoir Evaporation Conveyance Evaporation Stream Outflow	13,524 2,054 - 37,810 596 27 1 54,012 43,464 43,464 10,548 2040 194,896 714 727,089 1 922,700 170,100 412 789	12,382 1,717 - 72,494 596 27 1 87,217 41,156 41,156 46,061 2041 150,631 552 878,808 1 ###### 151,307 368 691 46 831,518	13,627 1,604 - 19,697 596 27 1 35,553 46,349 46,349 (10,796) 2042 141,993 520 337,563 1 480,077 158,063 404 781	13,319 1,945 - 77,195 596 27 1 93,084 43,597 43,597 49,487 2043 197,252 723 890,868 1 ####### 165,533 403 754 47 872,619	14,168 1,481 - 11,947 596 27 1 28,220 49,524 49,524 (21,304) 2044 96,916 355 170,896 1 268,168 159,191 405 758 47 129,071	15,439 1,340 - 11,992 596 27 1 29,396 54,803 54,803 (25,407) 2045 93,605 343 171,875 1 265,823 165,244 433 802	13,032 1,659 - 23,622 596 27 1 38,938 43,509 43,509 (4,571) 2046 146,583 537 421,974 1 569,095 154,639 384 720
Inflow Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Storage Change INFLOW Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow Inflow Inflow Inflow Outflow	Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) IN WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Out of Basin	Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Evapotranspiration Stream Evaporation Reservoir Evaporation Conveyance Evaporation	13,524 2,054 - 37,810 596 27 1 54,012 43,464 43,464 10,548 2040 194,896 714 727,089 1 922,700 170,100 412 789 49	12,382 1,717 - 72,494 596 27 1 87,217 41,156 41,156 46,061 2041 150,631 552 878,808 1 ####### 151,307 368 691 46	13,627 1,604 - 19,697 596 27 1 35,553 46,349 46,349 (10,796) 2042 141,993 520 337,563 1 480,077 158,063 404 781 48	13,319 1,945 - 77,195 596 27 1 93,084 43,597 43,597 49,487 2043 197,252 723 890,868 1 ####### 165,533 403 754 47	14,168 1,481 - 11,947 596 27 1 28,220 49,524 49,524 (21,304) 2044 96,916 355 170,896 1 268,168 159,191 405 758 47	15,439 1,340 - 11,992 596 27 1 29,396 54,803 54,803 (25,407) 2045 93,605 343 171,875 1 265,823 165,244 433 802 52	13,032 1,659 - 23,622 596 27 1 38,938 43,509 - - 43,509 (4,571) 2046 146,583 537 421,974 1 569,095 154,639 384 720

Storage

Change

(32)-(33)

Change in Total System Storage

10,548

46,061

(10,796)

49,487

(21,304)

(25,44717

(4,571)

low Type	Origin/ Destination	Component	2047	2048	2049	2050	2051	2052	20
Inflow	Into Basin	Precipitation on Land System	112,828	109,588	75,064	225,757	109,477	199,671	205
Inflow	Between Systems	Surface Water Delivery	75,481	81,148	86,327	75,721	83,120	71,972	76
Inflow	Between Systems	Groundwater Extraction	44,408	49,085	54,406	39,876	50,096	39,618	44
Inflow	(1)+(2)+(3)	Total Inflow	232,717	239,821	215,797	341,355	242,692	311,261	325
Outflow	Out of Basin	Evapotranspiration	153,467	158,670	160,652	175,368	165,364	154,317	164
Outflow Outflow	Between Systems	Runoff	59,591	60,050	32,684	146,180	55,652	138,285	14:
Outflow	Between Systems Between Systems	Return Flow Recharge of Applied Water	4,988 13,076	5,520 14,095	6,128 15,061	4,458 12,961	5,633 14,429	4,437 12,381	13
Outflow	Between Systems	Recharge of Precipitation	1,597	1,486	1,271	2,387	1,615	1,842	-
Outflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-	
Outflow	(5)+(6)+(7)+(8)+(9)+(10)	Total Outflow	232,717	239,821	215,797	341,355	242,692	311,261	325
Storage Change	(4)-(11)	Change in Land System Storage	-	-	-	-	-	-	
	ATER SYSTEM WATER BUDGET	Commonant	2047	2048	2040	2050	2051	2052	20
low Type	Origin/ Destination Into Basin	Component Stream Inflow	2047 136,845	2048 266,826	2049 77,677	2050 639,443	2051 168,796	2052 939,201	83
Inflow	Into Basin	Precipitation on Reservoirs	413	402	275	827	401	732	030
Inflow	Between Systems	Runoff	59,591	60,050	32,684	146,180	55,652	138,285	14:
Inflow	Between Systems	Return Flow	4,988	5,520	6,128	4,458	5,633	4,437	4
Inflow	Between Systems	Stream Gain from Groundwater	-	-	-	-	-	-	
Inflow	Between Systems	Reservoir Gain from Groundwater	-	-	-	-	-	-	
Inflow	(13)+(14)+(6)+(7)+(15)+(16)	Total Inflow	201,836	332,797	116,764	790,908	230,482	1,082,654	98
Outflow	Out of Basin	Stream Outflow	114,222	233,452	20,949	679,625	133,636	910,698	848
Outflow	Out of Basin	Conveyance Evaporation	46	49	50	50	51	46	
Outflow Outflow	Between Systems Between Systems	Conveyance Seepage Surface Water Delivery	75,481	27 81,148	27 86,327	75,721	83,120	27 71,972	70
Outflow	Between Systems	Stream Loss to Groundwater	10,363	16,407	7,612	33,734	11,849	98,262	58
Outflow	Between Systems	Reservoir Loss to Groundwater	596	596	596	596	596	596	
Outflow	Out of Basin	Reservoir Evaporation	719	720	781	752	785	682	
					424	402	440	271	
Outflow	Out of Basin	Stream Evaporation	381	397	421	402	418	371	
Outflow (Out of Basin (18)+(19)+(20)+(2)+(21)+(22)+(23)+(24)	Stream Evaporation Total Outflow	381 201,836	397 332,797	116,764	790,908	230,482	1,082,654	98.
Outflow (Storage Change		·							985
Outflow (Storage Change	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25)	Total Outflow							
Outflow (Storage Change	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET	Total Outflow Change in Surface Water Storage	201,836	332,797	116,764 -	790,908 -	230,482	1,082,654 -	20
Outflow (Storage Change GROUNDWA	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination	Total Outflow Change in Surface Water Storage Component	201,836	332,797	116,764	790,908	230,482	1,082,654 - 2052	20
Outflow (Storage Change GROUNDWA Iow Type Inflow Inflow Inflow Inflow Inflow Inflow	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems	Total Outflow Change in Surface Water Storage Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge	201,836 - 2047 13,076 1,597	2048 14,095 1,486	2049 15,061 1,271	790,908 - 2050 12,961 2,387 -	230,482 - 2051 14,429 1,615	2052 12,381 1,842	20
Outflow (Storage Change	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream	201,836 - 2047 13,076 1,597 - 10,363	2048 14,095 1,486 - 16,407	2049 15,061 1,271 - 7,612	790,908 - 2050 12,961 2,387 - 33,734	230,482 - 2051 14,429 1,615 - 11,849	2052 12,381 1,842 - 98,262	20
Outflow (Storage Change GROUNDWA Iow Type Inflow	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir	201,836 - 2047 13,076 1,597 - 10,363 596	2048 14,095 1,486 - 16,407 596	2049 15,061 1,271 - 7,612 596	790,908 - 2050 12,961 2,387 - 33,734 596	230,482 - 2051 14,429 1,615 - 11,849 596	2052 12,381 1,842 - 98,262 596	20
Outflow (Storage Change GROUNDWA Iow Type Inflow Inflow	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir. Conveyance Seepage	201,836 - 2047 13,076 1,597 - 10,363 596 27	2048 14,095 1,486 - 16,407 596 27	2049 15,061 1,271 - 7,612 596 27	790,908 - 2050 12,961 2,387 - 33,734 596 27	230,482 - 2051 14,429 1,615 - 11,849 596 27	2052 12,381 1,842 - 98,262 596 27	20
Outflow (Storage Change GROUNDWA Iow Type Inflow	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Into Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow	201,836 - 2047 13,076 1,597 - 10,363 596 27 1	2048 14,095 1,486 - 16,407 596	2049 15,061 1,271 - 7,612 596 27	790,908 - 2050 12,961 2,387 - 33,734 596	230,482 2051 14,429 1,615 - 11,849 596 27 1	2052 12,381 1,842 - 98,262 596 27	20 13 5
Outflow (Storage Change	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir. Conveyance Seepage	201,836 - 2047 13,076 1,597 - 10,363 596 27	2048 14,095 1,486 - 16,407 596 27	2049 15,061 1,271 - 7,612 596 27	790,908 - 2050 12,961 2,387 - 33,734 596 27 1	230,482 - 2051 14,429 1,615 - 11,849 596 27	2052 12,381 1,842 - 98,262 596 27	200 133 588
Outflow (Storage Change	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27)	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow	201,836 - 2047 13,076 1,597 - 10,363 596 27 1 25,661	2048 14,095 1,486 - 16,407 596 27 1 32,613	2049 15,061 1,271 - 7,612 596 27 1 24,569	790,908 - 2050 12,961 2,387 - 33,734 596 27 1 49,707	230,482 - 2051 14,429 1,615 - 11,849 596 27 1 28,518	2052 12,381 1,842 - 98,262 596 27 1 113,109	200 133 588
Outflow (Storage Change	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir s	201,836 - 2047 13,076 1,597 - 10,363 596 27 1 25,661 44,408 -	2048 14,095 1,486 - 16,407 596 27 1 32,613 49,085	2049 15,061 1,271 - 7,612 596 27 1 24,569	790,908 - 2050 12,961 2,387 - 33,734 596 27 1 49,707 39,876	230,482 - 2051 14,429 1,615 - 11,849 596 27 1 28,518 50,096	2052 12,381 1,842 - 98,262 596 27 1 113,109	200 133 588
GROUNDWA Iow Type Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow	201,836 - 2047 13,076 1,597 - 10,363 596 27 1 25,661 44,408 - -	2048 14,095 1,486 - 16,407 596 27 1 32,613 49,085 - -	2049 15,061 1,271 - 7,612 596 27 1 24,569 54,406 - -	790,908 - 2050 12,961 2,387 - 33,734 596 27 1 49,707 39,876	230,482 - 2051 14,429 1,615 - 11,849 596 27 1 28,518 50,096	1,082,654 - 2052 12,381 1,842 - 98,262 596 27 1 113,109 39,618	200 133 558 744
Outflow (Storage Change	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir s	201,836 - 2047 13,076 1,597 - 10,363 596 27 1 25,661 44,408 -	2048 14,095 1,486 - 16,407 596 27 1 32,613 49,085	2049 15,061 1,271 - 7,612 596 27 1 24,569 54,406	790,908 - 2050 12,961 2,387 - 33,734 596 27 1 49,707 39,876	230,482 - 2051 14,429 1,615 - 11,849 596 27 1 28,518 50,096 -	2052 12,381 1,842 - 98,262 596 27 1 113,109 39,618	20 11 55
Outflow (Storage Change	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow	201,836 - 2047 13,076 1,597 - 10,363 596 27 1 25,661 44,408 - -	2048 14,095 1,486 - 16,407 596 27 1 32,613 49,085 - -	2049 15,061 1,271 - 7,612 596 27 1 24,569 54,406 - -	790,908 - 2050 12,961 2,387 - 33,734 596 27 1 49,707 39,876	230,482 - 2051 14,429 1,615 - 11,849 596 27 1 28,518 50,096	1,082,654 - 2052 12,381 1,842 - 98,262 596 27 1 113,109 39,618	200 11: 5: 7: 4:
Storage Change GROUNDWA Clow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Storage Change	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Out of Basin (3)+(15)+(16)+(29)	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir. Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow	201,836 - 2047 13,076 1,597 - 10,363 596 27 1 25,661 44,408 - - 44,408	2048 14,095 1,486 - 16,407 596 27 1 32,613 49,085 - - - 49,085	2049 15,061 1,271 - 7,612 596 27 1 24,569 54,406 54,406	790,908 - 2050 12,961 2,387 - 33,734 596 27 1 49,707 39,876 39,876	230,482 - 2051 14,429 1,615 - 11,849 596 27 1 28,518 50,096 50,096	2052 12,381 1,842 - 98,262 596 27 1 113,109 39,618 - - - 39,618	200 113 55 74 44
Outflow (Storage Change	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30)	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir. Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow	201,836 - 2047 13,076 1,597 - 10,363 596 27 1 25,661 44,408 - - 44,408	2048 14,095 1,486 - 16,407 596 27 1 32,613 49,085 - - - 49,085	2049 15,061 1,271 - 7,612 596 27 1 24,569 54,406 54,406	790,908 - 2050 12,961 2,387 - 33,734 596 27 1 49,707 39,876 39,876	230,482 - 2051 14,429 1,615 - 11,849 596 27 1 28,518 50,096 50,096	2052 12,381 1,842 - 98,262 596 27 1 113,109 39,618 - - - 39,618	200 13 558 74 44 33
Outflow Storage Change SROUNDWA Iow Type Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Ou	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30)	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage	201,836 - 2047 13,076 1,597 - 10,363 596 27 1 25,661 44,408 44,408 (18,748)	2048 14,095 1,486 - 16,407 596 27 1 32,613 49,085 - - - 49,085 (16,471)	2049 15,061 1,271 - 7,612 596 27 1 24,569 54,406 54,406 (29,836)	790,908 - 2050 12,961 2,387 - 33,734 596 27 1 49,707 39,876 39,876 9,832 2050 225,757	230,482 - 2051 14,429 1,615 - 11,849 596 27 1 28,518 50,096 50,096 (21,578) 2051 109,477	1,082,654 - 2052 12,381 1,842 - 98,262 596 27 1 113,109 39,618 39,618 73,491 2052 199,671	200 13 558 74 44 3
Outflow Storage Change SROUNDWA Iow Type Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Ou	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (3)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) I WATER BUDGET Origin/ Destination Into Basin Into Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs	201,836 - 2047 13,076 1,597 - 10,363 596 27 1 25,661 44,408 44,408 (18,748) 2047 112,828 413	2048 14,095 1,486 - 16,407 596 27 1 32,613 49,085 - - - 49,085 (16,471) 2048 109,588 402	2049 15,061 1,271 - 7,612 596 27 1 24,569 54,406 54,406 (29,836) 2049 75,064 275	790,908 - 2050 12,961 2,387 - 33,734 596 27 1 49,707 39,876 39,876 9,832 2050 225,757 827	230,482 - 2051 14,429 1,615 - 11,849 596 27 1 28,518 50,096 50,096 (21,578) 2051 109,477 401	2052 12,381 1,842 - 98,262 596 27 1 113,109 39,618 - - - - 39,618 73,491 2052 199,671 732	200 13 58 58 72 44 3
Outflow (Storage Change	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Into Basin (3)+(19)+(10)+(21)+(22)+(20)+(27) Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30)	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow	201,836 - 2047 13,076 1,597 - 10,363 596 27 1 25,661 44,408 44,408 (18,748) 2047 112,828 413 136,845	2048 14,095 1,486 - 16,407 596 27 1 32,613 49,085 49,085 (16,471) 2048 109,588 402 266,826	2049 15,061 1,271 - 7,612 596 27 1 24,569 54,406 54,406 (29,836) 2049 75,064 275 77,677	790,908 - 2050 12,961 2,387 - 33,734 596 27 1 49,707 39,876 39,876 9,832 2050 225,757 827 639,443	230,482 - 2051 14,429 1,615 - 11,849 596 27 1 28,518 50,096 50,096 (21,578) 2051 109,477 401 168,796	2052 12,381 1,842 - 98,262 596 27 1 113,109 39,618 39,618 73,491 2052 199,671 732 939,201	200 13 58 58 72 44 3
Outflow Storage Change Storage Change GROUNDWA Iow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow Inflow Inflow	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (3)+(19)+(10)+(21)+(22)+(20)+(27) Between Systems (3)+(15)+(16)+(29) (28)-(30)	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Subsurface Inflow	201,836 - 2047 13,076 1,597 - 10,363 596 27 1 25,661 44,408 44,408 (18,748) 2047 112,828 413 136,845 1	2048 14,095 1,486 - 16,407 596 27 1 32,613 49,085 49,085 (16,471) 2048 109,588 402 266,826 1	2049 15,061 1,271 - 7,612 596 27 1 24,569 54,406 54,406 (29,836) 2049 75,064 275 77,677 1	790,908 - 2050 12,961 2,387 - 33,734 596 27 1 49,707 39,876 39,876 9,832 2050 225,757 827 639,443 1	230,482 - 2051 14,429 1,615 - 11,849 596 27 1 28,518 50,096 50,096 (21,578) 2051 109,477 401 168,796 1	1,082,654 - 2052 12,381 1,842 - 98,262 596 27 1 113,109 39,618 39,618 73,491 2052 199,671 732 939,201 1	200 13 558 74 44 33 200 838
Outflow Storage Change Cottle Change Change Change Change Change Change Cottle C	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Into Basin (3)+(15)+(16)+(29) (28)-(30) I WATER BUDGET Origin/ Destination Into Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Subsurface Inflow Total Inflow	201,836 - 2047 13,076 1,597 - 10,363 596 27 1 25,661 44,408 44,408 (18,748) 2047 112,828 413 136,845 1 250,087	2048 14,095 1,486 - 16,407 596 27 1 32,613 49,085 49,085 (16,471) 2048 109,588 402 266,826 1 376,817	2049 15,061 1,271 - 7,612 596 27 1 24,569 54,406 54,406 (29,836) 2049 75,064 275 77,677 1 153,017	790,908 - 2050 12,961 2,387 - 33,734 596 27 1 49,707 39,876 39,876 9,832 2050 225,757 827 639,443 1 866,029	230,482 - 2051 14,429 1,615 - 11,849 596 27 1 28,518 50,096 50,096 (21,578) 2051 109,477 401 168,796 1 278,675	1,082,654 - 2052 12,381 1,842 - 98,262 596 27 1 113,109 39,618 39,618 73,491 2052 199,671 732 939,201 1,139,604	200 13 58 58 72 44 33 200 838 ###
Outflow Storage Change Storage Change GROUNDWA Iow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Storage Change Iom Type Inflow Inflow	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (3)+(15)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems (3)+(15)+(16)+(29) (28)-(30) I WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Out of Basin Out of Basin Out of Basin Out of Basin Origin/ Destination Origin/ Destination Origin/ Destination Origin/ Destination Out of Basin Out of Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Evapotranspiration	201,836 - 2047 13,076 1,597 - 10,363 596 27 1 25,661 44,408 44,408 (18,748) 2047 112,828 413 136,845 1 250,087 153,467	2048 14,095 1,486 - 16,407 596 27 1 32,613 49,085 49,085 (16,471) 2048 109,588 402 266,826 1 376,817 158,670	2049 15,061 1,271 - 7,612 596 27 1 24,569 54,406 54,406 (29,836) 2049 75,064 275 77,677 1 153,017 160,652	790,908 - 2050 12,961 2,387 - 33,734 596 27 1 49,707 39,876 39,876 9,832 2050 225,757 827 639,443 1 866,029 175,368	230,482 - 2051 14,429 1,615 - 11,849 596 27 1 28,518 50,096 50,096 (21,578) 2051 109,477 401 168,796 1 278,675 165,364	2052 12,381 1,842 - 98,262 596 27 1 113,109 39,618 39,618 73,491 2052 199,671 732 939,201 1,139,604 154,317	200 13 58 58 72 44 33 200 838 ###
Outflow Storage Change GROUNDWA Iow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow Inflow Inflow Outflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (3)+(15)+(16)+(29) (28)-(30) I WATER BUDGET Origin/ Destination Into Basin Out of Basin Out of Basin Out of Basin Out of Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Evapotranspiration Stream Evaporation	201,836 - 2047 13,076 1,597 - 10,363 596 27 1 25,661 44,408 44,408 (18,748) 2047 112,828 413 136,845 1 250,087 153,467 381	2048 14,095 1,486 - 16,407 596 27 1 32,613 49,085 49,085 (16,471) 2048 109,588 402 266,826 1 376,817 158,670 397	2049 15,061 1,271 - 7,612 596 27 1 24,569 54,406 54,406 (29,836) 2049 75,064 275 77,677 1 153,017 160,652 421	790,908 - 2050 12,961 2,387 - 33,734 596 27 1 49,707 39,876 39,876 9,832 2050 225,757 827 639,443 1 866,029 175,368 402	230,482 - 2051 14,429 1,615 - 11,849 596 27 1 28,518 50,096 50,096 (21,578) 2051 109,477 401 168,796 1 278,675 165,364 418	1,082,654 - 2052 12,381 1,842 - 98,262 596 27 1 113,109 39,618 39,618 73,491 2052 199,671 732 939,201 1 1,139,604 154,317 371	200 13 15 58 72 44 42 30 200 8388
Outflow Storage Change GROUNDWA Iow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Inflow Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflo	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (3)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) I WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Out of Basin Out of Basin Out of Basin Out of Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Evapotranspiration Stream Evaporation Reservoir Evaporation	201,836 - 2047 13,076 1,597 - 10,363 596 27 1 25,661 44,408 44,408 (18,748) 2047 112,828 413 136,845 1 250,087 153,467 381 719	2048 14,095 1,486 - 16,407 596 27 1 32,613 49,085 49,085 (16,471) 2048 109,588 402 266,826 1 376,817 158,670 397 720	2049 15,061 1,271 - 7,612 596 27 1 24,569 54,406 54,406 (29,836) 2049 75,064 275 77,677 1 153,017 160,652 421 781	790,908 - 2050 12,961 2,387 - 33,734 596 27 1 49,707 39,876 39,876 9,832 2050 225,757 827 639,443 1 866,029 175,368 402 752	230,482 - 2051 14,429 1,615 - 11,849 596 27 1 28,518 50,096 50,096 (21,578) 2051 109,477 401 168,796 1 278,675 165,364 418 785	2052 12,381 1,842 - 98,262 596 27 1 113,109 39,618 39,618 73,491 2052 199,671 732 939,201 1,139,604 154,317	200 13 15 58 72 44 42 30 200 8388
Outflow Storage Change C	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (3)+(15)+(16)+(29) (28)-(30) I WATER BUDGET Origin/ Destination Into Basin Out of Basin Out of Basin Out of Basin Out of Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Evapotranspiration Stream Evaporation	201,836 - 2047 13,076 1,597 - 10,363 596 27 1 25,661 44,408 44,408 (18,748) 2047 112,828 413 136,845 1 250,087 153,467 381	2048 14,095 1,486 - 16,407 596 27 1 32,613 49,085 49,085 (16,471) 2048 109,588 402 266,826 1 376,817 158,670 397	2049 15,061 1,271 - 7,612 596 27 1 24,569 54,406 54,406 (29,836) 2049 75,064 275 77,677 1 153,017 160,652 421	790,908 - 2050 12,961 2,387 - 33,734 596 27 1 49,707 39,876 39,876 9,832 2050 225,757 827 639,443 1 866,029 175,368 402	230,482 - 2051 14,429 1,615 - 11,849 596 27 1 28,518 50,096 50,096 (21,578) 2051 109,477 401 168,796 1 278,675 165,364 418	1,082,654 2052 12,381 1,842 - 98,262 596 27 1 113,109 39,618 39,618 73,491 2052 199,671 732 939,201 11,139,604 154,317 371 682	200 13 58 74 44 3 20 20 838 ###
Outflow Storage Change C	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Out of Basin (3)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) I WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Out of Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Evapotranspiration Stream Evaporation Reservoir Evaporation Conveyance Evaporation	201,836 - 2047 13,076 1,597 - 10,363 596 27 1 25,661 44,408 (18,748) 2047 112,828 413 136,845 1 250,087 153,467 381 719 46	2048 14,095 1,486 - 16,407 596 27 1 32,613 49,085 49,085 (16,471) 2048 109,588 402 266,826 1 376,817 158,670 397 720 49	2049 15,061 1,271 - 7,612 596 27 1 24,569 54,406 54,406 (29,836) 2049 75,064 275 77,677 1 153,017 160,652 421 781 50	790,908 - 2050 12,961 2,387 - 33,734 596 27 1 49,707 39,876 39,876 9,832 2050 225,757 827 639,443 1 866,029 175,368 402 752 50	230,482 - 2051 14,429 1,615 - 11,849 596 27 1 28,518 50,096 (21,578) 2051 109,477 401 168,796 1 278,675 165,364 418 785 51	1,082,654 - 2052 12,381 1,842 - 98,262 596 27 1 113,109 39,618 39,618 73,491 2052 199,671 732 939,201 1,139,604 154,317 371 682 46	200 13 58 74 44 3 20 20 838 ###
Outflow Storage Change GROUNDWA Iow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow Inflow Inflow Outflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (3)+(10)+(12)+(22)+(20)+(27) Between Systems Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) I WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Into Basin Out of Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Subsurface Inflow Frecipitation on Reservoirs Stream Inflow Subsurface Inflow Evapotranspiration Stream Evaporation Reservoir Evaporation Conveyance Evaporation Stream Outflow	201,836 - 2047 13,076 1,597 - 10,363 596 27 1 25,661 44,408 112,828 413 136,845 1 250,087 153,467 381 719 46 114,222	2048 14,095 1,486 - 16,407 596 27 1 32,613 49,085 49,085 (16,471) 2048 109,588 402 266,826 1 376,817 158,670 397 720 49 233,452	2049 15,061 1,271 - 7,612 596 27 1 24,569 54,406 54,406 (29,836) 2049 75,064 275 77,677 1 153,017 160,652 421 781 50	790,908 - 2050 12,961 2,387 - 33,734 596 27 1 49,707 39,876 39,876 9,832 2050 225,757 827 639,443 1 866,029 175,368 402 752 50 679,625	230,482 - 2051 14,429 1,615 - 11,849 596 27 1 28,518 50,096 (21,578) 2051 109,477 401 168,796 1 278,675 165,364 418 785 51 133,636	1,082,654 - 2052 12,381 1,842 - 98,262 596 27 1 113,109 39,618 39,618 73,491 2052 199,671 732 939,201 1,139,604 154,317 371 682 46	200 13 11 588 744 44 30 205 838 ### 164

Flow Type	Origin/ Destination	Component	2054	2055	2056	2057	2058	2059	2060
Inflow	Into Basin	Precipitation on Land System	181,148	240,300	165,297	145,585	86,442	130,562	161,922
Inflow	Between Systems	Surface Water Delivery	81,726	69,567	80,770	82,627	87,201	86,559	80,563
Inflow	Between Systems	Groundwater Extraction	46,992	36,069	46,825	47,959	53,321	51,640	46,430
Inflow	(1)+(2)+(3)	Total Inflow	309,865	345,936	292,892	276,171	226,963	268,760	288,915
Outflow	Out of Basin	Evapotranspiration	171,815	162,194	168,075	173,482	164,756	169,002	167,314
Outflow	Between Systems	Runoff	116,731	165,574	103,752	81,087	39,646	77,352	100,633
Outflow Outflow	Between Systems Between Systems	Return Flow Recharge of Applied Water	5,274 14,113	4,029 11,896	5,257 13,962	5,385 14,283	5,999 15,158	5,805 15,005	5,211 13,917
Outflow	Between Systems	Recharge of Precipitation	1,933	2,242	1,846	1,935	1,404	1,596	1,839
Outflow	Between Systems	Managed Aquifer Recharge	-	-,	-	-	-,	-	-
Outflow	(5)+(6)+(7)+(8)+(9)+(10)	Total Outflow	309,865	345,936	292,892	276,171	226,963	268,760	288,915
Storage Change	(4)-(11)	Change in Land System Storage	-	-	-	-	-	-	-
	ATER SYSTEM WATER BUDGET		2054	2055	2056	2057	2050	2050	2050
Flow Type	Origin/ Destination	Component	2054	2055	2056	2057	2058	2059	2060
Inflow Inflow	Into Basin Into Basin	Stream Inflow Precipitation on Reservoirs	659,533 664	809,502 881	712,444	240,135 533	96,425 317	160,946 478	229,397 593
Inflow	Between Systems	Runoff	116,731	165,574	103,752	81,087	39,646	77,352	100,633
Inflow	Between Systems	Return Flow	5,274	4,029	5,257	5,385	5,999	5,805	5,211
Inflow	Between Systems	Stream Gain from Groundwater	-	-	-	-	-	-	-
Inflow	Between Systems	Reservoir Gain from Groundwater	-	-	-	-	-	-	-
Inflow	(13)+(14)+(6)+(7)+(15)+(16)	Total Inflow	782,201	979,986	822,059	327,140	142,387	244,582	335,835
Outflow	Out of Basin	Stream Outflow	663,923	859,330	702,286	227,447	44,776	144,611	238,751
Outflow Outflow	Out of Basin Between Systems	Conveyance Evaporation Conveyance Seepage	51 27	46 27	50 27	51 27	52 27	52 27	49 27
Outflow	Between Systems Between Systems	Surface Water Delivery	81,726	69,567	80,770	82,627	87,201	86,559	80,563
Outflow	Between Systems	Stream Loss to Groundwater	34,668	49,384	37,129	15,166	8,484	11,484	14,667
Outflow	Between Systems	Reservoir Loss to Groundwater	596	596	596	596	596	596	596
Outflow	Out of Basin	Reservoir Evaporation	789	668	786	801	820	819	769
Outflow	Out of Basin	Stream Evaporation	420	367	414	424	430	433	412
Outflow Storage	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24)	Total Outflow	782,201	979,986	822,059	327,140	142,387	244,582	335,835
Change	(17)-(25)	Change in Surface Water Storage							
GROUNDWA	Origin/ Destination	Component	2054	2055	2056	2057	2058	2059	2060
Inflow	Between Systems	Recharge of Applied Water	14,113	11,896	13,962	14,283	15,158		
Inflow	Between Systems						15,156	15,005	13,917
Inflow		Recharge of Precipitation	1,933	2,242	1,846	1,935	1,404	15,005 1,596	
Inflant	Between Systems	Managed Aquifer Recharge	1,933	-				-	
Inflow	Between Systems	Managed Aquifer Recharge Groundwater Gain from Stream	34,668	2,242 - 49,384	1,846 - 37,129	1,935 - 15,166	1,404 - 8,484	1,596 - 11,484	13,917 1,839 - 14,667
Inflow	Between Systems Between Systems	Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir	34,668 596	2,242 - 49,384 596	1,846 - 37,129 596	1,935 - 15,166 596	1,404 - 8,484 596	1,596 - 11,484 596	1,839 - 14,667 596
Inflow Inflow	Between Systems Between Systems Between Systems	Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage	34,668 596 27	2,242 - 49,384 596 27	1,846 - 37,129 596 27	1,935 - 15,166 596 27	1,404 - 8,484 596 27	1,596 - 11,484 596 27	1,839 - 14,667 596 27
Inflow Inflow Inflow	Between Systems Between Systems Between Systems Into Basin	Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow	34,668 596 27	2,242 - 49,384 596 27 1	1,846 - 37,129 596 27 1	1,935 - 15,166 596 27 1	1,404 - 8,484 596 27 1	1,596 - 11,484 596 27 1	1,839 - 14,667 596 27
Inflow Inflow	Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27)	Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage	34,668 596 27	2,242 - 49,384 596 27	1,846 - 37,129 596 27	1,935 - 15,166 596 27	1,404 - 8,484 596 27	1,596 - 11,484 596 27	1,839 - 14,667 596 27
Inflow Inflow Inflow	Between Systems Between Systems Between Systems Into Basin	Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow	34,668 596 27 1 51,339	2,242 - 49,384 596 27 1 64,147	1,846 - 37,129 596 27 1 53,562	1,935 - 15,166 596 27 1 32,009	1,404 - 8,484 596 27 1 25,671	1,596 - 11,484 596 27 1 28,710	1,839 - 14,667 596 27 1 31,048
Inflow Inflow Inflow Inflow Outflow Outflow Outflow	Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems	Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir s	34,668 596 27 1 51,339 46,992	2,242 - 49,384 596 27 1 64,147 36,069	1,846 - 37,129 596 27 1 53,562 46,825	1,935 - 15,166 596 27 1 32,009 47,959	1,404 - 8,484 596 27 1 25,671 53,321	1,596 - 11,484 596 27 1 28,710 51,640	1,839 - 14,667 596 27 1 31,048 46,430
Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow	Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin	Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow	34,668 596 27 1 51,339 46,992	2,242 - 49,384 596 27 1 64,147 36,069 -	1,846 - 37,129 596 27 1 53,562 46,825 - -	1,935 - 15,166 596 27 1 32,009 47,959 - -	1,404 - 8,484 596 27 1 25,671 53,321 - -	1,596 - 11,484 596 27 1 28,710 51,640 - -	1,839 - 14,667 596 27 1 31,048 46,430
Inflow Inflow Inflow Outflow Outflow Outflow	Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29)	Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow	34,668 596 27 1 51,339 46,992 - - 46,992	2,242 - 49,384 596 27 1 64,147 36,069 - - - 36,069	1,846 - 37,129 596 27 1 53,562 46,825 - - 46,825	1,935 - 15,166 596 27 1 32,009 47,959 - - 47,959	1,404 - 8,484 596 27 1 25,671 53,321 53,321	1,596 - 11,484 596 27 1 28,710 51,640 51,640	1,839 - 14,667 596 27 1 31,048 46,430
Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow	Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin	Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow	34,668 596 27 1 51,339 46,992	2,242 - 49,384 596 27 1 64,147 36,069 -	1,846 - 37,129 596 27 1 53,562 46,825 - -	1,935 - 15,166 596 27 1 32,009 47,959 - -	1,404 - 8,484 596 27 1 25,671 53,321 - -	1,596 - 11,484 596 27 1 28,710 51,640 - -	1,839 - 14,667 596 27 1 31,048 46,430
Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow Total Storage Change	Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30)	Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage	34,668 596 27 1 51,339 46,992 - - - 46,992 4,347	2,242 - 49,384 596 27 1 64,147 36,069 - - 36,069 28,079	1,846 - 37,129 596 27 1 53,562 46,825 - - 46,825 6,736	1,935 - 15,166 596 27 1 32,009 47,959 - - 47,959 (15,950)	1,404 - 8,484 596 27 1 25,671 53,321 - - 53,321 (27,650)	1,596 - 11,484 596 27 1 28,710 51,640 51,640 (22,930)	1,839 - 14,667 596 27 1 31,048 46,430 - - - 46,430 (15,382
Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow Total Storage Change TOTAL BASI	Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) N WATER BUDGET Origin/ Destination	Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component	34,668 596 27 1 51,339 46,992 - - 46,992 4,347	2,242 - 49,384 596 27 1 64,147 36,069 - - 36,069 28,079	1,846 - 37,129 596 27 1 53,562 46,825 - - 46,825 6,736	1,935 - 15,166 596 27 1 32,009 47,959 47,959 (15,950)	1,404 - 8,484 596 27 1 25,671 53,321 53,321 (27,650)	1,596 - 11,484 596 27 1 28,710 51,640 51,640 (22,930)	1,839 - 14,667 596 27 1 31,048 46,430 - - 46,430 (15,382
Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow Total Storage Change	Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30)	Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage	34,668 596 27 1 51,339 46,992 - - - 46,992 4,347	2,242 - 49,384 596 27 1 64,147 36,069 - - 36,069 28,079	1,846 - 37,129 596 27 1 53,562 46,825 - - 46,825 6,736	1,935 - 15,166 596 27 1 32,009 47,959 - - 47,959 (15,950)	1,404 - 8,484 596 27 1 25,671 53,321 - - 53,321 (27,650)	1,596 - 11,484 596 27 1 28,710 51,640 51,640 (22,930)	1,839 - 14,667 596 27 - 131,048 46,430 46,430 (15,382
Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow Total Storage Change TOTAL BASII Flow Type	Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) N WATER BUDGET Origin/ Destination Into Basin	Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System	34,668 596 27 1 51,339 46,992 - - - 46,992 4,347	2,242 - 49,384 596 27 1 64,147 36,069 - - 36,069 28,079 2055 240,300	1,846 - 37,129 596 27 1 53,562 46,825 - - 46,825 6,736	1,935 - 15,166 596 27 1 32,009 47,959 47,959 (15,950)	1,404 - 8,484 596 27 1 25,671 53,321 53,321 (27,650)	1,596 - 11,484 596 27 1 28,710 51,640 51,640 (22,930)	1,839 - 14,667 596 27 - 131,048 46,430 46,430 (15,382 2060 161,922 593
Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow Total Storage Change TOTAL BASII Flow Type Inflow Inflow	Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) N WATER BUDGET Origin/ Destination Into Basin Into Basin	Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs	34,668 596 27 1 51,339 46,992 - - - 46,992 4,347 2054 181,148 664	2,242 - 49,384 596 27 1 64,147 36,069 - - - 36,069 28,079 2055 240,300 881	1,846 - 37,129 596 27 1 53,562 46,825 - - - 46,825 6,736 2056 165,297 606	1,935 - 15,166 596 27 1 32,009 47,959 47,959 (15,950) 2057 145,585 533	1,404 - 8,484 596 27 1 25,671 53,321 53,321 (27,650) 2058 86,442 317	1,596 - 11,484 596 27 1 28,710 51,640 51,640 (22,930) 2059 130,562 478	1,839 - 14,667 596 27 - 131,048 46,430 46,430 (15,382 2060 161,922 593 229,397
Inflow Inflow Inflow Outflow Outflow Outflow Outflow Storage Change TOTAL BASII Flow Type Inflow	Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) N WATER BUDGET Origin/ Destination Into Basin	Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow	34,668 596 27 1 51,339 46,992 - - - - 46,992 4,347 2054 181,148 664 659,533 1 841,345	2,242 49,384 596 27 1 64,147 36,069 36,069 28,079 2055 240,300 881 809,502 1 #######	1,846 - 37,129 596 27 1 53,562 46,825 - - - - 46,825 6,736 2056 165,297 606 712,444 1 878,347	1,935 - 15,166 596 27 1 32,009 47,959 47,959 (15,950) 2057 145,585 533 240,135 1 386,254	1,404 - 8,484 596 27 1 25,671 53,321 53,321 (27,650) 2058 86,442 317 96,425 1 183,184	1,596 - 11,484 596 27 1 28,710 51,640 51,640 (22,930) 2059 130,562 478 160,946 1 291,987	1,839 14,667 596 27 1 31,048 46,430 - - - - 46,430 (15,382 2060 161,922 593 229,397 1 391,913
Inflow Inflow Inflow Outflow Outflow Outflow Outflow Storage Change TOTAL BASII Flow Type Inflow Inflow Inflow Inflow Outflow	Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) N WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Into Basin Into Basin Out of Basin Into Basin	Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Evapotranspiration	34,668 596 27 1 51,339 46,992 - - - - 46,992 4,347 2054 181,148 664 659,533 1 841,345 171,815	2,242 49,384 596 27 1 64,147 36,069 36,069 28,079 2055 240,300 881 809,502 1 ####### 162,194	1,846 - 37,129 596 27 1 53,562 46,825 46,825 6,736 2056 165,297 606 712,444 1 878,347 168,075	1,935 - 15,166 596 27 1 32,009 47,959 47,959 (15,950) 2057 145,585 533 240,135 1 386,254 173,482	1,404 - 8,484 596 27 1 25,671 53,321 53,321 (27,650) 2058 86,442 317 96,425 1 183,184 164,756	1,596 - 11,484 - 596 27 - 1 28,710 - 51,640 51,640 (22,930) 2059 130,562 478 160,946 - 1 291,987 169,002	1,839 - 14,667 - 596 27 - 131,048 46,430 46,430 (15,382 2060 161,922 593 229,397 1 391,913 167,314
Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow TOTAL BASII Flow Type Inflow Inflow Inflow Inflow Outflow	Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) N WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Out of Basin Out of Basin Out of Basin	Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Evapotranspiration Stream Evaporation	34,668 596 27 1 51,339 46,992 - - - 46,992 4,347 2054 181,148 664 659,533 1 841,345 171,815 420	2,242 49,384 596 27 1 64,147 36,069 36,069 28,079 2055 240,300 881 809,502 1 ####### 162,194 367	1,846 - 37,129 596 27 1 53,562 46,825 46,825 6,736 2056 165,297 606 712,444 1 878,347 168,075 414	1,935 - 15,166 596 27 1 32,009 47,959 47,959 (15,950) 2057 145,585 533 240,135 1 386,254 173,482 424	1,404 - 8,484 596 27 1 25,671 53,321 53,321 (27,650) 2058 86,442 317 96,425 1 183,184 164,756 430	1,596 - 11,484 - 596 27 - 1 28,710 - 51,640 51,640 (22,930) 2059 130,562 478 160,946 - 1 291,987 169,002 433	1,839 -14,667 596 27 1 31,048 46,430
Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Change TOTAL BASII Flow Type Inflow Inflow Inflow Inflow Outflow	Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) N WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Out of Basin Out of Basin Out of Basin	Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Evapotranspiration Stream Evaporation Reservoir Evaporation	34,668 596 27 1 51,339 46,992 - - - 46,992 4,347 2054 181,148 664 659,533 1 841,345 171,815 420 789	2,242 - 49,384 596 27 1 64,147 36,069 36,069 28,079 2055 240,300 881 809,502 1 ####### 162,194 367 668	1,846 - 37,129 - 596 - 27 - 1 53,562 - 46,825 46,825 - 6,736 2056 165,297 - 606 712,444 - 1 878,347 168,075 - 414 786	1,935 - 15,166 596 27 1 32,009 47,959 47,959 (15,950) 2057 145,585 533 240,135 1 386,254 173,482 424 801	1,404 - 8,484 596 27 1 25,671 53,321 53,321 (27,650) 2058 86,442 317 96,425 1 183,184 164,756 430 820	1,596 - 11,484 - 596 27 - 1 28,710 - 51,640 51,640 (22,930) 2059 130,562 478 160,946 1 291,987 169,002 433 819	1,839 - 14,667 596 27 1 31,048 46,430 46,430 (15,382 2060 161,922 593 229,397 1 391,913 167,314 412 769
Inflow Inflow Inflow Outflow Outflow Outflow Outflow Storage Change TOTAL BASII Flow Type Inflow Inflow Inflow Inflow Outflow	Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) N WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Out of Basin Out of Basin Out of Basin	Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Evapotranspiration Stream Evaporation	34,668 596 27 1 51,339 46,992 - - - 46,992 4,347 2054 181,148 664 659,533 1 841,345 171,815 420	2,242 49,384 596 27 1 64,147 36,069 36,069 28,079 2055 240,300 881 809,502 1 ####### 162,194 367	1,846 - 37,129 596 27 1 53,562 46,825 46,825 6,736 2056 165,297 606 712,444 1 878,347 168,075 414	1,935 - 15,166 596 27 1 32,009 47,959 47,959 (15,950) 2057 145,585 533 240,135 1 386,254 173,482 424	1,404 - 8,484 596 27 1 25,671 53,321 53,321 (27,650) 2058 86,442 317 96,425 1 183,184 164,756 430	1,596 - 11,484 - 596 27 - 1 28,710 - 51,640 51,640 (22,930) 2059 130,562 478 160,946 - 1 291,987 169,002 433	1,839 - 14,667 - 596 27 - 131,048 46,430 46,430 (15,382 2060 161,922 593 229,397 1 391,913 167,314
Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Storage Change TOTAL BASII Flow Type Inflow Inflow Inflow Unflow Outflow	Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) N WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Out of Basin Out of Basin Out of Basin Out of Basin	Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Evapotranspiration Stream Evaporation Reservoir Evaporation Conveyance Evaporation	34,668 596 27 1 51,339 46,992 - - - 46,992 4,347 2054 181,148 664 659,533 1 841,345 171,815 420 789 51	2,242 - 49,384 596 27 1 64,147 36,069 36,069 28,079 2055 240,300 881 809,502 1 ###### 162,194 367 668 46	1,846 - 37,129 - 596 - 27 - 1 53,562 - 46,825 46,825 - 6,736 2056 165,297 - 606 712,444 - 1 878,347 168,075 - 414 786 - 50	1,935 - 15,166 596 27 1 32,009 47,959 47,959 (15,950) 2057 145,585 533 240,135 1 386,254 173,482 424 801 51	1,404 - 8,484 596 27 1 25,671 53,321 53,321 (27,650) 2058 86,442 317 96,425 1 183,184 164,756 430 820 52	1,596 - 11,484 - 596 - 27 - 1 28,710 - 51,640 51,640 (22,930) 2059 130,562 - 478 160,946 - 1 291,987 169,002 - 433 - 819 - 52	1,839 - 14,667 - 596 - 27 - 1 31,048 - 46,430 46,430 (15,382 2060 161,922 - 593 - 229,397 - 1 391,913 167,314 - 412 - 769 - 49
Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Storage Change TOTAL BASII Flow Type Inflow Inflow Inflow Outflow	Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) N WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Out of Basin	Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Evapotranspiration Stream Evaporation Conveyance Evaporation Stream Outflow	34,668 596 27 1 51,339 46,992 - - - 46,992 4,347 2054 181,148 664 659,533 1 841,345 171,815 420 789 51 663,923	2,242 - 49,384 596 27 1 64,147 36,069 36,069 28,079 2055 240,300 881 809,502 1 ####### 162,194 367 668 46 859,330	1,846 - 37,129 - 596 - 27 - 1 53,562 - 46,825 46,825 - 6,736 2056 165,297 - 606 712,444 - 1 878,347 168,075 - 414 786 - 50 702,286	1,935 - 15,166 596 27 1 32,009 47,959 47,959 (15,950) 2057 145,585 533 240,135 1 386,254 173,482 424 801 51 227,447	1,404 - 8,484 596 27 1 25,671 53,321 53,321 (27,650) 2058 86,442 317 96,425 1 183,184 164,756 430 820 52 44,776	1,596 - 11,484 - 596 27 - 1 28,710 - 51,640 51,640 (22,930) 2059 130,562 478 160,946 - 1 291,987 169,002 433 819 52 144,611	1,839 -14,667 -596 -27 -131,048 -46,43046,430 (15,38215,38216,1922 -593 -229,397 -1391,913 -167,314 -412 -769 -49
Inflow Inflow Inflow Outflow Outflow Outflow Outflow Storage Change TOTAL BASII Flow Type Inflow Inflow Inflow Outflow	Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) N WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Out of Basin	Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Evapotranspiration Stream Evaporation Conveyance Evaporation Stream Outflow Subsurface Outflow Subsurface Outflow Subsurface Outflow	34,668 596 27 1 51,339 46,992 - - - - - - - - - - - - -	2,242 - 49,384 596 27 1 64,147 36,069 36,069 28,079 2055 240,300 881 809,502 1 ####### 162,194 367 668 46 859,330	1,846 - 37,129 596 27 1 53,562 46,825 - - - 46,825 6,736 2056 165,297 606 712,444 1 878,347 168,075 414 786 50 702,286	1,935 - 15,166 596 27 1 32,009 47,959 47,959 (15,950) 2057 145,585 533 240,135 1 386,254 173,482 424 801 51 227,447	1,404 - 8,484 596 27 1 25,671 53,321 53,321 (27,650) 2058 86,442 317 96,425 1 183,184 164,756 430 820 52 44,776 -	1,596 - 11,484 596 27 1 28,710 51,640 51,640 (22,930) 2059 130,562 478 160,946 1 291,987 169,002 433 819 52 144,611	1,839 - 14,667 596 27 1 31,048 46,430 46,430 (15,382 2060 161,922 593 229,397 1 391,913 167,314 412 766 49 238,751

Change

Flow Type	Origin/ Destination	Component	2061	2062	2063	2064	2065	2066	2067
Inflow	Into Basin	Precipitation on Land System	146,572	148,701	232,665	118,707	132,516	149,197	135,123
Inflow	Between Systems	Surface Water Delivery	85,780	77,131	76,997	84,401	82,618	83,095	77,64
Inflow	Between Systems	Groundwater Extraction	51,324	44,577	42,403	51,384	48,300	47,652	44,47
Outflow Outflow	(1)+(2)+(3) Out of Basin	Total Inflow Evapotranspiration	283,677 166,689	<i>270,410</i> 158,629	<i>352,064</i> 169,465	<i>254,491</i> 173,250	<i>263,434</i> 170,923	<i>279,943</i> 176,605	257,242 166,230
Outflow	Between Systems	Runoff	94,789	91,736	162,505	59,003	70,946	81,620	70,674
Outflow	Between Systems	Return Flow	5,770	5,003	4,750	5,780	5,425	5,348	4,99
Outflow	Between Systems	Recharge of Applied Water	14,876	13,333	13,240	14,667	14,293	14,344	13,40
Outflow Outflow	Between Systems Between Systems	Recharge of Precipitation Managed Aquifer Recharge	1,554	1,709	2,105	1,791 -	1,847	2,027 -	1,93
Outflow	(5)+(6)+(7)+(8)+(9)+(10)	Total Outflow	283,677	270,410	352,064	254,491	263,434	279,943	257,24
Storage Change	(4)-(11)	Change in Land System Storage	-	-	-	-	-	-	-
SURFACE WAT	TER SYSTEM WATER BUDGET								
Flow Type	Origin/ Destination	Component	2061	2062	2063	2064	2065	2066	2067
Inflow	Into Basin	Stream Inflow	321,321	372,195	798,642	131,362	254,574	150,766	106,62
Inflow	Into Basin	Precipitation on Reservoirs	521,321	545	853	435	486	547	49
Inflow	Between Systems	Runoff	94,789	91,736	162,505	59,003	70,946	81,620	70,67
Inflow	Between Systems	Return Flow	5,770	5,003	4,750	5,780	5,425	5,348	4,99
Inflow	Between Systems	Stream Gain from Groundwater	-	-	-	-	-	-	-
Inflow	Between Systems (13)+(14)+(6)+(7)+(15)+(16)	Reservoir Gain from Groundwater Total Inflow	422,417	469,479	966,750	196,580	331,430	238,280	182,78
Outflow	Out of Basin	Stream Outflow	315,780	369,247	841,604	100,139	231,086	142,278	94,37
Outflow	Out of Basin	Conveyance Evaporation	51	47	49	51	51	50	4
Outflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27	2
Outflow Outflow	Between Systems Between Systems	Surface Water Delivery Stream Loss to Groundwater	85,780 18,941	77,131 21,307	76,997 46,323	84,401 10,108	82,618 15,838	83,095 11,011	77,64 8,95
Outflow	Between Systems	Reservoir Loss to Groundwater	596	596	596	596	596	596	59
Outflow	Out of Basin	Reservoir Evaporation	811	730	750	823	793	797	74
								_	
Outflow	Out of Basin	Stream Evaporation	429	393	403	434	420	427	
Outflow (1	8)+(19)+(20)+(2)+(21)+(22)+(23)+(24)	Total Outflow	429 422,417	469,479	966,750	196,580	331,430	238,280	
			429						399 182,788 -
Outflow (1 Storage Change	8)+(19)+(20)+(2)+(21)+(22)+(23)+(24)	Total Outflow	429 422,417	469,479	966,750	196,580	331,430	238,280	
Outflow (1 Storage Change	8)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25)	Total Outflow	429 422,417	469,479	966,750	196,580	331,430	238,280	
Outflow (1 Storage Change GROUNDWAT Flow Type Inflow	8)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems	Total Outflow Change in Surface Water Storage Component Recharge of Applied Water	429 422,417 - 2061 14,876	469,479 - 2062 13,333	966,750 - 2063 13,240	196,580 - 2064 14,667	331,430 - 2065 14,293	238,280 - 2066 14,344	2067 13,40
Outflow (1 Storage Change GROUNDWAT Flow Type Inflow Inflow	8)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems	Total Outflow Change in Surface Water Storage Component Recharge of Applied Water Recharge of Precipitation	429 422,417 - 2061 14,876 1,554	2062 13,333 1,709	966,750 - 2063 13,240 2,105	196,580 - 2064 14,667 1,791	2065 14,293 1,847	238,280 - 2066 14,344 2,027	182,78
Outflow (1 Storage Change GROUNDWAT Flow Type Inflow Inflow Inflow	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems	Total Outflow Change in Surface Water Storage Component Recharge of Applied Water	429 422,417 - 2061 14,876 1,554	2062 13,333 1,709	2063 13,240 2,105	2064 14,667 1,791	2065 14,293 1,847	238,280 - 2066 14,344 2,027 -	2067 13,40 1,93
Outflow (1 Storage Change GROUNDWAT Flow Type Inflow Inflow	8)+(19)+(20)+(2)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems	Total Outflow Change in Surface Water Storage Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge	429 422,417 - 2061 14,876 1,554	2062 13,333 1,709	966,750 - 2063 13,240 2,105	196,580 - 2064 14,667 1,791	2065 14,293 1,847	238,280 - 2066 14,344 2,027	2067 13,40 1,93 - 8,95
Outflow (1 Storage Change GROUNDWAT Flow Type Inflow	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage	429 422,417 - 2061 14,876 1,554 - 18,941 596 27	2062 13,333 1,709 - 21,307 596 27	2063 13,240 2,105 - 46,323 596 27	2064 14,667 1,791 - 10,108 596 27	2065 14,293 1,847 - 15,838 596 27	238,280 - 2066 14,344 2,027 - 11,011 596 27	2067 13,40 1,93 - 8,95 59 2
Outflow (1 Storage Change GROUNDWAT Flow Type Inflow	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Into Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow	429 422,417 - 2061 14,876 1,554 - 18,941 596 27 1	2062 13,333 1,709 - 21,307 596 27 1	2063 13,240 2,105 - 46,323 596 27 1	2064 14,667 1,791 - 10,108 596 27 1	2065 14,293 1,847 - 15,838 596 27 1	238,280 - 2066 14,344 2,027 - 11,011 596 27 1	2067 13,40° 1,933 - 8,955 590 2
Outflow (1 Storage Change GROUNDWAT Flow Type Inflow	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27)	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow	429 422,417 - 2061 14,876 1,554 - 18,941 596 27 1 35,995	2062 13,333 1,709 - 21,307 596 27 1 36,973	2063 13,240 2,105 - 46,323 596 27 1 62,292	2064 14,667 1,791 - 10,108 596 27 1 27,191	2065 14,293 1,847 - 15,838 596 27 1 32,602	238,280 - 2066 14,344 2,027 - 11,011 596 27 1 28,006	2067 13,40 1,93 8,95 59 2
Outflow (1 Storage Change GROUNDWAT Flow Type Inflow	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Into Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow	429 422,417 - 2061 14,876 1,554 - 18,941 596 27 1	2062 13,333 1,709 - 21,307 596 27 1	2063 13,240 2,105 - 46,323 596 27 1	2064 14,667 1,791 - 10,108 596 27 1	2065 14,293 1,847 - 15,838 596 27 1	238,280 - 2066 14,344 2,027 - 11,011 596 27 1	182,786 - - 2067 13,40
Outflow (1 Storage Change GROUNDWAT Flow Type Inflow Outflow Outflow Outflow Outflow	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir s	2061 14,876 1,554 - 18,941 596 27 1 35,995 51,324	2062 13,333 1,709 -21,307 596 27 1 36,973 44,577 -	2063 13,240 2,105 46,323 596 27 1 62,292 42,403	2064 14,667 1,791 - 10,108 596 27 1 27,191 51,384 -	2065 14,293 1,847 - 15,838 596 27 1 32,602 48,300	238,280 - 2066 14,344 2,027 - 11,011 596 27 1 28,006 47,652	2067 13,40 1,93 8,95 59 2
Outflow (1 Storage Change GROUNDWAT Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Out of Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Groundwater Extraction Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow	2061 14,876 1,554 - 18,941 596 27 1 35,995 51,324	2062 13,333 1,709 - 21,307 596 27 1 36,973 44,577 -	2063 13,240 2,105 - 46,323 596 27 1 62,292 42,403 - -	2064 14,667 1,791 - 10,108 596 27 1 27,191 51,384 - -	2065 14,293 1,847 - 15,838 596 27 1 32,602 48,300 - -	238,280 - 2066 14,344 2,027 - 11,011 596 27 1 28,006 47,652 	2067 13,40 1,93 - 8,95 59 2 24,92 44,47
Outflow (1 Storage Change GROUNDWAT Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Storage	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir s	2061 14,876 1,554 - 18,941 596 27 1 35,995 51,324	2062 13,333 1,709 -21,307 596 27 1 36,973 44,577 -	2063 13,240 2,105 46,323 596 27 1 62,292 42,403	2064 14,667 1,791 - 10,108 596 27 1 27,191 51,384 -	2065 14,293 1,847 - 15,838 596 27 1 32,602 48,300	238,280 - 2066 14,344 2,027 - 11,011 596 27 1 28,006 47,652	2067 13,40 1,93 5,95 2 24,92 44,47
Outflow (1 Storage Change GROUNDWAT Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow Storage Change	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Onto Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30)	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow	429 422,417 - 2061 14,876 1,554 - 18,941 596 27 1 35,995 51,324 - - - - - - - - - - - - -	2062 13,333 1,709 - 21,307 596 27 1 36,973 44,577 - - 44,577	2063 13,240 2,105 - 46,323 596 27 1 62,292 42,403 42,403	2064 14,667 1,791 - 10,108 596 27 1 27,191 51,384 51,384	2065 14,293 1,847 - 15,838 596 27 1 32,602 48,300 - - - 48,300	238,280 - 2066 14,344 2,027 - 11,011 596 27 1 28,006 47,652 47,652	2067 13,40 1,93 5,95 2 24,92 44,47
Outflow (1 Storage Change GROUNDWAT Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow Storage Change	(17)-(25) (17)-(25) (17)-(25) FER SYSTEM WATER BUDGET Origin/ Destination Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29)	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow	429 422,417 - 2061 14,876 1,554 - 18,941 596 27 1 35,995 51,324 - - - - - - - - - - - - -	2062 13,333 1,709 - 21,307 596 27 1 36,973 44,577 - - 44,577	2063 13,240 2,105 - 46,323 596 27 1 62,292 42,403 42,403	2064 14,667 1,791 - 10,108 596 27 1 27,191 51,384 51,384	2065 14,293 1,847 - 15,838 596 27 1 32,602 48,300 - - - 48,300	238,280 - 2066 14,344 2,027 - 11,011 596 27 1 28,006 47,652 47,652	2067 13,40 1,93 5,95 2 24,92 44,47
Outflow (1 Storage Change GROUNDWAT Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Storage Change	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30)	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage	429 422,417 - 2061 14,876 1,554 - 18,941 596 27 1 35,995 51,324 - - - - - - - - - - - - -	2062 13,333 1,709 - 21,307 596 27 1 36,973 44,577 - - 44,577 (7,604)	966,750 - 2063 13,240 2,105 - 46,323 596 27 1 62,292 42,403 42,403 19,889	2064 14,667 1,791 - 10,108 596 27 1 27,191 51,384 51,384 (24,192)	2065 14,293 1,847 - 15,838 596 27 1 32,602 48,300 - - 48,300 (15,698)	238,280 - 2066 14,344 2,027 - 11,011 596 27 1 28,006 47,652 47,652 (19,646)	2067 13,40 1,93 - 8,95 59 2 24,92 44,47 - - - 44,47 (19,55)
Outflow (1 Storage Change GROUNDWAT Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Storage Change TOTAL BASIN Flow Storage Change	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) WATER BUDGET Origin/ Destination	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Change in Groundwater Storage Component	429 422,417 - 2061 14,876 1,554 - 18,941 596 27 1 35,995 51,324 - - - - - - - - - - - - -	2062 13,333 1,709 - 21,307 596 27 1 36,973 44,577 - - - 44,577 (7,604)	966,750 - 2063 13,240 2,105 - 46,323 596 27 1 62,292 42,403 42,403 19,889	2064 14,667 1,791 - 10,108 596 27 1 27,191 51,384 51,384 (24,192)	2065 14,293 1,847 - 15,838 596 27 1 32,602 48,300 - - - 48,300 (15,698)	238,280 - 2066 14,344 2,027 - 11,011 596 27 1 28,006 47,652 47,652 (19,646)	2067 13,40 1,93 - 8,95 59 2 24,92 44,47 (19,55
Outflow (1 Storage Change GROUNDWAT Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Storage Change TOTAL BASIN Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Inflow In	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Into Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow	429 422,417 - 2061 14,876 1,554 - 18,941 596 27 1 35,995 51,324 51,324 (15,329) 2061 146,572 537 321,321	2062 13,333 1,709 - 21,307 596 27 1 36,973 44,577 44,577 (7,604) 2062 148,701 545 372,195	2063 13,240 2,105 - 46,323 596 27 1 62,292 42,403 42,403 19,889 2063 232,665 853 798,642	2064 14,667 1,791 - 10,108 596 27 1 27,191 51,384 51,384 (24,192) 2064 118,707 435 131,362	2065 14,293 1,847 - 15,838 596 27 1 32,602 48,300 - - - 48,300 (15,698) 2065 132,516 486 254,574	238,280 - 2066 14,344 2,027 - 11,011 596 27 1 28,006 47,652 47,652 (19,646) 2066 149,197 547 150,766	2067 13,40 1,93 - 8,95 59 2 24,92 44,47 (19,55) 2067 135,12 49 106,62
Outflow (1 Storage Change GROUNDWAT Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Storage Change TOTAL BASIN Flow Type Inflow Inf	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Into Basin Into Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow	429 422,417 - 2061 14,876 1,554 - 18,941 596 27 1 35,995 51,324 51,324 (15,329) 2061 146,572 537 321,321 1	2062 13,333 1,709 - 21,307 596 27 1 36,973 44,577 44,577 (7,604) 2062 148,701 545 372,195 1	2063 13,240 2,105 - 46,323 596 27 1 62,292 42,403 42,403 19,889 2063 232,665 853 798,642 1	2064 14,667 1,791 - 10,108 596 27 1 27,191 51,384 51,384 (24,192) 2064 118,707 435 131,362 1	331,430 - 2065 14,293 1,847 - 15,838 596 27 1 32,602 48,300 48,300 (15,698) 2065 132,516 486 254,574 1	238,280 - 2066 14,344 2,027 - 11,011 596 27 1 28,006 47,652 47,652 (19,646) 2066 149,197 547 150,766 1	2067 13,40 1,93 - 8,95 59 2 24,92 44,47 - - - 44,47 (19,55) 2067 135,12 49 106,62
Outflow (1 Storage Change GROUNDWAT Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Storage Change TOTAL BASIN Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow Inflow In	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) WATER BUDGET Origin/ Destination Into Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Total Inflow	429 422,417 - 2061 14,876 1,554 - 18,941 596 27 1 35,995 51,324 51,324 (15,329) 2061 146,572 537 321,321 1 468,431	2062 13,333 1,709 - 21,307 596 27 1 36,973 44,577 44,577 (7,604) 2062 148,701 545 372,195 1 521,442	2063 13,240 2,105 - 46,323 596 27 1 62,292 42,403 42,403 19,889 2063 232,665 853 798,642 1 #######	2064 14,667 1,791 - 10,108 596 27 1 27,191 51,384 51,384 (24,192) 2064 118,707 435 131,362 1 250,505	2065 14,293 1,847 - 15,838 596 27 1 32,602 48,300 48,300 (15,698) 2065 132,516 486 254,574 1 387,576	238,280 - 2066 14,344 2,027 - 11,011 596 27 1 28,006 47,652 47,652 (19,646) 2066 149,197 547 150,766 1 300,511	2067 13,40 1,93 - 8,95 59 2 24,92 44,47 (19,55 2067 135,12 49 106,62
Outflow (1 Storage Change GROUNDWAT Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Storage Change TOTAL BASIN Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Inflow Infl	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Into Basin Into Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow	429 422,417 - 2061 14,876 1,554 - 18,941 596 27 1 35,995 51,324 51,324 (15,329) 2061 146,572 537 321,321 1	2062 13,333 1,709 - 21,307 596 27 1 36,973 44,577 44,577 (7,604) 2062 148,701 545 372,195 1	2063 13,240 2,105 - 46,323 596 27 1 62,292 42,403 42,403 19,889 2063 232,665 853 798,642 1	2064 14,667 1,791 - 10,108 596 27 1 27,191 51,384 51,384 (24,192) 2064 118,707 435 131,362 1	331,430 - 2065 14,293 1,847 - 15,838 596 27 1 32,602 48,300 48,300 (15,698) 2065 132,516 486 254,574 1	238,280 - 2066 14,344 2,027 - 11,011 596 27 1 28,006 47,652 47,652 (19,646) 2066 149,197 547 150,766 1	2067 13,40 1,93 - 8,95 59 2 24,92 44,47 (19,55 2067 135,12 49 106,62
Outflow (1 Storage Change GROUNDWAT Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Storage Change TOTAL BASIN Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow Inflow Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow	(3)+(19)+(20)+(21)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Out of Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Subsurface Inflow Subsurface Inflow Subsurface Inflow Subsurface Inflow Subsurface Inflow Total Inflow Evapotranspiration Stream Evaporation Reservoir Evaporation	429 422,417 - 2061 14,876 1,554 - 18,941 596 27 1 35,995 51,324 51,324 (15,329) 2061 146,572 537 321,321 1468,431 166,689 429 811	2062 13,333 1,709 - 21,307 596 27 1 36,973 44,577 - 44,577 (7,604) 2062 148,701 545 372,195 1 521,442 158,629 393 730	2063 13,240 2,105 - 46,323 596 27 1 62,292 42,403 42,403 19,889 2063 232,665 853 798,642 1 ####### 169,465 403 750	2064 14,667 1,791 - 10,108 596 27 1 27,191 51,384 51,384 (24,192) 2064 118,707 435 131,362 1 250,505 173,250 434 823	2065 14,293 1,847 - 15,838 596 27 1 32,602 48,300 48,300 (15,698) 2065 132,516 486 254,574 1 387,576 170,923 420 793	238,280 - 2066 14,344 2,027 - 11,011 596 27 1 28,006 47,652 47,652 (19,646) 2066 149,197 547 150,766 1 300,511 176,605 427 797	2067 13,40 1,93 - 8,95 59 2 24,92 44,47 44,47 (19,55) 2067 135,12 49 106,62 242,24 166,23 39 74
Outflow (1 Storage Change GROUNDWAT Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Storage Change TOTAL BASIN Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow Inflow Inflow Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Ou	(3)+(19)+(20)+(21)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Between Systems Between Systems Between Systems Between Systems Into Basin (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Out of Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Total Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Evapotranspiration Stream Evaporation Reservoir Evaporation Conveyance Evaporation	429 422,417 - 2061 14,876 1,554 - 18,941 596 27 1 35,995 51,324 51,324 (15,329) 2061 146,572 537 321,321 1468,431 166,689 429 811 51	2062 13,333 1,709 - 21,307 596 27 1 36,973 44,577 44,577 (7,604) 2062 148,701 545 372,195 1 521,442 158,629 393 730 47	2063 13,240 2,105 - 46,323 596 27 1 62,292 42,403 42,403 19,889 2063 232,665 853 798,642 1 ####### 169,465 403 750 49	2064 14,667 1,791 - 10,108 596 27 1 27,191 51,384 51,384 (24,192) 2064 118,707 435 131,362 1 250,505 173,250 434 823 51	2065 14,293 1,847 - 15,838 596 27 1 32,602 48,300 (15,698) 2065 132,516 486 254,574 1 387,576 170,923 420 793 51	238,280 - 2066 14,344 2,027 - 11,011 596 27 1 28,006 47,652 47,652 (19,646) 2066 149,197 547 150,766 1 300,511 176,605 427 797 50	2067 13,40 1,93 - 8,95 59 24,92 44,47 (19,55 2067 135,12 49 106,62 242,24 166,23 39 74
Outflow (1 Storage Change GROUNDWAT Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Storage Change TOTAL BASIN Flow Type Inflow Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow Inflow Outflow Inflow Outflow Outflo	(3)+(19)+(20)+(21)+(21)+(22)+(23)+(24) (17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems (8)+(9)+(10)+(21)+(22)+(20)+(27) Between Systems Between Systems Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Out of Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Subsurface Inflow Subsurface Inflow Subsurface Inflow Subsurface Inflow Subsurface Inflow Total Inflow Subsurface Inflow Frecipitation on Reservoirs Stream Inflow Subsurface Inflow Frecipitation Stream Evaporation Reservoir Evaporation	429 422,417 - 2061 14,876 1,554 - 18,941 596 27 1 35,995 51,324 51,324 (15,329) 2061 146,572 537 321,321 1468,431 166,689 429 811	2062 13,333 1,709 - 21,307 596 27 1 36,973 44,577 - 44,577 (7,604) 2062 148,701 545 372,195 1 521,442 158,629 393 730	2063 13,240 2,105 - 46,323 596 27 1 62,292 42,403 42,403 19,889 2063 232,665 853 798,642 1 ####### 169,465 403 750	2064 14,667 1,791 - 10,108 596 27 1 27,191 51,384 51,384 (24,192) 2064 118,707 435 131,362 1 250,505 173,250 434 823	2065 14,293 1,847 - 15,838 596 27 1 32,602 48,300 48,300 (15,698) 2065 132,516 486 254,574 1 387,576 170,923 420 793	238,280 - 2066 14,344 2,027 - 11,011 596 27 1 28,006 47,652 47,652 (19,646) 2066 149,197 547 150,766 1 300,511 176,605 427 797	2067 13,40 1,93 - 8,95 59 2 44,47 44,47 (19,55) 2067 135,12 49 106,62 242,24 166,23
Outflow (1 Storage Change GROUNDWAT Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Storage Change TOTAL BASIN Flow Type Inflow Inflow Inflow Inflow Inflow Outflow Outflow Outflow Outflow Outflow Outflow Outflow Inflow Inflow Inflow Inflow Inflow Inflow Inflow Inflow Inflow Outflow Ou	(17)-(25) TER SYSTEM WATER BUDGET Origin/ Destination Between Systems Out of Basin (3)+(15)+(16)+(29) (28)-(30) WATER BUDGET Origin/ Destination Into Basin Into Basin Into Basin Into Basin Out of Basin	Component Recharge of Applied Water Recharge of Precipitation Managed Aquifer Recharge Groundwater Gain from Stream Groundwater Gain from Reservoir Conveyance Seepage Subsurface Inflow Total Inflow Groundwater Loss to Stream Groundwater Loss to Reservoir s Subsurface Outflow Change in Groundwater Storage Component Precipitation on Land System Precipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Frecipitation on Reservoirs Stream Inflow Subsurface Inflow Total Inflow Evapotranspiration Stream Evaporation Reservoir Evaporation Conveyance Evaporation Stream Outflow	429 422,417 - 2061 14,876 1,554 - 18,941 596 27 1 35,995 51,324 51,324 (15,329) 2061 146,572 537 321,321 1468,431 166,689 429 811 51 315,780	2062 13,333 1,709 - 21,307 596 27 1 36,973 44,577 44,577 (7,604) 2062 148,701 545 372,195 1 521,442 158,629 393 730 47 369,247	2063 13,240 2,105 - 46,323 596 27 1 62,292 42,403 42,403 19,889 2063 232,665 853 798,642 1 ####### 169,465 403 750 49 841,604	2064 14,667 1,791 - 10,108 596 27 1 27,191 51,384 51,384 (24,192) 2064 118,707 435 131,362 1 250,505 173,250 434 823 51 100,139	2065 14,293 1,847 - 15,838 596 27 1 32,602 48,300 (15,698) 2065 132,516 486 254,574 1 387,576 170,923 420 793 51 231,086	238,280 - 2066 14,344 2,027 - 11,011 596 27 1 28,006 47,652	2067 13,40 1,93 - 8,95 59 24,92 44,47 44,47 (19,55 2067 135,12 49 106,62 242,24 166,23 39 74 4 94,37

- ·	Component	2068
Into Basin	Precipitation on Land System	198,73
Between Systems	Surface Water Delivery	73,21
Between Systems	Groundwater Extraction	39,93
(1)+(2)+(3)	Total Inflow	311,88
Out of Basin	Evapotranspiration	162,35
Between Systems	Runoff	130,42
Between Systems	Return Flow	4,47
Between Systems	Recharge of Applied Water	12,58
Between Systems	Recharge of Precipitation	2,04
Between Systems	Managed Aquifer Recharge	-
(5)+(6)+(7)+(8)+(9)+(10)	Total Outflow	311,88
	Between Systems Between Systems (1)+(2)+(3) Out of Basin Between Systems	Between Systems Surface Water Delivery Between Systems Groundwater Extraction (1)+(2)+(3) Total Inflow Out of Basin Between Systems Runoff Between Systems Return Flow Between Systems Recharge of Applied Water Between Systems Recharge of Precipitation Between Systems Retween Systems Recharge Aquifer Recharge


	SURFACE V	NATER SYSTEM WATER BUDGET		
item	Flow Type	Origin/ Destination	Component	2068
(13)	Inflow	Into Basin	Stream Inflow	652,832
(14)	Inflow	Into Basin	Precipitation on Reservoirs	728
(6)	Inflow	Between Systems	Runoff	130,426
(7)	Inflow	Between Systems	Return Flow	4,471
(15)	Inflow	Between Systems	Stream Gain from Groundwater	-
(16)	Inflow	Between Systems	Reservoir Gain from Groundwater	-
(17)	Inflow	(13)+(14)+(6)+(7)+(15)+(16)	Total Inflow	788,457
(18)	Outflow	Out of Basin	Stream Outflow	679,139
(19)	Outflow	Out of Basin	Conveyance Evaporation	46
(20)	Outflow	Between Systems	Conveyance Seepage	27
(2)	Outflow	Between Systems	Surface Water Delivery	73,214
(21)	Outflow	Between Systems	Stream Loss to Groundwater	34,357
(22)	Outflow	Between Systems	Reservoir Loss to Groundwater	596
(23)	Outflow	Out of Basin	Reservoir Evaporation	697
(24)	Outflow	Out of Basin	Stream Evaporation	380
(25)	Outflow	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24)	Total Outflow	788,457
(26)	Storage Change	(17)-(25)	Change in Surface Water Storage	-

	GROUNDWATER SYSTEM WATER BUDGET							
item	Flow Type	Origin/ Destination	Component	2068				
(8)	Inflow	Between Systems	Recharge of Applied Water	12,581				
(9)	Inflow	Between Systems	Recharge of Precipitation	2,049				
(10)	Inflow	Between Systems	Managed Aquifer Recharge	-				
(21)	Inflow	Between Systems	Groundwater Gain from Stream	34,357				
(22)	Inflow	Between Systems	Groundwater Gain from Reservoir	596				
(20)	Inflow	Between Systems	Conveyance Seepage	27				
(27)	Inflow	Into Basin	Subsurface Inflow	1				
(28)	Inflow	(8)+(9)+(10)+(21)+(22)+(20)+(27)	Total Inflow	49,612				
(3)	Outflow	Between Systems	Groundwater Extraction	39,935				
(15)	Outflow	Between Systems	Groundwater Loss to Stream	-				
(16)	Outflow	Between Systems	Groundwater Loss to Reservoir s	-				
(29)	Outflow	Out of Basin	Subsurface Outflow	-				
(30)	Outflow	(3)+(15)+(16)+(29)	Total Outflow	39,935				
(31)	Storage Change	(28)-(30)	Change in Groundwater Storage	9,676				

Flow Type	Origin/ Destination	Component	2068
Inflow	Into Basin	Precipitation on Land System	198,73
Inflow	Into Basin	Precipitation on Reservoirs	72
Inflow	Into Basin	Stream Inflow	652,83
Inflow	Into Basin	Subsurface Inflow	
Inflow	(1)+(14)+(13)+(27)	Total Inflow	852,29
Outflow	Out of Basin	Evapotranspiration	162,35
Outflow	Out of Basin	Stream Evaporation	38
Outflow	Out of Basin	Reservoir Evaporation	69
Outflow	Out of Basin	Conveyance Evaporation	4
Outflow	Out of Basin	Stream Outflow	679,13
Outflow	Out of Basin	Subsurface Outflow	-
Outflow	(5)+(24)+(23)+(19)+(18)+(29)	Total Outflow	842,62
Storage Change	(32)-(33)	Change in Total System Storage	9,67


Appendix 6C Water Budget Bar Charts

LAND SYSTEM

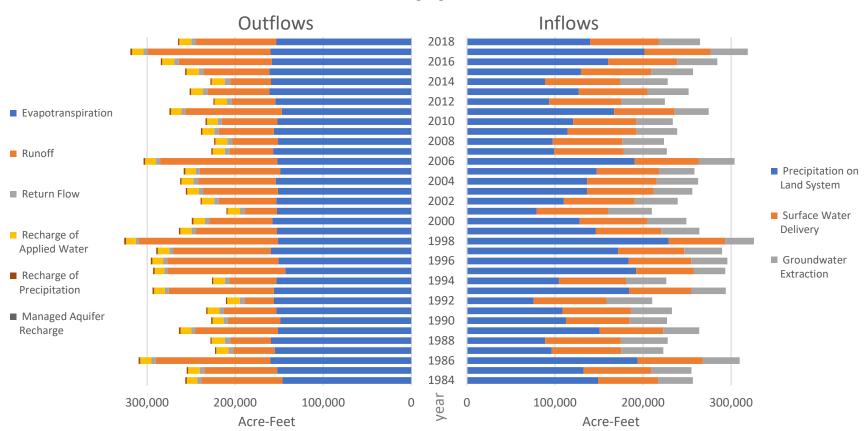


Future Water Budget

LAND SYSTEM

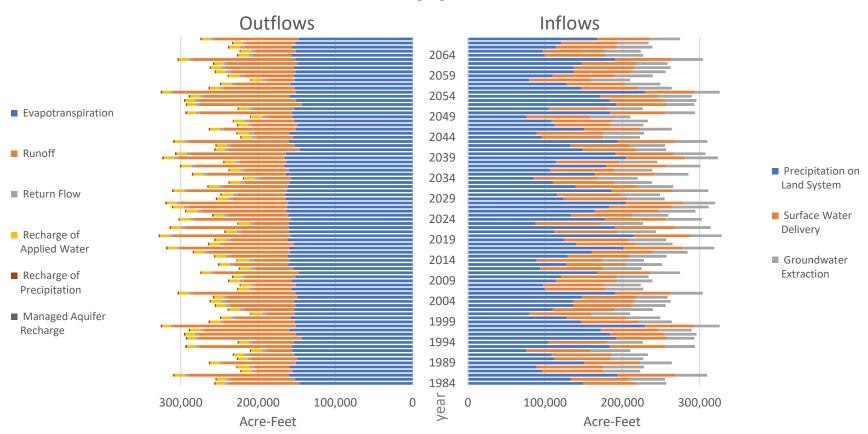


Future Water Budget With Climate Change

LAND SYSTEM

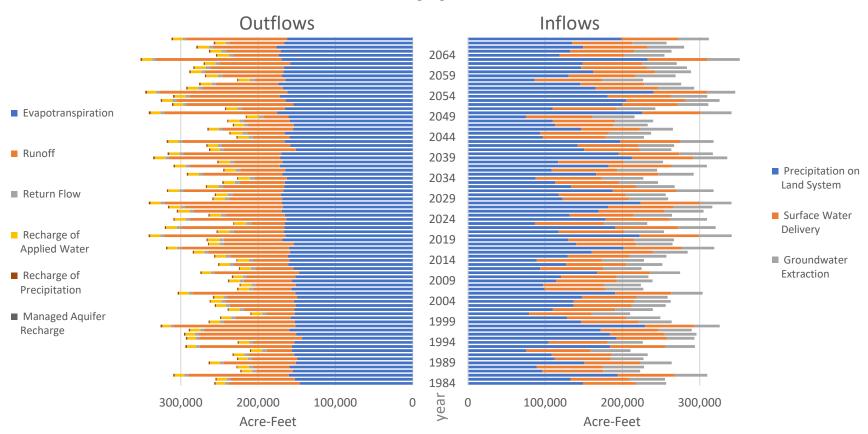


SURFACE WATER SYSTEM

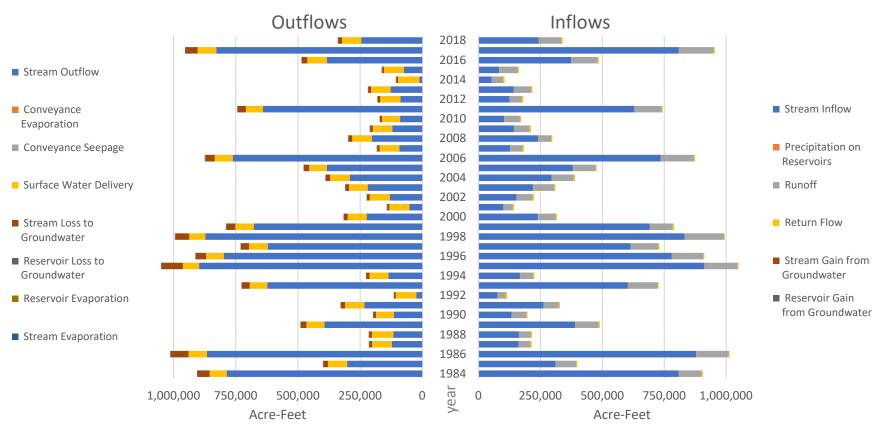


Future Water Budget

SURFACE WATER SYSTEM

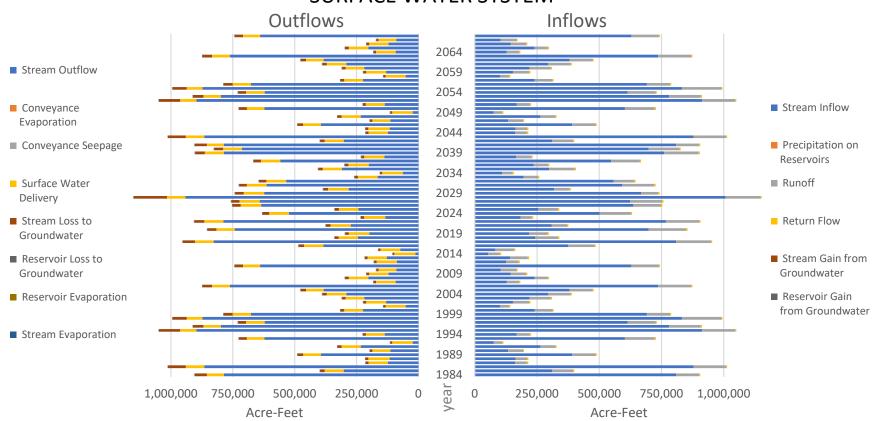


Future Water Budget With Climate Change

SURFACE WATER SYSTEM

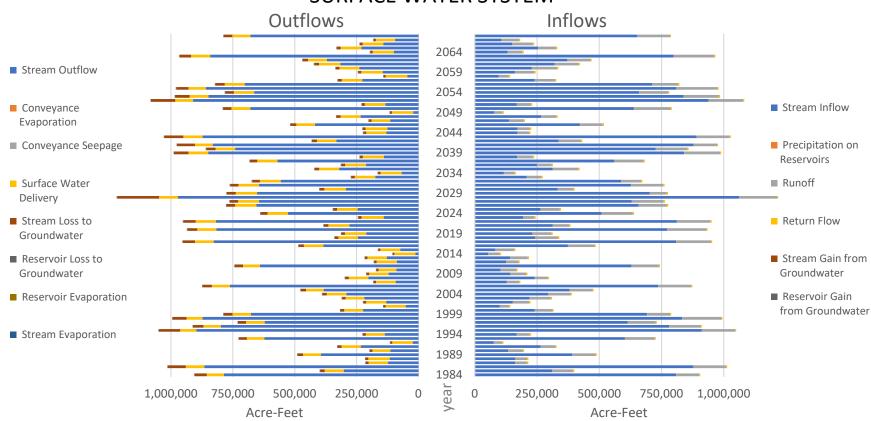


GROUNDWATER SYSTEM

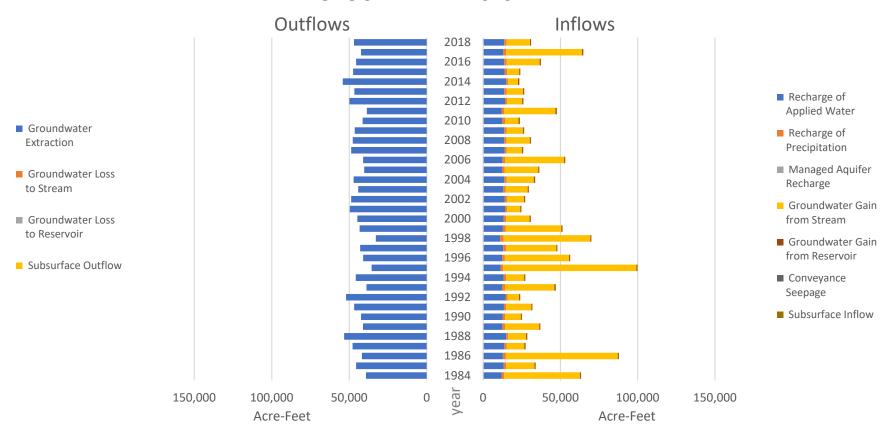


Future Water Budget

GROUNDWATER SYSTEM

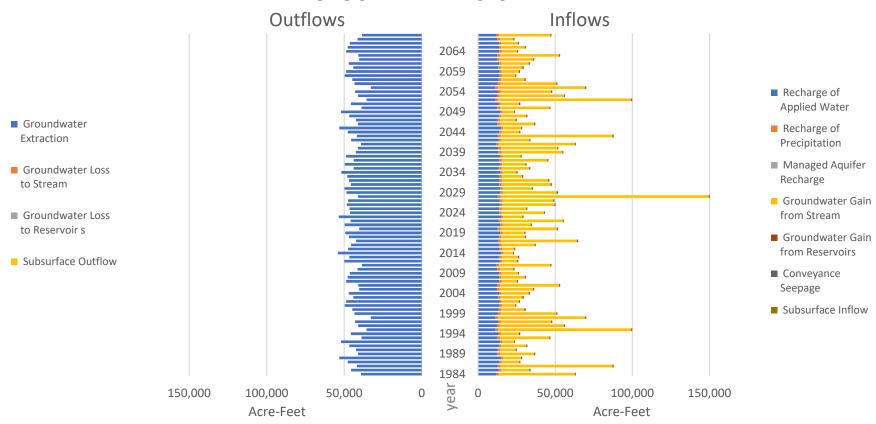


Future Water Budget With Climate Change

GROUNDWATER SYSTEM

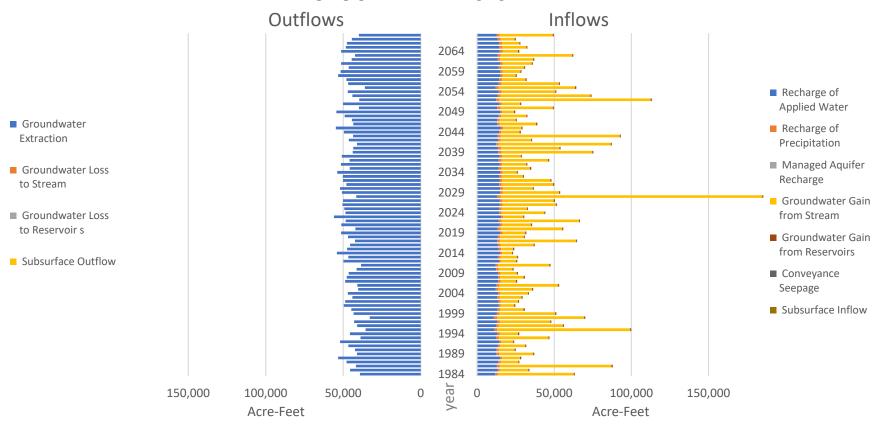


TOTAL BASIN

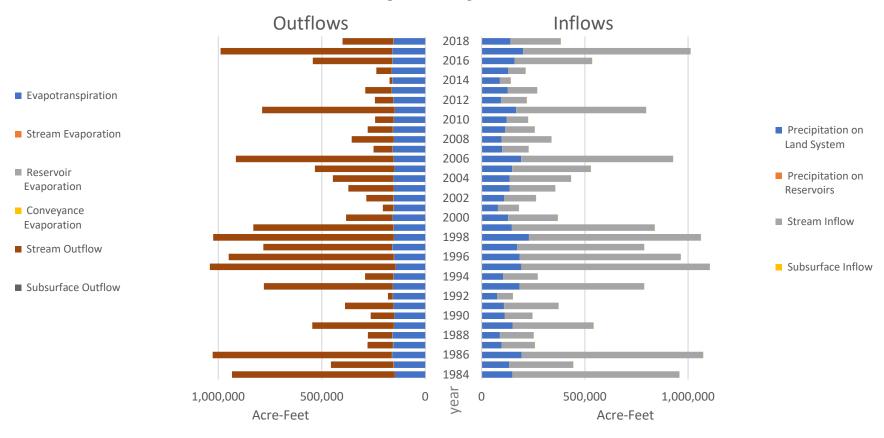


Future Water Budget

TOTAL BASIN

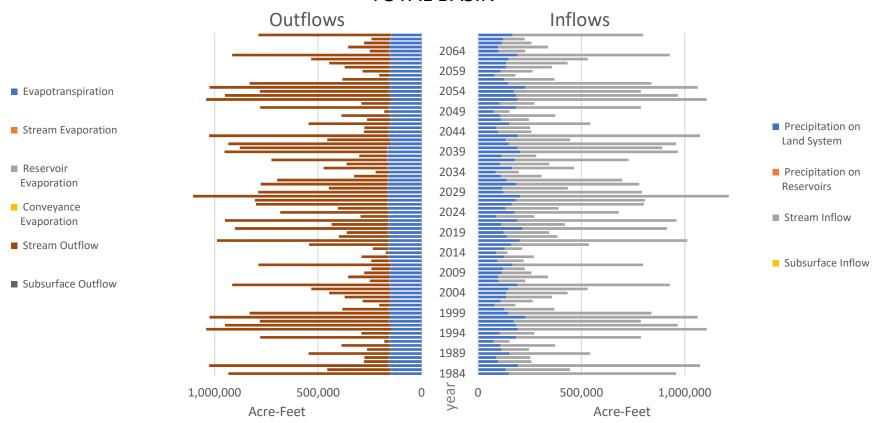

Future Water Budget With Climate Change

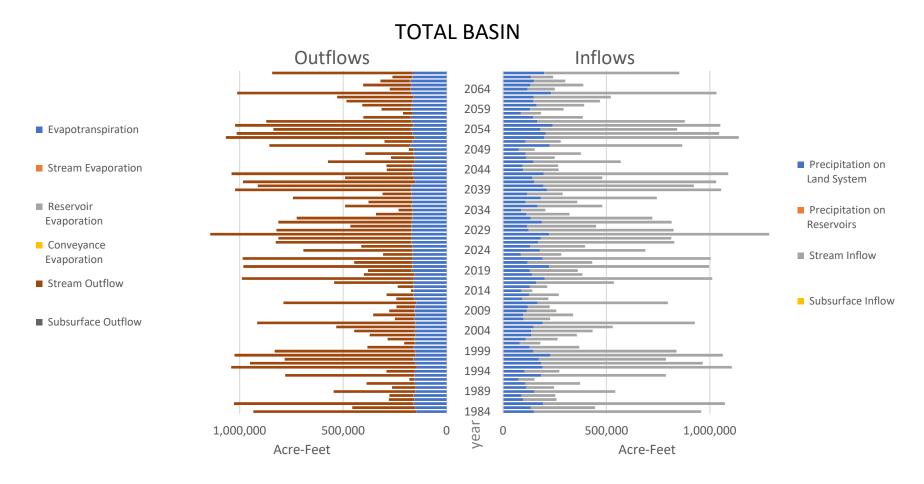

Appendix 7A Pumping Cost Calculations

Example of Typical Well Pumps And Capabilities

Horsepower	Gallons per minute	Pumping head or lift
50 HP	500 GPM	304'
75 HP	500 GPM	456' (152' drop)
100 HP 150 HP	1000 GPM 1000 GPM	320' 480'
		(160' drop)
144 HP	1500 GPM	328′
216 HP	1500 GPM	492'
		(164' drop)


[•] For every 50 ft of drop in pumping level 16.66% increase in horsepower or cost. 150 ft drop = 50 HP increase in HP or cost

Surprise Valley Electric Cost to Pump 2021

50 HP uses	41.45 kWh per hour so 41.45 X 24 =	994.80 kWh
75 HP uses	62.18 kWh per hour so 62.18 X 24 =	1492.32 kWh
100 HP uses	82.90 kWh per hour so 82.90 X 24 =	1989.6 kWh
125 HP uses	103.63 kWh per hour so 103.63 X24 =	2487.12 kWh
150 HP uses	124.35 kWh per hour so 124.36 X 24 =	2984.64 kWh
200 HP uses	165.80 kWh per hour so 165.80 X 24 =	3979.20 kWh

^{*}Basic Charge for irrigation accounts is \$2.67 per HP

	BASIC/MONTH	KWh/DAY	IRRIGATION RATE	DAILY COST
50 HP	\$133.50	994.80	\$.069	\$68.64
75 HP	\$200.25	1492.32	\$.069	\$102.97
100 HP	\$267.00	1989.60	\$.069	\$137.28
125 HP	\$333.75	2487.12	\$.069	\$171.61
150 HP	\$400.50	2984.64	\$.069	\$205.94
200 HP	\$534.00	3979.20	\$.069	\$274.56

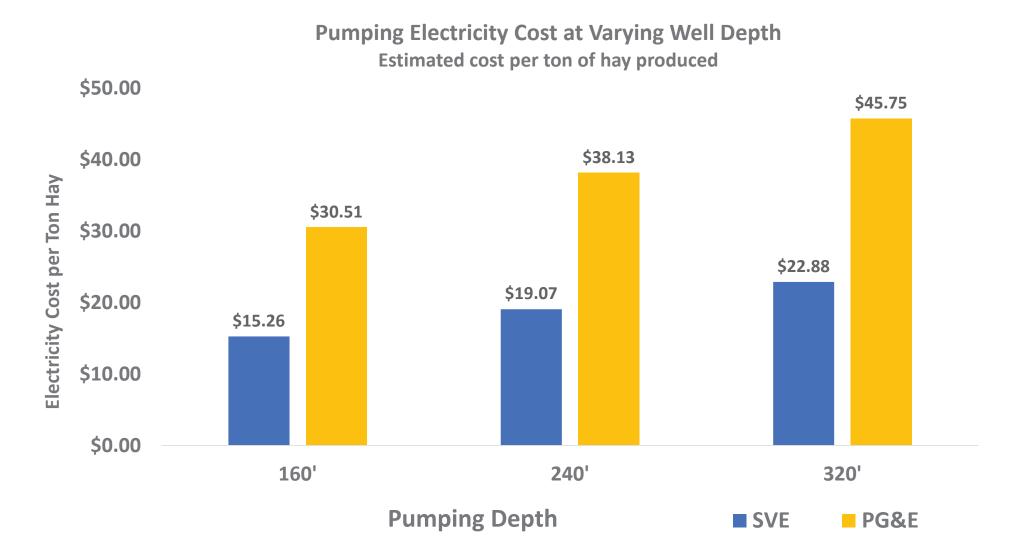

Appendix 8A Water Level Monitoring Well Details

					Ground	Reference					Period of	Period of	Highest	Lowest	Depth to	Groundwater	I
			DWR Well		Surface	Point		Well		Screen ¹	Record	Record	Depth to	Depth to	Water	Elevation	
Well	State	DWR	Completion	Well	Elevation	Elevation		Depth	Open	Interval	Start	End	Water	Water	Range	Range	
Name	Well Number	Site Code	Report Number	Use	(feet msl)	(feet msl)	Reference Point Description	(feet bgs)	Hole	(feet bgs)	(water year)	(water year)	(feet bgs)	(feet bgs)	(feet bgs)	(feet msl)	Comments
01A1	39N07E01A001M	412539N1211050W001	14565	Stockwatering	4183.40	4184.40	Hole in plate at TOC.	300	yes	40 - 300	1979	2021	19.50	148.00	20 - 148	4164 - 4035	
03D1	38N08E03D001M	411647N1210358W001	16564	Irrigation	4163.40	4163.40	TOC below pump base, west side.	280	no	50 - 280	1982	2021	14.80	91.80	15 - 92	4149 - 4072	
06C1	37N08E06C001M	410777N1210986W001	14580	Irrigation	4133.40	4133.90	Hole in pump base on NW side.	400	yes	20 - 400	1982	2016	6.60	67.20	7 - 67	4127 - 4066	
08F1		411493N1209656W001	49934	Other	4253.40		Top of casing below welded plate.	217	yes	26 - 217	1979	2021	23.60	32.90	24 - 33	4230 - 4221	
12G1		411467N1211110W001		Residential	4143.38	4144.38	None Provided	116	no		1979	1994	4.70	12.40	5 - 12		Measurements stopped in 1994
13K2		410413N1211147W001	090029	Irrigation	4127.40	4127.90	Hole in pump base NE side; remove bolt.	260	yes	20 - 260	1982	2021	17.70	65.50	18 - 66	4110 - 4062	
16D1		411359N1210625W001	090143	Irrigation	4171.40	4171.60	2" access tube, SW side.	491	yes	100 - 491	1982	2021	9.00	92.67	9 - 93	4162 - 4079	
17K1		411320N1210766W001	218	Residential	4153.30	4154.30	TOC	180	yes	30 - 180	1957	2021	3.30	38.20	3 - 38	4150 - 4115	
18E1		411356N1209900W001	138559	Irrigation	4248.40	4249.50	Hole in pumpbase, SE side.	520	yes	21 - 520	1981	2021	14.30	86.40	14 - 86	4234 - 4162	La cata di protetta 4054
18M1		411305N1209896W001	138563 127457	Irrigation	4288.40	4288.90	Under cap plate, southwest side.	525	yes	40 - 525 40 - 250	1981 1979	2021 2021	55.70	96.10 26.80	56 - 96 3 - 27		Located next to 18E1
18N2		412144N1211013W001		Residential	4163.40		TOC	250	yes	41 - 183	1	2021	3.20				Located next to BVMW-3
20B6 21C1		411242N1211866W001 412086N1210574W001	128135 127008	Residential Irrigation	4126.30 4161.40		TOC where rope goes in well. TOC; remove bolt from 3/8" hole in steel plate SE side	183 300	yes	30 - 300	1979 1979	2021	9.70 12.90	49.40 79.30	10 - 49 13 - 79	4117 - 4077 4149 - 4082	
22G1		412074N1211497W001	5322	Residential	4143.40	4144.40	TOC under plate SW side.	260	yes	115 - 260	1979	2021	6.70	38.20	7 - 38		In Lookout, outside basin
23E1		411207N1211395W001	38108	Residential	4123.40		TOC where rope goes in.	84	yes	28 - 84	1979	2021	14.30	53.00	14 - 53		In Bieber next to BVMW-5
24J2		411228N1211054W001		Irrigation	4138.40	4139.40	Hole in pump base.	192	yes	1 - 192	1979	2021	0.70	81.70	1 - 82	4138 - 4057	siese: new to still to
26E1		411911N1211354W001	127484	Irrigation	4133.40	4135.00	Hole inside SE corner of pumpbase.	400	no	20 - 400	1979	2021	2.10	44.50	2 - 45	4131 - 4089	
28F1		411907N1209447W001		Residential	4206.60	4207.10	None Provided	73	no		1982	2021	4.50	12.03	5 - 12	4202 - 4195	In Adin next to BVMW-1
32A2	38N07E32A002M	410950N1211839W001		Other	4118.80	4119.50	тос	49	no		1959	2021	0.00	12.10	0 - 12	4119 - 4107	
32R1	39N09E32R001M	411649N1209569W001		Irrigation	4243.40	4243.60	Hole in pumpbase, south side.		no		1981	2021	37.90	82.20	38 - 82	4206 - 4161	
ACWA-1	38N08E07A001M	411508N1210900W001	0962825	Irrigation	4142.00	4142.75	Access port on NE side of wellhead.	780	no	60 - 780	2016	2021	15.65	102.85	16 - 103	4126 - 4039	
ACWA-2	39N08E33P002M	411699N1210579W001	484622	Irrigation	4153.00	4153.20	Access on SE side of well casing	800	no	50 - 800	2016	2021	13.65	26.60	14 - 27	4139 - 4126	
ACWA-3		411938N1210478W001	0951365	Irrigation	4159.00	4159.83	Hole in pump base, remove plug. Same access as airline.	720	no	60 - 720	2016	2021	8.42	23.07	8 - 23	4151 - 4136	
BVMW 1-1		411880N1209599W001	2020-006214	Observation	4214.17	4213.84	Notch on PVC casing	265	no	175 - 265	2020	2021	29.66	52.66	30 - 53	4185 - 4162	
BVMW 1-2		411881N1209598W001		Observation	4214.54	4214.21	Notch on PVC casing	52	no	32 - 52	2020	2021	28.69	36.82	29 - 37	4186 - 4178	
BVMW 1-3		411878N1209593W001	2020-006285	Observation	4218.50	4218.17	Notch on PVC casing	50	no	30 - 50	2020	2021	32.69	40.84	33 - 41	4186 - 4178	
BVMW 1-4		411880N1209590W001	2020-006328	Observation	4218.39	4218.06	Notch on PVC casing	49	no	29 - 49	2020	2021	32.38	40.36	32 - 40	4186 - 4178	
BVMW 2-1 BVMW 2-2		412119N1210286W001 412118N1210286W001		Observation	4216.51 4216.77	4216.18 4216.44	Notch on PVC casing	250 70	no	210 - 250 50 - 70	2020 2020	2021 2021	21.66 17.48	22.33 20.82	22 - 22 17 - 21	4195 - 4194 4199 - 4196	
BVMW 2-3		412118N1210286W001	2020-006674	Observation Observation	4216.77	4213.93	Notch on PVC casing Notch on PVC casing	70	no no	50 - 70	2020	2021	31.30	34.73	31 - 35	4199 - 4196	
BVMW 2-4		412110N1210287W001		Observation	4209.95	4213.93	Notch on PVC casing	60	no	40 - 60	2020	2021	19.77	23.63	20 - 24	4190 - 4186	
BVMW 3-1		412169N1211050W001		Observation	4164.75	4164.41	Notch on PVC casing	185	no	135 - 185	2020	2021	14.86	18.34	15 - 18	4150 - 4146	
BVMW 3-2		412170N1211050W001	2020-006595	Observation	4164.92	4164.58	Notch on PVC casing	40	no	25 - 40	2020	2021	9.96	13.60	10 - 14	4155 - 4151	
BVMW 3-3		412157N1211051W001	2020-006593	Observation	4164.36	4164.02	Notch on PVC casing	50	no	25 - 50	2020	2021	5.70	8.56	6-9	4159 - 4156	
BVMW 3-4		412157N1211054W001	2020-006596	Observation	4165.31	4164.97	Notch on PVC casing	50	no	25 - 50	2020	2021	6.83	9.81	7 - 10	4158 - 4156	
BVMW 4-1		412029N1211587W001	2019-017359	Observation	4152.73	4152.40	Notch on PVC casing	425	no	385 - 415	2020	2021	37.43	64.75	37 - 65	4115 - 4088	
BVMW 4-2		412029N1211588W001	2019-017360	Observation	4153.06	4152.73	Notch on PVC casing	74	no	54 - 74	2020	2021	29.77	48.57	30 - 49	4123 - 4104	
BVMW 4-3		412030N1211579W001		Observation	4152.66	4152.33	Notch on PVC casing	80	no	60 - 80	2020	2021	29.68	48.96	30 - 49	4123 - 4104	
BVMW 4-4		412035N1211578W001		Observation	4161.65	4161.32	Notch on PVC casing	93	no	73 - 93	2020	2021	39.06	58.80	39 - 59	4123 - 4103	
BVMW 5-1		411219N1211339W001		Observation	4129.05		Notch on PVC casing	540	no	485 - 535	2020	2021	40.35	46.65	40 - 47	4089 - 4082	
BVMW 5-2		411220N1211339W001		Observation	4128.92		Notch on PVC casing	115	no	65 - 115	2020	2021	20.40	25.80	20 - 26	4109 - 4103	
BVMW 5-3		411212N1211366W001		Observation	4131.73		Notch on PVC casing	85	no	65 - 85	2020	2021	34.86	45.02	35 - 45	4097 - 4087	
BVMW 5-4		411206N1211340W001	2020-006663	Observation	4130.23	4130.23	Notch on PVC casing	90	no	70 - 90	2020	2021	33.67	43.27	34 - 43	4097 - 4087	

Notes:

-- = information not available


feet bgs = feet below ground surface (depth to water)


feet msl = feet above mean sea level (groundwater elevation NAVD88)


water year = October 1 to September 30


¹ For the purposes of this GSP, the terms "screen" or "perforation" encompases any interval that allows water to enter the well from the aquifer, including casing perforations, well screens, or open hole.


Appendix 8B New Monitoring Well As-Built Drawings

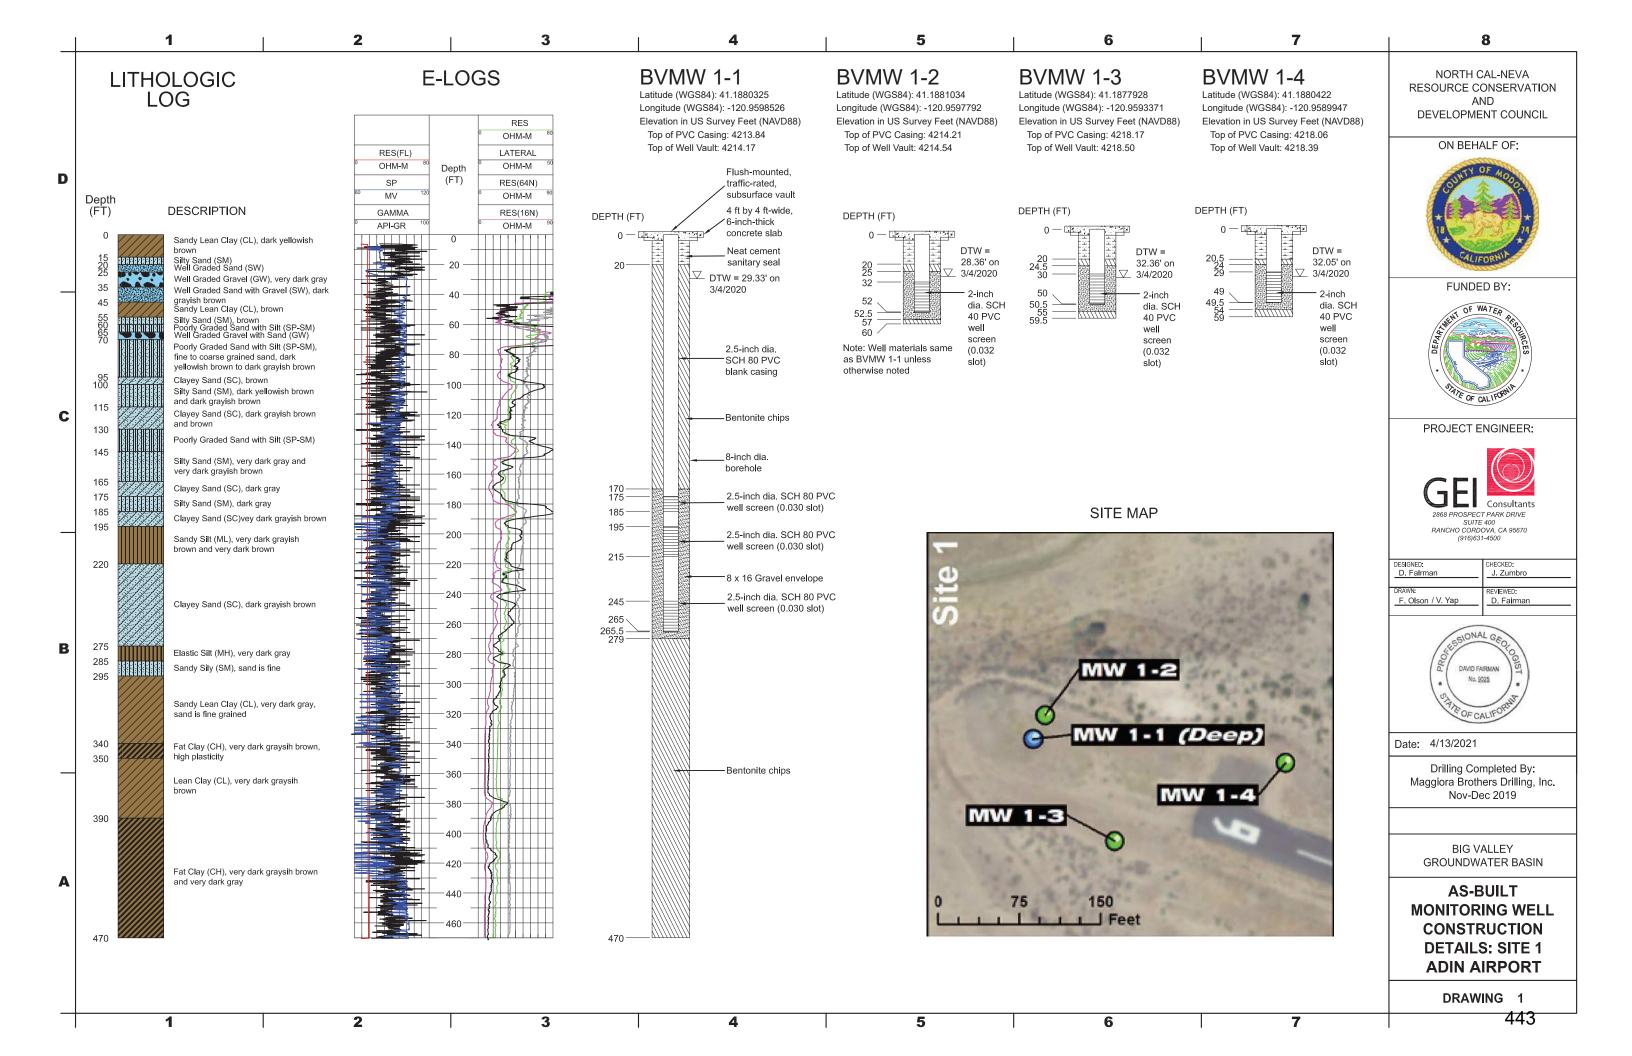

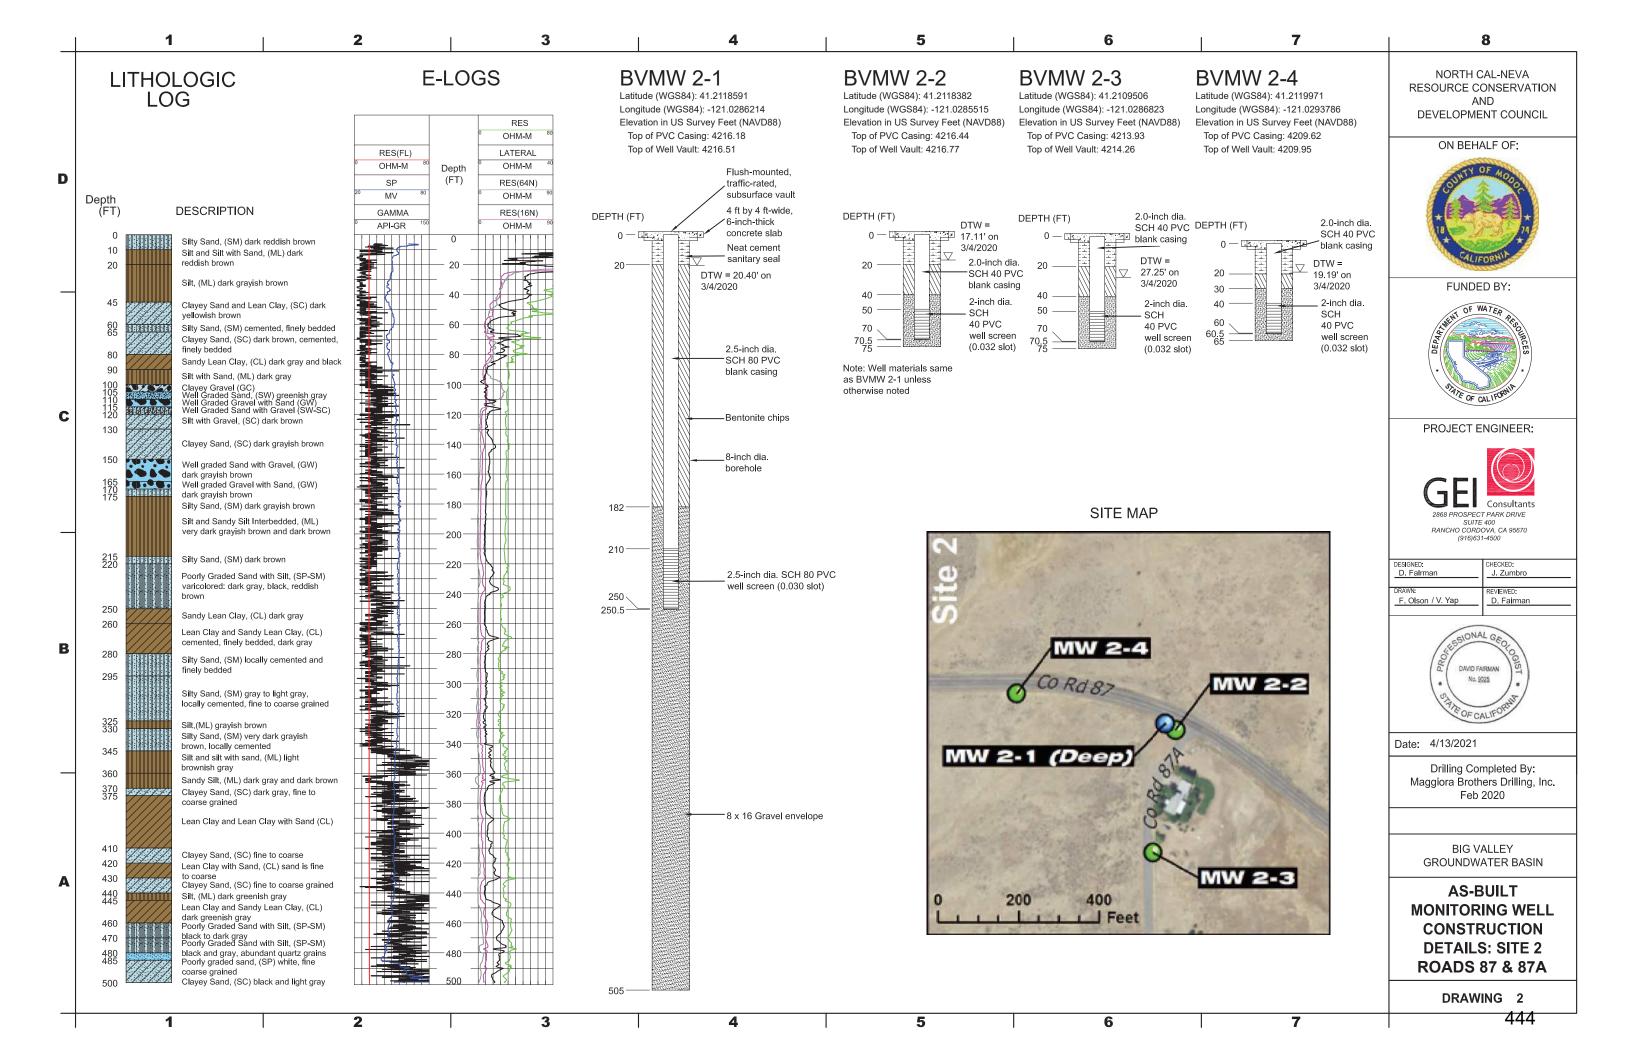

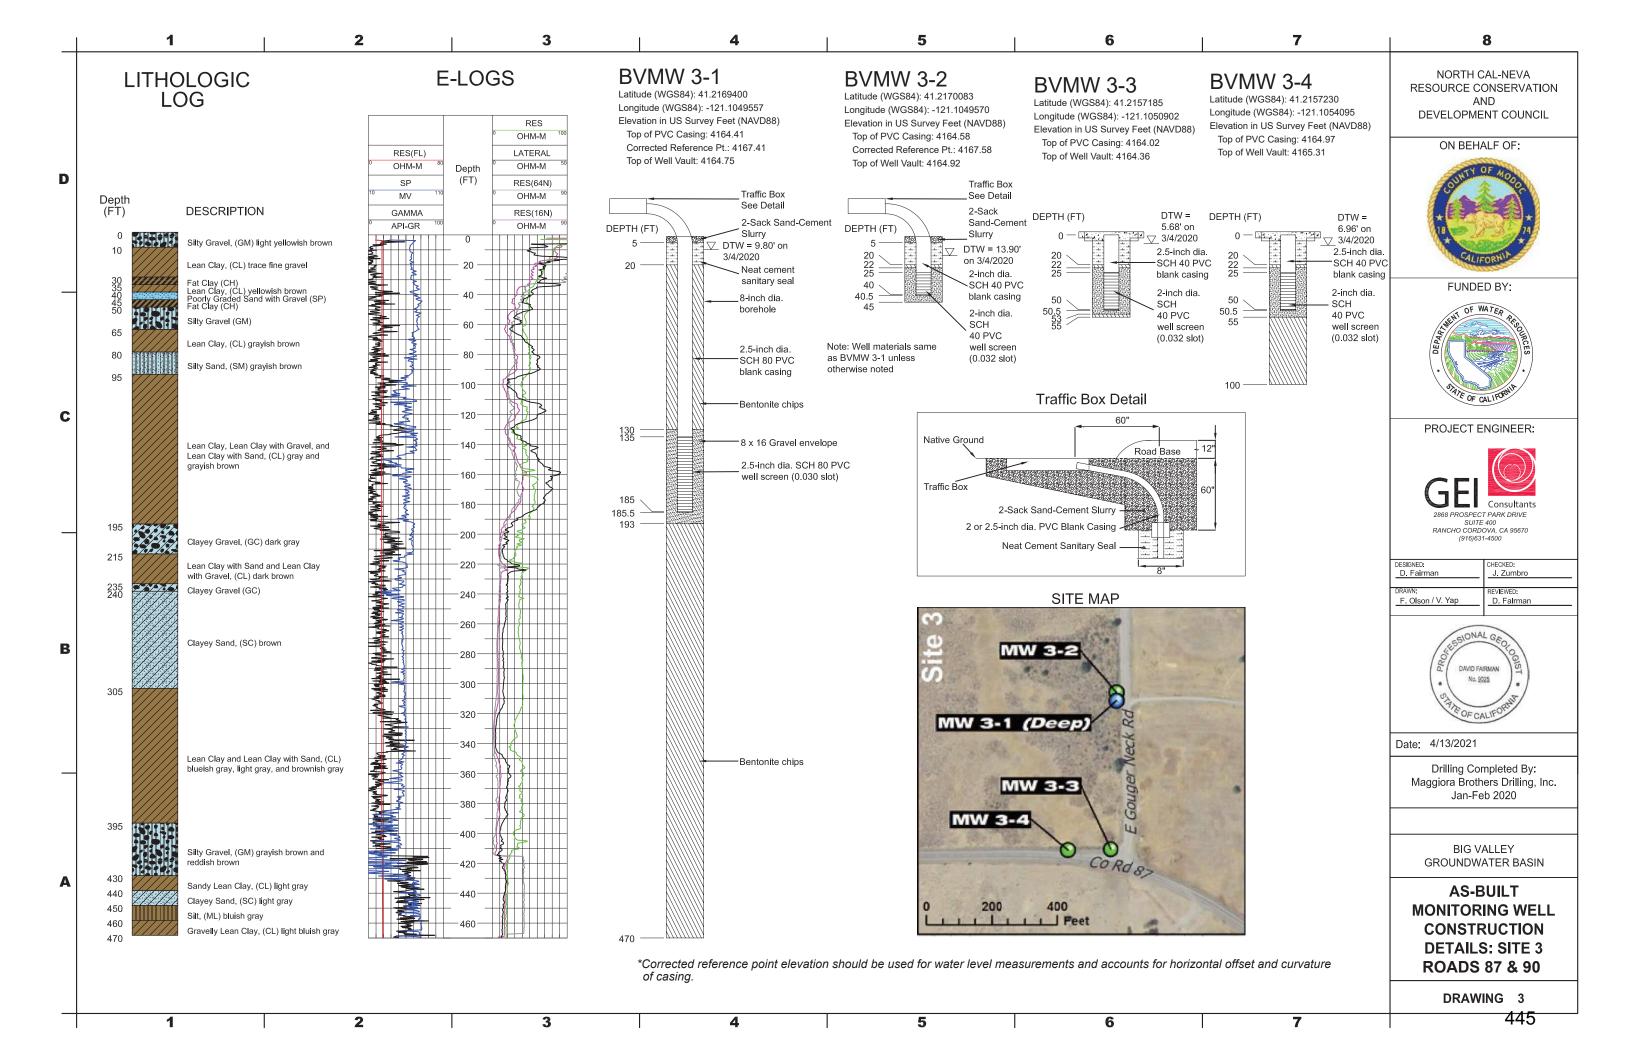

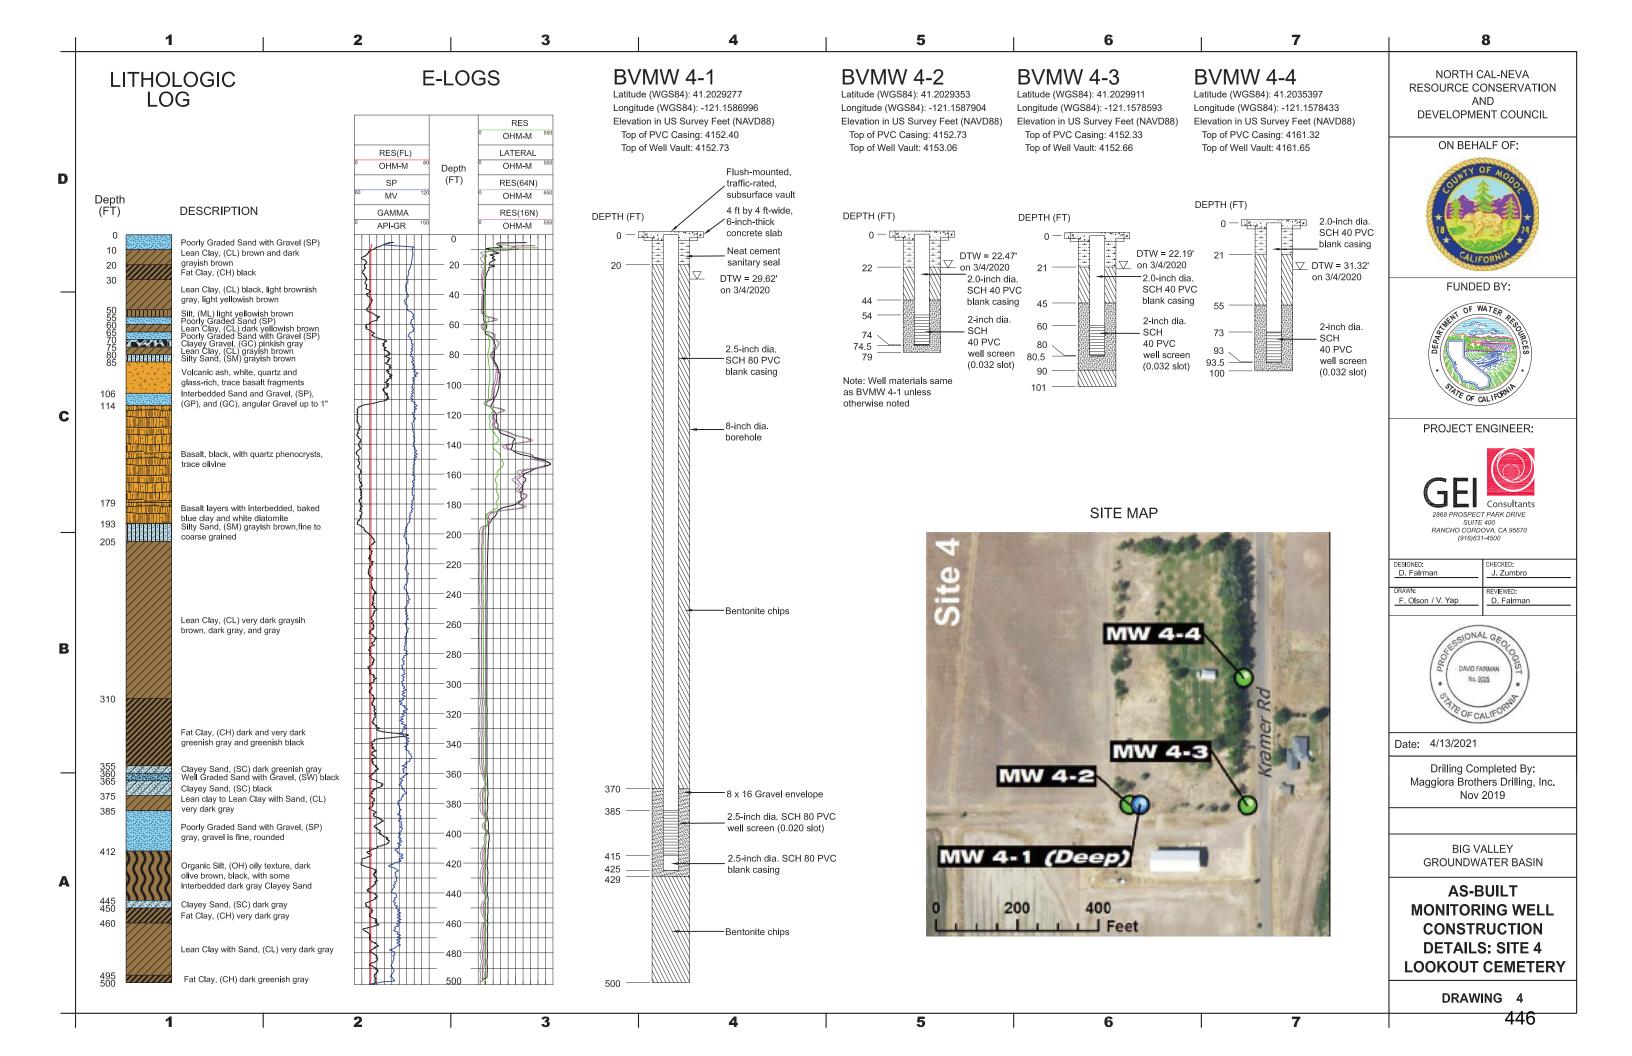

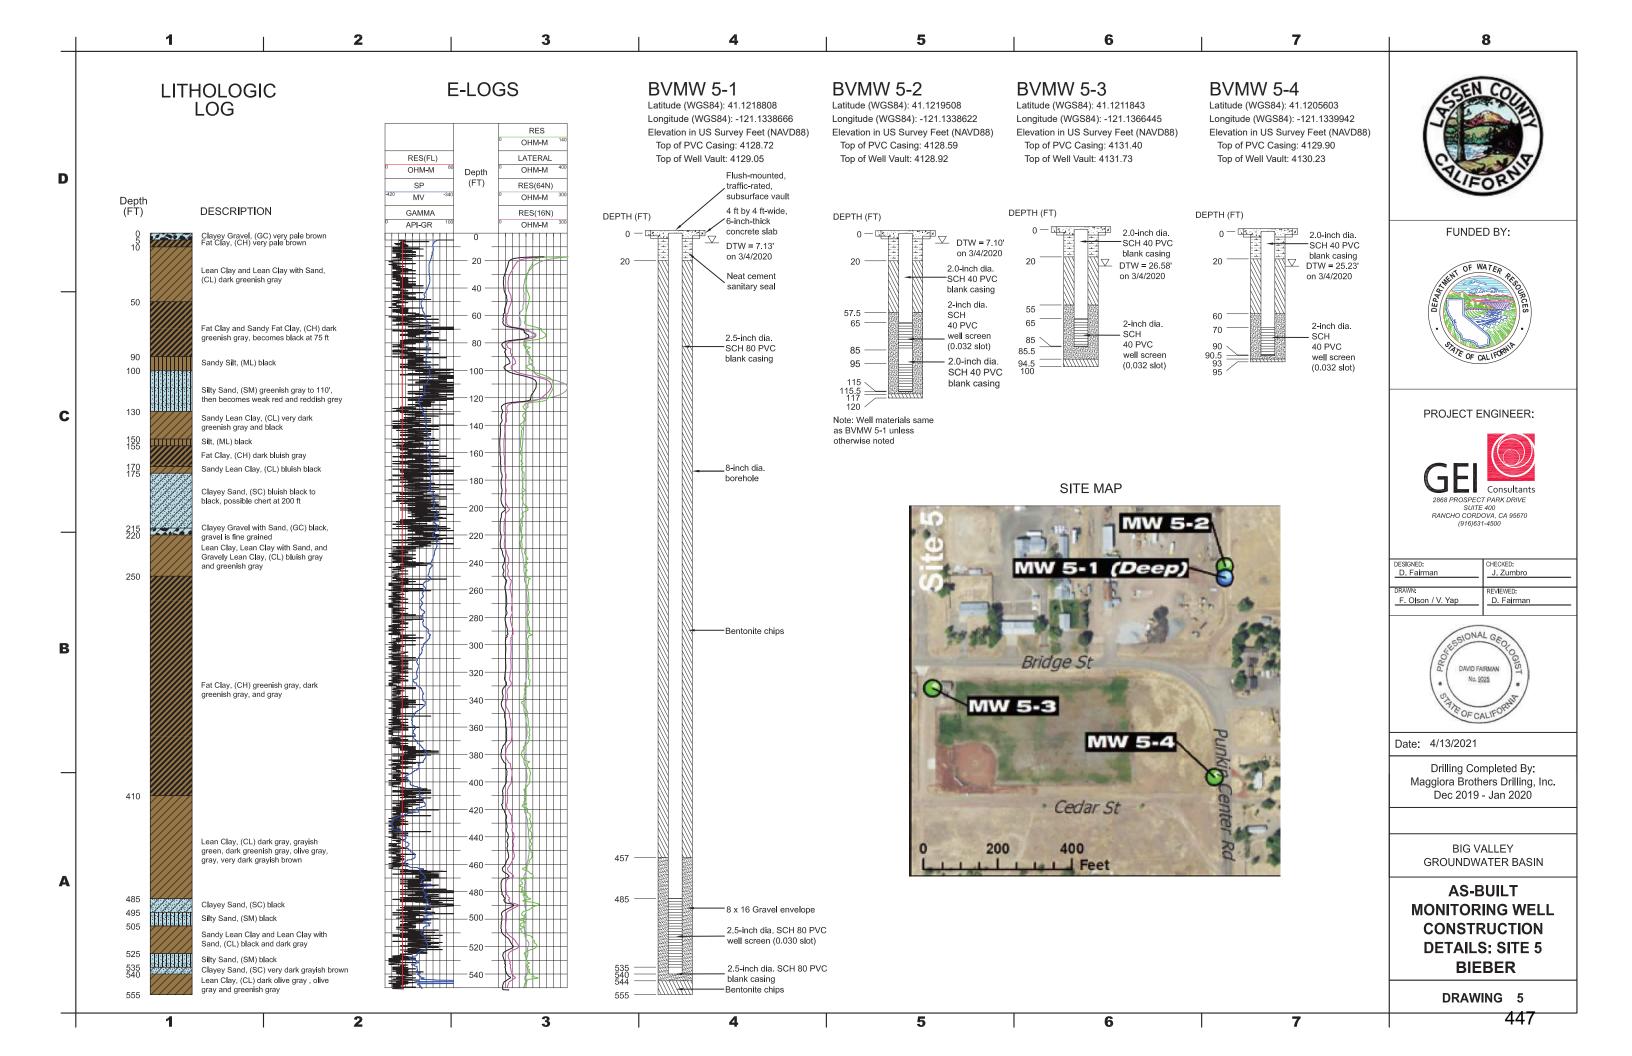

Appendix 8C Selection from DWR Monitoring BMP

PROTOCOLS FOR MEASURING GROUNDWATER LEVELS

This section presents considerations for the methodology of collection of groundwater level data such that it meets the requirements of the GSP Regulations and the DQOs of the specific GSP. Groundwater levels are a fundamental measure of the status of groundwater conditions within a basin. In many cases, relationships of the sustainability indicators may be able to be correlated with groundwater levels. The quality of this data must consider the specific aquifer being monitored and the methodology for collecting these levels.

The following considerations for groundwater level measuring protocols should ensure the following:

- Groundwater level data are taken from the correct location, well ID, and screen interval depth
- Groundwater level data are accurate and reproducible
- Groundwater level data represent conditions that inform appropriate basin management DQOs
- All salient information is recorded to correct, if necessary, and compare data
- Data are handled in a way that ensures data integrity

General Well Monitoring Information

The following presents considerations for collection of water level data that include regulatory required components as well as those which are recommended.

- Groundwater elevation data will form the basis of basin-wide water-table and piezometric maps, and should approximate conditions at a discrete period in time. Therefore, all groundwater levels in a basin should be collected within as short a time as possible, preferably within a 1 to 2 week period.
- Depth to groundwater must be measured relative to an established Reference Point (RP) on the well casing. The RP is usually identified with a permanent marker, paint spot, or a notch in the lip of the well casing. By convention in open casing monitoring wells, the RP reference point is located on the north side of the well casing. If no mark is apparent, the person performing the measurement should measure the depth to groundwater from the north side of the top of the well casing.
- The elevation of the RP of each well must be surveyed to the North American Vertical Datum of 1988 (NAVD88), or a local datum that can be converted to NAVD88. The elevation of the RP must be accurate to within 0.5 foot. It is preferable for the RP elevation to be accurate to 0.1 foot or less. Survey grade global navigation satellite system (GNSS) global positioning system (GPS) equipment can achieve similar vertical accuracy when corrected. Guidance for use of GPS can be found at USGS http://water.usgs.gov/osw/gps/. Hand-held GPS units likely will not produce reliable vertical elevation measurement accurate enough for the casing elevation consistent with the DQOs and regulatory requirements.
- The sampler should remove the appropriate cap, lid, or plug that covers the monitoring access point listening for pressure release. If a release is observed, the measurement should follow a period of time to allow the water level to equilibrate.
- Depth to groundwater must be measured to an accuracy of 0.1 foot below the RP. It is preferable to measure depth to groundwater to an accuracy of 0.01 foot. Air lines and acoustic sounders may not provide the required accuracy of 0.1 foot.
- The water level meter should be decontaminated after measuring each well.

Where existing wells do not meet the base standard as described in the GSP Regulations or the considerations provided above, new monitoring wells may need to be constructed to meet the DQOs of the GSP. The design, installation, and documentation of new monitoring wells must consider the following:

- Construction consistent with California Well Standards as described in Bulletins 74-81 and 74-90, and local permitting agency standards of practice.
- Logging of borehole cuttings under the supervision of a California Professional Geologist and described consistent with the Unified Soil Classification System methods according to ASTM standard D2487-11.
- Written criteria for logging of borehole cuttings for comparison to known geologic formations, principal aquifers and aquitards/aquicludes, or specific marker beds to aid in consistent stratigraphic correlation within and across basins.
- Geophysical surveys of boreholes to aid in consistency of logging practices.
 Methodologies should include resistivity, spontaneous potential, spectral
 gamma, or other methods as appropriate for the conditions. Selection of
 geophysical methods should be based upon the opinion of a professional
 geologist or professional engineer, and address the DQOs for the specific
 borehole and characterization needs.
- Prepare and submit State well completion reports according to the requirements
 of §13752. Well completion report documentation should include geophysical
 logs, detailed geologic log, and formation identification as attachments. An
 example well completion as-built log is illustrated in Figure 2. DWR well
 completion reports can be filed directly at the Online System for Well
 Completion Reports (OSWCR) http://water.ca.gov/oswcr/index.cfm.

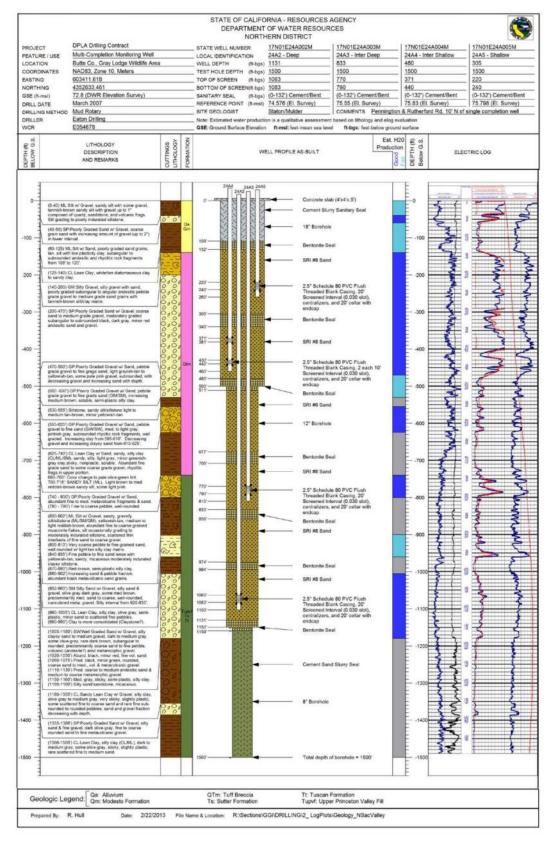


Figure 2 – Example As-Built Multi-Completion Monitoring Well Log

Measuring Groundwater Levels

Well construction, anticipated groundwater level, groundwater level measuring equipment, field conditions, and well operations should be considered prior collection of the groundwater level measurement. The USGS *Groundwater Technical Procedures* (Cunningham and Schalk, 2011) provide a thorough set of procedures which can be used to establish specific Standard Operating Procedures (SOPs) for a local agency. **Figure 3** illustrates a typical groundwater level measuring event and simultaneous pressure transducer download.



Figure 3 - Collection of Water Level Measurement and Pressure Transducer Download

The following points provide a general approach for collecting groundwater level measurements:

- Measure depth to water in the well using procedures appropriate for the measuring device. Equipment must be operated and maintained in accordance with manufacturer's instructions. Groundwater levels should be measured to the nearest 0.01 foot relative to the RP.
- For measuring wells that are under pressure, allow a period of time for the groundwater levels to stabilize. In these cases, multiple measurements should be collected to ensure the well has reached equilibrium such that no significant changes in water level are observed. Every effort should be made to ensure that a representative stable depth to groundwater is recorded. If a well does not stabilize, the quality of the value should be appropriately qualified as a

questionable measurement. In the event that a well is artesian, site specific procedures should be developed to collect accurate information and be protective of safety conditions associated with a pressurized well. In many cases, an extension pipe may be adequate to stabilize head in the well. Record the dimension of the extension and document measurements and configuration.

The sampler should calculate the groundwater elevation as:

$$GWE = RPE - DTW$$

Where:

GWE = Groundwater Elevation RPE = Reference Point Elevation DTW = Depth to Water

The sampler must ensure that all measurements are in consistent units of feet, tenths of feet, and hundredths of feet. Measurements and RPEs should not be recorded in feet and inches.

Recording Groundwater Levels

- The sampler should record the well identifier, date, time (24-hour format), RPE, height of RP above or below ground surface, DTW, GWE, and comments regarding any factors that may influence the depth to water readings such as weather, nearby irrigation, flooding, potential for tidal influence, or well condition. If there is a questionable measurement or the measurement cannot be obtained, it should be noted. An example of a field sheet with the required information is shown in **Figure 4**. It includes questionable measurement and no measurement codes that should be noted. This field sheet is provided as an example. Standardized field forms should be used for all data collection. The aforementioned USGS *Groundwater Technical Procedures* offers a number of example forms.
- The sampler should replace any well caps or plugs, and lock any well buildings or covers.
- All data should be entered into the GSA data management system (DMS) as soon as possible. Care should be taken to avoid data entry mistakes and the entries should be checked by a second person for compliance with the DQOs.

STATE OF CALIFORNA THE RESOURCES AGENCY DEPARTMENT OF WATER RESOURCES

WELL DATA

	STATE WELL NUMBER COU						UNTY	REFERENCE MEASURING AGE							
									DWR						
NO MEASUREMENT 0. Measurement discontinued 1. Pumping 2. Pump house locked 3. Tape hung up 4. Can't get tape in casing 5. Unable to locate well 6. Well has been destroyed 7. Special 8. Casing leaky or wet 9. Temporarily inaccessible								QUESTIONABLE MEASUREMENT 0. Caved or deepened 1. Pumping 2. Nearby pump operating 3. Casing leaky or wet 4. Pumped recently 5. Air or pressure gauge measurement 6. Other 7. Recharge operation at or nearby well 8. Oil in casing							
DATE	N M	Q M	TAPE AT RP	TAPE AT WS	F	RP to WS	OBSR VR		COMMENTS	5					
	\downarrow														
	+				_										
	+														
	+														
	+														
	\top														
	4														
	+														
	+														

Figure 4 – Example of Water Level Well Data Field Collection Form

DWR 1213

Pressure Transducers

Groundwater levels and/or calculated groundwater elevations may be recorded using pressure transducers equipped with data loggers installed in monitoring wells. When installing pressure transducers, care must be exercised to ensure that the data recorded by the transducers is confirmed with hand measurements.

The following general protocols must be followed when installing a pressure transducer in a monitoring well:

- The sampler must use an electronic sounder or chalked steel tape and follow the protocols listed above to measure the groundwater level and calculate the groundwater elevation in the monitoring well to properly program and reference the installation. It is recommended that transducers record measured groundwater level to conserve data capacity; groundwater elevations can be calculated at a later time after downloading.
- The sampler must note the well identifier, the associated transducer serial number, transducer range, transducer accuracy, and cable serial number.
- Transducers must be able to record groundwater levels with an accuracy of at least 0.1 foot. Professional judgment should be exercised to ensure that the data being collected is meeting the DQO and that the instrument is capable. Consideration of the battery life, data storage capacity, range of groundwater level fluctuations, and natural pressure drift of the transducers should be included in the evaluation.
- The sampler must note whether the pressure transducer uses a vented or non-vented cable for barometric compensation. Vented cables are preferred, but non-vented units provide accurate data if properly corrected for natural barometric pressure changes. This requires the consistent logging of barometric pressures to coincide with measurement intervals.
- Follow manufacturer specifications for installation, calibration, data logging intervals, battery life, correction procedure (if non-vented cables used), and anticipated life expectancy to assure that DQOs are being met for the GSP.
- Secure the cable to the well head with a well dock or another reliable method. Mark the cable at the elevation of the reference point with tape or an indelible marker. This will allow estimates of future cable slippage.
- The transducer data should periodically be checked against hand measured groundwater levels to monitor electronic drift or cable movement. This should happen during routine site visits, at least annually or as necessary to maintain data integrity.

• The data should be downloaded as necessary to ensure no data is lost and entered into the basin's DMS following the QA/QC program established for the GSP. Data collected with non-vented data logger cables should be corrected for atmospheric barometric pressure changes, as appropriate. After the sampler is confident that the transducer data have been safely downloaded and stored, the data should be deleted from the data logger to ensure that adequate data logger memory remains.

PROTOCOLS FOR SAMPLING GROUNDWATER QUALITY

The following protocols can be incorporated into a GSP's monitoring protocols for collecting groundwater quality data. More detailed sampling procedures and protocols are included in the standards and guidance documents listed at the end of this BMP. A GSP that adopts protocols that deviate from these BMPs must demonstrate that the adopted protocols will yield comparable data.

In general, the use of existing water quality data within the basin should be done to the greatest extent possible if it achieves the DQOs for the GSP. In some cases it may be necessary to collect additional water quality data to support monitoring programs or evaluate specific projects. The USGS *National Field Manual for the Collection of Water Quality Data* (Wilde, 2005) should be used to guide the collection of reliable data. **Figure 5** illustrates a typical groundwater quality sampling setup.



Figure 5 - Typical Groundwater Quality Sampling Event

Appendix 11A GSA Letters to Governor and Legislature

County of Lassen Board of Supervisors

CHRIS GALLAGHER
District 1
DAVID TEETER
District 2
JEFF HEMPHILL
District 3
AARON ALBAUGH
District 4
TOM HAMMOND
District 5



County Administration Office 221 S. Roop Street, Suite 4 Susanville, CA 96130 Phone: 530-251-8333 Fax: 530-251-2663

August 11, 2020

Gavin Newsom Governor, State of California 1303 10th Street, Suite 1173 Sacramento, CA 95814

RE: Request for Extension for Submittal of a Groundwater Sustainability Plan for the Big Valley

Groundwater Basin

Dear Governor Newsom:

COVID-19 has had (and continues to have) a monumental impact on the ability of State and local government to conduct the people's business. Accordingly, as the Governor of the State of California, you have, on multiple occasions, exercised authority granted to you pursuant to the State's police power and through the Emergency Services Act to issue Executive Orders in response to the COVID-19 emergency. As discussed herein, these orders have often altered the implementation of various Statutes and Regulations. This letter is to request that you use your authority to extend the January 31, 2022, deadline to submit a Groundwater Sustainability Plan (GSP) to the Department of Water Resources (DWR) for the Big Valley Groundwater Basin (DWR Bulletin 118 Basin 5-004) as required by the Sustainable Groundwater Management Act (SGMA).

The Big Valley Groundwater Basin is located in two counties (Lassen and Modoc), and the counties have stepped forward to act as the Groundwater Sustainability Agencies (GSAs) for their respective portions of the Basin. Big Valley is a rural, agricultural area where ranching and farming make up the bulk of the economy by producing alfalfa, hay, wild rice, pasture and range. Ranching and farming have a long history in Big Valley and many current, active ranchers are the same families that homesteaded here. In addition, there is a state wildlife refuge in the middle of the Basin that supports important species and acts as part of the Pacific flyway. Big Valley is designated as a disadvantaged community. To say that there is a high level of interest in how the GSP for Big Valley is developed is an understatement.

The GSAs have been unable to successfully conduct the public outreach expected by stakeholders and required by the SGMA during the COVID-19 emergency. Further, the ability to conduct telephonic or web-based participation is highly limited in Big Valley because there is inadequate internet access and in some cases no internet access at all for stakeholders to participate in public meetings.

Choose Civility 459

Gavin Newsom, Governor of California August 11, 2020 Page 2 of 5

While the GSP deadline is still 16 months away, it is clear that we do not have enough time to meet the robust public participation requirements found in the SGMA (summarized in this letter) while also meeting the current submittal deadline. The combination of complex GSP Regulations which require highly technical content and the need for public participation mean that the outreach process will take a lot of time for all parties to come to a shared understanding of what the Regulations require and what the content of the GSP means to them. Decisions that will have a huge impact in the Basin will be made and implemented through the GSP.

The public outreach and participation plan we developed prior to COVID-19 requires frequent public meetings between now and January 31, 2022, to prepare a draft GSP that the GSAs can approve and submit to DWR as required by the SGMA. Between now and the due date, we will be working chapter by chapter, requirement by requirement, attempting to develop a shared understanding and make reasoned decisions. Even before COVID-19, the schedule was tight and the GSAs were challenged to accommodate adequate public involvement, which is focused through the Big Valley Groundwater Basin Advisory Committee (BVAC). The BVAC is formed through a memorandum of understanding between the two GSAs and is proving ineffective because COVID-19 requirements and health considerations have made it difficult or impossible to conduct public meetings. Given the realities of the COVID-19 emergency, many will be left out of the conversation unless additional time is provided.

You have responded to difficulties that agencies are experiencing conducting public meetings during COVID-19 by relaxing certain Brown Act meeting requirements. Through Executive Order Numbers N-25-20 and N-29-20, your Administration has taken important steps to ensure that public meetings are able to convene and conduct necessary public business during the COVID-19 emergency. Again, you issued the above and many other executive orders, as authorized by the State's police power and through the Emergency Services Act to maintain proper functioning of state and local governments. In summary, said Executive Orders modified certain requirements for noticing and conducting public meetings, as described in Government Code sections 54950-54963 (Chapter 9, Meetings). In part, provisions of these orders allow remote (web or phone-based) meetings to be conducted from multiple locations, without meeting all of the requirements of the above sections. This includes allowing elected or appointed representatives to participate remotely.

The intent for meeting in this fashion is to allow government to continue functioning while those that need to can maintain isolation. This is necessary and prudent for routine functions, but the SGMA is different. This legislation is new territory for all involved and has wide reaching impacts on stakeholders of all varieties. Because of the long-term nature of the SGMA, the GSAs and stakeholders want to develop a GSP off the bat that stakeholders can live with and reduces the uncertainty that the future holds.

Unfortunately, the above orders are not enough in the Big Valley Groundwater Basin because this remote area of rural, mountainous, northeastern California does not have the digital connectivity required to successfully conduct remote meetings. As discussed herein, attempts to conduct remote meetings in Big Valley have been unsuccessful due to the exceptionally poor internet connectivity. Allowing the public to attend meetings through the internet may be a good strategy for areas that have reliable internet connectivity, but not in rural mountain areas. For internet-based meetings to be successful, infrastructure is needed. This infrastructure is severely lacking in Big Valley and surrounding areas.

In addition to the lack of internet capability, Big Valley is already recognized by the DWR and other State Departments as an economically disadvantaged area. The reality is that many of the citizens in Big Valley do not have the resources, both technical and financial, to access the internet, even if adequate internet connectivity were available. The internet access disparity between urban and rural areas is well-documented. Further, many of the residents are not familiar with the mechanics of participating in meetings electronically. They have had no training or exposure to this technology and meeting venue. Another challenge is staff availability to facilitate internet-based meetings. The two Big Valley Groundwater Basin GSAs, like many rural governments, have very limited staff, especially technical staff.

On July 1, 2020, the GSAs attempted to conduct a combined live and internet-based meeting in lieu of a traditional live-only public outreach meeting. We attempted to conduct the meeting with "Go-To-Webinar" and failed miserably with unintelligible audio. After thirty minutes, one stakeholder who tried to participate from home decided to take the risk of coming to the live portion of the meeting because of the webinar problems even though her spouse has health concerns that make him high risk.

As stated, the fundamental issue we are working through is that, because of COVID-19, there are now two sections of the SGMA that conflict with each other. The legislation provides a deadline, but the same legislation also requires meaningful public involvement. Because of COVID-19, the public in the Big Valley Groundwater Basin has shown a reluctance to attend public meetings to discuss development of the GSP. Further, and again as a direct result of COVID-19, limitations and requirements have been placed on local governments on how public meetings are to be conducted. Below is a summary of some of the public participation requirements found in the SGMA that, as a result of this health emergency, are at odds with the January 31, 2022, deadline:

- In part, Water Code section 10723.2 states "[t]] he groundwater sustainability agency shall consider the interests of all beneficial uses and users of groundwater, as well as those responsible for implementing groundwater sustainability plans. These interests include, but are not limited to, all of the following..." Without providing an effective means of participation and in the current COVID-19 environment, it is not possible to consider the interest of all beneficial users or to work with our professional staff on the implementation of whatever plan is ultimately adopted. More time is necessary or an important part of the SGMA will be meaningless. This weakens the resulting GSP, making it more difficult to implement and subjecting the GSP to added scrutiny and challenge. Again, we cannot meet the above public participation requirement while also meeting the January 31, 2022, deadline.
- In part, Water Code section 10727.8 states "Prior to initiating the development of a groundwater sustainability plan, the groundwater sustainability agency shall make available to the public and the department a written statement describing the manner in which interested parties may participate in the development and implementation of the groundwater sustainability plan..." In accordance with said section, the GSA's have adopted a memorandum of understanding that establishes an Advisory Committee. A primary function of the Advisory Committee is to facilitate public comment. A meeting format has been

Gavin Newsom, Governor of California August 11, 2020 Page 4 of 5

established to incorporate public comment. In light of COVID-19, the above process has proved itself insufficient to capture and facilitate public comment regarding development of the GSP.

Clearly it was the intent of the legislature in adopting the SGMA that GSPs be prepared with broad public participation. Unfortunately, COVID-19 has restricted the ways in which public meetings can be conducted. The GSP will have a huge impact on the lives of the residents and their children. As such, the SGMA rightfully provides the requirement to include the public in the preparation of the GSP. COVID-19, is jeopardizing the public's participation in the very process that the SGMA assured them they could be part of. It is not realistic to expect the public to be satisfied with our limited ability to conduct internet and phone-based meetings for a process they were assured by the legislature that they would be allowed to participate in. Given the lack of alternatives we have for engaging the public in the GSP development process, it seems clear that we will not be able to meet the January 31, 2022, deadline the legislature established for submittal of the GSP to DWR.

We owe it to the public to provide an opportunity to meaningfully participate. In the end, allowing additional time to prepare the GSP is not likely to have as profound an impact as preparing and submitting a GSP without involving the affected public. The GSP is a major undertaking that will affect the lives of the residents and generations to come. For the GSP to be implemented successfully, the legislature recognized the importance of public participation. Submittal of a plan that will take more than 20 years to implement without the involvement and participation of the very people it will affect is not a good way to start.

As stated, an Executive Order is an appropriate mechanism to grant our request to provide additional time for the GSAs to more fully engage the public in this process as intended by the SGMA. The authority of the Executive to temporarily modify the implementation of Statute and Regulation is demonstrated through the many other Executive Orders you have issued in response to the COVID-19 pandemic. Examples of Statutes affected by Executive Orders you have issued include the Elections Code, Insurance Code, Education Code, Penal Code, Civil Code, Code of Civil Procedure, Vehicle Code, Labor Code, Welfare and Institutions Code, Health and Safety Code, Public Resources Code, Government Code, Unemployment Insurance Code and others. As said, there are also examples of Regulations that have been affected by your Executive Orders.

As a result of this health emergency, you are authorized to issue an Executive Order allowing more time to submit the required GSP to DWR. The COVID-19 emergency has directly hindered our ability to conduct the public outreach and participation required by the SGMA to prepare said GSP. You continue to issue executive orders in response to this pandemic that affect our ability to properly engage the public. Thus, such an order falls under your authority pursuant to the State police power and through the Emergency Services Act. There are various ways in which such an order could implemented:

• You could simply issue an Executive Order extending the deadline to submit a GSP by one year (until January 31, 2023, or further). In summary, support for such an order is demonstrated through the continued quarantine limitations that are in effect and in the continued advice from health professionals for at risk segments of the population to avoid public gatherings. After a year, the need for any further extension could be evaluated based on the status of the COVID-19 pandemic at that time.

 Another (or additional), more specific way, to implement such an Order is through section 10735.2 of the Water Code. Said section requires the Water Resources Control Board to schedule a public hearing to designate Big Valley as a "probationary basin" if the GSP is not submitted by January 31, 2022. In summary, your Executive Order could direct the Water Resources Control Board to postpone scheduling said public hearing, should we not meet the January 31, 2022, GSP submittal deadline.

Thank you for considering our request.

Sincerely,

David Teeter, Chairman

Lassen County Board of Supervisors

DT:MLA:gfn

cc: Toni G. Atkins, President pro Tempore, California Senate

Anthony Rendon, California State Assembly, Speaker

Brian Dahle, Senator, California Senate

Megan Dahle, Assembly Member, California State Assembly

Modoc County Board of Supervisors as the Big Valley Modoc GSA

Big Valley Groundwater Basin Advisory Committee

Department of Water Resources

c/sustainable groundwater management/extend deadline

County of Lassen Board of Supervisors

CHRIS GALLAGHER
District 1
DAVID TEETER
District 2
JEFF HEMPHILL
District 3
AARON ALBAUGH
District 4
TOM HAMMOND
District 5

SEN COLUMN TO THE REPORT OF TH

County Administration Office 221 S. Roop Street, Suite 4 Susanville, CA 96130 Phone: 530-251-8333 Fax: 530-251-2663

November 17, 2020

CERTIFIED MAIL/RETURN RECEIPT 7017 1070 0000 7544 8450 Gavin Newsom Governor, State of California 1303 10th Street Sacramento, CA 95814

RE: Inquiry Regarding an August 11, 2020, Letter Requesting an Extension for Submittal of a Groundwater Sustainability Plan for the Big Valley Groundwater Basin (DWR Bulletin 118 Basin 5-004)

Dear Governor Gavin Newsom:

This letter is to request a response from you to our letter to you dated August 11, 2020 (attached), in regard to preparation of the Groundwater Sustainability Plan (GSP) required to be submitted to the Department of Water Resources by January 31, 2022, pursuant to the Sustainable Groundwater Management Act of 2014 (SGMA), for the Big Valley Groundwater Basin. To date, we have not received communication of any type regarding said letter (by telephone, letter or email).

As stated in more detail in our previous letter, COVID-19 has drastically limited our ability, and the public's willingness, to have the in-person public meetings necessary to prepare the required GSP. This has left both the Lassen and Modoc Groundwater Sustainability Agencies (GSAs) with few options. Many around the state have turned to internet-based meetings during this pandemic. However, conducting meetings through the internet is a poor substitution in Big Valley because there is not sufficient internet access. Further, we do not have sufficient resources to conduct internet-based meetings in a meaningful way. Again, our letter to you describes our challenges in great detail.

Even though the GSP deadline is still a little over a year away, it is clear that we do not have enough time to prepare a GSP supported by the level of public participation a plan of this

Gavin Newsom, Governor, State of California November 17, 2020 Page 2 of 2

magnitude deserves. Lassen County and the residents of Big Valley have accepted the responsibility required by SGMA to prepare the GSP when no one else would. Neither Lassen County or Modoc County were required by SGMA to accept the responsibility (financially and in terms of land use responsibility) to serve as the GSAs for Big Valley, but that is exactly what we have done. We have more than demonstrated our willingness to meet the challenges presented by SGMA head-on. That said, if we are going to prepare this GSP, it is in the interest of everyone, including you, that it be done right.

This was a serious enough subject to warrant passage of SGMA and signature by the prior Governor. We can assure you that preparation of the GSP for the Basin is certainly a matter of direct concern to the citizens of Big Valley. As such, this Board deserves an answer to our letter, and, even more so, the citizens of Big Valley deserve the courtesy of an answer, even if the answer is contrary to our request. To give the GSP the service it truly deserves, we simply need a little more time. That's all.

Thank you for considering our request and we look forward to your prompt response.

Thank you in advance,

David Teeter, Chairman

Lassen County Board of Supervisors

DT:MLA:gfn

cc:

Brian Dahle, Senator, California Senate

Megan Dahle, Assembly Member, California State Assembly

Modoc County Board of Supervisors as the Big Valley Modoc GSA

Big Valley Groundwater Basin Advisory Committee

Department of Water Resources

County of Lassen Board of Supervisors

TEORIES CONTRACTOR OF THE PROPERTY OF THE PROP

CHRIS GALLAGHER

District 1
DAVID TEETER
District 2
JEFF HEMPHILL
District 3
AARON ALBAUGH
District 4
TOM HAMMOND
District 5

County Administration Office 221 S. Roop Street, Suite 4 Susanville, CA 96130 Phone: 530-251-8333

Fax: 530-251-2663

February 16, 2021

CERTIFIED RETURN RECEIPT 7020 1290 0000 0270 7632 Gavin Newsom Governor, State of California 1303 10th Street Sacramento, CA 95814

RE: Inquiry Regarding an August 11, 2020, Letter Requesting an Extension for Submittal of a Groundwater Sustainability Plan for the Big Valley Groundwater Basin (DWR Bulletin 118 Basin 5-004)

Dear Governor Gavin Newsom:

This letter is to request a response from you to our letters to you dated August 11, 2020 and November 17, 2020 (attached), in regard to preparation of the Groundwater Sustainability Plan (GSP) required to be submitted to the Department of Water Resources by January 31, 2022, pursuant to the Sustainable Groundwater Management Act of 2014 (SGMA), for the Big Valley Groundwater Basin. To date, we have not received communication of any type regarding said letter (by telephone, letter or email).

As stated in more detail in our previous letter, COVID-19 has drastically limited our ability, and the public's willingness, to have the in-person public meetings necessary to prepare the required GSP. This has left both the Lassen and Modoc Groundwater Sustainability Agencies (GSAs) with few options. Many around the state have turned to internet-based meetings during this pandemic. However, conducting meetings through the internet is a poor substitution in Big Valley because there is not sufficient internet access. Further, we do not have sufficient resources to conduct internet-based meetings in a meaningful way. Again, our letter to you describes our challenges in great detail.

Even though the GSP deadline is still a little over a year away, it is clear that we do not have enough time to prepare a GSP supported by the level of public participation a plan of this magnitude deserves. Lassen County and the residents of Big Valley have accepted the

Choose Civility

Gavin Newsom, Governor, State of California February 16, 2021 Page 2 of 2

responsibility required by SGMA to prepare the GSP when no one else would. Neither Lassen County or Modoc County were required by SGMA to accept the responsibility (financially and in terms of land use responsibility) to serve as the GSAs for Big Valley, but that is exactly what we have done. We have more than demonstrated our willingness to meet the challenges presented by SGMA head-on. That said, if we are going to prepare this GSP, it is in the interest of everyone, including you, that it be done right.

This was a serious enough subject to warrant passage of SGMA and signature by the prior Governor. We can assure you that preparation of the GSP for the Basin is certainly a matter of direct concern to the citizens of Big Valley. As such, this Board deserves an answer to our letter, and, even more so, the citizens of Big Valley deserve the courtesy of an answer, even if the answer is contrary to our request. To give the GSP the service it truly deserves, we simply need a little more time. That's all.

Thank you for considering our request and we look forward to your prompt response.

Thank you in advance,

Aaron Albaugh, Chairman

Lassen County Board of Supervisors

Claron allange

DT:MLA:gfn

cc: Bri

Brian Dahle, Senator, California Senate

Megan Dahle, Assembly Member, California State Assembly

Modoc County Board of Supervisors as the Big Valley Modoc GSA

Big Valley Groundwater Basin Advisory Committee

Department of Water Resources

County of Lassen Board of Supervisors

CHRIS GALLAGHER
District 1
DAVID TEETER
District 2
JEFF HEMPHILL
District 3
AARON ALBAUGH
District 4
TOM HAMMOND
District 5



County Administration Office 221 S. Roop Street, Suite 4 Susanville, CA 96130 Phone: 530-251-8333

Fax: 530-251-2663

March 23, 2021

CERTIFIED RETURN RECEIPT 7017 0660 0000 6271 1758 Gavin Newsom Governor, State of California 1303 10th Street Sacramento, CA 95814



RE:

Inquiry Regarding the February 16, 2020, Letter Requesting an Extension for Submittal of a Groundwater Sustainability Plan for the Big Valley Groundwater Basin (DWR Bulletin 118 Basin 5-004)

Dear Governor Gavin Newsom:

This letter is to request a response from you to our letters to you dated February 16, 2021, August 11, 2020 and November 17, 2020 (attached), in regard to preparation of the Groundwater Sustainability Plan (GSP) required to be submitted to the Department of Water Resources by January 31, 2022, pursuant to the Sustainable Groundwater Management Act of 2014 (SGMA), for the Big Valley Groundwater Basin. To date, we have not received communication of any type regarding said letter (by telephone, letter or email).

As stated in more detail in our previous letter, Government imposed COVID-19 restrictions have drastically limited our ability, and the public's willingness, to have the in-person public meetings necessary to prepare the required GSP. This has left both the Lassen and Modoc Groundwater Sustainability Agencies (GSAs) with few options. Many around the state have turned to internet-based meetings during this pandemic. However, conducting meetings through the internet is a poor substitution in Big Valley because there is not sufficient internet access. Further, we do not have sufficient resources to conduct internet-based meetings in a meaningful way. Again, our letter to you describes our challenges in great detail.

The GSP deadline is approximately 7 months away and it is clear that we do not have enough time to prepare a GSP supported by the level of public participation a plan of this magnitude deserves. Lassen County and the residents of Big Valley have accepted the responsibility

Choose Civility

required by SGMA to prepare the GSP when no one else would. Neither Lassen County or Modoc County were required by SGMA to accept the responsibility (financially and in terms of land use responsibility) to serve as the GSAs for Big Valley, but that is exactly what we have done. We have more than demonstrated our willingness to meet the challenges presented by SGMA head-on. That said, if we are going to prepare this GSP, it is in the interest of everyone, including you, that it be done right.

This was a serious enough subject to warrant passage of SGMA and signature by the prior Governor. We can assure you that preparation of the GSP for the Basin is certainly a matter of direct concern to the citizens of Big Valley. As such, this Board deserves an answer to our letter, and, even more so, the citizens of Big Valley deserve the courtesy of an answer, even if the answer is contrary to our request. To give the GSP the service it truly deserves, we simply need a little more time or simply remove the Government imposed regulations. That's all.

Thank you for considering our request and we look forward to your prompt response.

Thank you in advance,

Aaron Albaugh, Chairman

Lassen County Board of Supervisors

AA:MLA:gfn

cc:

Brian Dahle, Senator, California Senate

Megan Dahle, Assembly Member, California State Assembly

Modoc County Board of Supervisors as the Big Valley Modoc GSA

Big Valley Groundwater Basin Advisory Committee

Department of Water Resources

County of Lassen Board of Supervisors

SEN COL

CHRIS GALLAGHER
District 1
DAVID TEETER
District 2
JEFF HEMPHILL
District 3
AARON ALBAUGH
District 4
TOM HAMMOND
District 5

221 S. Roop Street, Suite 4 Susanville, CA 96130 Phone: 530-251-8333 Fax: 530-251-2663

County Administration Office

April 13, 2021

CERTIFIED RETURN RECEIPT
7017 0660 0000 6271 3752 & 7017 0660 0000 6271 3745

Assembly Member Eduardo Garcia Chair of the Water, Parks, and Wildlife Committee Legislative Office Building 1020 N. Street, Room 160 Sacramento, CA 95814

Assembly Member Megan Dahle Vice Chair of the Water, Parks, and Wildlife Committee Legislative Office Building 1020 N. Street, Room 160 Sacramento, CA 95814

Dear Chair Garcia and Vice Chair Dahle:

This letter is in support of Assembly Bill 754, which was introduced by Assembly Member Devon Mathis. Said Assembly Bill was referred to the Water, Parks, and Wildlife Committee on March 15, 2021. In summary, this bill would extend the due date to January 31, 2023, for Groundwater Sustainability Agencies (GSA) in basins that are not critically over drafted to submit a Groundwater Sustainability Plan (GSP) to the Department of Water Resources.

Lassen County and Modoc County serve as the GSAs for the Big Valley Groundwater Basin, for the portion of the basin within their respective jurisdiction. Said GSAs have been working cooperatively (through a memorandum of understanding) to prepare a single GSP for the entire basin.

Preparation of said GSP has been negatively impacted by the Governor's Executive Orders. Specifically, the Governor's order has made it difficult to conduct the public outreach needed to prepare the plan. Over the last year, the public has been less inclined to meet physically because of the Executive Orders. We have attempted to accommodate by conducting more internet and phone-based meetings. However, internet connectivity in Big Valley is exceedingly poor and the basin is not well

Assembly Member Eduardo Garcia, Chair Water, Parks, and Wildlife Committee Assembly Member Megan Dahle, Vice Chair of the Water, Parks, and Wildlife Committee April 13, 2021 Page 2 of 2

situated to allow online type public meetings. We were very pleased to see proposed legislation to provide more time to submit the required GSP. In fact, on August 11, 2020, we sent a letter to the legislature requesting additional time (see attached) for this very reason (lack of ability to have meaningful public dialogue because of COVID-19). We have also sent multiple letters to the Governor, requesting an executive order allowing more time.

If adopted, this legislation will greatly improve upon the GSP that is ultimately adopted by ensuring the time needed for adequate public participation. The above said, please understand that we support this legislation only to the extent that it will provide more time to submit the required GSP. We are not supportive at all of the bill becoming a vehicle to legislate additional requirements. It is our position that the requirements of the Sustainable Groundwater Management Act are already too onerous, especially in basins like ours that were only designated a "medium priority basin" by half of one point.

Sincerely,

Aaron Albaugh, Chairman,

Lassen County Board of Supervisors

Claron Clary

Big Valley Lassen Groundwater Sustainability Agency

AA:MLA:gfn Enclosure

cc:

Devon Mathis, Assembly Member, California State Assembly Modoc County Board of Supervisors as the Big Valley Modoc GSA Rural County Representatives of California (RCRC) California State Association of Counties (CSAC)

County of Lassen Board of Supervisors

CHRIS GALLAGHER
District 1
DAVID TEETER
District 2
JEFF HEMPHILL
District 3
AARON ALBAUGH
District 4

T CONTRACTOR OF THE CONTRACTOR

County Administration Office 221 S. Roop Street, Suite 4 Susanville, CA 96130 Phone: 530-251-8333 Fax: 530-251-2663

April 27, 2021

TOM HAMMOND District 5

CERTIFIED RETURN RECEIPT 7020 1290 0000 0270 7649

Gavin Newsom Governor, State of California 1303 10th Street Sacramento, CA 95814

RE: Inquiry Regarding the March 23, 2021, Letter Requesting an Extension for Submittal of a Groundwater Sustainability Plan for the Big Valley Groundwater Basin (DWR Bulletin 118 Basin 5-004)

Dear Governor Gavin Newsom:

This letter is to request a response from you to our letters to you dated March 23, 2021, February 9, 2021, November 17, 2020, and August 11, 2020 (attached), in regard to preparation of the Groundwater Sustainability Plan (GSP) required to be submitted to the Department of Water Resources by January 31, 2022, pursuant to the Sustainable Groundwater Management Act of 2014 (SGMA), for the Big Valley Groundwater Basin. To date, we have not received communication of any type regarding said letter (by telephone, letter or email).

As stated in more detail in our previous letter, your Executive Orders have drastically limited our ability, and the public's willingness, to have the in-person public meetings necessary to prepare the required GSP. This has left both the Lassen and Modoc Groundwater Sustainability Agencies (GSAs) with few options. Many around the state have turned to internet-based meetings during this pandemic. However, conducting meetings through the internet is a poor substitution in Big Valley because there is not sufficient internet access. Further, we do not have sufficient resources to conduct internet-based meetings in a meaningful way. Again, our letter to you describes our challenges in great detail.

STATE OF CALIFORNIA - CALIFORNIA NATURAL RESOURCES AGENCY

DEPARTMENT OF WATER RESOURCES

1416 NINTH STREET, P.O. BOX 942836 SACRAMENTO, CA 94236-0001 (916) 653-5791

June 3, 2021



Dear Chaiman Teeter,

On behalf of Governor Newsom, I first want to thank you for your dedicated leadership in your community during these challenging times. The COVID-19 pandemic is a continuing and unprecedented global crisis and it has impacted our communities across California in many ways. I appreciate your attention to these impacts weighing on your community.

Your recent letter(s) submitted to the Governor requests an extension of the deadline for submitting your groundwater sustainability plan (GSP) to the Department of Water Resources (DWR) and highlights your concerns over your ability to ensure robust public outreach and stakeholder engagement with the limitations on public interaction resulting from COVID-19. We recognize the limitations all state and local entities have experienced with holding meetings virtually, especially in rural and mountainous areas where internet connectivity is less available and reliable. Despite these COVID-19 challenges, public agencies, such as yours, are continuing to provide their best efforts to ensure public engagement and oversight of activities in the public's interest.

With this in mind, a suspension or change to the submittal deadline cannot be granted. The GSP submittal process and deadline is in the Sustainable Groundwater Management Act (SGMA), which cannot be changed without an amendment to the law and approval by the Legislature. If a local agency does not submit a GSP by the statutory deadline, DWR is required to refer the basin to the State Water Board for intervention.

The Administration is committed to the central tenant of SGMA which is local control. To facilitate such, SGMA establishes a timeframe of 20 years for basins to achieve their sustainability goals and provides an outcome-based process for SGMA implementation to occur. Through this outcome-based process, local agencies have an opportunity to improve plans and continue public outreach over time. A number of DWR and other state agency assistance programs have been established to help with public outreach and to assist groundwater managers in maintaining local control throughout GSP development and implementation.

DWR values the working partnership with water managers in your basin, which have been established through continued dialogue and dedicated planning and financial assistance (summarized in Attachment A) to support your plan development and facilitate engagement among stakeholders. If you find your local outreach efforts lacking, even with this assistance and the efforts we have collectively undertaken, I encourage you to review the attached summary of state assistance (Attachment B) and reach out to my staff (identified below) so you can use all applicable programs that will aid in your local SGMA efforts.

For these reasons, I encourage you to continue working towards submitting your GSP by the statutory deadline. Within that plan, you may identify any data gaps, including how stakeholder engagement has been impacted by COVID-19, and document the next steps that will be taken to fill those gaps. As locals continue to conduct engagement efforts, GSAs can amend their plans at any time to reflect stakeholder



input. This documentation in the GSP will allow DWR to understand your planning efforts and complete the evaluation of your plan. Given this information, DWR will be able to align future assistance to continue to support locals in implementing their GSP and filling the specified data gaps.

Please contact Acting Deputy Director Steven Springhorn (<u>Steven.Springhorn@water.ca.gov</u>) or DWR's Northern Region Office Chief Teresa Connor (<u>Teresa.Connor@water.ca.gov</u>) if you have any additional questions, or if you need help in navigating moving forward.

Sincerely,

karla Mmetli Karla A. Nemeth

cc:
The Honorable Gavin Newsom, Governor, State of California
The Honorable Toni G. Atkins, President pro Tempore, California State Senate
The Honorable Anthony Rendon, Speaker, California State Assembly
The Honorable Brian Dahle, California State Senate
The Honorable Megan Dahle, California State Assembly
Christine Hironaka, Deputy Cabinet Secretary, Office of the Governor
Angela Pontes, Deputy Legislative Secretary, Office of the Governor
Sidd Nag, Legislative Advocate, Rural County Representatives of California
Catherine Freeman, Legislative Representative, California State Association of Counties
Gaylon Norwood, Assistant Director, County of Lassen GSA

Enclosure:

Attachment A: Summary Table of DWR Facilitation and Grant Funding Support Attachment B: Summary of Statewide SGMA Assistance (June 2021)

Attachment A:

Summary Table of DWR Facilitation and Grant Funding Support								
Subbasin	Funding Recipient	DWR Facilitation Funding	DWR Planning Funding	Total DWR Funding Support				
Vina Subbasin, Butte Subbasin, Wyandotte Creek Subbasin	Butte County	\$173,000	\$1,498,800	\$1,725,800				
Vina Subbasin	Vina GSA	\$54,000	· · · · · -					
Big Valley Basin	County of Modoc GSA	\$82,000	\$987,660	\$2,068,845				
big railey basis.	Lassen County	-	\$999,185	V 2,000,010				
	Colusa County	\$112,000	_					
Colusa Subbasin	Colusa Groundwater Authority	\$60,000	\$1,999,600	\$2,171,600				

Attachment B:

Summary of Statewide SGMA Assistance (As of June 2021)

The State is committed to supporting locals to develop and implement their Groundwater Sustainability Plans (GSPs). In addition to the two agencies (Department of Water Resources and State Water Resources Control Board) with defined roles in SGMA, there are other State agencies with existing programs that support local groundwater management. The following summarizes that assistance.

Department of Water Resources (DWR)

Since 2015 DWR has provided planning, technical, and financial assistance to support locals with SGMA implementation.

Planning Assistance

- Basin Points of Contact/Regional Coordinators: Each of the 94 high- and medium- priority
 basins are assigned a Point of Contact (POC) and a Regional Coordinator (RC) from DWR
 Region Offices. POCs and RCs assist Ground Sustainability Agencies and stakeholders in the
 basin to connect with DWR and locate resources for assistance. The following links contain
 each basin's POC and their respective contact information:
 - o Northern Region RC: Pat Vellines (Patricia. Vellines@water.ca.gov)
 - o North Central Region RC: Chelsea Spier (Chelsea.Spier@water.ca.gov)
 - o South Central Region RC: Amanda Peisch-Derby (Amanda.Peisch@water.ca.gov)
 - o Southern Region RC: Brian Moniz (Brian.Moniz@water.ca.gov)
- Facilitation Support Services (FSS): Provides professional facilitators to help Groundwater Sustainability Agencies (GSAs) foster discussions among diverse water management interest groups.
 - GSAs or other groups coordinating with the GSAs to develop GSPs, are eligible to apply on a continuous basis using the following link: https://sgma.gsae.water.ca.gov/SGMPUB/Facilitation/2020/FSSApp2020.aspx
- Written Translation Services (WTS): Available to help GSAs, or other groups assisting in local SGMA implementation efforts, to communicate the groundwater planning activities with their non-English speaking constituents.
 - GSAs or other groups coordinating with the GSAs to develop GSPs, are eligible to apply on a continuous basis using the following link: https://sgma.gsae.water.ca.gov/SGMPUB/Translation/TranslationServiceRequest.aspx

Technical Assistance

- Technical Support Services (TSS): Provides DWR technical staff and drilling and other
 contractors to assist GSAs with the installation of dedicated groundwater monitoring wells
 and other monitoring stations to fill data gaps identified in the basins.
 - For more information or help starting a TSS application, contact DWR's Region Coordinators at sgmp_rc@water.ca.gov
- Data and Tools: Statewide datasets and models have been developed to assist GSAs and
 the public by providing information to help inform the development of GSP elements. The
 following datasets and tools have been made available:

- Eight new online interactive maps for the public to view and download SGMA datasets: groundwater levels, wells, environmental, land use, and subsidence data
- A water resources management and planning model that simulates groundwater, surface water, stream-groundwater interaction (C2VSim-FG)
- o https://water.ca.gov/Programs/Groundwater-Management/Data-and-Tools

Guidance and Education:

- Six Best Management Practices (BMPs) and five Guidance Documents to provide clarification, guidance, and examples to help GSAs develop elements of a GSP.
- California's Groundwater Update: State's official publication on the occurrence and nature of groundwater in California.

Financial Assistance

Sustainable Groundwater Management (SGM) Grant Programs:

- SGM Planning Grant Program: provides funds to develop and implement sustainable groundwater planning and projects. Approximately \$150 million (M) has been awarded to date through three rounds of solicitations. Funding has been provided by Proposition 1 and Proposition 68.
- SGM Implementation Grant Program: designed to fund projects and programs that will assist GSAs implement their GSPs. Proposition 68 authorized ~\$100M for this new program.
 - The FY 20/21 Budget directed the acceleration of \$26M for the critically overdrafted (COD) basins responsible for implementing GSPs or Alternatives to a GSP. Final awards for this first round were announced April 23, 2021.
 - The second round for the remaining funds will begin in early 2022.
- Integrated Regional Water Management (IRWM) Implementation Grant Program: provides funding for projects and programs that implement an IRWM Plan, including groundwater management projects. Approximately \$220M of Proposition 1 funding has been awarded in 2019/2020.
 - Another \$180M in Proposition 1 funds will be available in 2021-2022 timeframe.
- <u>Drainage Reuse Grant Program</u>: provides funds to local public agencies, including public universities, in the state of California for research and/or programs that resolve agricultural subsurface drainage water issues. The program is funded by Proposition 204, through the California Department of Food and Agriculture (CDFA), who has entered into a memorandum of understanding to transfer the funds, as well as the responsibility for implementing the programs required by the legislation, to DWR. Approximately \$1.1M was awarded in 2020.

State Water Resources Control Board (State Water Board)

SGMA requires the State Water Board protect basins that are not managed sustainably through a process called State Intervention. In addition to this responsibility, the State Water Board has initiated assistance that will support locals with SGMA implementation. Assistance has been organized and distributed by the following categories:

Planning Assistance

<u>Recharge Permitting Options</u>: Capturing surface water to artificially recharge groundwater
aquifers is a potential method for improving groundwater basin conditions. To help support
this method, the Division of Water Rights has developed a streamlined permitting process for
diversions of water from high flow events to underground storage.

- Streamlining is primarily achieved through identifying eligibility criteria and a simplified water availability analysis targeting diversion of high flow events during winter.
- Temporary water right permits for groundwater recharge may be appropriate for short-term projects where an urgent need exists.
- New legislation through AB 658 gave the State Water Board a new 5-year temporary permitting option, also authorizing a 5-year temporary change petition.

Technical Assistance

- Water Availability Tool: State Water Board staff has developed an
 interactive Fully Appropriated Stream Systems (FASS) GIS Web Map, which provides users
 with information on fully appropriated stream systems, including seasonal limitations, relevant
 court references, and Board decisions/orders.
 - The interactive map can be accessed online and includes an overview and quick reference guide.
 - State and Federal Wild and Scenic Rivers are included as separate layers in the web map, as those systems also have limitations on new water right applications.

Financial Assistance

- Groundwater Grant Program: will administer a total of \$800M to prevent and cleanup contamination of groundwater that serves (or has served) as a source of drinking water. The funds are available as planning grants and construction grants.
 - o Round 3 Solicitation is expected to open in Summer 2021.
- Water Recycling Funding Program (WRFP): promotes the beneficial use of treated municipal
 wastewater to augment fresh water supplies in California, by providing technical and
 financial assistance to agencies and other stakeholders in support of water recycling
 projects and research. The funds are available as planning grants and construction grants.
- <u>Clean Water State Revolving Fund (CWSRF) Program</u>: provides low-interest loans to public agencies for planning, design, and construction of water recycling projects.
- <u>Small Community Funding</u>: is available to help small DACs, providing drinking water service
 to less than 10,000 people or wastewater service to less than 20,000 people, with: technical
 assistance needs, interim water supplies, and implement eligible drinking water or
 wastewater capital improvement projects. The funds are available as planning grants and
 construction grants.
- <u>Drinking Water State Revolving Fund (DWRSF) program</u>: assists public water systems in
 financing the cost of drinking water infrastructure projects needed to achieve or maintain
 compliance with Safe Drinking Water Act requirements. The funds are available as planning
 grants and construction grants.
- Groundwater Treatment and Remediation Grant Program: will administer \$74M in grants from Proposition 68 for treatment and remediation activities that prevent or reduce the contamination of groundwater that serves as a source of drinking water.

Department of Conservation (DOC)

The DOC offers financial incentive programs to further California's goals to conserve agricultural lands, restore and manage watersheds, and reduce greenhouse gas emissions.

2020 Sustainable Groundwater Management Watershed Coordinator (SGMA) Grant
 Program: awards funding for watershed coordinators that will build broad coalitions of

government, stakeholders, and communities to develop plans and projects to improve watershed health and meet California's groundwater sustainability goals. Awarded \$1.5M in January 2021.

- <u>Sustainable Agricultural Lands Conservation (SALC) Program</u>: SALC is a component of the SGC's Affordable Housing and Sustainable Communities (AHSC) Program. SALC complements investments made in urban areas with the purchase of agricultural conservation easements, development of agricultural land strategy plans, and other mechanisms that result in GHG reductions and a more resilient agricultural sector.
 - o Draft Guidelines for Round 7 were released February 19, 2021

Department of Food and Agriculture (CDFA)

CDFA supports agricultural production by incentivizing practices resulting in a net benefit for the environment through innovation, efficient management and science.

- State Water Efficiency and Enhancement Program (SWEEP): provides grant funding to
 implement irrigation systems that reduce greenhouse gases and save water on California
 agricultural operations. Eligible system components include (among others) soil moisture
 monitoring, drip systems, switching to low pressure irrigation systems, pump retrofits, variable
 frequency drives and installation of renewable energy to reduce on-farm water use and
 energy. Approximately, \$81.1M has been awarded to date to nearly 835 projects, covering
 over 137,000 acres. CDFA estimates that over 81,000 metric tons of CO2 emissions will be
 reduced annually.
- Healthy Soils Program (HSP): consists of two components: the HSP Incentives Program and the HSP Demonstration Projects.
 - HSP Incentives Program provides financial assistance for implementation of conservation management that improve soil health, sequester carbon and reduce greenhouse gas emissions. The 2020 HSP Incentives Program selected 324 projects for award, requesting almost a total of \$22M.
 - HSP Demonstration Projects showcase California farmers and rancher's implementation of HSP practices. The 2020 HSP Demonstration Projects selected 20 projects for award, requesting a total of over \$2.9M.

Appendix 11B List of Public Meetings

Meetings Held By Lassen and Modoc Counties Related to GSP Development

Event	GSA(s)	Date	Time	Location
Special Joint Meeting of the Lassen County and Modoc County Board of Supervisors	Lassen County, Modoc County	2/23/2016	2:00:00 PM	Adin Community Building 609 Main Street Adin, CA 96006
Meeting of the Lassen-Modoc County Flood Control and Water Conservation District	Lassen County, Modoc County	2/23/2016	2:00:00 PM	Adin Community Building 609 Main Street Adin, CA 96006
Public Outreach Meeting	Lassen County, Modoc County	1/27/2017	9:00:00 AM	Bieber Veterans Memorial Hall 657-575 Bridge Street Bieber, CA 96009
Meeting of Modoc County Board of Supervisors	Modoc County	2/28/2017	10:00:00 AM	Board of Supervisors Room 204 South Court Street #203 Alturas, CA 96101
Lassen County Board of Supervisors Meeting	Lassen County	3/14/2017	9:00:00 AM	Board Chambers 707 Nevada Street Susanville, CA 96130
Public Outreach Meeting June 2019	Lassen County, Modoc County	6/3/2019	2:00:00 PM	Bieber Veterans Memorial Hall 657-575 Bridge Street Bieber, CA 96009
Public Outreach Meeting Sept 2019	Lassen County, Modoc County	9/4/2019	4:00:00 PM	Adin Community Center 605 Highway 299 Adin, CA 96006
Big Valley Groundwater Basin Advisory Committee (BVAC) Meeting	Lassen County, Modoc County	2/3/2020	4:00:00 PM	Bieber Veterans Memorial Hall 657-575 Bridge Street Bieber, CA 96009
Big Valley Groundwater Basin Advisory Committee (BVAC) Meeting	Lassen County, Modoc County	3/4/2020	4:00:00 PM	Adin Community Center 605 Highway 299 Adin, CA 96006
Big Valley Groundwater Basin Advisory Committee (BVAC) Meeting	Lassen County, Modoc County	5/6/2020	4:00:00 PM	Bieber Veterans Memorial Hall 657-575 Bridge Street Bieber, CA 96009
Big Valley Groundwater Basin Advisory Committee (BVAC) Meeting	Lassen County, Modoc County	7/1/2020	4:00:00 PM	Adin Community Center 605 Highway 299 Adin, CA 96006
Big Valley Groundwater Basin Advisory Committee (BVAC) Special Meeting	Lassen County, Modoc County	9/24/2020	4:00:00 PM	Bieber Veterans Memorial Hall 657-575 Bridge Street Bieber, CA 96009
Big Valley Groundwater Basin Advisory Committee (BVAC) Meeting	Lassen County, Modoc County	11/4/2020	4:00:00 PM	Adin Community Center 605 Highway 299 Adin, CA 96006
Big Valley Groundwater Basin Advisory Committee (BVAC) Special Meeting	Lassen County, Modoc County	12/2/2020	4:00:00 PM	Adin Community Center 605 Highway 299 Adin, CA 96006
Big Valley Groundwater Basin Advisory Committee (BVAC) Meeting	Lassen County, Modoc County	2/3/2021	4:00:00 PM	Adin Community Center 605 Highway 299 Adin, CA 96006
Big Valley Groundwater Basin Advisory Committee (BVAC) Special Meeting	Lassen County, Modoc County	3/3/2021	4:00:00 PM	Adin Community Center 605 Highway 299 Adin, CA 96006
Groundwater Management Workshop	Lassen County, Modoc County	3/24/2021	5:00:00 PM	Adin Community Center 605 Highway 299 Adin, CA 96006
Big Valley Groundwater Basin Advisory Committee (BVAC) Meeting	Lassen County, Modoc County	4/7/2021	4:00:00 PM	Adin Community Center 605 Highway 299 Adin, CA 96006
Big Valley Groundwater Basin Advisory Committee (BVAC) Special Meeting	Lassen County, Modoc County	5/5/2021	2:00:00 PM	Bieber Veterans Memorial Hall 657-575 Bridge Street Bieber, CA 96009
Big Valley Groundwater Basin Advisory Committee (BVAC) Meeting	Lassen County, Modoc County	6/2/2021	2:00:00 PM	Adin Community Center 605 Highway 299 Adin, CA 96006
Big Valley Groundwater Basin Advisory Committee (BVAC) Meeting	Lassen County, Modoc County	7/7/2021	2:00:00 PM	Bieber Veterans Memorial Hall 657-575 Bridge Street Bieber, CA 96009

Assembled 6/18/2021

Appendix 11C Brochure Summarizing the Big Valley GSP May 2021

Summary of the Big Valley Groundwater Sustainability Plan

May 2021

In 2014, California's Sustainable Groundwater Management Act (SGMA) was signed into law, requiring local governments and agencies in groundwater basins designated as high and medium priority to create governance structures and develop, adopt, and implement a Groundwater Sustainability Plan (GSP) for each basin. The Big Valley Groundwater Basin (BVGB) is identified as a medium-priority basin by the California Department of Water Resources (DWR) and is therefore subject to SGMA. The "high" and "medium" designations were assigned by DWR prior to the adoption of SGMA. Local agencies in the BVGB contested the medium-priority designation, which DWR denied, and are preparing a GSP to comply with the law because non-compliance may result in intervention by the State Water Board. Intervention could include metering, reporting, and fees for pumping groundwater. All formal basin-priority challenges have been denied to-date but may be revisited in the future.

Location and Boundaries

BVGB is a small basin in the north-eastern region of California. It encompasses a 144-square-mile area located in portions of Modoc and Lassen counties, including the unincorporated communities of Adin, Lookout, Bieber, and Nubieber. SGMA applies only to the areas inside the basin boundary (**Figure 1**), but GSP projects may include areas outside the boundary. The boundary lacks accurate detail in places and does not follow the DWR boundary definition, so leaders in the BVGB submitted a basin boundary modification request to DWR in 2016 that was denied. There are plans to submit another basin boundary modification request in the future.

GSP Content and Structure

Governments and agencies in basins subject to SGMA form one or more Groundwater Sustainability Agencies (GSA) to develop a GSP and oversee its implementation. The two counties, Lassen and Modoc, have designated themselves as the GSAs for the Basin and that designation has been confirmed by DWR. The counties took on this huge responsibly because no other local agencies were able to serve as the GSAs. If the counties had not agreed to be the GSAs, the State Water Board would have assumed management responsibility (e.g.. "intervention"). Each GSA manages the portion of the basin in its county. In 2019, the Big Valley Groundwater Basin Advisory Committee (BVAC) was formed to advise the GSAs on preparation of a single GSP for the entire BVGB. The BVAC consists of representatives from each county's board of supervisors and two BVGB residents from each county who were appointed by the GSAs after extensive outreach was conducted to all residents of the BVGB. The BVAC holds regular meetings which are open to the public. Meeting information can be found on the Big Valley GSP website: https://bigvalleygsp.org.

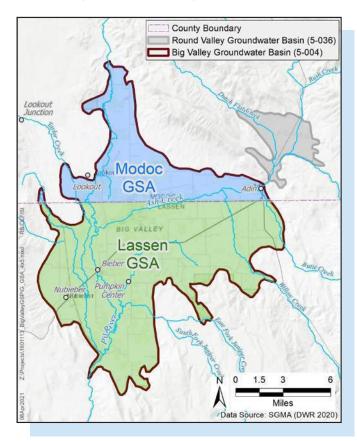


FIGURE 1: BIG VALLEY GROUNDWATER BASIN AND GSA BOUNDARIES

Physical Characteristics

The BVGB GSP follows a very specific structure because SGMA regulatory requirements dictate the information that must be contained within the document. First, the GSP must describe the general background and physical characteristics of the groundwater basin. In the BVGB GSP, this information is covered in Chapters 1 through 4 as follows:

- Chapter 1. Introduction to BVGB
- **Chapter 2.** Agency Information
- Chapter 3. Plan Area
- Chapter 4. Hydrogeologic Conceptual Model

Plan Area (Chapter 3) and Hydrogeologic Conceptual Model (Chapter 4) introduce important information, such as land use, geology, and hydrology, that will be used to make decisions throughout the planning process. They are based on the best available scientific data, but also include assumptions where reliable data is not available. The term 'hydrogeologic conceptual model' refers to a written description of the physical characteristics of the basin – where the water flows, the makeup of the soils, how deep the groundwater is, etc.

Drafts of Chapters 1 through 4 were developed in 2020, reviewed by the BVAC and the public, and "set aside" in order to move forward with the GSP. They will be revisited once the entire document is assembled. The "set aside" drafts are available and open for comment on the home page of the BGVB website (https://bigvalleygsp.org). Previous chapter versions, comments submitted, and other relevant information is available on the documents page.

Figures 2 and 3 show data highlights from Chapters 3 and 4 of the GSP.

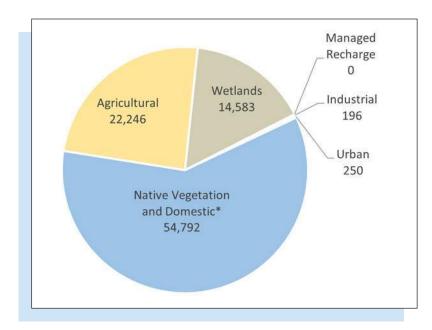


FIGURE 2: BIG VALLEY GROUNDWATER BASIN LAND USE

* Domestic use generally occurs in conjunction with agricultural and native vegetation and is best categorized with native vegetation, as most of the agricultural area is delineated by field and does not include residences.

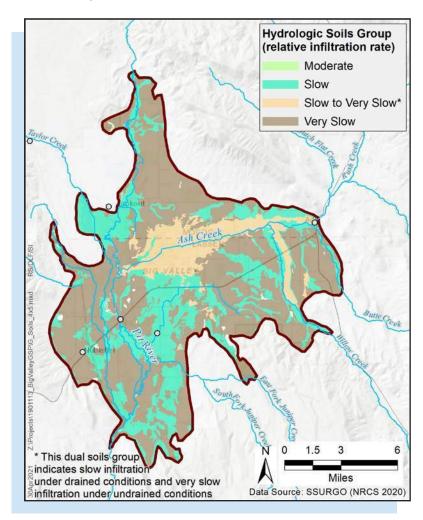


FIGURE 3: BIG VALLEY GROUNDWATER BASIN HYDROLOGIC SOILS GROUPS

Groundwater Conditions

Professional geologists and hydrogeologists examined data from wells throughout BVGB to determine groundwater conditions. They observed that most areas of the BVGB have experienced little to no change in water levels, while other areas have fluctuated more. They also found that groundwater in the BVGB is generally of excellent quality. The details of their findings are available in BVGB GSP Chapter 5. Groundwater Conditions (which has been temporarily "set aside" by the BVAC). Chapter 5 also includes other data required by the GSP regulations including changes in groundwater storage, water quality, land subsidence, and interconnected surface water. None of these indicators have shown undesirable results. Figure 4 shows the estimated direction of groundwater flow in the BVGB.

An important tool to monitor groundwater sustainability is a water budget. BVGB GSP Chapter 6. Water Budget ("set aside") has estimates of the volume of water flowing into and out of the basin - from causes such as rain, rivers, and evaporation. Comparing the volumes of water entering and exiting the basin indicates if the basin is in balance, is in overdraft, or has surplus water. **Figure 5** shows the draft historical water budget (1984 to 2018).

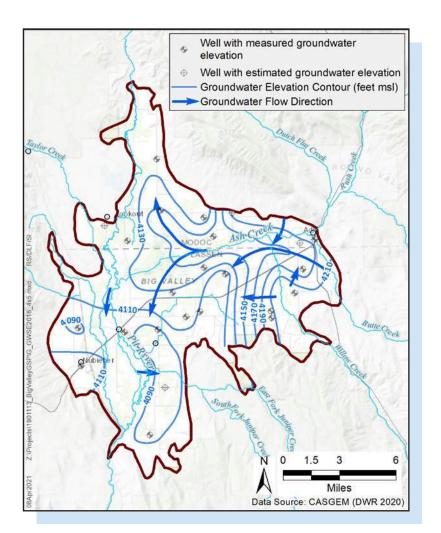


FIGURE 4: BIG VALLEY GROUNDWATER BASIN GROUNDWATER CONTOURS AND ESTIMATED FLOW DIRECTION

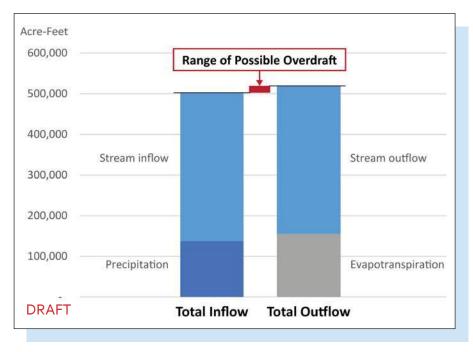


FIGURE 5: DRAFT AVERAGE ANNUAL WATER BUDGET (1984-2018)

Figure 6 shows the change in groundwater storage and indicates that most of the deficit is due to the 2000-2018 time frame being drier than it had been historically. Conversely, the extended wet periods that occurred in the late 1990s caused groundwater levels to recover.

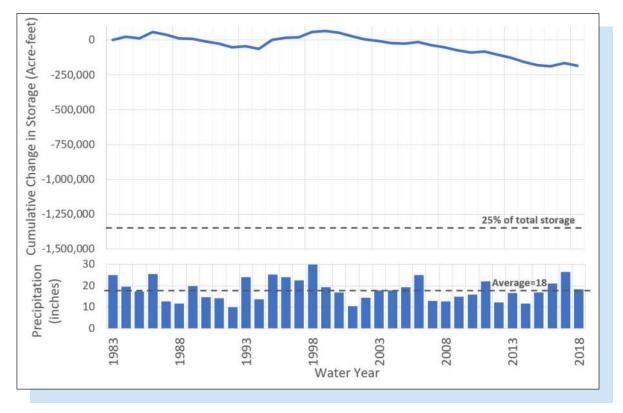


FIGURE 6: CUMULATIVE CHANGE IN STORAGE (1982-2018)

Up Next: Projects and Actions

The next steps in the GSP process are to set measurable criteria to track progress toward sustainability and to define projects and actions to help move the basin toward sustainable groundwater management. The BVAC and GSAs are currently developing these items, and **you are invited** to participate.

How to Participate

- Register as an interested party on our website: https://bigvalleygsp.org.
- Attend BVAC meetings, which are advertised to interested parties and viewable on the online calendar: https://bigvalleygsp.org/calendar.
- View draft GSP documents and offer your comments using the online form: https://bigvalleygsp.org/comment/new.

Thank you for your interest in the Big Valley GSP.

Appendix 11D Comment Matrix

		Page & Line			
Name	Document	Number	Comment	Date	Response
Aaron Albaugh	Public Draft Chapters 1 and 2		Prove description of Lassen County Basin. DWR boundary definitions and the GSP need to be more specific.	3/4/2020	The boundaries of the basin are established by DWR in their Bulletin 118 for SGMA. A basin boundary modification process is allowed under SGMA and can be investigated, but is outside the scope of writing the GSP. A background section has been added to Chap 1 that describes the County's request for basin boundary modification that was denied by DWR.
Aaron Albaugh	Public Draft Chapters 1 and 2	Section 1.3	DWR prioritization criteria are subjective. Groundwater irrigated acres need to be differentiated from surface water irrigation. DWR doesn't respond to questions.	3/4/2020	A section was added describing the basin prioritization process and the interaction between the counties and DWR regarding the ranking. DWR's dataset that they used to determine irrigated acres is documented on their website. The acreage irrigated by groundwater will be evaluated in Chapter 6: Water Budget. The extent of lowering groundwater levels in the basin will be evaluated in Chapter 5: Groundwater Conditions. DWR's lack of responsiveness to questions is noted.
Aaron Albaugh		Chap 2 Line 61	Add that GSA was established because we have to, it is not voluntary	3/4/2020	A Background section was added describing the basin prioritization, basin boundary modification request, and correspondence between the counties and DWR. The overarching message of this new text is to document that the counties did not start this process willingly. Wording was changed in Chap 2 to add the word "mandate" when referring to SGMA to emphasize that compliance with this law is not voluntary.
Bryan Hutchinson	Public Draft Chapters 1 and 2	_	1.1 Lines 6,7,&8 Should state in the body with verbiage of the fact that the Stake Holders" contested DWR findings and protested the priority ranking.1.3 Line 54 graphWhat is it? Where do these numbers come from?I also think that we should refer to the land owners with wells effected by the basin should be referred to as "Stake Holders"	3/5/2020	A background section has been added to Chap 1 that describes the prioritization and the Counties' responses. DWR provides some of the data it used for prioritization on its website, at the URL shown on Line 53. Use of the term "stakeholders" will be defined and used in future chapters.

Page 1 of 59 488

	1	Page & Line	big valley don comment wat in cita		_
Name	Document	Number	Comment	Date	Response
Barbara Donohue	Public Draft Chapters 1 and 2	Page #: 1-2, Line #: 42	I would like to recommend that the description of the boundary of the Big Valley Basin be amended to include the water delivery sources which feed into the water table of the valley. These water sources are varied and include a number of perennial and ephemeral drainages, springs and reservoirs. For example:North: Halls Canyon Creek, Howell Canyon Creek, Fox Draw, Hayes Canyon and seventeen (17) Unnamed ephemeral drainages along Barber and Ryan Ridges.East: Ash Creek, Butte Creek and seven (7) Unnamed Ephemeral drainages.South: Willow Creek, Juniper Creek, Juniper Creek Ace South Fork, Hot Springs Slough, Gobel Slough, Big Valley Canal and twenty (20) Unnamed ephemeral drainages.West: Taylor Reservoir, Kramer Reservoir, Lower Roberts Reservoir, Taylor Creek, Widow Valley Creek, Bull Run Slough, Egg Lake Slough and fifteen (15) Unnamed ephemeral drainages.My reasoning for this recommendation to include these delivery systems is due to the topographic gradients that assist in the recharging of the Big Valley Basin groundwater. The Pit River itself offers limited influence on recharging groundwater levels to the West and southwest areas of the basin. It offers very little to no influence to the north, east and southwest areas of the basin. It offers very little to no influence to the north, east and southern areas. The elevation gradient in the basin varies approximately from 4450 feet in the east to 4160 feet in the westAce; adrop of a few hundred feet. These areas are vital to not only modeling the water budget for the Basin, but provide potential areas for remediation projects. It will make it easier for project planning in the future since we will not have to go through amending the original boundaries at a later date. Although DWR Bulletin 118 determines the boundary based on alluvial deposits, the basin does not exist in an environmental vacuum and is dependent upon all of its water delivery systems.	3/8/2020	A background section has been added to Chap 1 that, in part, describes Lassen County's request for a basin boundary modification that was denied by DWR in 2016. DWR may again accept requests for basin boundary modifications in the future, but DWR has not indicated a timeline. The current GSP will need to honor the currently established basin boundary. With that said, the GSP will acknowledge the importance of areas outside the basin on recharge. Projects and management actions described in the Plan are not restricted to being inside the groundwater basin.
Aaron Albaugh	Public Draft Chapter 3	Section 3.1 lines 23-34	Says that Round Valley is separated from the basin by a 1/2 mile gap. What is the proof of that?	5/6/2020	This text describes how the basin boundaries were drawn by DWR. The text has been updated to reflect this. Connectivity to the Round Valley groundwater basin has been investigated and estimated at about 1 Acrefoot per year.
Geri Byrne	Public Draft Chapter 3	Section 3.4.2	Concern expressed that domestic well is being combined with agricultural use.	5/6/2020	Text has been updated and domestic categorized as a separate use from agriculture
Aaron Albaugh	Public Draft Chapter 3	Section 3.4.1	Disagree with USGS being represented as a public supply well.	5/6/2020	There are specific definitions used by the SWRCB with regard to a public water supply system, and the text reflects this categorization. Text has been modified to emphasize that the USFS station does not serve a resident population.
Aaron Albaugh	Public Draft Chapter 3	Section 3.5	The addition of monitoring wells into the well inventory increases the well density per square mile. This is not right. There is some confusion on the public supply wells, with 6 on the maps, but only 2 public water supply systems.	5/6/2020	The figures in this section only show wells that are designated by drillers on their well completion reports as production, domestic, and public supply. Some of the public supply wells on the map are inactive. The map has been updated to indicate inactive public supply wells.
Geri Byrne	Public Draft Chapter 3	Section 3.6.1	Information on wells monitored by LMFCWCD says information is not readily available. This information should be public.	5/6/2020	The information has been obtained and assessed by UC Cooperative Extension. Some of the results of the assessment have been considered in the GSP.
Geri Byrne	Public Draft Chapter 3	3.6.6	Should say that the Lassen County ordinance prohibits extraction of groundwater for use outside the County.	5/6/2020	Text modified to be accurate.
Julie	Public Draft Chapter 3	Fig. 3-2 Jurisdictions	There may be some areas indicated as BLM, that are not BLM. It's possible that this is the same for some Tribal lands.	7/1/2020	The maps in the GSP are based on the best available data from BLM and DWR.

489 Page 2 of 59

	1	In 0 11			_
Name	Document	Page & Line Number	Comment	Date	Response
	-	Number			1
Julie	Public Draft Chapter 3		There is significant new irrigated acreage in the basin since 2014.	//1/2020	Maps have been updated to use 2016 land use data.
Ned Coe	Public Draft Chapter 3	Table 3-1 Crop Use	The crop of rice should say wild rice - this should be changed wherever referenced	7/1/2020	Change made
Ned Coe	Public Draft Chapter 3		Do USFS mangagement plans need to be included in the section on Land Use plans? (Are there USFS lands within the Basin?)	7/1/2020	A reference to the Modoc National Forest Land and Resource Management Plan from 1991 has been added to Section 3.7.3
BVAC	Public Draft Chapter 3		Regarding response to question about whether surface water supplies are adequate for irrigation, the answer is "YES." There is significant acreage irrigated with surface water supplies.	7/1/2020	Comment received.
Sup. Albaugh	Public Draft Chapter 3		Ash Creek Wildlife Area: This is a "potentially" managed area.	7/1/2020	New text clarifies that the wildlife area is minimally improved.
BVAC	Public Draft Chapter 3		In response to the question of: "How should Wildlife Area and riparian be represented?" - Show riparian areas along creeks and Pit River, where wetlands make it too wet to farm. Use the footprint of the Wildlife Area in all maps and add riparian lines along the river. For example; "x" number of feet along Pit River, other creeks. Either map it or put it into text - explaining number of river miles and estimating width of riparian corridor. (e.g. 363 acres for Pit River)	7/1/2020	The category of "riparian areas" is removed from the maps, per discussion at the July 1, 2020 BVAC meeting in Adin. Table 3-1, Land Use Summary, has been revised to show 12,407 acres of riparian areas (including Ash Creek Wildlife Management area and corridors along waterways.
BVAC	Public Draft Chapter 3		The document reports the Wildlife Area and/or riparian area as 12,000 acres v. 14,000. There is a discrepancy in the numbers.	7/1/2020	See previous reponse.
BVAC	Public Draft Chapter 3		Much of the area of Ash Creek Wildlife Area is not riparian. Some areas along Ash Creek are not riparian. Water supplies for the Wildlife Area include a mix of surface water and groundwater supplies.	7/1/2020	See previous reponse.
BVAC	Public Draft Chapter 3		Water bodies should be on the map, including lower Roberts Reservoir.	7/1/2020	Water bodies are shown on Map
BVAC	Public Draft Chapter 3		How is mixed source shown on the map? There are areas represented as groundwater only, where landowners also irrigate with surface water.	7/1/2020	Looking at water rights information from the Modoc County watermaster and Water Boards. If information cannot resolve the question, it may need to be listed as a data gap.
Laura	Public Draft Chapter 3	line 91	Remove language on LMFCWCD.	7/1/2020	Deleted.
Sup. Albaugh	Public Draft Chapter 3		Beneficial uses: reassess categories of municipal, domestic, recreation (both contact and non-contact).	7/1/2020	First paragraph on surface water regulation reivsed (section 3.5.6) and added new section 3.3.3, Beneficial Uses of Groundwater
BVAC	Public Draft Chapter 3		There are questions about the accuracy of information (data gaps). Be clear about degrees of uncertainty. How will the GSP deal with data gaps - where is it so wrong that additional survey or study must be done? The GSP needs to note inaccuracies. 70% - 80% accuracy is not good enough.	7/1/2020	The GSAs are being cautious about identifying data gaps, commmitting to activities without providing funding to do so.
M. Anderson	Public Draft Chapter 3		It's not the level of importance about certain points of data. The fact is, that it's not right that we have to make decisions based on inaccuracies. That's an imposition. Having to accept inaccuracies is not reasonable. Where there are questions, Big Valley can make estimate and assumptions to our benefit.	7/1/2020	A paragraph of draft text discusses data uncertainties and decision-making. This will be presented at the next BVAC meeting. Currently place in Chapter 4, page 4-1.
T. Martinez	Public Draft Chapter 3		It's not clear what's important. The better information that is collected now, perhaps the basin prioritization will be lowered in the future.	7/1/2020	Other data sets may help increase accuracy - those will need to be looked at.
BVAC	Ch. 3 Plan Area		The term managed wetlands should be changed to state wildlife habitat	9/24/2020	Change made in text

490 Page 3 of 59

	1	1	Dig valley dor comment matrix cha		
Name	Document	Page & Line Number	Comment	Date	Response
	Ch.3 Plan Area	page 173, line 399	In reference to Diversions: There are claimants on the river that do their own measurments and recordings separate from Water Master. Document set aside with the condition that	- / /	Changes made in text
BVAC			the language is revised.	9/24/2020	
BVAC	Ch 3 Plan Area	Line 404	Ash Creek diversions are not measure past Modoc county line by water master	9/24/2020	Changes made in text
Nancy Monchamp	Revised Draft Chapters 1-2 v2	Page #:, Line #:	Currently BV Groundwater District mapping has defined groundwater zones within its boundaries. Will the district consider groundwater use similar to surface water use (CA riparian doctrine) in that beneficial use and waste or unreasonable use is first applied within zones to help alleviate projected over draft of groundwater reserves within zones? Does the SWRCB have guidance regarding this subject under the current groundwater law? Has this been applied in other groundwater management plans in California?	2/17/2021	Surface water rights and the consideration of highest and best use are not under the purview of the GSP.
Barbara Donohue	BigValleyGSP _Ch3_Revise dDraft_2020_ 08_19.pdf	Page #: 3-15, Line #: 323	The estimate of 18 well in the town of Adin is too low. I would guestimate the number of wells to match the number of parcels and homes in town which would come close to 60+ Each home has its own well, and some parcels have two. Many of these wells were put in place long before well drillers appeared in the community. The town sits a the edge of a very large artesian system and many of the homes have wells less than 100 feet deep. For example, my home was built in 1868 with a hand dug well system that reaches down 80 feet.	3/15/2021	Comment received. The data displayed represents the wells that have been constructed since DWR has required drillers to submit well completion reports. The purpose of displaying the number of wells per 1-mile section is to identify where there are higher densities of the various well types. This map achieves this goal, despite the numbers potentially being too low. Well inventory has been identified as a data gap.
Barbara Donohue	BigValleyGSP _Ch3_Revise dDraft_2020_ 08_19.pdf	Page #: 3-21, Line #: 403	There is a great deal of precipitation monitoring performed by the US Forest Service Big Valley Ranger Station. they collect both monthly and annual estimates. As a matter of fact, this will be their 78th year of providing this data to NOAA (they received a plaque from NOAA a couple of years ago celebrating their 75th year in providing weather information). Please call Lennie Edgerton who has this information in spreadsheet form at the Forest Service: (530) 299-8444	3/15/2021	Comment received. The GSP contains the best readily available information regarding precipitation.
Barbara Donohue	BigValleyGSP _Ch3_Revise dDraft_2020_ 08_19.pdf	Page #: 3-21, Line #: 407	Using CIMIS data from McArthur CA is incongruous at best. The nearest CIMIS Station that best represents the weather attributes of the Big Valley area is located in Alturas, CA (CIMIS #90). Although located 40 miles to the east, both Alturas and the Big Valley area are located within the Modoc Plateau Physiographic Province, NOT the Fall River Valley. Being over 1000 feet higher in elevation can drive significant differences in precipitation levels and evapotranspiration rates as well as significant differences in soil types. Please reconsider your "source data" Even NOAA uses weather information from the Alturas Airport to estimate changes in weather for this area.	3/15/2021	Comment received. In the water budget, McArthur climate data was not used directly. The water budget uses interpolated values for the town of Bieber.
Barbara Donohue	BigValleyGSP _Ch3_Revise dDraft_2020_ 08_19.pdf	Page #: 3-21, Line #: 407	Continuation of limited climate information for the Big Valley Basin. There is a Remote Access Weather Station (RAWS) that is located just north of Round Valley on a west facing slope. It has been collecting local weather information for decades. You can find its weather data here: https://raws.dri.edu/cgi-bin/rawMAIN.pl?caCRUSIt is named "Rush Creek RAWS"	3/15/2021	Comment received. The GSP contains the best readily available information regarding climate.
BVAC	Big Valley GSP All Chapters Public Draft 8/26/21	Chapt 1	Comment was made that the Ash Creek Wildlife Area is a "disaster". Before it was taken on by the state, the local land owner was farming the property and the area was teeming with wildlife. Since taking over, the state has left the property unmanaged and it does not support the wildlife that it used to	9/9/2021	Text was added to Section 1.1 describing this mismanagement.

491 Page 4 of 59

		Page & Line	big valiey doi: comment wather that	•	<u></u> T
Name	Document	Number	Comment	Date	Response
BVAC	Big Valley GSP All Chapters Public Draft 8/26/21	Chapt 1	Comment was made that many Big Valley residents participated in a program with the State Board where they put in stockwatering wells off-stream to keep cattle out of the riparian areas to improve water quality. Now those extra wells drilled are being used against the residents due to the prioritization including the number of wells as one of the prioritization criteria	<u>!</u>	Text was added to Section 1.1 regarding residents participating in this program to protect water quality. Text added to section 1.3 describing how the inventory of wells has been used against the landowners.
Sup. Byrne	Big Valley GSP All Chapters Public Draft 8/26/21	Line 132	Don't like sentence. Change to Currently there is no evidence to suggest that	9/9/2021	Sentence changed
Sup. Byrne	Big Valley GSP All Chapters Public Draft 8/26/21	Line 164	Change may to will Capitalize Board of Supervisors	9/9/2021	Text changed
Sup. Byrne	Big Valley GSP All Chapters Public Draft 8/26/21	Line 234	Strike contend	9/9/2021	Word stricken
Sup. Byrne	Big Valley GSP All Chapters Public Draft 8/26/21	Line 809	The Goose Lake Basin statement needs further clarification such as "The Goose Lake Basin, with similar land use practices"	9/9/2021	Text changed
Doreen SmithPower	BigValleyGSP _Ch1_2_Revi sedDraft_202 1_03_21_set aside.pdf	#:	See Letter 1 from Doreen Smith Power to BVAC dates 9/11/21. General comments on chapters 1-6.: https://bigvalleygsp.org/service/document/download/281	9/13/2021	Letter received and included in GSP Appendix
Doreen SmithPower	BigValleyGSP _Ch1_2_Revi sedDraft_202 1_03_21_set aside.pdf	Line #:	See Letter 2 from Doreen SmithPower to BVAC Dated 9/9/21. BigValley GSP Chapters 1-3, Comments are both editorial and content. See attached memo. https://bigvalleygsp.org/service/document/download/280	9/13/2021	Memo received and included in GSP Appendix.
BVAC	Big Valley GSP All Chapters Public Draft 8/26/21	Line 230	Add text "of this unfunded mandate"	9/9/2021	Text added
BVAC	Big Valley GSP All Chapters Public Draft 8/26/21	Lines 243-245	There are local conservation groups such as the FSA that have helped	9/9/2021	Text modified to include NGOs.

Page 5 of 59

		Page & Line	big valley dor comment water che	•	<u> </u>
Name	Document	Number	Comment	Date	Response
BVAC	Big Valley GSP All Chapters Public Draft 8/26/21	Line 251	Wildlife grazes on ag lands and also rear their young and seek protection from predators	9/9/2021	Text modified. Quote from Stadtler (2007), former land owner, added.
BVAC	Big Valley GSP All Chapters Public Draft 8/26/21	Chapter 1	We installed off-stream stockwatering wells to improve water quality. Now this increase in well inventory is coming back to bite us.	9/9/2021	Text added regarding participation in the EQUIP program. Text added to Table 1-1. Text added to section 3.4.1
BVAC	Big Valley GSP All Chapters Public Draft 8/26/21	Line 299	BVAC members were appointed, not elected	9/9/2021	Text changed
BVAC	Big Valley GSP All Chapters Public Draft 8/26/21	Line 302	BVAC and county staff have devoted their hours without compensation	9/9/2021	Text added, stating that time was largely uncompensated.
BVAC	Big Valley GSP All Chapters Public Draft 8/26/21	Line 318	DWR needs the better understanding of the Basin	9/9/2021	Text added.
BVAC	Big Valley GSP All Chapters Public Draft 8/26/21	Line 390	County staff didn't "feel" misled, they "were" misled	9/9/2021	Text changed.
BVAC	Big Valley GSP All Chapters Public Draft 8/26/21	Line 428-434	Please point out the inadequacy of using a 60 year old map to draw basin boundries	9/9/2021	Text changed.
BVAC	Big Valley GSP All Chapters Public Draft 8/26/21	Lines 531-532	Last sentence regarding right to pump water should be bold	9/9/2021	Text bolded
BVAC	Big Valley GSP All Chapters Public Draft 8/26/21	Section 3.2	The Superior Court has jurisdiction over water rights.	9/9/2021	Section added regarding court role. Text will be added

Page 6 of 59 493

		Page & Line	big valiet Got Comment Matrix Cite	<u> </u>	T
Name	Document	Number	Comment	Date	Response
BVAC	Big Valley GSP All Chapters Public Draft	Section 3.2	Don't like saying that federal and state agencies "own" land.	9/9/2021	Text changed to "has jurisdiction over".
	8/26/21				
BVAC	Big Valley GSP All Chapters Public Draft 8/26/21	Line 647	Change "Habitat" to "Area"	9/9/2021	Text changed.
BVAC	Big Valley GSP All Chapters Public Draft 8/26/21	Figure 3-5	Don't like this map it is grossly inaccurate	9/9/2021	Map replaced with the one used in Chapter 6
BVAC	Big Valley GSP All Chapters Public Draft 8/26/21	Lines 685-686	Pumping on ACWA is for growing feed stock, not for creating wetlands	9/9/2021	Text changed to be more general "habitat".
BVAC	9/22/21 Draft GSP as introduced at 10/6/2021 BVAC meeting		Reference to Conner 2021 should be for multiple years	10/6/2021	Reference changed to 2020-2021
BVAC	9/22/21 Draft GSP as introduced at 10/6/2021 BVAC meeting		Ag was not supplemented by timber. Both were equally important	10/6/2021	Text changed from "supplemented" to "complemented"
BVAC	9/22/21 Draft GSP as introduced at 10/6/2021 BVAC meeting	Line 36-37	Doesn't the designation of "disadvantaged" comes from the state, not DWR in particular?	10/6/2021	For the purposes of SGMA and grant funding, DWR has performed an analysis of the status of communities throughout the state and designates areas that are "disadvantaged" and "severely disadvantaged". The information is available on their map viewer: https://gis.water.ca.gov/app/dacs/
BVAC	9/22/21 Draft GSP as introduced at 10/6/2021 BVAC meeting	310	Change "SGMA mandate" to "SGMA unfunded mandate"	10/6/2021	Text changed

Page 7 of 59

		Page & Line	big valie y con comment water x circ	<u> </u>	
Name	Document	Number	Comment	Date	Response
BVAC	9/22/21 Draft GSP as introduced at 10/6/2021 BVAC meeting		Add text "and prosecute" with respect to the illegal marijuana grows	10/6/2021	Text added
BVAC	9/22/21 Draft GSP as introduced at 10/6/2021 BVAC meeting		Change "habitat" to "ecosystem"	10/6/2021	Text changed
BVAC			This sentence about diversification of the economy is unclear	10/6/2021	Sentence modified for clarity.
BVAC			Add "prove that the Basin is low priority" to the list of reasons why the GSP is being developed	10/6/2021	Sentence modified
BVAC	9/22/21 Draft GSP as introduced at 10/6/2021 BVAC meeting		Add "and maintain" sustainability	10/6/2021	Text added
BVAC	9/22/21 Draft GSP as introduced at 10/6/2021 BVAC meeting		Don't understand why "understanding upland recharge" and "improved estimate of crop water usage" are listed here.	10/6/2021	Sentence shortened to remove those elements
BVAC	9/22/21 Draft GSP as introduced at 10/6/2021 BVAC meeting		Change "should" to "will"	10/6/2021	Text changed

495 Page 8 of 59

		Page & Line	big valley got comment matrix end	•	T
Name	Document	Number	Comment	Date	Response
				 	
BVAC	9/22/21 Draft GSP as introduced at 10/6/2021 BVAC meeting		Add "and should be re-ranked as low priority"	10/6/2021	Text added
BVAC	9/22/21 Draft GSP as introduced at 10/6/2021 BVAC meeting		Add "inaccurate" basin boundary	10/6/2021	Text added
BVAC	9/22/21 Draft GSP as introduced at 10/6/2021 BVAC meeting	Lines 232-240	Point out that DWR's denial was based on a lack of scientific justification, yet they used inaccurate, unscientific information in their ranking process.	10/6/2021	Sentence added.
BVAC	9/22/21 Draft GSP as introduced at 10/6/2021 BVAC meeting		Add "inaccurate" basin boundary	10/6/2021	Text added
BVAC	9/22/21 Draft GSP as introduced at 10/6/2021 BVAC meeting		It states "about 144 square miles" here, yet elsewhere it says "approximately" or just states "144 square miles". Which is it?	10/6/2021	Text changed in the document to consistently be "about 144 square miles"
BVAC	Changes made between 9/22 & 10/5/21 introduced at 10/6/21 BVAC	4577	SGMA cannot alter existing water rights	10/6/2021	Text changed to state that SGMA does not alter existing water rights.
BVAC	9/22/21 Draft GSP as introduced at 10/6/2021 BVAC meeting		The Forest Service is also an agency with jurisdiction over illegal cannibis operations	10/6/2021	Text modified to add USFS to list of agencies

Page 9 of 59

		Page & Line	Dig valley doi: Comment Wath Com	ptc.5 I	T
Name	Document	Number	Comment	Date	Response
BVAC	9/22/21 Draft GSP as introduced at 10/6/2021 BVAC meeting		The language regarding the BVWUA measurement and reporting of diversions may be inaccurate	10/6/2021	Text changed and verified with BVWUA and Modoc Watermaster.
BVAC	9/22/21 Draft GSP as introduced at 10/6/2021 BVAC meeting		The historic gages on the map are hard to see	10/6/2021	Map updated with color of historic gages changed
BVAC	9/22/21 Draft GSP as introduced at 10/6/2021 BVAC meeting	Line 668	Table 3-12 needs to be explained better	10/6/2021	Additional explanation added to section 3.5.1.3
BVAC	9/22/21 Draft GSP as introduced at 10/6/2021 BVAC meeting	Line 774	Groundwater export ordinances aren't requirements as much as they are limitations	10/6/2021	Text changed from "requirements" to "limitations".
BVAC	9/22/21 Draft GSP as introduced at 10/6/2021 BVAC meeting	Line 905	Sentence ends in a preposition	10/6/2021	Sentence modified as requested.
BVAC	Changes made between 9/22 & 10/5/21 introduced at 10/6/21 RVAC	Line 4703	Many CRP and WRP contracts do not end after 10-15 years	10/6/2021	Text modified to remove the time and just state until end of contract.
BVAC	Changes made between 9/22 & 10/5/21 introduced at 10/6/21 RVAC		Sometimes reserve lands are kept in agricultural production to enhance habitat	10/6/2021	Text changed to simply state that the land owner agrees to promote plant species that will improve environmental health and quality.

497 Page 10 of 59

		Page & Line		Ī	
Name	Document	Number	Comment	Date	Response
BVAC	Changes	Line 5516	Misspelling	10/6/2021	Corrected.
	made				
	between				
	9/22 &				
	10/5/21				
	introduced at				
	10/6/21				
	RVAC				
BVAC	Changes	Line 4628	Private parties also report diversions	10/6/2021	Text added.
	made				
	between				
	9/22 &				
	10/5/21				
	introduced at				
	10/6/21				
D) /A C	Changes	Lines CE 77	Ibla mat alaan uuha thia muata ia fuama	10/6/2021	Deference manual to effect the must
BVAC	made	Lines 65-77	It's not clear who this quote is from.	10/6/2021	Reference moved to after the quote.
	between				
	9/22 &				
	10/5/21				
	introduced at				
	10/6/21				
	BVAC				
Julie	Draft GSP	Lines 369-370	For public comment period: Chapt 3: Line 369-370 in today's packet version: " Landowners	10/6/2021	Water rights are not addressed directly in the GSP. However, BVAC
	9/22/21		have the right to extract and use groundwaterbeneath their property." Please provide legal	' '	members and stakeholders advocated for this language to be added to the
	' '		reference for that right, including whether there are any limitations, conditions, or		text to emphasize that private well owners do have water rights. This
			requirements on that right. (e.g. historical/previous use)		statement is consistent with current water rights law. More detail about
					water rights can be found at:
					https://www.waterboards.ca.gov/waterrights/board_info/
Julie	BigValleyGSP	Page #: 3-11	Sec 3.4.1: Emphasis of data gap is on removing abandoned wells from inventory. At least in	10/20/2021	Comment received. The data displayed represents the wells that have been
	Revised Draft	Line #: 753	Adin, it is obvious that 18 wells is an undercount of wells to standard. I have mentioned this		constructed since DWR has required drillers to submit well completion
	10/18/2021		before.		reports. The purpose of displaying the number of wells per 1-mile section is
					to identify where there are higher densities of the various well types. This
					map achieves this goal, despite the numbers potentially being too low.
					Well inventory has been identified as a data gap.
NGOs	BigValleyGSP	Section 3.2	See Letter 3 from NGOs to GSAs dated 11/28/21. While the plan identifies Modoc County	11/28/2021	Maps of DACs are not required by the regulations. The text clearly states
	_PublicRevie		and Lassen County as DACs, it fails to provide a map identifying the locations of each DAC		that both counties are disadvantaged and therefore the entire basin is
	wDraft_2021		by census block groups, tracts, or places. The plan also fails to clearly state the population		disadvantaged. Furthermore, the population of the Basin is stated in the
	_10_28		of each DAC or include the population dependent on groundwater as their source of		GSP and therefore the entire Basin population is disadvantaged.
			drinking water in the basin.		

498 Page 11 of 59

		1	<u> </u>	!	
Name	Document	Page & Line Number	Comment	Date	Response
NGOs	BigValleyGSP	Section 3.4	See Letter 3 from NGOs to GSAs dated 11/28/21. The GSP provides a density map of	11/28/2021	An analysis of well depth was performed basin-wide and is included in
	_PublicRevie wDraft_2021 _10_28		domestic wells in the basin (Figure 3-7). However, the plan fails to provide depth of these wells (such as minimum well depth, average well depth, or depth range). This information is necessary to understand the distribution of shallow and vulnerable drinking water wells within the basin.		Chapter 7, Figure 7-2.
Julie Rechtin	BigValleyGSP _PublicRevie wDraft_2021 _10_28	Section 1.1	In this section and elsewhere, the poor opinion of the ACWA is apparent. The quote from Phillip Stadtler's book "I Made A Lot of Tracks" is typical and, I believe, not relevant or appropriate. Mr Stadtler was a cattle and land trader, an apparent master of the deal (until he wasn't,) who appears to have leased then owned ~15,000 acres (plus a smaller 300-acre parcel) in Big Valley for decades. Stadtler does not state the dates that he bought and sold (part of) the Hunt and Woods Ranch, but he spent 6 years in court fighting to buy it and a ranch in Red Bluff (he only got the former,) probably in the 1960's (the book jumps around,) and the ACWA was created in 1986. It appears that Stadtler rarely visited the area. Instead, his home base was mostly Hilmar, California. He also moved to Texas when the banks were hounding him in the 1970's, and he traveled and traded all over Mexico, throughout the Western US, Iran, and more. By his own account in the 1960's, "Every time I turned around, I was buying another ranch. I bought the Oak Flat Ranch in California, one in Kansas, and one in Minnesota with Terrell Spence. I bought four or five ranches in Arizona and a couple in Texas. Everything seemed to be falling into place. I didn't always make money, though" (p. 137)	11/29/2021	Comment received. The quote in the GSP text is appropriately referenced and its sentiment and appropriateness was supported by the BVAC members and was not questioned by other members of the public.
Julie Rechtin	BigValleyGSP _PublicRevie wDraft_2021 _10_28	Section 1.1	Stadtler was a master of "shrinkage" and other shipping logistics. His major story about the ranch involved shipping an estimated 7000 cattle out of the ranch over about a week's time because "the market got tough and it was getting late in the year and the grass was going away on us." However, shipping out was apparently delayed to "the last part of October, icy and froze up. The cattle should have been out of there a long time before but the market was bad." (p. 133) No mention of the effect on the wildlife. Actually, Stadtler seems to have little interest in or knowledge of wildlife habitat requirements, groundwater recharge, or wetlands diversity in general. The quote in the Groundwater Plan (p134-135) is a rare mention of wildlife in his book. Also, to my knowledge, the land was sold directly to the state of California, so CDFG (at the time), not US Fish and Wildlife Service bought it. Since Stadtler appears to have an encyclopedic memory of his deals, partners, towns, visitor accommodations, and adventures, it is telling that he can't keep his agencies straight. In BVAC advisory committee meetings, I have commented on the diversity of wildlife and their habitats within the ACWA and surrounding agricultural, forested, and sage steppe ecotypes. I suggest that the GSP take a more factual and open-minded view toward the ACWA. This may lead to a recognition of the value of the ACWA's wildlife and groundwater recharge (both current and potential future.)		Comment received. The quote in the GSP text is appropriately referenced and its sentiment and appropriateness was supported by the BVAC members and was not questioned by other members of the public.

Page 12 of 59 499

		Page & Line	•	Ī	
Name	Document	Number	Comment	Date	Response
Julie Rechtin	BigValleyGSP _PublicRevie wDraft_2021 _10_28	Section 1.1	(continued) Blaming the closure of the four mills in Big Valley on state and federal regulations is not factually appropriate and could lead to missing opportunities that the actual facts would suggest. Most of the decreased number of timber jobs, both in the woods and in the mills, here and elsewhere, is due to economies of scale, mechanization, and change of ownerships. The assessment in the GSP appears influenced by politics more than reality. Actually, there is plenty of logging occurring in the Big Valley area, but the timber products are going to mills elsewhere: Burney, Klamath Falls, Lakeview, and occasionally other mills. This includes a significant increase in the rate of SPI clearcutting land that previously was managed by Beaty, and often processed locally.	11/29/2021	Comment received. The nexus between state and federal regulations and the demise of the timber industry in Big Valley and elsewhere is well established and accepted by the County's GSP development team, including UC Cooperative Extension rangeland experts.
Julie Rechtin	BigValleyGSP _PublicRevie wDraft_2021 _10_28	Section 1.2	I repeatedly have questioned the goal of agriculture having the sole mentioned "vested right" to groundwater. I found an excellent summary of groundwater rights law (at least up to 2004) in the Upper Pit Watershed Assessment, 2004. All land owners have "overlying rights;" there is no prescriptive right based on past use. Instead, groundwater rights are based on current, reasonable, and beneficial uses. It appears that this claimed "vested right" is being used to justify discounting the rights of community members and possible industry, including revival of the Bieber mill site to utilize fuels removal materials. It is also being used to justify allowing the groundwater levels to drop 140' from current levels, based on the economics of agriculture alone. I believe our goal should be much more focused on sustainability with actions taken much sooner. We have an opportunity to avoid the Undesirable Outcomes in the more-concerning high- and medium-priority basins and already occurring especially on the west side of the BV groundwater basin as evidenced by the groundwater contour maps and wells going (functionally) dry.	11/29/2021	Comment received. More information about water rights can be found at: https://www.waterboards.ca.gov/waterrights/board_info/. The importance of agriculture was consistently expressed and supported by the BVAC and was not questioned by others during the GSP development process. The feeling is that since agriculture is virtually the only economic activity in the Basin that directly supports the local economy, other uses such as domestic would not exist without agriculture. An inventory of wells (including domestic) has been identified as a data gap and the GSAs will seek funding.
Julie Rechtin	BigValleyGSP _PublicRevie wDraft_2021 _10_28	Section 3.2.6	Upper Pit IRWMP: Can this plan be found anywhere on the web? I looked and didn't find it. If it isn't there, can it be posted? I did find the Watershed Assessment, which has a lot of helpful information, and which the GSP doesn't list as a reference either. Fig 3-2: There is no BLM land along Hwy 139, approximately 2 miles S of Adin.	11/29/2021	The IRWMP has been uploaded to the GSP website and is available at: https://bigvalleygsp.org/service/document/download/341

Page 13 of 59 500

		Page & Line			
Name	Document	Number	Comment	Date	Response
Julie Rechtin	BigValleyGSP _PublicRevie wDraft_2021 _10_28	Section 3.3	The GSP doesn't mention the increasing number of wells and irrigated acres (often converted from sagebrush steppe or unirrigated pasture.) This has been occurring for some time. From Upper Pit River Watershed Assessment, prepared by Vestra for Pit River Alliance, 2004: If the number of irrigation wells can be used as an indicator, groundwater usage in the Upper Pit River Watershed has increased approximately 10 fold in the last 40 years. For example, the number of irrigation and municipal wells within the Alturas basin increased 3.6 times between 1960 and 1979, and 2.3 times between 1979 and 1997. Within the Big Valley basin, the number of municipal and irrigation wells increased by 5.9 times between 1960 and 1979, and 1.8 times between 1979 and 1997. Statewide, well drilling peaked in 1977, in response to the 1975–76 drought; and in 1993, in response to the 1987–92 drought (DWR, 2000). USGS estimated that approximately 50,000 acre-feet of water were used consumptively for irrigation in the watershed in 1990, and approximately 80,000 acre-feet of water were used consumptively for irrigation in 1995 (USGS, The National Water-Use Program, 2003). The Assessment then provides a table of older well inventories, broken down by groundwater basin. New well drilling and conversion of native vegetation to agriculture have continued since 2004. This is obvious looking at the historical imagery vs most recent on Google Earth. Recent imagery will be helpful in updating the GSP's facts and figures. For instance, a large (3700' diameter circle) center pivot recently was installed just W of Hwy 139, less than a mile south of Adin. It is not visible in 2015 imagery, the conversion was in progress in 2017, and the field is actively being farmed in 2021 imagery. This field is not shown on Figs 3-5 or 3-6. A note on Fig 3-5 states that the map may be updated with 2018 Land IQ data. I suggest even more recent data will be required.		Comment received. The GSP presents the best readily available information and data on these topics. Updated land use data provided by DWR will be used for annual reports and future updates of the GSP.

Page 14 of 59 501

		Page & Line		Ī	
Name	Document	Number	Comment	Date	Response
Julie Rechtin	BigValleyGSP _PublicRevie wDraft_2021 _10_28	Section 3.4	Figure 3-7 and almost certainly the well inventory are incomplete and inaccurate. Rather than make an effort to update the well count, the GSP instead emphasizes that wells have been abandoned and need to be subtracted from the count. For instance, the main Adin block shows 18 wells in the Groundwater Plan. I repeatedly have commented that this is an undercount of domestic wells. There are at least 50 wells in this block, as most houses have their own well with only occasionally several houses on one well. All the blocks surrounding the main Adin block also are undercounted. Yes, some of these wells are shallow, with jet surface pumps, and possibly may be accessing a perched aquifer. But over the years, these pumps are being replaced with submersible pumps as the water table slowly lowers. However, the GSP appears to discount many of Adin's wells as "hand-dug," and therefore does not include them in the inventory. The comment was made during a BVAC meeting that any well less than 100' deep is "substandard" and needs to be deepened and improved. I believe you will have a revolt on your hands if the County insists on this and/or the water table continues to drop. Either that, or a significant percentage of Adin's housing (mostly lower-value rentals) will become unusable, because many home owners will not be able to improve their wells either economically or logistically. I suspect that a community water system would be prohibitively expensive to install. And yes, the water table is slowly sinking. See Sec 5.1 comments. My concern is that the GSP's under-count also under-values the importance of Adin's wells to maintaining the house stock in our community, and therefore lowering of the groundwater levels here doesn't rate seriously as an Undesirable Outcome.		Comment received. The data displayed represents the wells that have been constructed since DWR has required drillers to submit well completion reports. The purpose of displaying the number of wells per 1-mile section is to identify where there are higher densities of the various well types. This map achieves this goal, despite the numbers potentially being too low. The well inventory has been identified as a data gap so that future updates can be more accurate.
Julie Dawson- Parlee	BigValleyGSP _PublicRevie wDraft_2021 _10_28		With all the evidence of how inaccurate and unfair the Basin boundary is, it seems abrupt to just say that the GSAs will submit a Basin boundary modification. Perhaps it should say that the GSAs will continue to submit Basin boundary modification requests as long as DWR continues to ignore the science and updated information available. This section also needs to be specific in mentioning that the majority neighboring landholder to the Basin is the USFS, so accurate boundaries would increase the likelihood of cooperation and partnership in recharge projects.	11/28/2021	Comment received. There is lengthy discussion in the introduction and throughout the text about the inaccuracy of the basin boundary, the GSA's request to change it which was denied, and the current intention is to submit a future modification request.

Page 15 of 59 502

		Daga 0 1:aa	Dig valicy doi: Comment Watrix Cit		<u> </u>
Name	Document	Page & Line Number	Comment (NOTE: break from 02:19:30-02:28:00	Date	Response
Julie	Public Draft Chapter 4	Number	How much UC Davis information is included in Chapter 4? Is preliminary information available from that Study?	<u> </u>	The UC Davis groundwater recharge study is ongoing. Specific information and data is not included in the GSP, as it was not finalized and available during the GSP development process.
Presentation	Public Draft Chapter 4		DWR identifies options for defining a basin bottom: bedrock, water quality that precludes use (using resistivity) It's not clear where bedrock occurs, or where water quality decreases. Are using 1,200' as a definable bottom, to capture existing wells.	3/19/2021	See conceptual language at the bottom of page 4-10 and at the top of page 4-13.
Presentation	Public Draft Chapter 4		Data gaps include: basin boundary, confining conditions, definable bottom, faults as barriers to flow, soil permeability, recharge	3/19/2021	See language on page 4-1
Sup. Albaugh	Public Draft Chapter 4	Page 1 line 13	Dimensions of basins do not match with Chapter 3.	3/19/2021	Text has been modified for consistency of dimensions and acreage.
Sup. Albaugh	Public Draft Chapter 4	Page 1 Line 21	Add in 363.63 acres of riparian area (30 miles of Pit River, 50' on each side)	3/19/2021	Riparian area is captured in Table 3-1
Sup. Albaugh	Public Draft Chapter 4	Sec. 4.4.1	Single principal aquifer is most appropriate for managing groundwater. This should be removed. The BVAC is not interested in managing groundwater. What is the basis for the determination of a single aquifer? To define multiple aquifers, there would need to be evidence of hydrologic separation (such as clay layers). Pumps that have different levels of production could be connected - the differences resulting from the fact that aquifers are not consistent throughout. Also, there is a stream between the upper basin and lower basin. Laura: If there was a bathtub filled with sand, everyone would have the same pumping. However, the bathtub is filled with sand, gravel, clay and silt. There are also layers of lava, faults and streams. Additionally, the basin is thinner at the edges. Better pumping occurs in sand, less production is found where drilling occurred where there is more clay or silt. Wells were drilled to see what the layers of materials are in areas where there aren't many wells. Tiffany: These wells supllement the CASGEM wells. Also: the Wildlife Area looked at adding a monitoring well. However, it is not likely that that the well would have been permitted in time to inform the GSP. (Note:Check into whether this is proceeding?)		Language for section 4.4.1 is that: "a single principal aquifer will be used for this GSP." (will not say "for managing groundwater") Explain that there are potential differences across the basin. There are 21 CASGEM wells. Ranging in depth from 800' to 50'-100'. It's hard to pin down details and distinctions with 21 wells with a wide range in depth. There are three wells in Lookout (or south of Bieber) that provide a clue that something might be different. There is language in the Plan that the GSAs are being forced to use inaccurate data to make the decisions. "Adaptive Management" is stated as a concept in the GSP where the Plan can adapt as more and better data and information is obtained.
Sup. Albaugh	Public Draft Chapter 4	page 26 Line 423	Shows many small towns and reservoirs. There are also small ponds and reservoirs within the basin. Ranchers have to pay dam fees for reservoirs and water rights fees for stock ponds. These are surface supplies. These should be shown on the maps or described in text.	3/19/2021	There will be an opportunity to mark up maps and revise presentation of waterbodies. (Map -14)
Sup. Albaugh	Public Draft Chapter 4	page 26 Line 425	Importing surface water into the basin: Roberts Reservoir and Silver Reservoir has water rights used in this basin, that is stored outside the basin boundaries. Clarify language on imported water. Explain that some water sources used in the basin is stored outside the basin boundaries. Ensure that all incoming supplies are accounted for in water balances.	3/19/2021	Imported water refers to surface water supplies that originate from outside the watershed where the supplies are used. This is clarified.

Page 16 of 59 503

		Page & Line			
Name	Document	Number	Comment (NOTE: break from 02:19:30-02:28:00	Date	Response
Sup. Albaugh	Public Draft Chapter 4	page 27	The issue of definable bottom: What value works to the favor, in the interests of, Big Valley residents? Say that the definable bottom has not been established, there is much variability, and that a bottom is set at "x" for the purposes of the plan. Helpful to know when things are, or are not, in our interest - and to explain why that is so. If the definable bottom needs to be in the plan, say so. Then heavily caveat the number. Any uncertainties should be evaluated in favor of the Basin.		Annual reports require calculations on change in storage for the basin. Those calculations are multiplied by the number of aquifers. Then definable bottoms must be determined for each aquifer. The change in storage is what is important, not the overall storage. The key is to understand the conditions and the best options for optimizing and using the resource to make sure there are not dire consequences in the future. NOTE: GEI provides a list of required elements for each chapter.
Sup. Byrne	Public Draft Chapter 4	Page 23 Line 360	Replace the word "poorer." Perhaps lesser - keep looking The quality of water that is naturally occuring will not be affected by management decisions. Clarify that this is not about good water quality being degraded.	3/19/2021	Language changed.
Julie	Public Draft Chapter 4		Explain that there is a lot of complexity across the basin, including termperature and water quality. Show the variety in where water levels are maintaining or going down. Want to focus on the goals, for example - wells not drying up, supporting agriculture, springs going dry. Management will focus on the goals rather than absolute numbers.		This is a central discussion for creating Sustainable Management Criteria - this suggestion has been considered in developing the sustainable management criteria.
Julie	Public Draft Chapter 4		How can the GSP use remedial soils, outside of basin boundaries, to help support recharge to the basin?	3/19/2021	Projects in Chapter 9 help address this.
Barbara Donohue	BigValleyGSP _Ch4_Revise dDraft_2020_ 08_19.pdf	Page #: 4-16, Line #: 270	Figure 4.5.1 Taxonomic Soil Orders identified for the Basin are oversimplified and are too "Coarse Grain" to be used effectively for any management implications. It certainly simplifies the landscape analysis process, but does not adequately describe in enough detail as to the attributes of soil classification that supports the poor infiltration and problems with groundwater recharge found in throughout this area. Please include more extensive soil classification descriptions. NRCS soil maps provide a more comprehensive backdrop to the soils out here		Soils maps are a required element of the GSP. The maps presented represent the best readily available information.
Barbara Donohue	BigValleyGSP _Ch4_Revise dDraft_2020_ 08_19.pdf	Page #: 4-18, Line #: 303	Table 4.5.2 Hydrologic soil descriptions Again, the Hydrologic Soil Descriptions identified for the Basin are oversimplified and are too "Coarse Grain" to be used effectively for any management implications. They do not adequately describe in enough detail as to the attributes of different hydrologic soil classifications that support this area. Please include more extensive hydrologic soil descriptions. These hydrologic soil descriptions are important for protection of rare habitat types found within the Valley which include northern basalt vernal pools.	3/19/2021	Soils maps are a required element of the GSP. The maps presented represent the best readily available information.

Page 17 of 59 504

		Page & Line	Dig valicy doi: Comment Water Cit	<u> </u>	<u> </u>
Name	Document	Number		Date	Response
Barbara Donohue	BigValleyGSP _Ch4_Revise dDraft_2020_ 08_19.pdf	Page #: 4-23, Line #: 400	Figure 4-12 NCCAG Wetland delineation. I am challenging the use of the NCCAG dataset at the principal data source for the delineation of wetland systems in the Big Valley Basin. It appears that wetland acreages are under represented in their data set due to the fact that it is based upon "natural community types", i.e; vegetation. The USGS National Wetlands Inventory Wetland Mapper utilizes multiple variables including soil type, soil profile, oxidation within the soil profile, depth to water, vegetation, hydrologic factors and more when delineating and describing wetland types in their mapping data. I would recommend that the information provided by the USGS National Wetland Inventory be compared with the NCCAG dataset. The history of land use in the Valley by ranching and agricultural activity has has a direct effect on the "vegetation community types" one can identify on an aerial photograph. These activities however, do not necessarily change the underlying attributes of wetland characteristics within the soil. You can access this information via the USGS website: https://fwsprimary.wim.usgs.gov/wetlands/apps/wetlands-mapper/		The NCCAG dataset is currently the best available information, and this has been suplemented with local knowledge including local experts. Further refinement of the data and field verification of the habitat has been identified as a data gap.
Barbara Donohue	BigValleyGSP _Ch4_Revise dDraft_2020_ 08_19.pdf	Page #: 4-26, Line #: 454	Figure 4-14 Recharge, discharge and major surface water bodies. The legend that is presented with this Figure has an item listed as "Lake". As mentioned on page 4-27, line 466, this figure represents the streams, ponds and surface waters within and adjacent to the Basin. There are little "lake" effects in the Valley. The surface waters present in the Basin are over-represented in this Figure. We have no reservoirs within the Valley basin. We DO have stock ponds, small impoundments and freshwater ponds located on the Ash Creek Wildlife Refuge. More current aerial photographs of the Basin clearly show extant, smaller and more depleted surface waters than what is presented in this Figure. Please review this data.	3/19/2021	Figure 4-14 presents the best available information to address the GSP requirement for a map that depicts the surface water bodies in the Basin.
Doreen SmithPower	BigValleyGSP _Ch4_Revise dDraft_2021_ 03_21_setasi de.pdf	Page #: 1-90, Line #:	See Letter 1 from Doreen Smith Power to BVAC dates 9/11/21. General comments on chapters 1-6.: https://bigvalleygsp.org/service/document/download/281	9/13/2021	Comments received.
Doreen SmithPower	BigValleyGSP _Ch4_Revise dDraft_2021_ 03_21_setasi de.pdf	Page #: 1-90, Line #:	See Letter 2 from Doreen SmithPower to BVAC Dated 9/9/21. BigValley GSP Chapters 1-3, Comments are both editorial and content. See attached memo. https://bigvalleygsp.org/service/document/download/280	9/13/2021	Comments received.
BVAC	Big Valley GSP All Chapters Public Draft 8/26/21	Section 4.2.1	Add more language regarding the inaccuracies in the Basin Boundary, particularly the finger that includes E. Fork Juniper Creek	9/9/2021	Text modified.
BVAC	Big Valley GSP All Chapters Public Draft 8/26/21	Lines 1274- 1275	Delete last sentence	9/9/2021	Sentence deleted

Page 18 of 59 505

			Dig valicy dol comment waters cr		
		Page & Line			
	Document	Number	Comment (NOTE: break from 02:19:30-02:28:00	Date	Response
	Big Valley	Section 4.6,	Don't like map and discussion of NCCAG		The NCCAG dataset is currently the best available information, and this has
	GSP All	Environment			been suplemented with local knowledge including local experts. Further
	Chapters	al Uses			refinement of the data and field verification of the habitat has been
	Public Draft				identified as a data gap.
	8/26/21				
1	Big Valley	Line 1515	Does young water mean we are not in overdraft?	9/9/2021	Young water indicates that the water is being flushed through the system.
	GSP All				
	Chapters				
	Public Draft				
	8/26/21				
BVAC	Big Valley	Lines 1555-	Flood irrigation doesn't occur just on lower portions of Pit River	9/9/2021	Text changed to state flood irrigation occurs in the Basin generally.
	GSP All	1558			
	Chapters				
	Public Draft				
	8/26/21				
BVAC	Big Valley	Figures 4-9	Expand these maps so they include areas outside the Basin	9/9/2021	This will be done before the final GSP is submitted.
	GSP All	through 4-11			
	Chapters				
	Public Draft				
	8/26/21				
BVAC	9/22/21 Draft	Line 1017	With regard to the basin boundary modification, change "may be necessary" to "is	9/9/2021	Text modified.
	GSP as		necessary"		
	introduced at				
	10/6/2021				
	BVAC				
	meeting				
BVAC	9/22/21 Draft	Line 1020	Change "may be inaccurate" to "is inaccurate"	9/9/2021	Text modified.
	GSP as				
	introduced at				
	10/6/2021				
	BVAC				
	meeting				
1 -	9/22/21 Draft	Line 1043	Change "suggested that these mountains serve as recharge" to "stated that"	10/6/2021	Text modified.
I	GSP as				
1	introduced at				
	10/6/2021				
	BVAC				
	meeting				
1	9/22/21 Draft	Line 1106	Big Valley doesn't have brackish or saline water. Why is this term in here?	10/6/2021	This reference to brackish or saline water does not indicate that it exists in
I	GSP as				the Basin, it is a reference to what DWR defines as an "effective bottom"
1	introduced at				
1	10/6/2021				
	BVAC				
	meeting				

Page 19 of 59 506

		Page & Line			
Name	Document	Number	Comment (NOTE: break from 02:19:30-02:28:00	Date	Response
BVAC	9/22/21 Draft GSP as introduced at 10/6/2021 BVAC meeting	Line 1050	What is the dashed line on the map?	10/6/2021	Map changed and dashed line added to legend.
BVAC	9/22/21 Draft GSP as introduced at 10/6/2021 BVAC meeting	1188	The data that was used to determine the aquifer characteristics came from the new monitoring wells which are small diameter and were pumped at a very low rate (8 gpm). Is this sufficient to determine the aquifer characteristics	10/6/2021	The text does acknowledge that larger wells pumped at higher rates would give higher values for the aquifer characteristics. This has been added as a data gap.
BVAC	9/22/21 Draft GSP as introduced at 10/6/2021 BVAC meeting	Line 1338	Change "underflow could enter the basin" to "underflow does enter the basin"	10/6/2021	Text changed
BVAC	9/22/21 Draft GSP as introduced at 10/6/2021 BVAC meeting		Don't like the blanket statement that precipitation that doesn't infiltrate runs off or is consumed through evapotranspiration	10/6/2021	Conceptually, precipitation that hits the ground must go in one of three places: deep infiltration, runoff, or remains in the soil and is eventually evapotranspirated. Text changed to remove the word "consumed".
BVAC	9/22/21 Draft GSP as introduced at 10/6/2021 BVAC meeting	Lines 937 to 938	Add "assumed" physical characteristics and "estimates" the principal aquifer	10/6/2021	These terms diminish and degrade the quality of the work put into the HCM. The changes are not necessary and the statement as written is complete and accurate. The statement ends by qualifying the HCM as being based on best available information. This is the appropriate language for introducing the chapter.
BVAC	9/22/21 Draft GSP as introduced at 10/6/2021 BVAC meeting		Add "estimated" before HCM	10/6/2021	See response above.

Page 20 of 59 507

	1	D 0 11	Dig valley dor dominient matrix er	 	
Name	Document	Page & Line Number	Comment	Date	Notes and Responses
BVAC	Public Draft Chapter 5	Subsidence, Section 5.5, pages 5-22 to 5- 24	How do the measurements account for agricultural practices that affect ground level? That should be discussed. Subsidence may not be due to changes in groundwater levels. It could be compaction, grazing land converted to row crops - with soils used to enhance levees. Or earthwork done at Caltrans. Or erosion. There may be other actions affecting ground levels, such as new ground disturbance. • Consider a footnote on land use, saying that additional on-ground monitoring is needed. Explain that these measurements show where ground is lower or higher.	9/24/2020	Subsidence associated with groundwater dynamics and pumping generally result in "bulls-eye" patterns of subsidence. Some of the subsidence in Big Valley is likely due to oxidation of organic materials. There are other options for monitoring subsidence, including the survey markers embedded in the new well monitoring foundations. Local knowledge was used in refinement of the map and in the discussion in the text.
BVAC	Public Draft Chapter 5	Water Quality Section 5.4, pages 5-9 to 5- 22.	There are concerns that providing quantitative measurements on water quality will encourage micro-analysis by the state.	9/24/2020	Elevated constituents are naturally occurring (iron, manganese, arsenic). Specific conductance is also naturally occurring and is a general measure of water quality. The GSP is required to report on contamination sites (such as gas stations and landfills). The graphs do show that there is better water quality (graphs 5-8, 5-9 and 5-10). It can support a baseline groundwater quality monitoring in the GSP. Additional data on water quality can show that conditions are even better than what was seen with Bieber samples.
BVAC	Public Draft Chapter 5	Groundwater Levels (and surface water interactions)	Don't groundwater levels necessarily need to be the same across the basin? Explain how it's determined that a stream is gaining or losing. It is not understandable.	9/24/2020	Two reasons why surface water depletions are a critical element: surface water rights and groundwater dependent ecosystems. (Response: as long as the wells are in the same geologic formation, the levels should be very close. If a pump is located in a different formation, the response times may be different - and affect the levels) (Response: Pit River and Ash Creek have different water signatures. Additional monitoring and samples will better inform the patterns of gaining and losing.
BVAC	Public Draft Chapter 5	GDEs, Sec. 5.7, pages 5-26 to 5- 31	The acreage for amount of willows in the basin is overstated. There is not 4,700 acres of willows in the basin. Ash Creek Refuge uses surface water supplies. There was discussion about groundwater levels in that specific area, which are closer to the surface and contribute to surface water supplies. Table 5.5, page Alfalfa is listed as a native species – change this Is aspen found in the basin? Is elderberry found in the basin? Change "salix" to "willow"	9/24/2020	Ash Creek Refuge does also use groundwater pumping to irrigate at Ash Creek. This area is known as an ecological preserve and land uses are not likely to change. The consultants were careful to clearly delineate what truly qualifies as a GDE. This current text is about describing likely or potential GDE. The big question is about managing for GDEs, which comes later in the Plan Species listings are obtained from the Native CalFlora website. The Nature Conservancy website was also reviewed and many of the species listed were deleted for the Big Valley GSP. Local knowledge from residents and local experts was used to develop this approach and text.
BVAC	Public Draft Chapter 5	GDEs	Do not say that Ash Crrek is "managed" Descriptions of GDEs should be verified by those who are working on the land	9/24/2020	Chapter 5 does not contain the word "managed" or "managed wetlands" - the area is referred to as Ash Creek Wildlife Area
BVAC	Public Draft Chapter 5	1	 Reaches 6 and 9 are both labled Upper Pit River Reach 3 is Willow Creek: water rights and diversions mean that Willow Creek does not exist after a certain point during the summer (Sup. Albaugh spoke to David Fairman about the issue, briefly, before the meeting) - 	9/24/2020	Figure updated

508 Page 21 of 59

		Page & Line			
Name	Document	Number	Comment	Date	Notes and Responses
BVAC	Public Draft Chapter 5		Referring to the Elements checklist guide, there was a question about which items are required.	9/24/2020	Clarification was provided during the presentation.
Barbara Donohue	BigValleyGSP _Ch5_Revise dDraft_2020_ 10_22.pdf	Page #: 5-29, Line #: 361	Regarding key "Vegetation Areas" "Willow" is described as the second largest habitat comprising 41% of the area. Wrong. If anything, we lack willow as a component within or adjacent to creeks, ditches and ponds in this area. We have no habitat for the Willow Flycatcher here. There are scant distributions of willow species among the Ash trees along the full length of Ash Creek, along the edges of freshwater ponds and water compounds on ranches and within the wildlife refuge as well as along Willow Creek. There is a dearth of willow in the basin especially enough to cover 41% of your vegetative composition. Please review this classification as a vegetation area. Something is in error here	3/19/2021	The data presented in this chapter is the best available at the time of development of the GSP. Ground truthing of the groundwater dependent ecosystems has been identified as a data gap. The list of species in the Basin was developed based on local knowledge, local experts, and information obtained from public available datasets
Barbara Donohue	BigValleyGSP _Ch5_Revise dDraft_2020_ 10 22.pdf		Figure 5-19 NCCAG Wetlands lacks the locations of "riverine" and "seep or spring" on the map	3/19/2021	This figure was removed from the GSP, and the included maps and text were developed based on local knowledge and local experts.
Barbara Donohue	BigValleyGSP _Ch5_Revise dDraft_2020_ 10_22.pdf	Page #: 5-31, Line #: 368	Figure 5-20 NCCAG Vegetation. The "willow" component in this figure is in error. The vegetation composition along Ash Creek is not willow at all but Oregon Ash (Fraxinus latifolia). There are a few individual willow shrubs on the ACWR along with a few Black Cottonwoon (Populous trichocarpa ssp. trichocarpa) as well as a few other Ash trees distributed here or there. No grand distribution of willowHas your environmental staff been on the ground here to support your vegetation suppositions? This entire "Willow" vegetation type needs to be reassessed	3/19/2021	This figure was removed from the GSP, and the included maps and text were developed based on local knowledge and local experts.
Barbara Donohue	BigValleyGSP _Ch5_Revise dDraft_2020_ 10_22.pdf		Table 5-5 "Big Valley Common Plant Species"Three out of the six plant species listed in this table do not occur in Big Valley. Carex sp., Alfalfa sp., and Salix sp. are the only ones that occur here. Aspen sp., Sambucus sp. (Elderberry) and Distichlis sp. (saltgrass) do not occur very often if at all in the local landscape. i is recommended that Oregon Ash (Fraxinus latifolia) or Black Cottonwood (Populus trichocarpa) be used for tree species that occur in these areas. There is rooting depth data available for both of these species. Wild rose (Rosa woodsii) is commonly found along Ash Creek and within the ACWR. We KNOW that Idaho fescue (Festuca idahoensis) and Tufted hair grass (Deschampsia cespitosa) are commonly found within wet meadow types, adjacent to ponds and along creekbanks in this area. Develop a more localized species list to use for rooting depth estimates.	3/19/2021	This table was developed by local experts (UCCE) based on literature research and local knowledge.
Sup. Byrne	Big Valley GSP All Chapters Public Draft 8/26/21	Line 1929	"It is unknown if the subsidence in these areas has been induced by groundwater extraction." We argue earlier that we don't have any and this is opening the door to saying we do.	9/9/2021	Text has been modified to reduce discussion of the nexus between groundwater extraction and subsidence.
BVAC	Big Valley GSP All Chapters Public Draft 8/26/21	Lines 1685-1586	Do we need the sentence describing the declines in water levels	9/9/2021	This is a factual statement and is important to putting changes in water levels in context.

509 Page 22 of 59

		Page & Line			İ
Name	Document	Number	Comment	Date	Notes and Responses
BVAC	Big Valley GSP All Chapters Public Draft	Line 1874	Delete "including groundwater pumping".	9/9/2021	Text removed.
BVAC	8/26/21 Big Valley GSP All Chapters Public Draft 8/26/21	Section 5.5	Subsidence is not happening in the Basin, yet we use the word subsidence many times	9/9/2021	Text changed to talk about "lowering of ground" where appropriate.
BVAC	Big Valley GSP All Chapters Public Draft 8/26/21	Section 5.7	We don't like this section, don't like the maps. This data is inaccurate	9/9/2021	Two maps removed, text changed to emphasize need to field verify GDEs and the discussion was based on local knowledge and local expert opinion.
BVAC	9/22/21 Draft GSP as introduced at 10/6/2021 BVAC meeting	Line 1486	Why is the word "regression" used here? Not all the lines are going down.	10/6/2021	Regression refers to the mathematical method used to detemine the line. Wording changed to "line of best fit".
BVAC	9/22/21 Draft GSP as introduced at 10/6/2021 BVAC meeting	Line 1728 Figure 5-17	Don't like this figure. Change the scaling so that each color is 3 inches	10/6/2021	The current scaling of 1.5" per color is appropriate given that the published accuracy of the data. Figure modified to show that white areas don't have data and that the lowest gradation goes from -3 to -3.2 rather than < -3. Also added the published accuracy of 0.7"
BVAC	9/22/21 Draft GSP as introduced at 10/6/2021 BVAC meeting	Line 1779	What does areal mean?	10/6/2021	Areal means how much space it takes up. Wording edited.
BVAC	9/22/21 Draft GSP as introduced at 10/6/2021 BVAC meeting	Line 1735	What is the definition of a perrennial stream? Why use perennial streams?	10/6/2021	A stream that flows year-round or nearly year-round indicates that it is not completely depleted. Using perennial streams is not a requirement of SGMA. Identification of interconnected surface water is a requirement. The word perennial was removed and the streams analyzed are seen to be the "major", defined as streams that are named in the National Hydrologic Dataset from USGS.
BVAC	9/22/21 Draft GSP as introduced at 10/6/2021 BVAC meeting	Line 1736 and 1794	Why use 20 feet. Isn't 15 feet more realistiz?	10/6/2021	Text and figures have been changed to 15 feet, and justification for that depth has been added to the text based on local knowledge and local expert opinion.

Page 23 of 59 510

	Page & Line								
Name	Document	Number	Comment	Date	Notes and Responses				
Julie	Draft GSP 9/22/21	Page #: 5-17 Line #: 1729 Figure 5-17	In Fig 5-17, what are the areas with no color within the groundwater basin? I see nothing in the legend. Also, what is the largest negative value recorded?	10/6/2021	Legend has been modified to indicate that the white areas are where there was "No data available".				
Doreen SmithPower	Draft GSP 9/22/21	Page #: 5-28 Line #: 1735	Perennial stream Definition: 399 Samples Law Insiderhttps://www.lawinsider.com/dictionary/perennial-streamPerennial stream means a well- defined channel that contains water year round during a year of normal rainfall with the aquatic bed located below the water table for most of the year.	10/6/2021	Comment received. Text was modified to eliminate the discussion of perennial streams.				
Doreen SmithPower	Draft GSP 9/22/21	Page #: 5-28 Line #: 1735	I did not find a definition for 'perennial stream' from DWR or in the Water Code. Looking at the definition for interconnected surface water, it seems that a stream being perennial or non-perennial stream would not preclude it from being considered interconnected. From the regulations: "Interconnected surface water" refers to conditions where surface water and theunderlying aquifer are hydraulically connected by a continuous saturated zone and theoverlying surface water is not completely depleted.	10/6/2021	Comment received. Text was modified to eliminate the discussion of perennial streams.				
NGOs	BigValleyGSP _PublicRevie wDraft_2021 _10_28	Section 5.6	See Letter 3 from NGOs to GSAs dated 11/28/21. The identification of Interconnected Surface Waters (ISWs) is insufficient, due to lack of supporting information provided for the ISW analysis. To assess ISWs, the GSP assumes streams to be interconnected where the depth to water is less than 15 feet below ground surface, based on spring 2015 contours. However, it is common practice to utilize deeper thresholds, such as 50 feet below groundwater surface, to indicate a disconnected stream reach, . Furthermore, using seasonal groundwater elevation data over multiple water year types is an essential component of identifying ISWs. Using depth-to-groundwater contours from one point in time is not sufficient evidence to state that reaches are not connected to groundwater. In California's Mediterranean climate, groundwater interconnections with surface water can vary seasonally and interannually, and that natural variability needs to be considered when identifying ISWs.	11/28/2021	The GSP identifies ISWs as a data gap and they will continue to be assessed as more data is available. At this time, there is insufficient data to clearly identify ISWs. 15 feet was used to identify "potential" ISWs was a conservative estimate, based on the observation that the channel banks of the major streams are largely less than 10 feet. Spring water levels were used for this potential ISW assessment to represent the highest groundwater levels that could occur seasonally, accounting for the fact that potentially interconnected surface water could become disconnected in the dry season. Furthermore, 2015 water levels were used because that is the baseline for SGMA, which does not required conditions to be improved to a condition that may have occurred prior to SGMA.				
NGOs	BigValleyGSP _PublicRevie wDraft_2021 _10_28	Section 5.7	See Letter 3 from NGOs to GSAs dated 11/28/21. The identification of Groundwater Dependent Ecosystems (GDEs) is insufficient. The GSP took initial steps to identify and map GDEs using the Natural Communities Commonly Associated with Groundwater dataset (NC dataset). However, insufficient groundwater data was used to characterize groundwater conditions in the basin's GDEs. The GSP uses depth-to-groundwater data from fall 2015 to characterize areas where the depth to groundwater was less than 15 feet to identify potential GDEs. We recommend using groundwater data from multiple seasons and water year types to determine the range of depth to groundwater around NC dataset polygons. Using seasonal groundwater elevation data over multiple water year types is an essential component of identifying GDEs and is necessary to capture the variability in groundwater conditions inherent in California's Mediterranean climate.	11/28/2021	The rationale for using Fall 2015 groundwater levels and less than 15 feet to groundwater are presented in the GSP.				
NGOs	BigValleyGSP _PublicRevie wDraft_2021 _10_28	Section 5.7	See Letter 3 from NGOs to GSAs dated 11/28/21. The GSP does not provide an inventory of the flora or fauna species present in the basin's GDEs, except to present the common plant species and their rooting depths. Furthermore, the GSP does not acknowledge endangered, threatened, or special status species in the basin.	11/28/2021	GSP regulations do not require an inventory of the flora and fauna species present.				

511 Page 24 of 59

	I	Page & Line	Dig valley GSI Comment Matrix CI		
Name	Document	Number	Comment	Date	Notes and Responses
	BigValleyGSP	Section 5.1	560-295 Hwy 139, S of Adin		Comment received. The data displayed represents the wells that have been
Julie Recitiii	PublicRevie	Section 3.1	72-acre parcel. I rented a house on property from 2001 to 2019. Three wells on	11/29/2021	constructed since DWR has required drillers to submit well completion
	wDraft 2021		property:Main ag well: ~2015, this well went (functionally?) dry mid-summer. When the		reports. The purpose of displaying the number of wells per 1-mile section is
	_10_28		property sold in 2019, it was under condition that the well be deepened by 80'.		to identify where there are higher densities of the various well types. This
			Pasture well: for watering livestock. Fall 2016, the faucet was left on moderate flow for at		map achieves this goal, despite the numbers potentially being too low.
			least a day, and the well began spitting air. It took a week to recover.		Better understanding of the inventory of wells in the Basin (including
			House well: Can't find exact records, but the water depth did drop over time, such that I		domestic) has been identified as a data gap.
			had to water the lawn with piped pasture well water. Also, the house well water quality		
			became "hot spring" earlier each summer until I only got drinking water from the pasture well or filtered the house well water.		
			420 Spring St, AdinLived here 2.5 years so far. Well is ~100' deep, standard well (1940's?)		
			with sanitary seal installed and pump lowered as of 4/2019. I had to stop watering the back		
			yard July 2020 due to water quality changing. I watered the front & side yards less, too, this		
			year, and the water quality stayed OK until a couple days in late Sept/early Oct when I		
			increased watering (so I stopped.)		
			Neighbors to north have 80' deep well, with limited capacity. They can't water front & back		
			yards at the same time. They are putting in more xeriscape landscaping throughout		
			property, trying to avoid drilling deeper.		
			US Forest ServiceWhen I arrived in 1988, there was an artesian well in the middle of the parking lot. Within a couple years, this well no longer functioned and it was paved over.		
			The USFS had to drill more wells.		
			Additional wells in Adin having problems, but you said you only wanted first person		
			knowledge.Adin Wells in generalAgain, discounting Adin's wells discounts the economic		
			impact lowering water tables have had and will have on this town. Loans must still be		
			repaid, and regardless of federal or state help, drilling wells deeper is expensive. Plus, I see		
			no "good neighbor policy" happening for Adin wells.		
Julie Rechtin	BigValleyGSP	Section 5.6	Biologist friends who spend more time in ACWA than I, one issue stands out: water. I	11/29/2021	Comment received. The GSP does not contain any text that discounts the
	PublicRevie		participated in the late 1980's planning for the ACWA, and it was very clear that the need to		ACWA as a recharge area.
	wDraft_2021		continue to respect and deliver on previous agricultural water rights outside the ACWA		
	_10_28		greatly constrained what CDFG could do. One comment made by the public was that there		
			was insufficient water to implement the planned ponds as "the ranch had been traditionally		
			short of water." My friends assure me this is still true.		
			Rather than write off the ACWA as a recharge area, I propose that we see the value it likely		
			had in the past as a recharge area, thus at least helping to maintain the groundwater levels		
			in BV basin. And we should look at our options to revive that interconnection and the		
			groundwater dependent ecosystems associated with it.		
			Also, springs are considered GDE's, and I don't believe their sustainability is adequately addressed in the GSP. They are mapped in Fig 4-13, but not on Fig 5-19 as GDE's.		
			adultessed in the Gor. They are mapped in Fig 4-15, but not on Fig 5-19 as GDE s.		
			•		

Page 25 of 59 512

		Page & Line	<u> </u>		<u>-</u>
Name	Document	Number	Comment	Date	Notes and Responses
BVAC	Public Draft Ch 6, Historic Wtr Budget	Figure 6-2, page 6-2	Why is the atmospheric system not incorporated into the water budget	11/4/2020	Inputs from the atmospheric system appear as precipitation, which is about 12" - 15" per year. The water budget accounts for precipitation as either falling onto land or onto water bodies.
BVAC	Public Draft Ch 6, Historic Wtr Budget		If inflow were to equal outflow, that would represent a balanced system. There are some streams that have crazy flows during periods of high precipitation.	11/4/2020	Yes, which is why it's important to recharge groundwater during high flows - so that stored groundwater can be used during dry periods.
BVAC	Public Draft Ch 6, Historic Wtr Budget	Section 6.2, page 6-4 and elsewhere	There are no naturally occuring lakes in the basin. Any standing bodies of water are reservoirs.	11/4/2020	Changed terms in text to "lakes/reservoirs" including bar charts and figures.
BVAC	Public Draft Ch 6, Historic Wtr Budget	Footnote 1, page 6-6	What is the definition of long-term (e.g. long-term sustainability)?	11/4/2020	By 2042, mechanisms should be in place to manage water from year to year. When it comes to setting thresholds, those levels should provide room so as to stay in compliance during periods of variation or fluctuation. It may be that, during the next 20 years, conditions might get worse before they get better.
BVAC	Public Draft Ch 6, Historic Wtr Budget	Figure 6-8, page 6-6; and PPT slide #15	Double-check the lines calculated by excel.	11/4/2020	The results where checked to see if they were reasonable.
BVAC	Public Draft Ch 6, Historic Wtr Budget		How are inflows from areas outside the basin boundaries represented? [Note: This is paraphrased from a question by Aaron asking if calcualtions can be provided to support future requests for boundary modifications.]	11/4/2020	GEI calculated the inflow through the gap between Round Valley and Big Valley based on the geometry of the gap, water levels, and hydraulic characteristics.
BVAC	Public Draft Ch 6, Historic Wtr Budget	Page 6-3, Line 49	Has the data from the CIMIS station in McArthur been adjusted for Bieber?	11/4/2020	That is being adjusted for. Also, Steve Orloff has a paper on percent application of water, in terms of ET, for alfalfa in Scott Valley - which may be a helpful estimate.
BVAC	Public Draft Ch 6, Historic Wtr Budget	Appendix 6-B, (multiple locations)	Why is Managed Aquifer Recharge set at zero?	11/4/2020	Managed Aquifer Recharge refers to actions where the primary objective is recharge (e.g., as opposed to reservoirs, where surface water storage is the primary objective, with recharge as a secondary result). Projects such as flooding for habitat might quantify as Managed Aquifer Recharge. It would be necessary to state that groundwater recharge is an intended benefit from the flooding.
BVAC	Public Draft Ch 6, Historic Wtr Budget	Figure 6-4, page 6-4	Question from the public: you mentioned approximately 100K error in stream outflow out of the basin. Also, you said that we know that more water actually flows into the basin than out. (Fig 6-4) Does this explain the approximately 80K difference between the estimated and actual groundwater budget? (not sure of slide #)	11/4/2020	Comment received. No, these are separate components of the water budget.
BVAC	Public Draft Ch 6, Historic Wtr Budget	Appendix 6A Land System, line 2, assumptions	Ag is not the only user of surface water: surface water is also used by loggers, fire-fighters, Caltrans, illegal marijuana grows, wildlife, etc.	11/4/2020	There is no quantification of other surface water uses.

513 Page 26 of 59

	big variet der Comment Matrix Chapter o								
Name	Document	Page & Line Number	Comment	Date	Notes and Responses				
BVAC	Public Draft Ch 6, Historic Wtr Budget	Appendix 6A Land System, line 2, data needs	Ash Creek Wildlife Area and Groundwater Pumping: (someone) retired and had maintained a lot of data on groundwater pumping.	11/4/2020	This data was obtained and considered in the GSP.				
BVAC	Public Draft Ch 6, Historic Wtr Budget	Appendix 6A Land System, line 3, data source	Population source shows Bieber - there are other communities as well.	11/4/2020	Bieber has a municipal system, which is different from domestic extractions. Adin will be added in as a public water supply which is a non-municipal use.				
BVAC	Public Draft Ch 6, Historic Wtr Budget	Appendix 6C Land System chart	Do inflows on the Land System bar chart include surface water sources from outside the basin what provide water for irrigation uses within the basin? (e.g., Roberts Reservoir, Silva Flat, etc.)	11/4/2020	Those reservoirs outside the basin are not per se considered here. The flows out of the reservoir are included in the category of the watershed that are ungaged. While flow out of the reservoir is measured, there is not access to a long-term record of that. It is shown as an inflow coming in as stream flow. The diversion of the stream flow to application to the field or ditch is represented as a surface water delivery. (40% of applied water is from surface water.)				
BVAC	Public Draft Ch 6, Historic Wtr Budget	6-4 and 6-5, Section 6.2	How is it possible that inflow exceeds outflow?	#######################################	While inflow and outflow may be more equal during certain seasons, outflow may exceed inflow during other seasons. This data represents the total annual inflow and outflow. *Figure 6-4 through 6-7 will be changed to read "Total Annual Water Budget" for clarity.				
BVAC		pg. 6-5, Figures 6-5, 6- 6, 6-7	A better explanation of "Between Systems" is needed.	#######################################	Flow between systems is depicted in Figure 6-2 (pg. 6-2) and will be further explained during 11/4/20 BVAC meeting. *Figure 6-2 can be referenced on page 6-5				
BVAC	Public Draft Ch 6, Historic Wtr Budget	Appendix 6A, Land System, items 2 & 3	Need clarification on where assumption of 40% surface water and 60% groundwater used for irrigation comes from.	#######################################	Further study of water sources was performed and incorporated into the water budget.				
BVAC	Public Draft Ch 6, Historic Wtr Budget	Appendix 6A, Land System, items 7 & 8	Need clarification on percentages under "Assumptions" column; change "grounwater" to "groundwater".	#######################################	*Explanation about the 85% irrigation efficiency and the 15% inefficiency, resulting in 7.5% return flow and 7.5% recharge, will be included for clarification; typo corrected.				
BVAC	Public Draft Ch 6, Historic Wtr Budget	Appendix 6A, GW System item 27	Is it true that no subsurface inflow occurs in the basin?	#######################################	Until it can be shown otherwise, it will be assumed that there are no inflows and 1 acre-foot per year of connection to Round Valley.				
BVAC	Public Draft Ch 6, Historic Wtr Budget	Appendix 6C, Total Basin bar chart	Stream inflow and outflow are even during some parts of the year but not others; It would be helpful to see exact number of acre-feet on Appendix 6C bar charts	#######################################	*Text will be added to read something like "Stream flow varies throughout the year."; Actual number of acre-feet will be added to some of the years on Appendix 6C bar charts				
BVAC	Public Draft Ch 6, Historic Wtr Budget	Appendix 6C, Surface Water bar chart	Explanation is needed for Surface Water Delivery as an outflow. If a percentage used for irrigation goes to the plants, is the percentage that goes back to the groundwater captured in one of the categories on the inflow side of the chart?	1	The routing of water within the water budget is shown in Figure 6-2				

Page 27 of 59 514

	big valley dor comment water a								
Name	Document	Page & Line Number	Comment	Date	Notes and Responses				
BVAC	Public Draft Ch 6, Historic Wtr Budget	Appendix 6C, Groundwater bar chart	Because the colors are similar, it appears that there is a small amount of subsurface inflow on the bar	#######################################	*Subsurface Inflow will be removed from the bar chart key				
BVAC	Public Draft Ch 6, Current Wtr Budget		The Tables in Chapter 6 should say "ESTIMATED" or "ASSUMED" for Inflow, Outflow.	12/2/2020	Data is used where it's available, rough estimates are made in other areas, and assumptions based on best professional judgement in still other areas. The water budget is balanced by adjusting the estimates and assumptions within generally acceptable ranges until the budget is balanced. As such, the water budget is not necessarily a unique solution, but represents the best professional estimate. Water budget estimates of this type are considered order of magnitude estimates and can be refined as new data becomes available (i.e. Adaptive Management)				
BVAC	Public Draft Ch 6, Current Wtr Budget		Some areas are shown on the map as irrigated, when they are actually dry farmed. These areas have only been irrigated on a select few occasions.	12/2/2020	In order to reflect these farming practices, the GSP development team needs data to substantiate it. Input was requested on water source throughout the Basin in previous BVAC meetings. Similar input will be solicited at upcoming meetings and the new information can be incorporated into the Water Budget in future revisions.				
BVAC	Public Draft Ch 6, Current Wtr Budget		Concern that the 14,000 acres of the wetland don't show irrigation. Ash Creek Refuge is white on the map, rather than blue.	12/2/2020	The focus was on calculating irrigated acreage. Wetlands are a water use in the water budget - the assumption is that 98% of the water supply on the refuge is from surface water, and 2% groundwater. The wetlands in the Ash Creek Wildlife area have been added to Figure 6-5.				
BVAC	Public Draft Ch 6, Current Wtr Budget		How were the percentages of 98% surface water and 2% groundwater derived for the wetlands?	12/2/2020	Starting with the area of the wetlands, the evapatranspiration values (more specific to the conditions in Big Valley) are combined with crop co-efficients. A coefficient was used for crops similar to the vegetation of the wetland. The yields an estimate of evapotranspiration associated with the plants in the wetland. If the refuge did not run any groundwater pumps, then the refuge would be supplied 100% by surface water. Because there are three pumps that are occasionally run, there is some source from groundwater. The 2% was estimated based on professional judgement due to knowledge of the locations of the wells, the areas that they irrigate and conversations from the CDFW about how often they use them (typically for a month or two in the fall to bridge the driest part of the year). Consultant staff has reached out to the CDFW to obtain pumping data, but they have indicated that the data does not exist. As such, 2% is currently the best estimate. Text was added to the chapter to document this estimate.				
BVAC	Public Draft Ch 6, Current Wtr Budget		What are the options for determining runoff? Which way is best?	12/2/2020	Modeling or calculations using the "Curve Number Method" (CNM) are the two widely accepted options to determine runoff. In the opinion of the consultants, modeling runoff would not produce significantly improved estimates from CNM, but would take additional time and budget.				

515 Page 28 of 59

	1	Page & Line	big valley day comment watrix c		<u></u>
Name	Document	Number	Comment	Date	Notes and Responses
BVAC	Public Draft Ch 6, Current Wtr Budget		Is there a way to get a larger map, or better electronic version, to take a closer look at the basin boundary?	12/2/2020	A KMZ file (viewable in Google Earth) of the Basin Boundary has been posted on the website. An email notification was sent to the interested parties notifying them of the file and how to use it.
BVAC	Public Draft Ch 6, Current Wtr Budget		Using the numbers on this chart, does this mean that a 7-8% reduction in pumping is needed?	12/2/2020	What this means is that there needs to be about 5,000 AF per year on average in compensation to reduce overdraft. It might involve managed aquifer recharge, reduced pumping or combination of the two. Reducing overdraft can be achieved in various ways.
BVAC	Public Draft Ch 6, Future Wtr Budget		Is it required to use 50 years of data? Does it specify which years of data need to be used?	12/2/2020	At least 50 years of historical data are required as per the GSP Regulations. Going back further would include data from a time period with higher uncertainty and lower accuracy.
BVAC	Public Draft Ch 6, Future Wtr Budget		How does an overdraft of about 5-10% compare with other basins? It's surprising that the number is so small, but it would still impact a lot of people.	12/2/2020	Not sure, but there are certainly a lot other basins that are much worse off.
BVAC	Public Draft Ch 6, Future Wtr Budget		Land System Water Budget Chart, item 2 (inflow between systems): This uses surface water. Ash Creek Wildlife Refuge is here. The assumption is that ag is the only sector that uses surface water. There are other uses and users of surface water.	12/2/2020	The wetlands are also a surface water user and text has been added to describe that. There are also illegal uses, fire uses. There is not a way to measure or quantify those uses. If some reasonable and defensible data or assumptions were provided to the GSP development team, then those uses could be incorporated into the budget.
BVAC	Public Draft Ch 6, Future Wtr Budget		Land System Water Budget Chart, item 3 (population): This only uses the population from the census of Bieber, there's Adin, New Bieber and Lookout. Those need to be added in.	12/2/2020	The water budget considers the entire population of Big Valley published by DWR. A distinction is made between Bieber and the rest of Big Valley, because Bieber is served by a public water supply system while the rest of domestic use in Big Valley is from individual wells. This is a distinction between "municipal" and "domestic" uses, which SGMA categorizes differently. However, all household use is considered and accounted for in the water budget.
BVAC	Public Draft Ch 6, Future Wtr Budget		There's a piece of ground that's not on the map that needs to be included (Jimmy Nunn).	1/22/2021	This information can be incorporated once the land is clearly identified. Such information will be solicited at future BVAC and/or public outreach meetings.
BVAC	Public Draft Ch 6, Future Wtr Budget	Line 38	Ideally In concept, each component could be quantified precisely and accurately, and the budget would could	Jan. 22	Changes will be made to next iteration of chapter.
BVAC	Public Draft Ch 6, Future Wtr Budget		come out balanced. In practice, many most of the components can only be roughly estimated, and in	1/22/2021	Changes will be made to next iteration of chapter.
BVAC	Public Draft Ch 6, Future Wtr Budget	Line 40	some many cases not at all. Therefore, much of the work to balancethe water budget is adjusting some many	1/22/2021	Changes will be made to next iteration of chapter.
BVAC	Public Draft Ch 6, Future Wtr Budget	Line 44	components estimated through the use of the water budget are order of magnitude. Estimation of Suggested wording change to "order of magnitude" comments were that the content needs to be made clearer to the reader	1/22/2021	Wording will be adjusted in the next iteration to make the concept of "order of magnitude" estimates more clear.

516 Page 29 of 59

	1	Page & Line	big valiey est comment matrix es		<u>-</u>
Name	Document	Number	Comment	Date	Notes and Responses
BVAC	Public Draft Ch 6, Future Wtr Budget	Line 56	because it represents an average set of climatic conditions and <u>adequate water</u> level, land use, "adequate water level" What is adequate? Define adequate water levels	1/22/2021	This refers to the fact that many of the wells with water level measurements started in 1983, so the amount of data was "adequate". We can remove the word "adequate"
BVAC	Public Draft Ch 6, Future Wtr Budget	Line 73	Add a footnote to Figure 6-4 regarding DWR using inaccurate data. Including in the footnote there should be a mention of better data needed for the waterbudget and that observational and public input has been received regarding the inaccuary of the map from DWR. (crop and wetland acreages)	1/22/2021	The land use data used for the water budget is different from the data used for basin prioritization. This part of the GSP is not addressing prioritization. We discuss data gaps in previous chapters, but can re-emphasize here.
BVAC	Public Draft Ch 6, Future Wtr Budget	Line 87	also has three wells that extract groundwater from the <u>deeper aquifers</u> and is applied in portions	1/22/2021	Not sure what the comment is here. Deeper aquifers emphasizes that the ACWA wells are around 800 feet deep and are not pulling solely from shallow (wetland) portion of the aquifer. In other words, the wells are simply re-distributing groundwater from deep portions of the aquifer to shallow (wetland) portions.
BVAC	Public Draft Ch 6, Future Wtr Budget	Line 110-111	Overdraft occurs when the groundwater system change in storage is negative over a long period. (Remove this sentence)	1/22/2021	Change will be made to next iteration of chapter.
BVAC	Public Draft Ch 6, Future Wtr Budget	Line 115-116	The current water budget is demonstrated by looking at water year 2018, which is the most recent year with reliable data. (Is 2018 the only year with reliable data? Who states what is reliable?)	1/22/2021	GEI has determined that 2018 is more reliable than 2019 because there were several wells without measurements. We can remove the "which is the most recent year with reliable data." in the next iteration of the Chapter.
BVAC	Public Draft Ch 6, Future Wtr Budget	Footnote	long-term undesirable results Who determines this? Suggested to add a note to the chapter where information which covers the details of DWR guidelines for estabilishing long-term undesirable results.	1/22/2021	Undesirable results are locally defined. This will be discussed in Chapter 7
BVAC	Revised Draft Chapter 6		This chapter is full of estimates and assumptions. It's not fair to have to make decisions based no such inaccurate and incomplete data	2/3/2021	The water budget uses the best, readily available data to develop the estimates. Improvements to the water budget can and should be made over time as more data is gathered and estimates and assumptions are refined with objective information.
BVAC	Revised Draft Chapter 6		Figure 6-5: Primary Applied Water Sources is inaccurate.	2/3/2021	Some input from local stakeholders has been used in the map. More field-by-field information will continue to be solicited and incorporated as it becomes available. Text was added to the chapter emphasizing the inaccurate nature of the map.
Barbara Donohue	BigValleyGSP_C h6_RevisedDra ft_2021_01_14 .pdf	Page #: 6-3, Line #: 62	Please update your precipitation estimates using local precipitation data from the US Forest Service in Adin and local RAWS (Remote Access Weather Station) on Rush Creek. Weather is significantly different between the Fall River Valley out of McArthur and what we experience here in Big Valley. Part of that is due to the orographic effect of Big Valley Mountain	3/20/2021	The water budget is based on data interpolated between the McArthur, Alturas, and other stations to represent local conditions in the center of the Basin (Bieber).
Barbara Donohue	BigValleyGSP_C h6_RevisedDra ft_2021_01_14 .pdf	Page #: 6-8, Line #: 132	Land use patterns are changing significantly right now. I have lived in the Valley for 30 years, and have never observed the number of acres under vegetation type conversion and we are seeing now. Hundreds of acres this year alone are being converted from native sagebrush steppe into alfalfa (which demands so much more water). It looks like most of these acreages are being watered using agricultural wells. Land use patterns are not static here this variable is currently experiencing a change in what has been known to occur in the past.	3/20/2021	There was no readily available information to indicate a projected growth rate, but populations in the two counties have been decreasing. Therefore a constant land use projection was used in the water budget.

517 Page 30 of 59

		Page & Line			
Name	Document	Number	Comment	Date	Notes and Responses
Barbara Donohue	BigValleyGSP_C h6_RevisedDra ft_2021_01_14 .pdf	1	I challenge the results of your predictive modeling regarding Climate Change for this area. For the last 30+ years Big Valley has been experiencing a contracted drying spell. Winter precipitation in both the form of snow and rain has significantly reduced over that period of time. I do not believe that the choice of your Climate Change predictive model adequately addresses the reality of what is actually happening in this Basin. What many of the locals have observed here are warming temps, drying climate, higher ET rates and less recharge to surface waters. I am challenging you on your "baseline" weather data utilized in all of your hydrologic and climatic models. Consider this a "fatal flaw" that is consistent in the underpinning of a lot of your generated analyses. Your models are only as good as the original data allows, and you utilize data that IS NOT specific to our area	1 ' '	Climate change projections were based on "VIC" climate change factors provided by DWR. This represents the best available, scientifically defensible data for climate change projections.
Barbara Donohue	BigValleyGSP_C h6_RevisedDra ft_2021_03_21 _setaside.pdf	Page #: 6-9, Line #: 150	Projection with Climate Change.I challenge your projection of the effects of climate change on soil water use and availability in the Big Valley basin. "Wetter and warmer" climate prediction may apply to central California up to its northern boundary at Santa Rosa but not here. Although the Big Valley area is located within California its floristic, hydrologic and geologic attributes are more similiar to the "Great Basin" province of the Intermountain West. The boundaries of the northeastern reach of the Great Basin province are located less than 50 miles east from Big Valley. Future effects of climate change in this area will definitely be seen as reductions in winter snow levels with precipitation coming in the form of rain. Summer temperatures are anticipated to increase as well as the number of days of warm/hot weather. The summer season will become longer and the night time temperatures warmer. Climatic predictions for both Nevada and California were identified in November 2020 in an article presented by the Desert Research Institute.		Climate change projections were based on "VIC" climate change factors provided by DWR. This represents the best available, scientifically defensible data for climate change projections.

Page 31 of 59 518

		Page & Line	big valley con comment matrix of	- •	<u>-</u>
Name		"	Comment	Date	Notes and Responses
Barbara Donohue		Page #: 6-9, Line			Climate change projections were based on "VIC" climate change factors provided by DWR. This represents the best available, scientifically defensible data for climate change projections.
Aaron Albaugh	Chap 10 Public Draft 5/26/21	10-3, 91-92	Groundwater extractions should also include water used for fire, wildlife, logging, and construction.	6/2/2021	There is no quantification of these surface water uses.
BVAC	Big Valley GSP All Chapters Public Draft 8/26/21	Chapter 6 figures	This budget has many assumptions. The numbers in the tables give the impression that it is highly accurate	9/9/2021	"Estimated" added to all figures. Figures rounded to indicate less accuracy.
BVAC	9/22/21 Draft GSP as introduced at 10/6/2021 BVAC meeting	Lines 1882-1883	Remove "that may be interconnected with Ash Creek"	10/6/2021	Text removed
BVAC		Line 1886	Don't like the term "groundwater-enhanced habitat"	10/6/2021	Text changed

519 Page 32 of 59

		Page & Line			
Name	Document	Number	Comment	Date	Notes and Responses
Jessica Boyt	BigValleyGSPC hapter 6 Public Draft 10/23/2020		There is also on-farm managed aquifer recharge. There are several GSA's that are doing pilot programs, 1 example is https://birdreturns.org/multi-benefit-groundwater-recharge/#:~:text=Working%20in%20partnership%20with%20the%20Colusa%20Groundwater%20Authority%2C,have%20nowhere%20to%20stop%20over%20on%20long%20migrations.	11/4/2020	Comment received.
Julie Retchin	BigValleyGSPC hapter 6 Public Draft 10/23/2020	Page #: 6-2 Line #: 27	David & Aaron: Are the non-ag water uses (residential, watering roads, firefighting?) significant within the overall level of acre-feet under discussion?	11/4/2020	These uses are not included in the water budget. Future iterations of the water budget may contain these uses.
BVAC	BigValleyGSPC hapter 6 Public Draft 10/23/2020	Page #: 6-2 Line #: 27	Julie: During the discussion, it was mentioned that it might be difficult to quantified - it could be mentioned in narrative that there are other uses of surface water (even though it might be relatively minor or unquantifiable).	11/4/2020	Comment received.
Julie Retchin	BigValleyGSPC hapter 6 Public Draft 10/23/2020	Page #: 6-2 Line #: 27	Aren't Silva Flat reservoir water rights split between East Fork of Juniper Creek and Dixie Valley? If so, you'd have to split the acres (and the precipitation falling on them) in the Silva Flat reservoir watershed.	11/4/2020	Comment received.
Julie Retchin	BigValleyGSPC hapter 6 Public Draft		For subsurface inflow: If there is so little outflow from Round Valley, why doesn't it fill up like a bathtub, resulting in at least the lowest part of it being a wetland or an inland lake?	12/2/2020	Groundwater at the outlet of Round Valley is near ground surface and groundwater is likely losing to the stream which transports the water out of the Round Valley Basin.
Rodney Fricke	BigValleyGSPC hapter 6 Public Draft		Ash Creek is the drain for Round Valley. During the summer (no rain), flow in Ash Creek is groundwater.	12/2/2020	Summer flows in streams comes from adjacent groundwater throughout the length of the stream. The location and amount of groundwater contribution outside of the Basin is not in the scope of the GSP. Flows into the Basin are measured at the DWR stream gage in Adin.
Julie Retchin	BigValleyGSPC hapter 6 Public Draft		If our goal is truly sustainability, why not assume more erratic climate/precipitation, and plan for as much resilience as possible: e.g. water retention during wet weather to allow for maximum recharge?	12/2/2020	The water budget presents the climate change scenario based on best available data provided by DWR, which indicates more precipitation, but with a higher proportion falling as rain rather than snow.
Julie Retchin	BigValleyGSPC hapter 6 Public Draft		I agree with Aaron on better local data refining our water budget numbers.	12/2/2020	Better local data to support the water budget has been identified as a data gap.
Julie Retchin	BigValleyGSPC hapter 6 Public Draft		My mic doesn't work, hence chatThis is one place where our lack of knowledge of local subsurface geology, including complex aquifers that create variable effects on groundwater levels in different parts of the basis, really hurts us. I agree with Geri; lowering water tables do impact some people significantly.	12/2/2020	Comment received.

Page 33 of 59 520

		Page & Line			
Name	Document	Number	Comment	Date	Notes and Responses
NGOs	BigValleyGSP_P ublicReviewDra ft_2021_10_28		See Letter 3 from NGOs to GSAs dated 11/28/21. Native vegetation and managed wetlands are water use sectors that are required to be included in the water budget., The integration of native vegetation into the water budget is insufficient. The water budget did not include the current, historical, and projected demands of native vegetation. The omission of explicit water demands for native vegetation is problematic because key environmental uses of groundwater are not being accounted for as water supply decisions are made using this budget, nor will they likely be considered in project and management actions. Managed wetlands are not mentioned in the GSP, so it is not known whether or not they are present in the basin.		Native vegetation is included in the water budget, as it is assumed to consume all of the remaining moisture from precipitation after removing runoff and deep percolation.
NGOs	BigValleyGSP_P ublicReviewDra ft_2021_10_28		See Letter 3 from NGOs to GSAs dated 11/28/21. The integration of climate change into the projected water budget is insufficient. The GSP incorporates climate change into the projected water budget using DWR change factors. However, the plan does not clearly indicate which DWR change factors (2030, 2070, or both) were incorporated into the projected water budget. In addition, the GSP does not indicate whether multiple climate scenarios (e.g., the 2070 extremely wet and extremely dry climate scenarios) were considered in the projected water budget. The GSP would benefit from clearly and transparently incorporating the extremely wet and dry scenarios provided by DWR into projected water budgets or select more appropriate extreme scenarios for the basin. While these extreme scenarios may have a lower likelihood of occurring, their consequences could be significant and their inclusion can help identify important vulnerabilities in the basin's approach to groundwater management. The GSP integrates climate change into key inputs (e.g., changes in precipitation, evapotranspiration, and surface water flow) of the projected water budget. However, the sustainable yield is based on the historic water budget, instead of the projected water budget with climate change incorporated. If the water budgets are incomplete, including the omission of extremely wet and dry scenarios and the omission of climate change projections in the sustainable yield calculations, then there is increased uncertainty in virtually every subsequent calculation used to plan for projects, derive measurable objectives, and set minimum thresholds. Plans that do not adequately include climate change projections may underestimate future impacts on vulnerable beneficial users of groundwater such as ecosystems, DACs, tribes, and domestic well owners.		The climate change scenario is based on climate change data provided by DWR. The projection uses the 2070 condition. The text in Section 6.4.2 has been updated to clarify which dataset is used. Analysis of extreme wet and extreme dry scenarios is not required by the regulations.

Page 34 of 59 521

		Page & Line	<u> </u>	' 	
Name	Document	Number	Comment	Date	Notes and Responses
	Public Draft	5, 113	Deep freezes can occur from September to May	4/7/2021	
Aaron Albaugh	Chap 7	5, 113	Deep freezes can occur from september to May	4///2021	Text changed
Albaugii	(4/1/2021)				
Aaron	Public Draft	6, 125	Environmental regulations include SGMA	4/7/2021	Text added
Albaugh	Chap 7	0, 123	Environmental regulations include 30th/	1,7,2021	Text daded
,	(4/1/2021)				
Aaron	Public Draft	6, 133	Change "may" to "will"	4/7/2021	Text changed
Albaugh	Chap 7				
	(4/1/2021)				
Aaron	Public Draft	6, 135	Change "may" to "is likely to"	4/7/2021	Text changed
Albaugh	Chap 7				
	(4/1/2021)				
Aaron	Public Draft	6,144-146	Ash creek wildlife area is 14,000 acres of unmanaged land	4/7/2021	Text added
Albaugh	Chap 7				
A	(4/1/2021) Public Draft	7 107 100	The Design and the suggest of Federal arrangement	4/7/2024	Tark share and
Albaugh	Chap 7	7, 197-199	The Basin needs the support of Federal management	4/7/2021	Text changed
Albaugh	(4/1/2021)				
Aaron	Public Draft	8, 215	Monitoring also helps DWR	4/7/2021	Text added
Albaugh	Chap 7	0, 213	Workering also helps 2001	1,7,2021	Text daded
,	(4/1/2021)				
Aaron	Public Draft	8, 224	Remove slightly	4/7/2021	Text changed
Albaugh	Chap 7				
	(4/1/2021)				
Aaron	Public Draft	9, 261	If there is no Ag there is no community.	4/7/2021	Text added
Albaugh	Chap 7				
	(4/1/2021)	+			
Aaron	Public Draft	11, 314-321	Paragraph needs clarification, table or example	4/7/2021	Section was re-worded for clarity
Albaugh	Chap 7 (4/1/2021)				
Aaron	Public Draft	11, 327	Add "and breeding grounds"	4/7/2021	Text added
Albaugh	Chap 7	11, 327	Aud and breeding grounds	4///2021	Text added
, iibaagii	(4/1/2021)				
Aaron	Public Draft	11, 328	Add "develop" a new water source	4/7/2021	Text added
Albaugh	Chap 7			' '	
	(4/1/2021)				
Aaron	Public Draft	11, 350	Add text clarifying that storage estimates are based on an assumed aquifer depth of 1200 feet	4/7/2021	Text added
Albaugh	Chap 7				
	(4/1/2021)	+			
Aaron	Public Draft	15, 479	NCWA is a regulatory program	4/7/2021	Text added. Detail on the nature of the program, regulations and fees
Albaugh	Chap 7	1			needed
	(4/1/2021)	5 05 00	All and the fact of the same o	4/7/2021	T. 1 . 11 . 1
Aaron	Public Draft	5, 95-98	Add spring-fed streams verbiage	4/7/2021	Text added
Albaugh	Chap 7 (4/1/2021)				
	1(4/1/2021)			I	1

Page 35 of 59 522

osts of pumping.
le water quality and water level data were
140 feet below the fall 2015 baseline (or
015 measurement). Chapter 8 details the
screen intervals and types. Undesireable
1/3 of the representative wells are below
ditches and canals is estimated in the
ne BVAC has been to not set thresholds
ne 5-year updates due to the current high
as been established and will be assessed
as been established and will be assessed
1

523 Page 36 of 59

		Page & Line		<u> </u>	
Name	Document	Number	Comment	Date	Notes and Responses
Julie	Public Draft Chap 7 (4/1/2021)		Of the GDEs, how much of it is springs?	4/7/2021	A map of GDEs can be found in Chapter 5 (Figure 5-20). A map of springs can be found in Chapter 4 (Figure 4-14).
Aaron Albaugh	Public Draft Chap 7 (4/1/2021)	6, 119	This helps to justify reasoning to get boundary modification	4/7/2021	The basin boundary and its limitations are discussed in Chapter 4. SGMA applies to areas within the basin boundary, but projects that benefit the basin can be outside the basin boundary.
Aaron Albaugh	Public Draft Chap 7 (4/1/2021)	16	DWR induced additional wells because they required off-stream watering sources to have grazing away from streams due to water quality concerns	4/7/2021	This EQUIP program is independent of the GSP and is described in the introduction.
Julie	Public Draft Chap 7 (4/1/2021)		Are we writing off that the Bieber mill site will be revived for novel wood products uses that require significant water?	4/7/2021	The GSP and water budget consider known uses. The future projection of the water budget assumes negligible industrial groundwater use.
Julie	Public Draft Chap 7 (4/1/2021)		Can we calculate and add in the cost per foot of deepening wells?	4/7/2021	Right now the GSP only addresses costs of pumping.
Julie	Public Draft Chap 7 (4/1/2021)		Any ideas on how to use monitoring data in innovative ways to solve some of Big Valley's specific data aps and questions that have arisen beyond the reasons that DWR wants the data collected.	4/7/2021	The detailed water level data from the new monitoring wells is being evaluated and may provide insights into recharge areas, interconnection of streams, and other questions.
Aaron Albaugh	Public Draft Chap 7 (4/22/2021)	7-5, 178	Add "California" Department of Fish and Wildlife	5/4/2021	Added and moved to Chapter 1
Aaron Albaugh	Public Draft Chap 7 (4/22/2021)	7-5, 187	Add further clarification: appropriately advertised, not much interest in being on BVAC	5/4/2021	Text added and moved to Chapter 1
Aaron Albaugh	Public Draft Chap 7 (4/22/2021)	7-6, 246	Insert "enacting various projects to improve management during the drought periods and wet periods experienced in the Basin"	5/4/2021	Text added
Aaron Albaugh	Public Draft Chap 7 (4/22/2021)	7-6, 263	Insert "In summary, there have not been wide-spread reports of issues or concerns regarding groundwater levels from the residents of the Basin (whether agriculture producers or domestic users or others). Instead the concern was raised by DWR based on isolated wells that experienced limited decline during a drought."	5/4/2021	Text changed
Aaron Albaugh	Public Draft Chap 7 (4/22/2021)	7-8, 295	re: word "diminished, work on wording (perhaps that it would be a ghost town or similar	5/4/2021	Text added "and the ability of people to live and work in the basin would be largely absent."
Aaron Albaugh	Public Draft Chap 7 (4/22/2021)	7-12, 402-406	All of these should be activated when 1/3 of the wells meet the action level.	5/4/2021	Text changed.
Aaron Albaugh	Public Draft Chap 7 (4/22/2021)	Appendix: Monitoring Well Construction Report, Page 6	Would like to see more GEI accountability, and that the public and BVAC wanted the wells redrilled	5/4/2021	Text changed in the well construction report. Report text removed from the appendix. Appendix now only contains the as-built drawings of the wells.
Aaron Albaugh	Public Draft Chap 7 (4/22/2021)	7-16, 550	LAMP needs to be added as a water quality regulatory program	5/21/2021	Text added.

Page 37 of 59 524

	1	In			
Nama	Desument	Page & Line	Commant	Data	Notes and Despenses
Name	Document	Number	Comment	Date	Notes and Responses
Geri Byrne	Big Valley GSP All Chapters Public Draft 8/26/21	Line 2516	"For all interested parties, there is need for a greater understanding of interconnected surface water that may be present in the Basin" Still opening the door. Recommend scratching the first part of the sentence	9/9/2021	Sentence modified
Geri Byrne	Big Valley GSP All Chapters Public Draft 8/26/21	Line 2531	"conclusive evidence of stream interconnection is not available." Recommend changing to "there is currently no evidence to support interconnected surface water."	9/9/2021	Text changed.
BVAC	Big Valley GSP All Chapters Public Draft 8/26/21	Section 7.3	Add "medium ranking" as undesirable result	9/9/2021	Undesirable result is a term defined in SGMA and the ranking is unrelated to undesirable results as defined.
BVAC	Big Valley GSP All Chapters Public Draft 8/26/21	Lines 2348-2351	Remove last paragraph	9/9/2021	Paragraph removed.
BVAC	Big Valley GSP All Chapters Public Draft 8/26/21	Section 7.3.6	We need better tracking of surface water allocations	9/9/2021	Text discusses data gap of surface water tracking.
BVAC	Big Valley GSP All Chapters Public Draft 8/26/21	Section 7.3.6	There is a lot of unpredictability of weather patterns	9/9/2021	Text added
BVAC	9/22/21 Draft GSP as introduced at 10/6/2021 BVAC meeting	Line 2052	Add the word "unscientific"	10/6/2021	Word added
BVAC	9/22/21 Draft GSP as introduced at 10/6/2021 BVAC meeting	Line 2059	Remove the words "assumed to be"	10/6/2021	Words deleted
Julie	BigValleyGSP Chapter 7 Public Draft 1/20/21	Line 364	Please give examples of groundwater-dependent ecosystemsmarshes? groves of certain trees? ephemeral pools?	2/3/2021	DWR defines GDE's as "ecological communities or species that depend on groundwater emerging from aquifers or on groundwater occurring near the ground surface".
Julie	BigValleyGSP Chapter 7 Public Draft 1/20/21		The well density map is incorrect. There are at least 50 wells in Adin. Some of them have already had to have their pumps lowered. These are locals who won't be happy if the groundwater level lowers too much. Please take this into account.	2/3/2021	The inaccuracy of the well inventory has been identified as a data gap and funding for such a study will be sought by the GSAs.
Julie	BigValleyGSP Chapter 7 Public Draft 4/1/2021		Data gap for Adin wells.	4/7/2021	The inaccuracy of the well inventory has been identified as a data gap and funding for such a study will be sought by the GSAs.

525 Page 38 of 59

		Page & Line		i	
Name	Document	Number	Comment	Date	Notes and Responses
Julie	BigValleyGSP Chapter 7 Public Draft 1/20/21	Line 285	There was a comment about most shallow wells being uncertified, and "should" be decommissioned or properly drilled as sanitary. Easily half the wells in Adin must be uncertified as the certified well count in the main Adin square mile block was 18, and we figure there are at least 50. (Adin has a sewer system but no water system. Each house or group of house has a well.) Are our wells illegal? Do we have no right to groundwater?	3/3/2021	The inaccuracy of the well inventory has been identified as a data gap and funding for such a study will be sought by the GSAs.
Julie	BigValleyGSP Chapter 7 Public Draft 1/20/21	Appendix 7B	If I understand the implications of these well measurements correctly, Ash Creek and Pit River are recharging Big Valley's groundwater? Isn't this what we want with our recharge projects?	3/3/2021	Because there are no major impoundments on the Pit River and Ash Creek upstream of Big Valley, there is no way to regulate flow for the benefit of groundwater recharge. Slowing small impoundments (e.g. beaver dam analogs) have been proposed in Chapter 9.
NGOs	BigValleyGSP_P ublicReviewDra ft_2021_10_28		See Letter 3 from NGOs to GSAs dated 11/28/21. For chronic lowering of groundwater levels, measurable objectives are set at the Fall 2015 water level, or at the lowest water level measured for wells that don't have a Fall 2015 measurement. Minimum thresholds are set at 140 feet below the measurable objective. While acknowledging that lowering of water levels throughout the Basin to the minimum threshold could result in a significant percentage of wells going dry, the GSP does not quantify the number of domestic wells that could go dry or otherwise consider or analyze the impact of minimum thresholds on domestic wells. The GSP does not sufficiently describe whether minimum thresholds will avoid significant and unreasonable loss of drinking water to domestic well users that are not protected by the minimum threshold. In addition, the GSP does not sufficiently describe or analyze direct or indirect impacts on DACs, drinking water users, or tribes when defining undesirable results, nor does it describe how the groundwater level minimum thresholds are consistent with the Human Right to Water policy.	11/28/2021	The GSP considers effects on other users as shown in Figure 7-2. Included in the GSP is a shallow well mitigation program.
NGOs	BigValleyGSP_P ublicReviewDra ft_2021_10_28		See Letter 3 from NGOs to GSAs dated 11/28/21. The GSP states that the undesirable result criterion for the groundwater level sustainability indicator occurs when the groundwater level in one-third of the representative monitoring wells drop below their minimum threshold for five consecutive years. Using this definition of undesirable results for groundwater levels, significant and unreasonable impacts to beneficial users experienced during dry years or periods of drought will not result in an undesirable result. This is problematic since the GSP is failing to manage the basin in such a way that strives to minimize significant adverse impacts to beneficial users, which are often felt greatest in below-average, dry, and drought years. Furthermore, the requirement that one-third of monitoring wells exceed the minimum threshold before triggering an undesirable result means that areas with high concentrations of domestic wells may experience impacts significantly greater than the established minimum threshold because the one-third threshold isn't triggered.		Levels dropping to minimum threshold levels would be preceded by triggering of action levels.

Page 39 of 59 526

	1	Page & Line	big valiey doi: comment wathy circ	1	
Name	Document	Number	Comment	Date	Notes and Responses
NGOs	BigValleyGSP_P ublicReviewDra ft_2021_10_28		See Letter 3 from NGOs to GSAs dated 11/28/21. The GSP does not establish SMC for groundwater quality. The GSP states (p. 7-10): "Due to the existence of excellent water quality in the Basin, significant amount of existing water quality monitoring, generally low impact land uses, and a robust effort to conduct conservation efforts by agricultural and domestic users, per §354.26(d), SMCs were not established for water quality because Undesirable Results are not present and not likely to occur." However, the GSP states (p. 7-9): "After a review of the best available data on water quality in the Basin, it was concluded that all the constituents which were elevated above suitable thresholds are naturally occurring. There has been no identifiable increase in the level of concentrations over time, and several constituents have indications of improvement in recent decades compared to concentrations in the 1950s and 1960s." All COCs in the basin that may be impacted or exacerbated by groundwater use and/or management should have established SMC, in addition to coordinating with water quality regulatory programs.		The data presented in Chapter 5 supports excellent water quality and supports not setting thresholds based on Section 354.28(e) which states that "An Agency that has demonstrated that undesirable results related to one or more sustainability indicators are not present and are not likely to occur in the basin, as described in Section 354.26, shall not be required to establish minimum thresholds related to those sustainability indicators."
NGOs	BigValleyGSP_P ublicReviewDra ft_2021_10_28		See Letter 3 from NGOs to GSAs dated 11/28/21. Sustainable management criteria for chronic lowering of groundwater levels provided in the GSP do not consider potential impacts to environmental beneficial users. The GSP neither describes nor analyzes direct or indirect impacts on environmental users of groundwater when defining undesirable results. This is problematic because without identifying potential impacts on GDEs, minimum thresholds may compromise, or even destroy, these environmental beneficial users. Since GDEs are present in the basin, they must be considered when developing SMC.	11/28/2021	The GSAs have identified field verification of GDE's as a data gap.
NGOs	BigValleyGSP_P ublicReviewDra ft_2021_10_28		See Letter 3 from NGOs to GSAs dated 11/28/21. The GSP does not establish SMC for depletion of interconnected surface water. The GSP acknowledges data gaps for interconnected surface water and states (p. 7-11): "At the five-year update, SMCs will be considered only if the trends indicate that undesirable results are likely to occur in the subsequent 5 years." The GSP continues (p. 7-11): "While Chapter 5 – Groundwater Conditions details the streams in Big Valley which may be interconnected by a "continuous saturated zone to the underlying aquifer and the overlying surface water" (DWR 2016c), there is currently no evidence to support interconnected surface water. Therefore, there is a lack of evidence for interconnection of streams." However, the absence of evidence is not evidence of absence. The GSP should establish interim SMC for the depletion of interconnected surface water condition indicator until more data is gathered. The GSP should discuss how the interim SMC will affect beneficial users, and more specifically GDEs, and the impact of these minimum thresholds on GDEs in the basin. The GSP should evaluate how the proposed minimum thresholds and measurable objectives will avoid significant and unreasonable effects on surface water beneficial users in the basin (see Attachment C for a list of environmental users in the basin), such as increased mortality and inability to perform key life processes (e.g., reproduction, migration).		The lack of evidence and ability to quantify any depletions that may be occurring preclude any meaningful thresholds. Therefore, the GSAs will continue to collect and assemble data to develop a better understanding on if and where surface water may be interconnected before establishing thresholds. For this sustainability indicator (and all others) the GSAs will implement "adaptive management", which is fully within the spirit and intention of SGMA statute and regulatioins.

527 Page 40 of 59

		Page & Line			
Name	Document	Number	Comment	Date	Notes and Responses
NGOs	BigValleyGSP_P ublicReviewDra ft_2021_10_28		See Letter 3 from NGOs to GSAs dated 11/28/21. The GSP has not established SMC or a monitoring network for water quality. As stated above in the SMC section of this letter, concentrations of COCs in the basin may be impacted or exacerbated by groundwater use and/or management, and therefore must be monitored. The GSAs should conduct and report water quality monitoring in coordination with the other water quality regulatory programs discussed in the GSP.		The data presented in Chapter 5 supports excellent water quality and supports not setting thresholds based on Section 354.28(e) which states that "An Agency that has demonstrated that undesirable results related to one or more sustainability indicators are not present and are not likely to occur in the basin, as described in Section 354.26, shall not be required to establish minimum thresholds related to those sustainability indicators." None the less, the GSAs have established a monitoring network to all them to "adaptively manage" this sustainability indicator at the 5-year update as required under SGMA.
Julie Dawson- Parlee	BigValleyGSP_P ublicReviewDra ft_2021_10_28	Lines 2207-2211	Of the Action Levels listed, only the first one requires five years of measurable change, but the other two only require one year of decline, which seems like an error. One dry year hardly seems justification for drastic action, but this section seems to indicate that could be the case. But, on the other hand, it's also quite vague on line 2205 to say that "actions may be considered, at the discretion of the GSAs" and it seems to render the thresholds inconsequential if the GSAs don't want to take action.		The actions levels described in the GSP are not intended to be regulatory in nature (i.e. not intended to "require" actions). They are established in the spirit of "adaptive management" where the GSAs, stakeholders, and the public are informed when potential problems may be occurring and adapt the implementation of projects and management actions accordingly.

Page 41 of 59 528

		Page & Line			
Name	Document	Number	Comment	Date	Notes and Responses
Geri Byrne and Aaron Albaugh	Chapter 8 Public Draft	Appendix 8B	Don't like the inclusion of well logs	4/27/2021	Well logs removed from appendix and well log number added to Appendix 8A.
Aaron Albaugh	Chapter 8 Public Draft	1, 67	Add "The assumed" groundwater contours	5/24/2021	Text added
Aaron Albaugh	Chapter 8 Public Draft	1, 68	Shallow groundwater monitoring to "help" define the potential interconnection of groundwater aquifers with surface water bodies	5/24/2021	Text added
Aaron Albaugh	Chapter 8 Public Draft	Table 8-1	Revise table to adjust to 140 feet below 2015 baseline	5/24/2021	Table replaced.
Aaron Albaugh	Chapter 8 Public Draft	Figure 8-1	During the summer, Willow Creek is 100% allocated. There is no water. If you were going to argue that there is a surface water/groundwater connection, what is it connected to if there is no water? Same for Ash Creek west of Adin.	5/24/2021	This comment should be addressed in Chapter 5, when it is updated and compiled into the entire draft of the GSP.
Aaron Albaugh	Chapter 8 Public Draft	4, 89:97	It is noted that many of the DWR wells are domestic which have pumps all the time. How is this accounted for?	5/24/2021	The end of the paragraph addresses this, where staff that monitor the wells should be noting when the well or a nearby well is pumping.
Aaron Albaugh	Chapter 8 Public Draft	4, footnote 2	Moniutoring needs to be late october. Needs to be communicated and coordinated with DWR who collects level measurements.	5/24/2021	Text changed to "late-October"
Aaron Albaugh	Chapter 8 Public Draft	5, 116	It needs to be noted that the BVAC has done a great job making sure the wells are spatially distributed.	5/24/2021	The factual statement that the wells are distributed throughout the basin should suffice. DWR or other readers can make their own judgment on this.
Aaron Albaugh	Chapter 8 Public Draft	5, 8.2.1.2	We would like to understand the contour mapping requirements better. Doesn't make sense.	5/24/2021	Groundwater contours are presented in Chapters 4 and 5

Page 42 of 59 529

		Page & Line		1	
Name	Document	Number	Comment	Date	Notes and Responses
Aaron Albaugh	Chapter 8 Public Draft	5, 136:143	Modify text: Chapter 5 discusses the lack of interconnected surface water and describes the perennial streams in the BVGB which may be interconnected to the groundwater aquifer. As described in Chapter 7 there is currently no conclusive evidence for interconnection of perennial streams with the groundwater aquifer, and the volume of depletions (if any) is unknown. Therefore, measurable objectives, minimum thresholds, and a representative monitoring network for depletion of interconnected surface water have not been established.	5/24/2021	Text modified.
Aaron Albaugh	Chapter 8 Public Draft	Table 8-2	DWR, 2016a: What is this?	5/24/2021	This is a reference (documented in the references list) to a best management practices paper published by DWR. This is used as guidance on monitoring standards so that data gaps can be assessed.
Aaron Albaugh	Chapter 8 Public Draft	Table 8-2	"Data must be sufficient for mapping groundwater depressions, recharge areas, and along margins of basins where groundwater flow is known to enter or leave a basin" Comment: There is no data.	5/24/2021	This table identifies the data gaps
Aaron Albaugh	Chapter 8 Revised Draft 5/24/21	8-1, 60	If monitoring from outside agencies change their monitoring, it shouldn't be up to the counties (GSAs) to pick up the slack.	6/2/2021	Text added: "The monitoring networks will generally be adjusted to the availability of data collected and provided by the outside agencies."
Aaron Albaugh	Chapter 8 Revised Draft 5/24/21	8-1, 65	What is the "groundwater storage" sustainability indicator?	6/2/2021	Text regarding groundwater storage removed.
Aaron Albaugh	Chapter 8 Revised Draft 5/24/21	8-4, 93-94	Measurements need to be taken March 15 or before beginning of pumping season in spring, and taken after Oct 15 in the fall	6/2/2021	This statement refers to historic data. Footnote (3) clarifies when measurements should be taken in the future.
Aaron Albaugh	Chapter 8 Revised Draft 5/24/21	8-5, 116	Need to point out that the the distribution of representative wells is excellent and based on a thoughtful, comprehensive review of the wells	6/2/2021	Text changed and added: "Extensive discussion and consideration was performed by the GSAs and local stakeholders to determine an appropriate water level monitoring monitoring network. Based on the comprehensive review of the wells, the network was selected based on:"
Aaron Albaugh	Chapter 8 Revised Draft 5/24/21	8-5, 136	Note that water in the basin is 100% allocated.	6/2/2021	Text added: "and all summer flows are 100% allocated based on existing surface water rights."
Aaron Albaugh	Chapter 8 Revised Draft 5/24/21	8-5, 137	Delete "which may be interconnected to the groundwater aquifer"	6/2/2021	Text removed
Aaron Albaugh	Chapter 8 Revised Draft 5/24/21	8-7, 181	second row, last column. Owner of well 06C1 is very unlikely to agree to monitoring again	6/2/2021	Comment noted. The table states that the absence of that well is a data gap.

530 Page 43 of 59

		Page & Line		T .	
Name	Document	Number	Comment	Date	Notes and Responses
Aaron Albaugh	Chapter 8 Revised Draft 5/24/21	8-8, 183	Please define "anomalous", perhaps in a footnote	6/2/2021	Footnote added.
Aaron Albaugh	Chapter 8 Revised Draft 5/24/21	8-11, 231	We don't want to have the land use data collection fall on the GSAs	6/2/2021	The text is written in a way that states the GSAs will rely on DWR for land use data.
BVAC	Big Valley GSP All Chapters Public Draft 8/26/21	Section 8.2.3	Subsidence is not happening	9/9/2021	Text changed to emphasize micro-subsidence in section 7.3.5
BVAC	9/22/21 Draft GSP as introduced at 10/6/2021 BVAC meeting	Line 2486	The land use data provided by DWR is inaccurate	10/6/2021	Footnote added.
Doreen SmithPower	Chapter 8 Public Draft		From: Doreen SmithPower I will forward a letter. However, the well measurements should be posted on the DWR website. The water quality information is set to the DWR and that has NOT been available on the DWR website and needs to be included in the water budget. The water budget is defined as the total of all water surface and below the surface entering and stored within the basin.	5/5/2021	Water level and water quality data will be reported to the state and made available to the public as required by SGMA and other regulatory programs.
Doreen SmithPower	Chapter 8 Revised Draft 5/24/21	Section 9.2.3	Adaptive Management/data gap/monitoring: Some domestic wells increasingly are having recharge issues, people are sinking wells deeper. If projects can be focused where this is happening, you will forestall the "revolt." (as one friend said to me.)	6/2/2021	Comment received.
NGOs	BigValleyGSP_P ublicReviewDra ft_2021_10_28		See Letter 3 from NGOs to GSAs dated 11/28/21. The consideration of beneficial users when establishing monitoring networks is insufficient, due to lack of specific plans to increase the Representative Monitoring Wells (RMWs) in the monitoring network that represent water quality conditions and shallow groundwater elevations around DACs, domestic wells, tribes, GDEs, and ISWs in the subbasin. These beneficial users may remain unprotected by the GSP without adequate monitoring and identification of data gaps in the shallow aquifer. The Plan therefore fails to meet SGMA's requirements for the monitoring network.	11/28/2021	The locations of the representative monitoring wells have considered all beneficial uses, and they are distributed among areas of agriculture, towns (domestic), and environmental (ACWA). Further refinement and expansion of the monitoring network is being sought through grant funding and a voluntary well monitoring program.
NGOs	BigValleyGSP_P ublicReviewDra ft_2021_10_28		See Letter 3 from NGOs to GSAs dated 11/28/21. Figure 8-1 (Water Level Monitoring Networks) shows insufficient representation of GDEs, DACs, drinkingwater users, and tribes for shallow groundwater elevation monitoring.	11/28/2021	Figure 8-1 shows the locations of the water level monitoring network. Mapping of the locations of different user groups on the same map is not required by SGMA.

531 Page 44 of 59

		Page & Line	<u> </u>	T	
Name	Document	Number	Comment	Date	Notes and Responses
Aaron Albaugh	Chapter 9 Public Draft 5/24/21	1, 21	change "returning to" to "remaining"	6/2/2021	Already resolved
Aaron Albaugh	Chapter 9 Public Draft 5/24/21	4, 95	What is meant by a "water storage basin"	6/2/2021	Clarification of reservoirs made
Aaron Albaugh	Chapter 9 Public Draft 5/24/21	6, 120-121 7, 180-181	Change "towards sustainability" to "remain sustainable"	6/2/2021	1 already resolved, line 216 revised (page line and number do not line up with this version of the text)
Aaron Albaugh	Chapter 9 Public Draft 5/24/21	7, 160-161	Regarding sentence "Development of additional wells strictly for monitoring is also of interest as they provide unobstructed measurements year round". It's not necessarily desirable. Remove or change wording.	6/2/2021	wording changed to beneficial previously (line 187)
Aaron Albaugh	Chapter 9 Public Draft 5/24/21	8, 195-196	change "achieve sustainability" to "maintain sustainability"	6/2/2021	Changed
Aaron Albaugh	Chapter 9 Public Draft 5/24/21	8, 198	Insert "several" to discussion of reservoirs. Multiple reservoirs could be expanded.	6/2/2021	discussion added previously
Aaron Albaugh	Chapter 9 Public Draft 5/24/21	9, 228-235	In discussion of Allen Camp Dam, strengthen language regarding the need for the reservoir	6/2/2021	Language is adequate
Aaron Albaugh	Chapter 9 Public Draft 5/24/21	9, 240 et seq	Add controlled burns to potential actions	6/2/2021	discussed
Aaron Albaugh	Chapter 9 Public Draft 5/24/21	12, 329	add "as compared to SGMA". to end of sentence	6/2/2021	Already resolved
Aaron Albaugh	Chapter 9 Public Draft 5/24/21	14, 375	Add text about illegal marijuana grows	6/2/2021	Already resolved
Geri Byrne	Big Valley GSP All Chapters Public Draft 8/26/21	Line 2776	Table 9-3 - 9.1 and 9.2 "projects will be communicated through the Big Valley Groundwater Advisory Committee." Have we determined if the Advisory Committee will continue to exist after plan adoption?	9/9/2021	Text changed to reflect communication from GSAs rather than BVAC.
BVAC	Big Valley GSP All Chapters Public Draft 8/26/21	Line 2755	Add "and economically disadvantaged.	9/9/2021	Text added
BVAC	Big Valley GSP All Chapters Public Draft 8/26/21	Line 3184	Add "and economically disadvantaged.	9/9/2021	Text added

532 Page 45 of 59

	Page & Line							
Name	Document	Number	Comment	Date	Notes and Responses			
Julie	BigValleyGSP Chapter 9 Revised Draft 6/23/2021	Page #: 9-15 Line #: 264 Section 9.4.1	Sec 9.4.1: I read most of the supporting references. It appears that the original articles were more nuanced and less definitive than represented. For instance, the Plan appears to say that increased Snow Water Content always correlates with potential groundwater recharge, and increased SWC occurs in more open areas, therefore opening up tree canopy is (always) desirable. In dry, volcanic, geologically-complex areas like ours, the situation is much more complex than the reference locations. Yes, juniper removal does usually result in more water release, but it may just be surface water. Removal of understory conifers (in this area, often incense cedar and white fir) also generally is helpful, but again may only indirectly contribute to groundwater. Large severe wildfires also can greatly impact quantity and timing of run-off and potential recharge. I recommend leaving the details of determination of whether a potential project would increase groundwater to the specialists involved with that project.	7/7/2021	Specialists have been consulted and wildfire potential evaluated in cited studies. Surface water runoff is not an undesirable result for additional catchment and forest health projects. Comment reinforces point of this section, so no further action is required.			
Julie	BigValleyGSP Chapter 9 Revised Draft 6/23/2021	Page #: 9-17 Line #: 306 Section 9.4.2	9.4.2: re Beaver analogs: Do we have examples of currently-implemented projects? I proposed this, as well as beaver reintroduction, for future projects. Also, probably better to use the spelling "analogue."	7/7/2021	Analog is the correct spelling. Projects have been completed in several upland areas around Big Valley and the greater watershed.			
Julie	BigValleyGSP Chapter 9 Revised Draft 6/23/2021	Page #: 9-2 Line #: 25 Figure 9-1	9.1: "watershed map" Why cut off the Pit River at that point?	7/7/2021	Watersheds are defined by topography. Rivers can run through multiple watersheds.			
Julie	BigValleyGSP Chapter 9 Revised Draft 6/23/2021	Page #: 9-2 Line #: 25 Figure 9-1	Figure 9.1: is this a watershed map or a groundwater map?	7/7/2021	Both combined			
Julie	BigValleyGSP Chapter 9 Revised Draft 6/23/2021	Page #: 9-2 Line #: 25 Figure 9-1	If it is a watershed map, then Round Valley watershed would be included. If it is a groundwater recharge map, then basin cut-offs, like Round Valley wouldn't be included.	7/7/2021	Watersheds are defined by topography. Round valley is its own watershed.			
Julie	BigValleyGSP Revised Draft 10/18/2021	Page #: 9-18 Line #: 3058	Sec 9.4.2: Beaver dam analogues are not "commonly used"yet. But they could be. I also note that a previous mention concerning beaver reintroduction has been removed, which is fine, because they evidently are still within the region enough that they could repopulate if we provided attractive habitat, such as dam analogues. There is also recent genetics research on beavers that they should not be moved long distances as they are genetically distinct by watershed. So we could relocate unwanted beavers off private land to other local locations.	10/20/2021	Addressed in 9.4.2.			
Julie	BigValleyGSP Revised Draft 10/18/2021	Page 9-14	I thought DWR instructed that the headgate not be closed on Roberts Reservoir thus preventing its use for storage and recharge. This needs to be addressed. They can't have it both ways	10/20/2021	The operation of the reservoir is not under the purview of the GSP.			
Julie	BigValleyGSP Revised Draft 10/18/2021	Section 9.3.2	I think we are selling ourselves short on Roberts Reservoir. I would like to see more language about the economic benefits, jobs, recreation, etc.	10/20/2021	Local support for this project is acknowledged in section 9.3.2			

Page 46 of 59 533

		Page & Line			
Name	Document	Number	Comment	Date	Notes and Responses
NGOs	BigValleyGSP_P ublicReviewDra ft_2021_10_28		See Letter 3 from NGOs to GSAs dated 11/28/21. The consideration of beneficial users when developing projects and management actions is insufficient, due to the failure to completely identify benefits or impacts of identified projects and management actions, including water quality impacts, to key beneficial users of groundwater such as GDEs, aquatic habitats, surface water users, DACs, tribes, and drinking water users. Therefore, potential project and management actions may not protect these beneficial users. Groundwater sustainability under SGMA is defined not just by sustainable yield, but by the avoidance of undesirable results for all beneficial users.		There is no need to consider benefits or impacts at this level for identified projects until the planning process, during which state and federal permits will be applied for as necessary. Projects and management actions identified in this section are noted for their potential to avoid undesirable results.
NGOs	BigValleyGSP_P ublicReviewDra ft_2021_10_28		See Letter 3 from NGOs to GSAs dated 11/28/21. We commend the GSAs for including projects and management actions with explicit environmental benefits, such as Agriculture Managed Aquifer Recharge (Section 9.1.1.) and Forest Health / Conifer and Juniper Thinning (Section 9.4.1). However, the GSP fails to describe this or other projects' explicit benefits or impacts to beneficial users such as DACs and tribes.	11/28/2021	Since the entire basin is part of the DAC, all projects and mangement actions benefit DACs. Project impacting tribes will include trical consultation.
NGOs	BigValleyGSP_P ublicReviewDra ft_2021_10_28		See Letter 3 from NGOs to GSAs dated 11/28/21. We note that the plan does not include a domestic well mitigation program to avoid significant and unreasonable loss of drinking water. We strongly recommend inclusion of a drinking water well impact mitigation program to proactively monitor and protect drinking water wells through GSP implementation.	11/28/2021	Appropriately addressed in section 9.2.2
Jim Copp	BigValleyGSP_P ublicReviewDra ft_2021_10_28 .pdf	Page #: 9-7, Line #:	The problem with all the recharge options is figuring out where the water comes from to do the recharge. With 100% of the water rights in the valley allocated, that only leaves high water events (which are not clearly defined), and there are few good options to capture and store that water when it comesif the government even lets us. Allen Camp Dam, or other large-scale surface-water storage options, are the best hope for long-term effective groundwater management in Big Valley.	11/28/2021	Water rights are not directly in the purview of the GSP. Future actions can (and likely will) include a water availability assessment (WAA) to determine if water rights can be obtained for high flow events (flood and/or storm flows).
Jim Copp	BigValleyGSP_P ublicReviewDra ft_2021_10_28 .pdf		The Allen Camp Dam section should mention that the 1981 feasibility study only considered the barest economic benefit to users within Big Valley, did not take into account the power generation that now exists downstream, and vastly underestimated the economic benefits to agriculture both in Big Valley and to downstream users. Positive impacts of this project could reach all the way to southern California and need to be acknowledged.	11/28/2021	The current feasibility study is the best readily available information.
Jim Copp	BigValleyGSP_P ublicReviewDra ft_2021_10_28 .pdf		The last sentence is a repeat of the sentence that comes two sentences earlier.	11/28/2021	Text modified.
Jim Copp		Page #: 9-6, Line #:	In the chart, under Project 9.3 Benefits, lines are cut off but it seems the phrase should read "would reduce reliance"	11/28/2021	Formatting repaired

534 Page 47 of 59

		Page & Line	big valiey dor comment matrix end	10000	T
Name	Document	Number	Comment	Date	Notes and Responses
Julie Rechtin	BigValleyGSP_P ublicReviewDra ft_2021_10_28 .pdf	Section 9.3.2	I have only started to wade into the history and specs of this project. I suspect that within the current contexts of increasing prolonged droughts and restructuring of energy production away from fossil fuels, Central Valley agriculture and power generation would be prioritized over Big Valley's low-value agriculture. I also note that much of the water that was to be delivered to Big Valley was dedicated to the National Wildlife Refuge that was proposed in the current location of Ash Creek Wildlife Area. And PG&E was assured by court ruling that no water would be diverted to Big Valley if the water flows were below specific levels at Pit 3 project. There is also some question of whether upstream water rights would impede the ability of the reservoir to fill to capacity. And, of course, all dams have a limited lifespan due to sedimentationwould it be cost effective to dredge out the sediments? I am concerned that this project isn't being examined from all angles. It is wishful thinking to avoid implementing restrictions on new well drilling, land conversion to agriculture, etc.	, ,	
Julie Rechtin	BigValleyGSP_P ublicReviewDra ft_2021_10_28 .pdf	Section 9.4.1	Smerdon et all isn't the best reference for this area. That study is based on and for British Columbia, a very different ecosystem than Big Valley. Furthermore, throughout the report, there are numerous disclaimers and qualifying statements, basically that recharge is very situation-dependent. To make broad statements about snow cover and vegetation removal from that report is inappropriate. I am concerned at the rush to attribute groundwater benefits to any forest treatment. Removing conifers along drainages is mentioned in Sec 9.4.1; be careful with this! Timing of run-off is as important as quantity. And retaining water on the landscape longer allows it more chance to recharge groundwater tables. Opening up the overstory canopy allows the sun to heat up and dry out the forest floor and creeks, decreasing water retention, encouraging flammable brush and thick understory reproduction (which then competes with the larger fire-resistant trees for water,) decreasing humus depth, etc. Which trees are removed is critical. Severely burnt landscapes lose protective soil and even become hydrophobic, therefore decreasing water retention. The goal should be fire resilience by removal of ladder fuels, by prescribed fire ideally. Mastication has been shown to decrease risk of crown fire but increase heat and smoldering of masticated materials. Masticated fuels also tend to decay slowly, so they remain flammable longer.		These concerns will be addressed in the planning and permitting processes for the specific projects proposed in this section. Smerdon et al. is cited once and not in the manner suggested by this comment. Many other sources and experts have been consulted in the development of this section to identify possible projects to enhance forest health.

Page 48 of 59 535

		Page & Line		<u> </u>	
Name	Document	Number	Comment	Date	Notes and Responses
Julie Rechtin	BigValleyGSP_P ublicReviewDra ft_2021_10_28 .pdf	Section 9.4.2	Mention of beavers has dropped to a sole sentence stating that pond and plug and beaver dam analogs (sic: analogues) are two commonly used techniques for meadow restoration in Big Valley basin. This isn't true of the beaver dams yet. I actually suggested reintroducing beavers and my comment was immediately discounted as impractical (or undesirable?) I suggest the book "Eager: The Surprising, Secret Life of Beavers and Why They Matter" by Ben Goldfarb. It is the 2019 winner of the PEN/EO Wilson Award for Literary Science Writing. It totally changed how I see the landscape of North America. Locally and historically, Dan Bouse (who is 80 years old) told me of beavers in Round Valley, along Ash Creek, and in the sloughs of Pit River when he was young. He said their dens were in the riverbanks. In the 1980's, I saw evidence of beavers in Rush Creek above Round Valley and upper Ash Creek near Ash Valley. The hydrogeomorphology of many of the tributaries to of these creeks, including specifically Dutch Flat Creek, indicates to me that beavers were resident there in the past.		Fits into the scope of projects discussed.
Julie Rechtin	BigValleyGSP_P ublicReviewDra ft_2021_10_28 .pdf	Section 9.4.2	(continued) As for moving beavers, they can move themselves 50+ miles, even across dry land. However, recent research has revealed that beaver genetics are hyper-local and complex, so relocating them for significant distances isn't a good idea anyhow. Best strategy would be to make some locations more attractive, which is where beaver dam analogues fit in. Plan B would be to relocate beavers that are unwanted locally, although if their new home isn't high enough quality habitat, they won't stay put and/or survive. Beavers need relatively gentle gradients with plenty of willows, cottonwoods, etc. I recently found out that there are still some beavers here. This summer, according to reports, beaver-chewed sticks floated down Ash Creek to below the low-water bridge in Adin. Aaron Albaugh apparently knows where beavers are on Ash Creek now but won't divulge due to them being on private land. Yes, beaver dam analogue dams can help. But they are much more expensive to build and maintain. Instead, as we say, "let the rodent do the work." An diversity of "beaver deceivers" and other tactics are available to deal with any threats to infrastructure.	11/29/2021	Fits into the scope of projects discussed.

Page 49 of 59 536

		Page & Line		<u> </u>	
Name	Document	Number	Comment	Date	Notes and Responses
Julie Dawson- Parlee	BigValleyGSP_P ublicReviewDra ft_2021_10_28	Lines 2596-2626	RE: AgMAR What constitutes "excess surface water"—how is "excess" defined? Will there be expedited processes and money awarded for citizens to build safer water storage options that do not require them to endanger themselves by manually replacing boards in diversions during high water events in order to capture surface water? There needs to be discussion in this section of the report about the necessity of a dam further upstream to regulate the flow of this "excess" water in order for it to be slowed enough to be captured for future use and recharge. Currently, high water events saturate the valley and flow downstream out of Big Valley, leaving very little actual stored water. Additionally, existing water regulations require discharge of captured excess surface water after 30 days, but that limits our ability to actually use surface water toward groundwater recharge. With the unpredictable timing of winter storms, it means that water captured in March won't be available in May, when it might actually be useful to use for irrigation, thus reducing the dependence on groundwater. Historically, the highest water events in Big Valley have happened in February and March, too early to be used when it's time to irrigate. Will new policies be considered as a result of SGMA to assist stakeholders in actually achieving recharge? However, early capture of excess surface water could lead to saturation of water storage areas and an elevated risk of flooding should another high water event occur when storage areas are already full. The unintended risks and consequences of recharge projects need to be acknowledged.	11/28/2021	Elevated flood risk related to AgMar is not anticipated at this level. The project planning process will provide a more comprehensive evaluation of possible costs and benefits. The projects in this section are identified for their potential to benefit basin recharge and draw upon existing practices.
Julie Dawson- Parlee	BigValleyGSP_P ublicReviewDra ft_2021_10_28	Lines 2628-2638	RE: Drainage or Basin Recharge The same risk applies to capturing water to fill storage areas, then causing excessive flooding if a big storm hits. Legal action was taken years ago in Big Valley by a landowner whose land was damaged by a neighbor's water management that caused flooding; will there be protection for landowners participating in this kind of recharge if it has unintended consequences? What recourse will there be for neighbors affected by recharge projects gone awry?		elevated flood risk associated with drainage recharge is not anticipated at this level. Project planning will identify and address these concerns where applicable.
Julie Dawson- Parlee	BigValleyGSP_P ublicReviewDra ft_2021_10_28	Lines 2640-2671	RE: Aquifer Storage and Recovery and Injection Wells Again, worth asking: WHERE WILL THE RECHARGE WATER COME FROM, WHO CONTROLS IT, WHO PAYS & HOW MUCH, AND HOW WILL STAKEHOLDERS ACCESS IT? And what could be some unintended consequences of adding chlorine to our groundwater? Would others affected by this action be able to sue if it's found to be detrimental to the overall groundwater quality?	11/28/2021	Exceeds the capacity of this plan to address at this level.
Julie Dawson- Parlee	BigValleyGSP_P ublicReviewDra ft_2021_10_28		For every recharge method, it must be asked and answered: WHERE WILL THE RECHARGE WATER COME FROM, WHO CONTROLS IT, WHO PAYS & HOW MUCH, AND HOW WILL STAKEHOLDERS ACCESS IT? Otherwise, this document is just a theoretical fantasy (which it largely is due to the acknowledged data gaps and uncertain outcomes of everything except Allen Camp Dam).		This section of the plan is meant to identify projects and management actions that are anticipated to ameliorate potential adverse effects before they come to pass. The planning and permitting processes for identified projects will provide a more comprehensive evaluation of these areas of concern, which exceed the capacity of the plan to perform at this level.

537 Page 50 of 59

	1	Page & Line	big valiey dor comment wath circ	1000.0	
Name	Document	Number	Comment	Date	Notes and Responses
Julie Dawson- Parlee	BigValleyGSP_P ublicReviewDra ft_2021_10_28	Lines 2757-2778	9.3.1 Expanding Existing Reservoirs — Given the very small number of beneficiaries currently controlling and receiving water from the existing reservoirs in Big Valley, how could this option be used to benefit a greater number of stakeholders and effectively contribute to groundwater recharge? To refill Roberts Reservoir during high water events, the water must be pumped from the Pit. Who would incur that cost? How will this be achieved if the watermaster is already being told by DWR not to put the headgate in this year to capture what little rain we've already had, after a record dry year when there's no guarantee of more rain this season? How can we as a local community control the water needed to achieve recharge? Will additional funding be made available to encourage private water storage projects, and will permits be expedited and new policies implemented to allow for more effective water capture and storage? Without assistance and accommodations, this valley is being asked to complete these tasks with our hands tied.	11/28/2021	These concerns exceed the capacity of this plan to address but the planning process for identified projects are anticipated to encompass them.
Julie Dawson- Parlee	BigValleyGSP_P ublicReviewDra ft_2021_10_28	Lines 2783-2813	9.3.2 Allen Camp Dam: The Allen Camp Dam project is widely acknowledged to be the one action that would make the most significant difference in Big Valley's water situation and solve virtually all the problems the GSP outlines, yet it gets very little support in this document as a top priority. With the Federal Government releasing record amounts of spending on "infrastructure" right now, it seems worth adding as much support as possible for moving forward with Allen Camp. Costs and government regulations are typically cited as the reason the Dam isn't aggressively pursued, but looking realistically at the money proposed for just the studies and smaller alternative recharge projects, it seems a case could be made for putting that energy, effort, and expense into a solution that will actually fix the problem for the long term. Additionally, the economic impact study that effectively killed the Dam project in 1981 was an inadequate, incompetent, and not-in-good-faith effort, which did not really even consider any possible economic benefit beyond Big Valley. The mathematical formula used to justify abandoning the Dam plan was wholly inadequate to portray any realistic economic impact. We need to point out the multitude of benefits to the entire region that could come from a sizable lake's recreation area, wildlife habitat, downstream users, power generation, constant and controllable flow of the Pit River year-round, and potential benefit to users all the way down the state.	11/28/2021	It is beyond the scope of this plan to conduct an updated feasibility study for Allen Camp Dam.
Julie Dawson- Parlee	BigValleyGSP_P ublicReviewDra ft_2021_10_28	Lines 2816-2855	9.4.1 Forest Health / Conifer and Juniper Thinning: The point needs to be made that prompt and beneficial action from the USFS and other government agencies is essential for Big Valley to be successful in reaching its recharge goals. If DWR is holding Big Valley water users to these standards of water management, then the government agencies who are our neighbors need to do their part in managing resources appropriately to help toward the same goals. Which USFS actions (or lack of action) cause recharge not to happen as effectively? What recourse do we as a community have to point out problems and expect results in order to achieve recharge?	11/28/2021	Comment addressed by including more explicit language to engage federal agency involvement and support.

Page 51 of 59 538

		Page & Line		<u> </u>	
Name	Document	Number	Comment	Date	Notes and Responses
Aaron Albaugh	Chap 10 Public Draft 5/26/21	10-2, 45-56	Why do we have to download, repackage, and send data back to state	6/2/2021	The GSP Regulations require this to be done as per §356 et. seq. Unlike most other basins in California, all Big VAlley data is being collected by outside agencies, including DWR taking water level measurements in the Basin. Therefore, the GSAs are downloading the data from the collecting agencies (e.g. DWR) to include in the annual report. The GSAs and their consultants are working to ensure that the data and figures that need to be submitted in the annual reports are able to be generated and submitted as easily as possible with little effort from GSA staff and/or consultants. Text has been added to point out the fact that the GSAs are regurgitating data.
Aaron Albaugh	Chap 10 Public Draft 5/26/21	10-3, 91-92	Groundwater extractions should also include water used for fire, wildlife, logging, and construction.	6/2/2021	A note has been made for future updates to Chapter 6 (Water Budget) to include these items. For water budgeting purposes these will fit under the umbrella of industrial uses. A footnote was added to this portion of Chapter 10 referring to these uses
Aaron Albaugh	Chap 10 Public Draft 5/26/21	10-3, 93-94	Surface water supply is 100% allocated	6/2/2021	A footnote was added to emphasize this point.
Aaron Albaugh	Chap 10 Public Draft 5/26/21	10-3, 95-96	Add industrial uses	6/2/2021	Industrial was added, with a footnote detailing the various users.
Aaron Albaugh	Chap 10 Public Draft 5/26/21	10-3, 101	"Progress toward achieving measurable objectives". Change wording to reflect that already sustainable.	6/2/2021	Wording changed
Aaron Albaugh	Chap 10 Public Draft 5/26/21	10-7, 138	Why do we need to manage water quality when it is already good.	6/2/2021	The discussion and approach to water quality data was changed to reflect that the GSAs will rely on the SWRCB to store and provide water quality data via their GAMA Groundwater Information System.
Aaron Albaugh	Chap 10 Public Draft 5/26/21	10-2, 40	The water year is difficult to apply to Big Valley	6/2/2021	Sentence added, pointing this out. "While the WY as defined by DWR isn't ideal for use in Big Valley, the GSAs will assemble data based on DWR's definition as per SGMA statute and regulationsThe discussion and approach to water quality data was changed to reflect that the GSAs will rely on the SWRCB to store and provide water quality data via their GAMA Groundwater Information System.
Aaron Albaugh	Chap 10 Public Draft 5/26/21	10-13, 234	Poor wording	6/2/2021	Wording changed
Aaron Albaugh	Chap 10 Public Draft 5/26/21	10-15, 270	Poor wording. Rewrite to emphasize that basin is economically disadvantaged and residents can't afford new taxes or fees	6/2/2021	Wording changed

539 Page 52 of 59

		Page & Line			
Name	Document	Number	Comment	Date	Notes and Responses
Aaron Albaugh	Chap 10 Public Draft 5/26/21	Appendix 10A	Don't like grant funding	6/2/2021	Wording changed
BVAC	9/22/21 Draft GSP as introduced at 10/6/2021 BVAC meeting	Line 3115	Change requirement of SGMA to mandates of SGMA	10/6/2021	Text changed.
Julie	BigValleyGSP Chapter Revised Draft 6/23/2021		To me, it is important for monitoring to not just provide specified info to the state, but to help us achieve our goals locally. Given the many unknowns within Big Valley Groundwater Basin, recharge areas, etc, I would like to see more emphasis on specific data gaps as "monitoring" needs in Chapt 10. Gathering this kind of data is expensive and requires specialized knowledge, but especially as the droughts continue, it is critical to us having the knowledge required for us to sustainable groundwater levels here. Discussing this here could help us attract or justify more of this type of support from state Universities etc.	7/7/2021	Comment received.
Julie	BigValleyGSP Chapter Revised Draft 6/23/2021	Appendix 10A	Appendix 10A: Why does this long document need to be included? Why not just a link to a web site where this can be accessed?	7/7/2021	Appendix removed. Link provided in text.

Page 53 of 59 540

Big Valley GSP Comment Matrix Chapter 11

		Page & Line			
Name	Document	Number	Comment	Date	Notes and Responses
Geri Byrne	Big Valley GSP All Chapters Public Draft 8/26/21	Line 2776	Lassen and Modoc County Boards of Supervisors sent letters. Supervisor Byrne testified before both the Senate and Assembly committees in support of this bill citing the constraints of inadequate broadband in the community for meaningful public participation.	9/9/2021	Text added
BVAC	9/22/21 Draft GSP as introduced at	Lines 3326 to 3345	Grammatical tenses are inconsistent	10/6/2021	Section edited for tense agreement.
BVAC	9/22/21 Draft GSP as introduced at 10/6/2021 BVAC meeting	Line 3378	Isn't the purpose of the BVAC to provide a product that the Boards of Supervisors can approve?	10/6/2021	The MOU states that the BVAC is to provide a recommendation.
Julie			First, Chapter 11 is the first time I have seen some of the comments within the comment matrix. They make some good points, and often there are no responses to them. They definitely change my perception of some of the issues in previous chapters. Second, I think one cause of this situation is that when accessing the GSP web site, older versions of the chapters were posted as available to the public for comments. Revised versions were only in the meeting Packets. I didn't understand this at first. And it appears this impacted the public's ability to make informed comments, and it backs up our request to extend the planning process. If we can't have an extension, then we need more (financial or logistic) support for the 5-year review.	7/7/2021	The GSAs have provided multiple ways for stakeholders to participate and comment on the GSP, one of which is the website. The main page of the website always displays the current versions of the chapters/draft GSP that are open for comment. All comments received on the website and by other means are included in this comment matrix.
Julie			Some of the comments in the comment matrix were cut off. This likely is an artifact of Excel software. Please fix.	7/7/2021	All comments received on the website and by other means are included in this comment matrix.
Julie		Appendix 11C	I would like you to at least consider the comments in the matrices for which there were no responses, if not for this document, for 5-year review.	7/7/2021	For the final GSP, all comments will be addressed in this "Notes and Responses" column of the comment matrix.
Julie	BigValleyGSP Revised Draft 10/18/2021		Might be good to note that the USPS routinely fails to deliver mail in Big Valley, there are many homes without reliable internet (or with none at all), there are no local TV stations, social media is distrusted and has very limited reach to ag groundwater users, and posters in the post offices need to go up at least two to three weeks in advance since many people only go in once every week or two. There are significatn challenges to reaching involved parties in this valley! And for the love of groundwater, if you want public participation, DO NOT schedule midweek, mid-day mid-summer meetings! You might have noticed a dramatic drop in participation, which was entirelly avoidable.	7/7/2021	Comment received. All required noticing with the appropriate timing as required by the Brown Act and other noticing regulations have been followed during the development of the GSP.

Page 54 of 59 541

Big Valley GSP Comment Matrix Chapter 11

		Page & Line			
Name	Document	Number	Comment	Date	Notes and Responses
	BigValleyGSP_P ublicReviewDra ft_2021_10_28		See Letter 3 from NGOs to GSAs dated 11/28/21. The GSP documents opportunities for public involvement and engagement in very general terms for listed stakeholders. Public outreach and engagement activities include updates to the GSP website and communication portal, community flyers, notices in the local newspaper, social media updates, brochures, and the formation of the Big Valley Advisory Committee. The GSP does not state whether DACs and environmental stakeholders are represented on the Big Valley Advisory Committee.		The BVAC was established by an MOU between the counties which is included in this GSP. The process for appointment to the BVAC were spelled out in the MOU. Applications were solicited and very few received. Appointments were made by the GSAs as indicated in the MOU and described in Chapter 11. DACs are represented by the fact that the whole basin is disadvantaged and the BVAC members are Basin residents. Also, CDFW and USFS were present at BVAC meetings both in person and remotely. ACWA staff, CALFIRE. Bryan Hutchinson (Bieber WW Dist) as well as BLM staff. GSAs wanted to do more, but broadband and COVID precluded this and an extension was requested but not granted.
	BigValleyGSP_P ublicReviewDra ft_2021_10_28		See Letter 3 from NGOs to GSAs dated 11/28/21. The plan does not include documentation on how stakeholder input from the above mentioned outreach and engagement was considered and incorporated into the GSP development process.		Stakeholder input was received in various ways described in Chapter 11. All formal comments are included in this comment matrix and include "Notes and Responses" for each.
	BigValleyGSP_P ublicReviewDra ft_2021_10_28		See Letter 3 from NGOs to GSAs dated 11/28/21. The GSP states the MOU establishing the Big Valley Advisory Committee will expire after the adoption of the GSP. As such, communication and engagement will (p. 11-8) "shift to the GSA Boards who will continue to inform the public about Plan progress and status of projects and management actions." Communication and engagement during implementation will include meetings of County Boards of Supervisors and updates provided to the interested parties list. The GSP does not include a detailed plan for continual opportunities for engagement during GSP implementation that is specifically directed to DACs, domestic well owners, tribes, and environmental stakeholders within the basin.		The purpose of the BVAC as per the MOU is to provide input during GSP development and provide a recommendation to the GSAs regarding the adoption of the GSP. Therefore, the BVAC does not have a role after the GSP is adopted. The GSAs have not established an advisory body for Plan implementation and will continue their outreach through available means (i.e. County Board of Supervisors announcements, meetings, and actions. The GSAs are discussing the future of the BVAC and the possibility of an addendum to the BVAC MOU for implementation.
Conservancy	BigValleyGSP_P ublicReviewDra ft_2021_10_28		See Letter 4. Email correspondence between the Nature Conservancy and Nancy McAllister		Emails received.

Page 55 of 59 542

Big Valley GSP Comment Matrix Chapter 12

		Page & Line			
Name	Document	Number	Comment	Date	Notes and Responses

Page 56 of 59 543

Big Valley GSP Comment Matrix General Comments

	Page & Line					
Name	Document	Number	Comment	Date	Notes and Responses	
Doreen SmithPower	General Comment	Page #:, Line #:	See Letter 1 from Doreen Smith Power to BVAC dates 9/11/21. General comments on chapters 1-6.: https://bigvalleygsp.org/service/document/download/281	9/13/2021	Letter received and included in GSP Appendix	
Doreen SmithPower	General Comment	Page #:, Line #:	See Letter 5 From Doreen SmithPower to the BVAC dated 10/5/21. My comments refer to the document as a whole. I appreciate the committees time and efforts. I hope my comments are utilized. https://bigvalleygsp.org/service/document/download/299	10/5/2021	Letter received and included in GSP Appendix	
jeffrey middlebrook	General Comment	Page #:, Line #:	My lady and I attended the meeting yesterday (Oct. 6, 2021) in Bieber mostly to learn what's going on regarding water rights in Big Valley, and if offered the opportunity, to ask questions and/or comment. We ended up leaving when a brief break was called because it was obvious that just more of the nitpicking over spelling, grammar, and semantics was going to drag on. This sort of very boring off-topic obsession over irrelevant minutia might be somewhat humorous at some level, but all of that needs to be done prior to a public meeting so that the meat of the issue(s) can be addressed and discussed. We ended up over at the Roundup and sat next to another couple that also bailed out of the meeting for the same reason I state above. Public meetings are supposed to be for the PUBLIC, not for inane grade school lessons regarding how to properly compose sentences. I have a degree in geology (though I never worked as a geologist) and a degree in civil engineering (which I worked in professionally for a couple of years in the 1970s). I independently study climate dynamics and I have a solid base of knowledge regarding paleo climate in our greater geographical region. We'd love to be involved in what looms on the horizon regarding the State's possible future water-snatching efforts, but if every "public" meeting is going to involve the nitpicking over how something has been structurally written then we will be loathe to be involved.	10/7/2021	Comment received.	
Jessica Boyt	General Comment	Page #:, Line #:	Siskiyou, Shasta Valley, and Butte Valley did a work shop recently like what Tiffany and Laura were talking about. I can give either contact info to connect with them and confer about what they did and how it worked.	11/4/2020	Comment received. The GSAs performed two public outreach workshops during GSP development.	
Julie Rechtin	General Comment	Page #:, Line #:	Can we add to our request for extension mentioning how these additional needs for large group public involvement/education and gathering additional data? I've been able to participate via internet better this meeting, but many people don't and would need to attend in person. And as has been mentioned, this may not be possible during COVID, especially when we can't ventilate during cold weather.	11/4/2020	The GSAs have actively advocated for the GSP deadline to be extended, but such an extension was not granted by the state.	
Jessica Boyt	General Comment	Page #:, Line #:	Prop 1 or Prop 68 grants can not pay for food.	11/4/2020	Comment received. No food at meetings was paid for by the grants.	
Rodney Fricke	General Comment	Page #:, Line #:	Science is not without assumptions. Science uses available data to develop a hypothesis, gathers more data to test the hypothesis, and progressively makes conclusions about the topic during the various phases of the project.	11/4/2020	Comment received. The GSP presents the best available science and the GSP intends to "adaptively manage" the Basin as more data is available.	
Julie Rechtin	General Comment	Page #:, Line #:	Yes, please, we want to support an extension!	12/2/2020	The GSAs have actively advocated for the GSP deadline to be extended, but such an extension was not granted by the state.	
Pat Vellines	General Comment	Page #:, Line #:	SWRCB probationary rate - \$40 AF, Interim Plan Rate \$55 ac/ft	2/3/2021	Comment received.	

544 Page 57 of 59

Big Valley GSP Comment Matrix General Comments

		Page & Line	big valley dor comment water deficit		
Name	Document	Number	Comment	Date	Notes and Responses
Doreen SmithPower	General Comment	Page #:, Line #:	I attended a webinar re: AES Airborn Electromegnetic System on June 28, 2021. This system was being done to study and gather information on the Glenn and Butte Counties. They use a loop and a plain hovers over an area to gather such information as 1) Subsurface groundwater levels to wells and amounts thereofthis includes some water quality information also 2) one type of graph showed electroconductivity of the type of ground coverage 3) another graph showed the type of ground coverage such as course or fine but did not show the soil type 4) the system can also give information regarding fault lines and activity.	7/7/2021	The AEM surveys have been completed. Data and analysis from the flights will be available in 2022.
Doreen SmithPower	General Comment	Page #:, Line #:	I was not finished with the last chat. I asked if the AEMS study was dangerous or posed a fire danger and was told no. I am not giving you this information to add to the load of the planning document you are preparing. I am telling you this because this information will be available through the CVWB and conducted through Butte College. Again it is information regarding water quality and subsurface information that through previous comments attendees thought was not available.	7/7/2021	The AEM surveys were completed safely.
Pat Vellines	General Comment	Page #:, Line #:	A couple of websites for low interest loans or grants for dry wells: https://www.rcac.org/lending/household-water-well-loans/	7/7/2021	Comment received.
Pat Vellines	General Comment	Page #:, Line #:	USDA website - grants - rd.usda.gov.	7/7/2021	Comment received.
Pat Vellines	General Comment	Page #:, Line #:	report dry wells to https://mydrywatersupply.water.ca.gov/report/	7/7/2021	Comment received.
Doreen SmithPower	General Comment	Page #:, Line #:	I submitted a letter last night before five o'clock and I submitted a memo over a week ago with detailed comments and I would like it acknowledged that you received both. My name is misspelled in the minutes it is Doreen SmithPower	10/6/2021	Letters received.
Doreen SmithPower	General Comment	Page #:, Line #:	I put forth correspondence during the last meeting. That correspondence was not entered into the record. Please find that correspondence and enter it into the record. Thank you doreen Smithpower	10/20/2021	All relevant correspondence in the chat during BVAC meetings was included in this comment matrix.
Julie	General Comment	Page #:, Line #:	Won't there be a 30-day comment period for the public?	10/20/2021	Yes, the Public Review Draft was open for comment from 10/28/21 to 11/28/21.
BVAC	General Comment	Page #:, Line #:	The resolution in todays meeting packet, if adopted by the BVAC, states "The BVAC hereby recommends that the GSAs (or GSA staff) initiate a 30-day public comment period for the Draft Groundwater Sustainability Plan."	10/20/2021	Comment received.
BVAC	General Comment	Page #:, Line #:	The document is currently open for public comment and when an end date for comment is established, a notice will be sent to our interested parties list, at minimum.	10/20/2021	Comment received.
Julie	General Comment	Page #:, Line #:	Limiting or discouraging comment isn't appropriate. We do not yet have a final document on which to comment. And many people have been limited by lack of internet access and COVID.	10/20/2021	Yes, the Public Review Draft was open for comment from 10/28/21 to 11/28/21.
Doreen SmithPower	General Comment	Page #:, Line #:	The Resolution is before the Board can you limit the comments?	10/20/2021	The BVAC passed the resolution to recommend approval of the GSP.
Doreen SmithPower	General Comment	Page #:, Line #:	Public comments were invited on the resolution before the advisory committee.	10/20/2021	The BVAC passed the resolution to recommend approval of the GSP.

545 Page 58 of 59

Big Valley GSP Comment Matrix General Comments

		Page & Line			
Name	Document	Number	Comment	Date	Notes and Responses
Julie	General Comment	Page #:, Line #:	The "vested right of agricultural pursuits" seems to imply that other users' access to water is secondary. Such other users could be residents, potential industry, tribes, wildlife/fish. Is this what is meant?	3/3/2021	Page 7 of the packet - thought would include in case can edit. Under "The following text was recommended for the Sustainability Goal". The BVAC recognized that Ag is important role and it affects all users. Important to the economic viability of the community.
Julie	General Comment	Page #:, Line #:	could we use "just" instead of "right" in the second sentence?	3/3/2021	Page 7 of the packet - thought would include in case can edit. Under "The following text was recommended for the Sustainability Goal"
Julie	General Comment	Page #:, Line #:	A summary for the public is going to be needed to bring folks up to speed. Especially with COVID, public participation has been tough for those without DSL. Thank you.	3/3/2021	A public information brochure was developed, distributed, and included in an appendix of the GSP. The brochure gives an overview of GSP chapters 1-6.
Julie	General Comment		I have attended most of the BVAC meetings. I tried to focus on facts or background that weren't mentioned by others. I have made comments and asked questions that weren't always answered, and I have noticed the same with other participants' comments. Unfortunately, I have had limited time to comment this month. I and others will continue to participate in the 5-year update, hopefully with some of the data gaps filled in so we can push for more informed changes and decisions. I also am concerned that the lack of diversity of stakeholder values on the BVAC may have led them to a too-narrow view of the current situation as well as the opportunities available. Above all, we need to assure a sustainable economy and the ecosystems that support it and us in the BV groundwater basin.		Comment received.
Julie Dawson- Parlee	General Comments		See Letter 6, email from Julie Dawson-Parlee to Tiffany Martinez and GEI.	11/28/2021	Email received.

Page 59 of 59 546

Letter 1

Doreen Smith Power

PO Box 208

Alturas, CA 96101

September 11, 2021

Big Valley Advisory Committee

BVGSMP – Big Valley Groundwater Sustainability Management Plan Committee(s)

Dear Committee Members:

Please review the following <u>comments regarding July 7, 2021 meeting minutes</u> that were approved during the <u>September 9, 2021</u> meeting of the BVGSP committee as the BVAC Big Valley Advisory Committee.

Meeting information:

Big Valley Groundwater Basin Advisory Committee (BVAC) Unapproved Meeting Minutes

Lassen County BVAC – Aaron Albaugh, Board Representative; Gary Bridges, Alt. Board Representative; Kevin Mitchell, Public Representative; Duane Conner, Public Representative Modoc County BVAC – Geri Byrne, Board Representative; Ned Coe, Alt. Board Representative; Jimmy Nunn, Public Representative; John Ohm, Public Representative Wednesday, July 7, 2021 2:00 PM Veterans Memorial Hall 657-575 Bridge Street Bieber, CA 96009

The following was in the meeting minutes of July 7, 2021 groundwater meeting. These minutes were approved by the "BVAC Committee Members" without any comment from the public.

NO COMMENT FROM THE PUBLIC WAS REQUESTED.

On line public comment: Doreen had attended a webinar on the Airborne Electromagnetic System and shared information on what she learned.

Number One I provided a summary overview of the Airborne Electromagnetic System. I provided my full name of Doreen SmithPower and I cannot believe that you did not provide my full name in the meeting minutes. Furthermore, I provided these comments at the beginning of the meeting and NOT as part of your agenda. I have a two college degrees from California State University Chico. The information was initially put on by Butte College. I went over everything that Ian Espinoza went over and I gave details such as.....

AES uses a helicopter to fly a hoop over the forest and ground. The hoop measures the groundwater to indicate the type soil or layering present on the earth such as clay, sand, silt or limestone. I also stated the maps were provided to show the level groundwater by color. I was told the AES system did not harm the environment but was only about 60% accurate. I provided the Butte College website information.

I am really tired of being overlooked for the work and effort I do to provide you with information. I urge you to get the information from Butte College. The maps provided are easier to read.

There were "breakouts" I could not attend because I attended online. Yes I could have driven there to attend. I have a car to do so but gas prices are not cheap. I also went onto the Modoc County Board of Supervisors website and applied to be on a Groundwater Sustainability Management Plan Committee. I have noted that there was a meeting on June 5, 2021. I applied in May 2021. I was not even given the courtesy of a reply.

DWR AEM- Ian Espinoza (In put the same information on the Devils Garden Website – It was not stated <u>if</u> he actually got permission from Butte College or if this has been plagiarized.)

- Provided an overview of the Airborne Electro Magnetic (AEM) Project.
- Provided an overview of the Airborne Electro Magnetic (AEM) Project. In short, AEM "is a geophysical method that measures the electrical properties of the subsurface from helicopter mounted equipment."
- Objective is to better understand underlying aquifer structures by differentiating sediments (gravels, sands, silts and clays). As a medium priority basin, Big Valley will be flown starting in October 2021. AEM SGMA Goal: "To improve the understanding of largescale aquifer structures which aids in the development or refinement of hydrologic conceptual model and identification of possible groundwater recharge areas."

The BVGSMP committee also known as BVAC needs to acknowledge the public as a valuable resource and stop ignoring comments. Source the information, plagiarism is illegal.

Doreen SmithPower, Paralegal

Letter 2

Doreen SmithPower Comments to BVAC and

BV Sustainable Groundwater Management Plan Committee

Page: Line 44:103-106; 45:15-16

<u>Editorial Comment</u>: You have Figures and Tables that contain information in the document Figure ES-1 - ES-5 the figures are maps and graphs however you have one table ES-4 that is labeled as a Figure and should be renamed a Table. Also this Figure/Table is really hard to read – the color should be removed so the data is legible and the font should be a little bigger.

Content Comment: On page 44 E-S 4 the water budgets states and estimated 39,400 acre feet yield for water with 5,200 acre feet overdraft. Does overdraft mean 5,200 acre fee, the threshold was reached and well water was need to be pumped up from the aquifer? It does not state the total number of acres in BV water budget for domestic, farming, ranching, and wildlife preserve here. Later the total number of acres in the BV basin is stated later at page 60:509 although not broken down is 92,057 acres and 144 miles. So this data needs to be worked into the water budget information. If the water budget only allow for 39,400 acre feet yield – the 92,057 less 39,400 = 52,657 as the overdraft. The total number of acres and how you got to the "overdraft" should be both in the report and Es-4 table. At page 66: 624 the acreage is broken down by type: Community (commercial and domestic?), Industrial, Agriculture, Wildlife Preserve, Manage Recharge (?), Native Vegetation and Rural Domestic (Table 3-2). Note 66:624 and 60:509 total acreage do not match. (66:624 says 92,067 and 60:509 states 92,057 pick one and make the total acreage consistent. If the total acreage is 92,067 the overdraft changes to 52,667.) The underlined information needs to be included in the Water Budget at page 44 and this tables that appear later can be used in the explanation. The Water Budget needs to be stated is further discussed infra @ Chapter 6.

Infra @ page __ line __ means information that appears later in the document. If you want to reference information that you have previously cited use Id at page ___ line ___.

Pages:Line 159:2123, 162:2169-2177

Editorial Comment: Figure 6-4 relabeled to Table and make the table legible by removing the color and increasing font. Figures 6-6- 6-8 relabeled to Table same comment re: legibility.

Page 44:98-102

"Groundwater in the BVGB is generally of good to excellent quality. (DWR 1963, USBR 1979) An analysis of available historic water quality indicates some naturally occurring constituents are slightly elevated, associated with volcanic formations and thermal waters. Elevated concentrations are extremely isolated and primarily not above thresholds that are a risk to human health. There are no contamination plumes or cleanup sites that are likely to affect groundwater quality for beneficial use."

<u>Content Comment</u>: This information from 1096 and 1979 can be used for historical references in the plan document. However, the information concerning thresholds and contamination plumes and clean up sites is OUTDATED AND SHOULD BE FROM 2018 FORWARD.

Page 42:65-69

"The coarse-grained deposits (gravel & sand) are aquifer materials and are part of the Big Valley principal aquifer. The "physical bottom" has not been clearly encountered or defined, but may extend 4,000 to 7,000 feet or deeper. The "practical bottom" of the aquifer is 1,200 feet because that depth encompasses the known production wells and water quality may be poorer below that depth."

<u>Content Comment</u>: There have been wells that have gone been drilled to 2,000 feet. What have you found that makes the quality poor after a depth of 1,200 feet? Is this the fault line or volcanic activity depth or something else?

Why did the baseline definition change to an aquifer definition for the entire BV Basin? The BV basin is not just sand and gravel or are we that low on topsoil and nutrient rich soil. Mountains contain waterfalls and spring which could be defined as aquifers within the mountain. Was an AES study done in Lassen County? If so, you should remember that Butte College did the AES studies in both Glenn and Butte Counties and the accuracy rate was only 60% utilizing the Airborne Electromagnetic System to measure groundwater to gather information on soil/ground cover layering. In previous drafts it was explained that the from the average height (sea level to the average height of the monitoring wells) created the baseline then the depth on average of the wells was 1,200 feet then the threshold was 150 feet to get to the water within the wells. Once the threshold dropped below 150 feet the cost went up to pump the water. The cost of producing hay was in the report and I would like to see the cost of producing a crop for human consumption fruit: strawberries, raspberries, and vegetation such as carrots, potatoes and onions, and trees such as apple, pear, and peaches and nuts as almonds and walnuts. The table timeline should include the following information: The type of vegetation grown, the month and date the surface water depleted so that groundwater needed to be pumped for irrigation and the yield of the vegetation and the quality of the vegetation. Finally, was there contamination to the end product and was there any health issues reported as a result.

Chapter 1

Page:Line

1.2: 247-252

"The Ash Creek Wildlife Area (ACWA) is an example of a local rancher who provided land for conservation efforts with an understanding that managed lands promote wildlife enhancement for the enjoyment of all. The California Department of Fish and Wildlife has largely left the property unmanaged. While the ACWA does offer refuge for waterfowl and other species, most species feed graze on the private lands around the Basin which are actively being cultivated because those lands offer better forage."

Content Comment:

The Bureau of Land Management has management responsibility. The Applegate BLM should be contacted. The National BLM – Department of the Interior, I believe has oversight to the California BLM. BLM has leasing authority and also has the authority to transfer management responsibility to other State Agencies such as the CALFIRE and the US Forest Service. BLM grants overlapping management. BLM also has the authority to sell the property. BLM – Department of the Interior goes

through the Army Corp of Engineers, located in Washington State for hiring. If the BLM – Department of Interior has oversight they may be able to create positions to manage that land.

This is a sideline informational comment that effects the groundwater situation and should be kept in mind.

The Jordan Cove Pipeline which hubs in Malin, California and connects three LGN pipelines to extend to Coos Bay, California effects the groundwater in this Plan. The three lines are the Ruby from Nevada-Lassen, the Pembina from Canada -Oregon and the Jordan from Malin to Coos Bay. The pipeline goes under the waterways (rivers streams etc.) in over 300 spots and also highways. The Federal Energy Regulatory Commission (FERC) approved the pipeline in 2020. When FERC approved BLM granted state agencies management authority so right of ways could be granted and water rights transferred. This is just so the committee is aware and I am not stating this should become a part of the plan.

Chapter 1 Page 53: 354-357

"Secondary MCLs which are due to naturally occurring minerals should not be factored into the scoring process. Here, the water quality conditions reflect the natural baseline and are not indicative of human-caused degradation and cannot be substantially improved through better groundwater management."

<u>Content Comment</u>: I do not agree. The naturally occurring minerals that could residual waste from industry and what is left of un-reclaimed property. Overpowering minerals: limestone and residual waste from digging such as arsenic effect the water. Limestone is another that effects the water and other minerals attach and make it hard to filter out. This has health side effects. The reports were due in 2020 to DWR I would like the results. This report references "secondary" MCL... I would like the initial Maximum Contaminant Levels.

Chapter 3 Page 62:565-566

Editorial Comment:

"...other stakeholders, including community organizations; environmental stewards; water purveyors; numerous local, county, state, and federal agencies; industry;..."

This line is cut off at the top making the sentence hard to read. Also starting at the point above, the font either changed or went down.

Chapter 3 Page 62:570-571

Editorial Comment:

"At 92,057 acres, the 571 BVGB comprises about three percent of the IRWMP area at its center."

It appears that when you have redlined the document then accept the changes, the font is either changed in the document or the size of the font is changing within the document. You can't tell when it is copied to word. The acres is either 92,057 or 92,067 – do a search and replace throughout the document.

Chapter 3 Page 66:624 & 625

<u>Editorial Comment</u>: Table 3-2 has some information necessary for explanation in the water budget. The table can be used by stating "infra at page 66:624". This states the total acreage by category: Community, Industrial, Agricultural, State Wildlife Habitat, Managed Recharge, Native and Rural Domestic totaling 92, 067 The water budget is at page 44. At page 60:509 the total acreage is listed at 92,057. The total acreage should be consistent.

The Table in 3-2 was redlined from Urban to Community the Key in the Figure 3-4 needs to be Changed from Urban to Community.

The Definitions of property type: Community, Industrial Agricultural State Wildlife Habitat, Managed Recharge and Native and Rural Domestic should be cited to as in the glossary of terms @ page ____. Then the table of information can be enlarged and more legible and any further definitions can be cited within the document and the definitions can be added to the glossary of terms making the current draft easier to read and future drafts easier to update. The total number of wells by well type (irrigation, domestic, monitoring) should be included in the definition of property type in the glossary. Information in Table 3-3 Well inventory number of wells by type can be added to the property type information.

Chapter 3 @ Page 65:603

"This data is developed by DWR "to serve as a 604 basis for calculating current and projected water uses. Surveys performed prior to 2014 were developed 605 by DWR using some <u>aerial imagery with significant field verification</u>. These surveys also included 606 DWR's <u>estimate of water source</u>."

<u>Editorial Comment</u>: Again the underline indicates that the top of the letters are cut off within the document and the font either changed or went down went the changes were accepted.

<u>Content Comment</u>: Is this the Airborne Electric Magnetic Survey? If so, please provide the accuracy rate. Or this is a completely different survey. At any rate the accuracy rate needs to be provided. Please explain "significant field verification". DWR has not provided any new information since 2014 and then superimposed the 2011-2014 information into 2016 datasets without updating the information... The information should be updated from 2018 forward. This information should be in the appendix of evidence and the new information should be included in the report.

Chapter 3.3.1 Water Source Types pages 68-69

Figure 3-5 gives a map submitted by DWR with Surface and Groundwater percentages from 2011 & 2013.

Content Comment: This GSMP is going to be worthless unless this information is more current that that. 2019-2021 is necessary and the 2011-2013 can be moved to historical data and referenced as historical data in the glossary then updated in the report.

Chapter 3 page 71:714-715

"This table shows that more than 600 wells have been drilled, of which about <u>475</u> (471) are of a type that could involve extraction (i.e. domestic, production, or public supply). It is unknown how many wells

are actively used, as some portion of them are likely abandoned. Abandoned wells no longer in use should be formally destroyed by state well standards. The 2015/2017 inventory of WCRs showed 6 well destructions, all on the Lassen County side of the Basin."

<u>Editorial Comment</u> (475 should be changed to 471). After state well standards insert... Well Code §§ cited infra at page 86 line 919-926.

<u>Content Comment</u>: It is unknown how many wells are actively used. The wells should be identified by parcel number and by well type as properties sell and added to the glossary of terms. "State Well Standards" should be defined in the glossary of terms and State Well Standard code §§ infra at page 86 line 919-926 – also copy this to glossary of terms.

3.4.2 Well Density Chapter at page 70 -75 lines 705-747

<u>Content Comment</u>: The table at 3-3 gives the well types as Domestic, Production & Public for 2018, and Domestic, Irrigation, stock, industrial, public, monitor, test other and unknown for 2017. Definitions for each well type should be provided and added to the Glossary of Terms. Each type of well should state the well capacity. Most Domestic well capacity are ____ gallons, irrigation ____ (___ gallons for ___ acre feet), Stock wells: not included in any definitions capacity ____, industrial not defined ___ capacity, Public not defined ____ capacity. Monitor, Test, other and unknown should state the capacity. The unknown should looked at first 27 in Lassen and 7 in Modoc.

Chapter 3.5.1.1 Well Monitoring

page 75: 758-761

All but one of the wells have depth information ranging from 73 to 800 feet bgs (median: 270 ft bgs, mean: 335 ft bgs)11. Figure 3-9 shows the locations of the 21 CASGEM wells and one additional well which has historic data, but measurements were discontinued in the 1990's.

<u>Content Comment</u>: The Irrigation District in the Tulelake Basin measures the levels CSEGEM wells and they are paid to do so. Also, you should provide the well depth, with the levels so the cost of pumping upward is feasible. When the surface water depletes well water is tapped and the levels should be provided so the, the cost can be estimated when needed (knowing when the threshold of below 150 feet may be critical. The property type should list the number of monitoring wells each: Community, Industrial, Agricultural, State Wildlife Habitat, Managed Recharge, Native and Rural Domestic referenced Id @ Chapter 3 pages 570-571.

Chapter 3 page 76:771-773

"Water quality is regulated and monitored under a myriad of programs. Table 3-4 describes the programs 772 relevant to Big Valley."

<u>Editorial Comment</u>: Table 3-4 **<u>infra at page 79</u>** to be inserted.

Chapter 3 Figure 3-10 @ page 78:792 Water Quality Monitoring (Gama Well Monitoring with historical water quality data)

Content Comment: What is historical water quality and where is the data?

Surface Water Monitoring

Page 80:819-820

"Stream gauges are shown on Figure 3-11."

Editorial Comment: Stream gauges are shown on Figure 3-11 infra @ page 82.

Climate Monitoring 3.5.13

Page:line 81:831-832

"Annual precipitation at the Bieber station is shown for 1985 to 1995 in Table 3-6."

Editorial Comment: ".... In Table 3-6 infra @ page 84."

Page 81:836

"Table 3-7 provides a summary of average monthly rainfall, temperature, an..."

<u>Editorial Comment</u>: "Table 3-7 <u>infra @ page 84</u>, provides a summary of average monthly rainfall, temperature and..."

Page 81:837-838

"Figure 3-12 shows annual rainfall for 1984 838 through 2018. The locations of all climate monitoring stations are shown on Figure 3-11."

Editorial Comment: "Figure 3-12 infra @ page 83 shown on Figure 3-11 infra at page 82."

Modoc County General Plan 3.7.1

Page 88:971

" The Water Resources section advocates the "wise and prudent"....

<u>Editorial and Content Comment</u>: The Water Resource Section _____ advocates the "wise and prudent management of groundwater resources to support a sustainable economy as well as maintaining 976 adequate supplies for domestic wells for rural subdivisions."" Code § Missing

Chapter 3 page 89:1014-1015

"The Lassen County GP land use map from 1999 is shown in Figure 3-13 shows intensive agriculture as the..."

"The Lassen Count GP land use map from 1999 is shown in Figure 3-13 infra at pg. 90...."

Chapter 3

Page 90:1018-1033

"Groundwater is addressed in several elements, including agriculture, land use, and natural resources. The GP identified the BVGB as a 'major ground water basin' due to the operation of wells at over 100 gallons per minute. Moreover, the GP expressed concern about water transfers and their impact on

local water needs and environmental impacts due to water marketeers pumping groundwater from the BVGB into the Pit River and selling it to downstream water districts or municipalities or using groundwater to augment summer flow through the Delta. The GP recognized that safe yield is dependent on recharge and that overdraft pumping would increase operating costs due to a greater pumping lift and could result in subsidence and water quality degradation. In addition, the GP referred to 1980s legislation that authorized the formation of water districts in Lassen County to manage and regulate the use of groundwater resources and to the 1959 Lassen-Modoc County Flood Control and Water Conservation District, as discussed above. The SGMA process established the requirements for a GSP in the BVGB and creation of the two GSAs.

The land use element identified several issues related to groundwater, including public services where 62 percent of rural, unincorporated housing units relied on individual (domestic) wells for their water. Another issue included open space and the managed production of resources, which includes areas for recharge of groundwater among others. The GP referred to the 1972 Open Space Plan, which required"

<u>Editorial Comment</u>: This above paragraph needs to be reinserted or retyped into the document. The lines are cutting off and the font size and/or type needs to be checked.

Comments through page 90 Chapter 3 both editorial and content dsp.

Letter 3





Leaders for Livable Communities





November 28, 2021

Lassen and Modoc County Groundwater Sustainability Agencies (GSAs)

Submitted via web:

https://bigvalleygsp.org/comment/new;jsessionid=5F3A0C5993B56E3B5F68A22E8CD4ECF3

Re: Public Comment Letter for Big Valley Draft GSP

Dear Tiffany Martinez,

On behalf of the above-listed organizations, we appreciate the opportunity to comment on the Draft Groundwater Sustainability Plan (GSP) for the Big Valley Groundwater Basin being prepared under the Sustainable Groundwater Management Act (SGMA). Our organizations are deeply engaged in and committed to the successful implementation of SGMA because we understand that groundwater is critical for the resilience of California's water portfolio, particularly in light of changing climate. Under the requirements of SGMA, Groundwater Sustainability Agencies (GSAs) must consider the interests of all beneficial uses and users of groundwater, such as domestic well owners, environmental users, surface water users, federal government, California Native American tribes and disadvantaged communities (Water Code 10723.2).

As stakeholder representatives for beneficial users of groundwater, our GSP review focuses on how well disadvantaged communities, drinking water users, tribes, climate change, and the environment were addressed in the GSP. While we appreciate that some basins have consulted us directly via focus groups, workshops, and working groups, we are providing public comment letters to all GSAs as a means to engage in the development of 2022 GSPs across the state. Recognizing that GSPs are complicated and resource intensive to develop, the intention of this letter is to provide constructive stakeholder feedback that can improve the GSP prior to submission to the State.

Based on our review, we have significant concerns regarding the treatment of key beneficial users in the Draft GSP and consider the GSP to be insufficient under SGMA. We highlight the following findings:

- 1. Beneficial uses and users are not sufficiently considered in GSP development.
 - a. Human Right to Water considerations are not sufficiently incorporated.
 - b. Public trust resources **are not sufficiently** considered.
 - c. Impacts of Minimum Thresholds, Measurable Objectives and Undesirable Results on beneficial uses and users are not sufficiently analyzed.
- 2. Climate change is not sufficiently considered.

Big Valley Basin Draft GSP 560

- 3. Data gaps are not sufficiently identified and the GSP does not have a plan to eliminate them.
- 4. Projects and Management Actions **do not sufficiently consider** potential impacts or benefits to beneficial uses and users.

Our specific comments related to the deficiencies of the Big Valley Draft GSP along with recommendations on how to reconcile them, are provided in detail in **Attachment A.**

Please refer to the enclosed list of attachments for additional technical recommendations:

Attachment A GSP Specific Comments

Attachment B SGMA Tools to address DAC, drinking water, and environmental beneficial uses

and users

Attachment C Freshwater species located in the basin

Attachment D The Nature Conservancy's "Identifying GDEs under SGMA: Best Practices for

using the NC Dataset"

Attachment E Maps of representative monitoring sites in relation to key beneficial users

Thank you for fully considering our comments as you finalize your GSP.

Best Regards,

Ngodoo Atume Water Policy Analyst

Clean Water Action/Clean Water Fund

J. Pablo Ortiz-Partida, Ph.D.

Western States Climate and Water Scientist

Danille Dolan

Union of Concerned Scientists

Samantha Arthur

Working Lands Program Director

Audubon California

E.S. Pune

Danielle V. Dolan

Water Program Director

Local Government Commission

Meliss M. Kinde

E.J. Remson

Senior Project Director, California Water Program

The Nature Conservancy

Melissa M. Rohde Groundwater Scientist

The Nature Conservancy

Attachment A

Specific Comments on the Big Valley Draft Groundwater Sustainability Plan

1. Consideration of Beneficial Uses and Users in GSP development

Consideration of beneficial uses and users in GSP development is contingent upon adequate identification and engagement of the appropriate stakeholders. The (A) identification, (B) engagement, and (C) consideration of disadvantaged communities, drinking water users, tribes, ¹ groundwater dependent ecosystems, streams, wetlands, and freshwater species are essential for ensuring the GSP integrates existing state policies on the Human Right to Water and the Public Trust Doctrine.

A. Identification of Key Beneficial Uses and Users

Disadvantaged Communities, Drinking Water Users, and Tribes

The identification of Disadvantaged Communities (DACs), drinking water users, and tribes is insufficient. The GSP maps tribal areas on Figure 3-2 (Jurisdictional Areas), with Lookout Rancheria and Tribal Trust Land included on the map. However, we note the following deficiencies with the identification of these key beneficial users.

- While the plan identifies Modoc County and Lassen County as DACs, it fails to provide a map identifying the locations of each DAC by census block groups, tracts, or places. The plan also fails to clearly state the population of each DAC or include the population dependent on groundwater as their source of drinking water in the basin.
- The GSP provides a density map of domestic wells in the basin (Figure 3-7). However, the plan fails to provide depth of these wells (such as minimum well depth, average well depth, or depth range). This information is necessary to understand the distribution of shallow and vulnerable drinking water wells within the basin.

These missing elements are required for the GSAs to fully understand the specific interests and water demands of these beneficial users, and to support the consideration of beneficial users in the development of sustainable management criteria and selection of projects and management actions.

RECOMMENDATIONS

- Provide a map of the locations of DACs within the basin and provide the population of each identified DAC. Identify the sources of drinking water for DAC members, including an estimate of how many people rely on groundwater (e.g., domestic wells, state small water systems, and public water systems).
- Include a map showing domestic well locations and average well depth across the basin.

(https://water.ca.gov/Programs/Groundwater-Management/SGMA-Groundwater-Management/Best-Management-Pra ctices-and-Guidance-Documents) to comprehensively address these important beneficial users in their GSP.

Page 3 of 13

562

¹ Our letter provides a review of the identification and consideration of federally recognized tribes (Data source: SGMA Data viewer) within the GSP from non-tribal members and NGOs. Based on the likely incomplete information available to our organizations for this review, we recommend that the GSA utilize the California Department of Water Resources' "Engagement with Tribal Governments" Guidance Document

Interconnected Surface Waters

The identification of Interconnected Surface Waters (ISWs) is **insufficient**, due to lack of supporting information provided for the ISW analysis. To assess ISWs, the GSP assumes streams to be interconnected where the depth to water is less than 15 feet below ground surface, based on spring 2015 contours. However, it is common practice to utilize deeper thresholds, such as 50 feet below groundwater surface, to indicate a disconnected stream reach^{2,3}. Furthermore, using seasonal groundwater elevation data over multiple water year types is an essential component of identifying ISWs. Using depth-to-groundwater contours from one point in time is not sufficient evidence to state that reaches are not connected to groundwater. In California's Mediterranean climate, groundwater interconnections with surface water can vary seasonally and interannually, and that natural variability needs to be considered when identifying ISWs.

RECOMMENDATIONS

- Use a deeper screening depth, such as 50 feet, to determine which stream reaches in the basin are potentially interconnected with groundwater.
- Use seasonal data over multiple water year types to capture the variability in environmental conditions inherent in California's climate, when mapping ISWs. We recommend the 10-year pre-SGMA baseline period of 2005 to 2015.
- Provide depth-to-groundwater contour maps using the best practices presented in Attachment D, to aid in the determination of ISWs. Specifically, ensure that the first step is contouring groundwater elevations, and then subtracting this layer from land surface elevations from a digital elevation model (DEM) to estimate depth-to-groundwater contours across the landscape. This will provide accurate contours of depth-to-groundwater along streams and other land surface depressions where GDEs are commonly found.
- On the map of stream reaches in the basin (Figure 5-18), consider any segments with data gaps as potential ISWs and clearly mark them as such. Reconcile ISW data gaps with specific measures (shallow monitoring wells, stream gauges, and nested/clustered wells) along surface water features in the Monitoring Network section of the GSP.

Groundwater Dependent Ecosystems

The identification of Groundwater Dependent Ecosystems (GDEs) is **insufficient**. The GSP took initial steps to identify and map GDEs using the Natural Communities Commonly Associated with Groundwater dataset (NC dataset). However, insufficient groundwater data was used to characterize groundwater conditions in the basin's GDEs. The GSP uses depth-to-groundwater data from fall 2015 to characterize areas where the depth to groundwater was less than 15 feet to identify potential GDEs. We recommend using groundwater data from multiple seasons and water year types to determine the range of depth to groundwater around NC dataset polygons. Using seasonal groundwater elevation data over multiple water year types is an essential component of identifying GDEs and is necessary to capture the variability in groundwater conditions inherent in California's Mediterranean climate.

_

² Jasechko, S. et al. 2021. Widespread potential loss of streamflow into underlying aquifers across the USA. Nature, 591: 391-395. doi: https://doi.org/10.1038/s41586-021-03311-x

³ The Nature Conservancy. 2021. ICONS Tool. Available at: https://icons.codefornature.org/

The GSP does not provide an inventory of the flora or fauna species present in the basin's GDEs, except to present the common plant species and their rooting depths. Furthermore, the GSP does not acknowledge endangered, threatened, or special status species in the basin.

RECOMMENDATIONS

- Use depth-to-groundwater data from multiple seasons and water year types (e.g., wet, dry, average, drought) to determine the range of depth to groundwater around NC dataset polygons. We recommend that a baseline period (10 years from 2005 to 2015) be established to characterize groundwater conditions over multiple water year types. Refer to Attachment D of this letter for best practices for using local groundwater data to verify whether polygons in the NC Dataset are supported by groundwater in an aquifer.
- Provide depth-to-groundwater contour maps, noting the best practices presented in Attachment D. Specifically, ensure that the first step is contouring groundwater elevations, and then subtracting this layer from land surface elevations from a DEM to estimate depth-to-groundwater contours across the landscape. Map the location of groundwater wells on the contour maps to illustrate monitoring locations in relation to GDEs.
- If insufficient data are available to describe groundwater conditions within or near polygons from the NC dataset, include those polygons as "Potential GDEs" in the GSP until data gaps are reconciled in the monitoring network.
- Include an inventory of the fauna and flora present within the basin's GDEs (see Attachment C of this letter for a list of freshwater species located in the Big Valley Basin). Note any threatened or endangered species.

Native Vegetation and Managed Wetlands

Native vegetation and managed wetlands are water use sectors that are required to be included in the water budget.^{4,5} The integration of native vegetation into the water budget is **insufficient**. The water budget did not include the current, historical, and projected demands of native vegetation. The omission of explicit water demands for native vegetation is problematic because key environmental uses of groundwater are not being accounted for as water supply decisions are made using this budget, nor will they likely be considered in project and management actions. Managed wetlands are not mentioned in the GSP, so it is not known whether or not they are present in the basin.

Big Valley Basin Draft GSP

Page 5 of 13

⁴ "Water use sector' refers to categories of water demand based on the general land uses to which the water is applied, including urban, industrial, agricultural, managed wetlands, managed recharge, and native vegetation." [23 CCR §351(al)]

⁵ "The water budget shall quantify the following, either through direct measurements or estimates based on data: (3) Outflows from the groundwater system by water use sector, including evapotranspiration, groundwater extraction, groundwater discharge to surface water sources, and subsurface groundwater outflow." [23 CCR §354.18]

RECOMMENDATIONS

- Quantify and present all water use sector demands in the historical, current, and projected water budgets with individual line items for each water use sector, including native vegetation.
- State whether or not there are managed wetlands in the basin. If there are, ensure that their groundwater demands are included as separate line items in the historical, current, and projected water budgets.

B. Engaging Stakeholders

Stakeholder Engagement During GSP Development

Stakeholder engagement during GSP development is insufficient. SGMA's requirement for public notice and engagement of stakeholders is not fully met by the description in the Notice and Communication chapter.6

The GSP documents targeted outreach to tribes, including inviting the Pit River Tribe to be a member of the Big Valley Advisory Committee. However, we note the following deficiencies with the overall stakeholder engagement process:

- The GSP documents opportunities for public involvement and engagement in very general terms for listed stakeholders. Public outreach and engagement activities include updates to the GSP website and communication portal, community flyers, notices in the local newspaper, social media updates, brochures, and the formation of the Big Valley Advisory Committee. The GSP does not state whether DACs and environmental stakeholders are represented on the Big Valley Advisory Committee.
- The plan does not include documentation on how stakeholder input from the above mentioned outreach and engagement was considered and incorporated into the GSP development process.
- The GSP states the MOU establishing the Big Valley Advisory Committee will expire after the adoption of the GSP. As such, communication and engagement will (p. 11-8) "shift to the GSA Boards who will continue to inform the public about Plan progress and status of projects and management actions." Communication and engagement during implementation will include meetings of County Boards of Supervisors and updates provided to the interested parties list. The GSP does not include a detailed plan for continual opportunities for engagement during GSP implementation that is specifically directed to DACs, domestic well owners, tribes, and environmental stakeholders within the basin.

Big Valley Basin Draft GSP Page 6 of 13

565

⁶ "A communication section of the Plan shall include a requirement that the GSP identify how it encourages the active involvement of diverse social, cultural, and economic elements of the population within the basin." [23 CCR §354.10(d)(3)]

RECOMMENDATIONS

- In the Notice and Communication chapter, describe active and targeted outreach to engage all stakeholders throughout the GSP development and implementation phases. Refer to Attachment B for specific recommendations on how to actively engage stakeholders during all phases of the GSP process. While some of these resources have already been stated in the GSP, we recommend that the GSAs should improve utilization of these resources and documentation of the engagement process.
- Provide documentation on how stakeholder input was incorporated into the GSP development process.
- Utilize DWR's tribal engagement guidance to comprehensively identify, involve, and address all tribes and tribal interests that may be present in the basin.⁷

C. Considering Beneficial Uses and Users When Establishing Sustainable Management Criteria and Analyzing Impacts on Beneficial Uses and Users

The consideration of beneficial uses and users when establishing sustainable management criteria (SMC) is insufficient. The consideration of potential impacts on all beneficial users of groundwater in the basin are required when defining undesirable results and establishing minimum thresholds.^{8,9,10}

Disadvantaged Communities and Drinking Water Users

For chronic lowering of groundwater levels, measurable objectives are set at the Fall 2015 water level, or at the lowest water level measured for wells that don't have a Fall 2015 measurement. Minimum thresholds are set at 140 feet below the measurable objective. While acknowledging that lowering of water levels throughout the Basin to the minimum threshold could result in a significant percentage of wells going dry, the GSP does not quantify the number of domestic wells that could go dry or otherwise consider or analyze the impact of minimum thresholds on domestic wells. The GSP does not sufficiently describe whether minimum thresholds will avoid significant and unreasonable loss of drinking water to domestic well users that are not protected by the minimum threshold. In addition, the GSP does not sufficiently describe or analyze direct or indirect impacts on DACs, drinking water users, or tribes when defining undesirable results, nor does it describe how the groundwater level minimum thresholds are consistent with the Human Right to Water policy. 11

Big Valley Basin Draft GSP Page 7 of 13 566

⁷ Engagement with Tribal Governments Guidance Document. Available at: https://water.ca.gov/-/media/DWR-Website/Web-Pages/Programs/Groundwater-Management/Sustainable-Groundwat er-Management/Best-Management-Practices-and-Guidance-Documents/Files/Guidance-Doc-for-SGM-Engagementwith-Tribal-Govt av 19.pdf

⁸ "The description of undesirable results shall include [...] potential effects on the beneficial uses and users of groundwater, on land uses and property interests, and other potential effects that may occur or are occurring from undesirable results." [23 CCR §354.26(b)(3)]

⁹ "The description of minimum thresholds shall include [...] how minimum thresholds may affect the interests of beneficial uses and users of groundwater or land uses and property interests." [23 CCR §354.28(b)(4)]

¹⁰ "The description of minimum thresholds shall include [...] how state, federal, or local standards relate to the relevant sustainability indicator. If the minimum threshold differs from other regulatory standards, the agency shall explain the nature of and the basis for the difference." [23 CCR §354.28(b)(5)]

¹¹ California Water Code §106.3. Available at:

https://leginfo.legislature.ca.gov/faces/codes displaySection.xhtml?lawCode=WAT§ionNum=106.3

The GSP states that the undesirable result criterion for the groundwater level sustainability indicator occurs when the groundwater level in one-third of the representative monitoring wells drop below their minimum threshold for five consecutive years. Using this definition of undesirable results for groundwater levels, significant and unreasonable impacts to beneficial users experienced during dry years or periods of drought will not result in an undesirable result. This is problematic since the GSP is failing to manage the basin in such a way that strives to minimize significant adverse impacts to beneficial users, which are often felt greatest in below-average, dry, and drought years. Furthermore, the requirement that one-third of monitoring wells exceed the minimum threshold before triggering an undesirable result means that areas with high concentrations of domestic wells may experience impacts significantly greater than the established minimum threshold because the one-third threshold isn't triggered.

The GSP does not establish SMC for groundwater quality. The GSP states (p. 7-10): "Due to the existence of excellent water quality in the Basin, significant amount of existing water quality monitoring, generally low impact land uses, and a robust effort to conduct conservation efforts by agricultural and domestic users, per §354.26(d), SMCs were not established for water quality because Undesirable Results are not present and not likely to occur." However, the GSP states (p. 7-9): "After a review of the best available data on water quality in the Basin, it was concluded that all the constituents which were elevated above suitable thresholds are naturally occurring. There has been no identifiable increase in the level of concentrations over time, and several constituents have indications of improvement in recent decades compared to concentrations in the 1950s and 1960s." All COCs in the basin that may be impacted or exacerbated by groundwater use and/or management should have established SMC, in addition to coordinating with water quality regulatory programs.

RECOMMENDATIONS

Chronic Lowering of Groundwater Levels

- Describe direct and indirect impacts on drinking water users, DACs, and tribes when
 describing undesirable results and defining minimum thresholds for chronic lowering of
 groundwater levels. Include information on the impacts during prolonged periods of
 below average water years.
- Consider and evaluate the impacts of selected minimum thresholds and measurable objectives on drinking water users, DACs, and tribes within the basin. Further describe the impact of passing the minimum threshold for these users. For example, provide the number of domestic wells that would be fully or partially de-watered at the minimum threshold.
- Consider minimum threshold exceedances during drought years when defining the groundwater level undesirable result across the basin.

Degraded Water Quality

• Establish water quality SMC. Set minimum thresholds and measurable objectives for all water quality constituents within the basin that can be impacted and/or exacerbated as a result of groundwater use or groundwater management.

- Describe direct and indirect impacts on drinking water users, DACs, and tribes when
 defining undesirable results for degraded water quality.¹² For specific guidance on how
 to consider these users, refer to "Guide to Protecting Water Quality Under the
 Sustainable Groundwater Management Act." ¹³
- Evaluate the cumulative or indirect impacts of proposed minimum thresholds for degraded water quality on drinking water users, DACs, and tribes.

Groundwater Dependent Ecosystems and Interconnected Surface Waters

Sustainable management criteria for chronic lowering of groundwater levels provided in the GSP do not consider potential impacts to environmental beneficial users. The GSP neither describes nor analyzes direct or indirect impacts on environmental users of groundwater when defining undesirable results. This is problematic because without identifying potential impacts on GDEs, minimum thresholds may compromise, or even destroy, these environmental beneficial users. Since GDEs are present in the basin, they must be considered when developing SMC.

The GSP does not establish SMC for depletion of interconnected surface water. The GSP acknowledges data gaps for interconnected surface water and states (p. 7-11): "At the five-year update, SMCs will be considered only if the trends indicate that undesirable results are likely to occur in the subsequent 5 years." The GSP continues (p. 7-11): "While Chapter 5 – Groundwater Conditions details the streams in Big Valley which may be interconnected by a "...continuous saturated zone to the underlying aquifer and the overlying surface water..." (DWR 2016c), there is currently no evidence to support interconnected surface water. Therefore, there is a lack of evidence for interconnection of streams." However, the absence of evidence is not evidence of absence. The GSP should establish interim SMC for the depletion of interconnected surface water condition indicator until more data is gathered. The GSP should discuss how the interim SMC will affect beneficial users, and more specifically GDEs, and the impact of these minimum thresholds on GDEs in the basin. The GSP should evaluate how the proposed minimum thresholds and measurable objectives will avoid significant and unreasonable effects on surface water beneficial users in the basin (see Attachment C for a list of environmental users in the basin), such as increased mortality and inability to perform key life processes (e.g., reproduction, migration).

RECOMMENDATIONS

- When establishing SMC for the basin, consider that the SGMA statute [Water Code §10727.4(I)] specifically calls out that GSPs shall include "impacts on groundwater dependent ecosystems."
- When defining undesirable results for chronic lowering of groundwater levels, provide specifics on what biological responses (e.g., extent of habitat, growth, recruitment rates) would best characterize a significant and unreasonable impact to GDEs. Undesirable results to environmental users occur when 'significant and unreasonable'

Big Valley Basin Draft GSP Page 9 of 13 568

¹² "Degraded Water Quality [...] collect sufficient spatial and temporal data from each applicable principal aquifer to determine groundwater quality trends for water quality indicators, as determined by the Agency, to address known water quality issues." [23 CCR §354.34(c)(4)]

¹³ Guide to Protecting Water Quality under the Sustainable Groundwater Management Act https://d3n8a8pro7vhmx.cloudfront.net/communitywatercenter/pages/293/attachments/original/1559328858/Guide_to _Protecting_Drinking_Water_Quality_Under_the_Sustainable_Groundwater_Management_Act.pdf?1559328858.

effects on beneficial users are caused by one of the sustainability indicators (i.e., chronic lowering of groundwater levels, degraded water quality, or depletion of interconnected surface water). Thus, potential impacts on environmental beneficial uses and users need to be considered when defining undesirable results in the basin.¹⁴ Defining undesirable results is the crucial first step before the minimum thresholds can be determined.¹⁵

• When defining undesirable results for depletion of interconnected surface water, include a description of potential impacts on instream habitats within ISWs when minimum thresholds in the basin are reached. The GSP should confirm that minimum thresholds for ISWs avoid adverse impacts on environmental beneficial users of interconnected surface waters as these environmental users could be left unprotected by the GSP. These recommendations apply especially to environmental beneficial users that are already protected under pre-existing state or federal law. The state of
2. Climate Change

The SGMA statute identifies climate change as a significant threat to groundwater resources and one that must be examined and incorporated in the GSPs. The GSP Regulations require integration of climate change into the projected water budget to ensure that projects and management actions sufficiently account for the range of potential climate futures.¹⁸ The effects of climate change will intensify the impacts of water stress on GDEs, making available shallow groundwater resources especially critical to their survival. Condon *et al.* (2020) shows that GDEs are more likely to succumb to water stress and rely more on groundwater during times of drought.¹⁹ When shallow groundwater is unavailable, riparian forests can die off and key life processes (e.g., migration and spawning) for aquatic organisms, such as steelhead, can be impeded.

The integration of climate change into the projected water budget is **insufficient**. The GSP incorporates climate change into the projected water budget using DWR change factors. However, the plan does not clearly indicate which DWR change factors (2030, 2070, or both) were incorporated into the projected water budget. In addition, the GSP does not indicate whether multiple climate scenarios (e.g., the 2070 extremely wet and extremely dry climate scenarios) were considered in the projected water budget. The GSP would benefit from clearly and transparently incorporating the extremely wet and dry scenarios

¹⁴ "The description of undesirable results shall include [...] potential effects on the beneficial uses and users of groundwater, on land uses and property interests, and other potential effects that may occur or are occurring from undesirable results". [23 CCR §354.26(b)(3)]

¹⁵ The description of minimum thresholds shall include [...] how minimum thresholds may affect the interests of beneficial uses and users of groundwater or land uses and property interests." [23 CCR §354.28(b)(4)]

¹⁶ "The minimum threshold for depletions of interconnected surface water shall be the rate or volume of surface water depletions caused by groundwater use that has adverse impacts on beneficial uses of the surface water and may lead to undesirable results." [23 CCR §354.28(c)(6)]

¹⁷ Rohde MM, Seapy B, Rogers R, Castañeda X, editors. 2019. Critical Species LookBook: A compendium of California's threatened and endangered species for sustainable groundwater management. The Nature Conservancy, San Francisco, California. Available at:

https://groundwaterresourcehub.org/public/uploads/pdfs/Critical_Species_LookBook_91819.pdf

¹⁸ "Each Plan shall rely on the best available information and best available science to quantify the water budget for the basin in order to provide an understanding of historical and projected hydrology, water demand, water supply, land use, population, climate change, sea level rise, groundwater and surface water interaction, and subsurface groundwater flow." [23 CCR §354.18(e)]

¹⁹ Condon et al. 2020. Evapotranspiration depletes groundwater under warming over the contiguous United States. Nature Communications. Available at: https://www.nature.com/articles/s41467-020-14688-0

provided by DWR into projected water budgets or select more appropriate extreme scenarios for the basin. While these extreme scenarios may have a lower likelihood of occurring, their consequences could be significant and their inclusion can help identify important vulnerabilities in the basin's approach to groundwater management.

The GSP integrates climate change into key inputs (e.g., changes in precipitation, evapotranspiration, and surface water flow) of the projected water budget. However, the sustainable yield is based on the historic water budget, instead of the projected water budget with climate change incorporated. If the water budgets are incomplete, including the omission of extremely wet and dry scenarios and the omission of climate change projections in the sustainable yield calculations, then there is increased uncertainty in virtually every subsequent calculation used to plan for projects, derive measurable objectives, and set minimum thresholds. Plans that do not adequately include climate change projections may underestimate future impacts on vulnerable beneficial users of groundwater such as ecosystems, DACs, tribes, and domestic well owners.

RECOMMENDATIONS

- Clearly indicate which of the DWR change factors (2030, 2070, or both) were incorporated into the projected water budget.
- Integrate climate change, including extreme climate scenarios, into all elements of the projected water budget to form the basis for development of sustainable management criteria and projects and management actions
- Calculate sustainable yield based on the projected water budget with climate change incorporated.
- Incorporate climate change scenarios into projects and management actions.

3. Data Gaps

The consideration of beneficial users when establishing monitoring networks is **insufficient**, due to lack of specific plans to increase the Representative Monitoring Wells (RMWs) in the monitoring network that represent water quality conditions and shallow groundwater elevations around DACs, domestic wells, tribes, GDEs, and ISWs in the subbasin. These beneficial users may remain unprotected by the GSP without adequate monitoring and identification of data gaps in the shallow aquifer. The Plan therefore fails to meet SGMA's requirements for the monitoring network.²⁰

Figure 8-1 (Water Level Monitoring Networks) shows insufficient representation of GDEs, DACs, drinking water users, and tribes for shallow groundwater elevation monitoring. Refer to Attachment E for maps of these monitoring sites in relation to key beneficial users of groundwater.

The GSP has not established SMC or a monitoring network for water quality. As stated above in the SMC section of this letter, concentrations of COCs in the basin may be impacted or exacerbated by groundwater use and/or management, and therefore must be monitored. The GSAs should conduct and report water quality monitoring in coordination with the other water quality regulatory programs discussed in the GSP.

²⁰ "The monitoring network objectives shall be implemented to accomplish the following: [...] (2) Monitor impacts to the beneficial uses or users of groundwater." [23 CCR §354.34(b)(2)]

As stated in Section 8.2.1.3 of the GSP, a representative monitoring network for ISW has not been established in the basin. Section 9.2.3 acknowledges that (p. 9-13) "monitoring could aid in the analysis of the relationship between groundwater levels and GDEs." However, the GSP fails to provide specific plans for establishing a monitoring network to adequately assess the presence of GDEs and ISWs, and to monitor the impact of SMC on these ecosystems.

RECOMMENDATIONS

- Provide maps that overlay current and proposed monitoring well locations with the locations of DACs, domestic wells, tribes, and GDEs to clearly identify monitored areas.
- Increase the number of RMWs in the shallow aquifer across the basin as needed to map ISWs and adequately monitor all groundwater condition indicators across the basin and at appropriate depths for all beneficial users. Prioritize proximity to DACs, domestic wells, tribes, GDEs, and ISWs when identifying new RMWs.
- Ensure groundwater elevation and water quality RMWs are monitoring groundwater conditions spatially and at the correct depth for all beneficial users - especially DACs, domestic wells, tribes, and GDEs.
- Describe biological monitoring that can be used to assess the potential for significant and unreasonable impacts to GDEs or ISWs due to groundwater conditions in the basin.

4. Addressing Beneficial Users in Projects and Management Actions

The consideration of beneficial users when developing projects and management actions is **insufficient**, due to the failure to completely identify benefits or impacts of identified projects and management actions, including water quality impacts, to key beneficial users of groundwater such as GDEs, aquatic habitats, surface water users, DACs, tribes, and drinking water users. Therefore, potential project and management actions may not protect these beneficial users. Groundwater sustainability under SGMA is defined not just by sustainable yield, but by the avoidance of undesirable results for *all* beneficial users.

We commend the GSAs for including projects and management actions with explicit environmental benefits, such as Agriculture Managed Aquifer Recharge (Section 9.1.1.) and Forest Health / Conifer and Juniper Thinning (Section 9.4.1). However, the GSP fails to describe this or other projects' explicit benefits or impacts to beneficial users such as DACs and tribes.

We note that the plan does not include a domestic well mitigation program to avoid significant and unreasonable loss of drinking water. We strongly recommend inclusion of a drinking water well impact mitigation program to proactively monitor and protect drinking water wells through GSP implementation.

RECOMMENDATIONS

- For DACs and domestic well owners, include a drinking water well impact mitigation program to proactively monitor and protect drinking water wells through GSP implementation. Refer to Attachment B for specific recommendations on how to implement a drinking water well mitigation program.
- For DACs and domestic well owners, include a discussion of whether potential impacts to water quality from projects and management actions could occur and how the GSAs plan to mitigate such impacts.
- Recharge ponds, reservoirs, and facilities for managed aquifer recharge can be designed as multiple-benefit projects to include elements that act functionally as wetlands and provide a benefit for wildlife and aquatic species. For guidance on how to integrate multi-benefit recharge projects into your GSP, refer to the "Multi-Benefit Recharge Project Methodology Guidance Document."²¹
- Develop management actions that incorporate climate and water delivery uncertainties to address future water demand and prevent future undesirable results.

Big Valley Basin Draft GSP

Page 13 of 13


²¹ The Nature Conservancy. 2021. Multi-Benefit Recharge Project Methodology for Inclusion in Groundwater Sustainability Plans. Sacramento. Available at:

https://groundwaterresourcehub.org/sgma-tools/multi-benefit-recharge-project-methodology-guidance/

Attachment B

SGMA Tools to address DAC, drinking water, and environmental beneficial uses and users

Stakeholder Engagement and Outreach

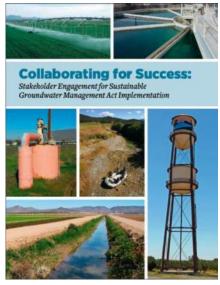


Clean Water Action, Community Water Center and Union of Concerned Scientists developed a guidance document called Collaborating for success: Stakeholder engagement for Sustainable Groundwater Management Act Implementation. It provides details on how to conduct targeted and broad outreach and engagement during Groundwater Sustainability Plan (GSP) development and implementation. Conducting a targeted outreach involves:

- Developing a robust Stakeholder Communication and Engagement plan that includes outreach at frequented locations (schools, farmers markets, religious settings, events) across the plan area to increase the involvement and participation of disadvantaged communities, drinking water users and the environmental stakeholders.
- Providing translation services during meetings and technical assistance to enable easy participation for non-English speaking stakeholders.
- GSP should adequately describe the process for requesting input from beneficial users and provide details on how input is incorporated into the GSP.


The Human Right to Water

Human Right To Water Scorecard for the Review of Groundwater Sustainability Plans



The <u>Human Right to Water Scorecard</u> was developed by Community Water Center, Leadership Counsel for Justice and Accountability and Self Help Enterprises to aid Groundwater Sustainability Agencies (GSAs) in prioritizing drinking water needs in SGMA. The scorecard identifies elements that must exist in GSPs to adequately protect the Human Right to Drinking water.

Drinking Water Well Impact Mitigation Framework

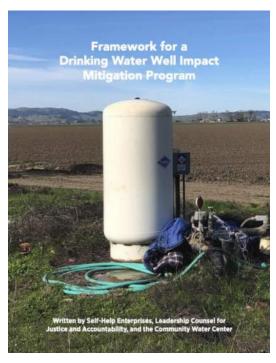

The <u>Drinking Water Well Impact Mitigation</u>
<u>Framework</u> was developed by Community Water
Center, Leadership Counsel for Justice and
Accountability and Self Help Enterprises to aid
GSAs in the development and implementation of
their GSPs. The framework provides a clear
roadmap for how a GSA can best structure its
data gathering, monitoring network and
management actions to proactively monitor and
protect drinking water wells and mitigate impacts
should they occur.

Groundwater Resource Hub



The Nature Conservancy has developed a suite of tools based on best available science to help GSAs, consultants, and stakeholders efficiently incorporate nature into GSPs. These tools and resources are available online at GroundwaterResourceHub.org. The Nature Conservancy's tools and resources are intended to reduce costs, shorten timelines, and increase benefits for both people and nature.

Rooting Depth Database



The <u>Plant Rooting Depth Database</u> provides information that can help assess whether groundwater-dependent vegetation are accessing groundwater. Actual rooting depths will depend on the plant species and site-specific conditions, such as soil type and

availability of other water sources. Site-specific knowledge of depth to groundwater combined with rooting depths will help provide an understanding of the potential groundwater levels are needed to sustain GDEs.

How to use the database

The maximum rooting depth information in the Plant Rooting Depth Database is useful when verifying whether vegetation in the Natural Communities Commonly Associated with Groundwater (NC Dataset) are connected to groundwater. A 30 ft depth-togroundwater threshold, which is based on averaged global rooting depth data for phreatophytes¹, is relevant for most plants identified in the NC Dataset since most plants have a max rooting depth of less than 30 feet. However, it is important to note that deeper thresholds are necessary for other plants that have reported maximum root depths that exceed the averaged 30 feet threshold, such as valley oak (Quercus lobata), Euphrates poplar (Populus euphratica), salt cedar (Tamarix spp.), and shadescale (Atriplex confertifolia). The Nature Conservancy advises that the reported max rooting depth for these deeper-rooted plants be used. For example, a depth-to groundwater threshold of 80 feet should be used instead of the 30 ft threshold, when verifying whether valley oak polygons from the NC Dataset are connected to groundwater. It is important to re-emphasize that actual rooting depth data are limited and will depend on the plant species and site-specific conditions such as soil and aguifer types, and availability to other water sources.

The Plant Rooting Depth Database is an Excel workbook composed of four worksheets:

- 1. California phreatophyte rooting depth data (included in the NC Dataset)
- 2. Global phreatophyte rooting depth data
- 3. Metadata
- 4. References

How the database was compiled

The Plant Rooting Depth Database is a compilation of rooting depth information for the groundwater-dependent plant species identified in the NC Dataset. Rooting depth data were compiled from published scientific literature and expert opinion through a crowdsourcing campaign. As more information becomes available, the database of rooting depths will be updated. Please Contact Us if you have additional rooting depth data for California phreatophytes.

¹ Canadell, J., Jackson, R.B., Ehleringer, J.B. et al. 1996. Maximum rooting depth of vegetation types at the global scale. Oecologia 108, 583–595. https://doi.org/10.1007/BF00329030

GDE Pulse



<u>GDE Pulse</u> is a free online tool that allows Groundwater Sustainability Agencies to assess changes in groundwater dependent ecosystem (GDE) health using satellite, rainfall, and groundwater data. Remote sensing data from satellites has been used to monitor the health of vegetation all over the planet. GDE pulse has compiled 35 years of satellite imagery from NASA's Landsat mission for every polygon in the Natural Communities Commonly Associated with Groundwater Dataset. The following datasets are available for downloading:


Normalized Difference Vegetation Index (NDVI) is a satellite-derived index that represents the greenness of vegetation. Healthy green vegetation tends to have a higher NDVI, while dead leaves have a lower NDVI. We calculated the average NDVI during the driest part of the year (July - Sept) to estimate vegetation health when the plants are most likely dependent on groundwater.

Normalized Difference Moisture Index (NDMI) is a satellite-derived index that represents water content in vegetation. NDMI is derived from the Near-Infrared (NIR) and Short-Wave Infrared (SWIR) channels. Vegetation with adequate access to water tends to have higher NDMI, while vegetation that is water stressed tends to have lower NDMI. We calculated the average NDVI during the driest part of the year (July–September) to estimate vegetation health when the plants are most likely dependent on groundwater.

Annual Precipitation is the total precipitation for the water year (October 1st – September 30th) from the PRISM dataset. The amount of local precipitation can affect vegetation with more precipitation generally leading to higher NDVI and NDMI.

Depth to Groundwater measurements provide an indication of the groundwater levels and changes over time for the surrounding area. We used groundwater well measurements from nearby (<1km) wells to estimate the depth to groundwater below the GDE based on the average elevation of the GDE (using a digital elevation model) minus the measured groundwater surface elevation.

ICONOS Mapper Interconnected Surface Water in the Central Valley

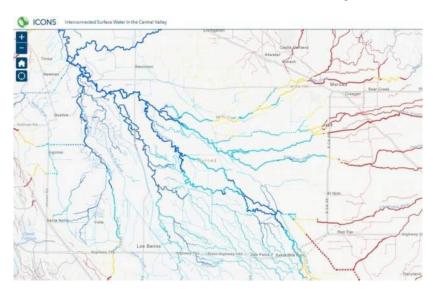

ICONS maps the likely presence of interconnected surface water (ISW) in the Central Valley using depth to groundwater data. Using data from 2011-2018, the ISW dataset represents the likely connection between surface water and groundwater for rivers and streams in California's Central Valley. It includes information on the mean, maximum, and minimum depth to groundwater for each stream segment over the years with available data, as well as the likely presence of ISW based on the minimum depth to groundwater. The Nature Conservancy developed this database, with guidance and input from expert academics, consultants, and state agencies.

We developed this dataset using groundwater elevation data <u>available online</u> from the California Department of Water Resources (DWR). DWR only provides this data for the Central Valley. For GSAs outside of the valley, who have groundwater well measurements, we recommend following our methods to determine likely ISW in your region. The Nature Conservancy's ISW dataset should be used as a first step in reviewing ISW and should be supplemented with local or more recent groundwater depth data.

Attachment C

Freshwater Species Located in the Big Valley Basin

To assist in identifying the beneficial users of surface water necessary to assess the undesirable result "depletion of interconnected surface waters", Attachment C provides a list of freshwater species located in the Big Valley Basin. To produce the freshwater species list, we used ArcGIS to select features within the California Freshwater Species Database version 2.0.9 within the basin boundary. This database contains information on ~4,000 vertebrates, macroinvertebrates and vascular plants that depend on fresh water for at least one stage of their life cycle. The methods used to compile the California Freshwater Species Database can be found in Howard et al. 2015¹. The spatial database contains locality observations and/or distribution information from ~400 data sources. The database is housed in the California Department of Fish and Wildlife's BIOS² as well as on The Nature Conservancy's science website³.

Caiantifia Nama	Common Nama	Legal Protected Status				
Scientific Name	Common Name	Federal	State	Other		
BIRDS						
Agelaius tricolor	Tricolored Blackbird	Bird of Conservation Concern	Special Concern	BSSC - First priority		
Grus canadensis tabida	Greater Sandhill Crane		Threatened			
Actitis macularius	Spotted Sandpiper					
Aechmophorus clarkii	Clark's Grebe					
Aechmophorus occidentalis	Western Grebe					
Aix sponsa	Wood Duck					
Anas acuta	Northern Pintail					
Anas americana	American Wigeon					
Anas clypeata	Northern Shoveler					
Anas crecca	Green-winged Teal					
Anas cyanoptera	Cinnamon Teal					
Anas platyrhynchos	Mallard					
Anas strepera	Gadwall					
Anser albifrons	Greater White- fronted Goose					
Ardea alba	Great Egret					
Ardea herodias	Great Blue Heron					
Aythya affinis	Lesser Scaup					
Aythya americana	Redhead		Special Concern	BSSC - Third priority		

¹ Howard, J.K. et al. 2015. Patterns of Freshwater Species Richness, Endemism, and Vulnerability in California. PLoSONE, 11(7). Available at: https://journals.plos.org/plosone/article?id=10.1371/journal.pone.0130710

² California Department of Fish and Wildlife BIOS: https://www.wildlife.ca.gov/data/BIOS

³ Science for Conservation: https://www.scienceforconservation.org/products/california-freshwater-species-database

Aythya collaris	Ring-necked Duck			
	-			
Aythya marila	Greater Scaup		0 11	
Aythya valisineria	Canvasback		Special	
Botaurus lentiginosus	American Bittern			
Bucephala albeola	Bufflehead			
Bucephala clangula	Common Goldeneye			
Butorides	Green Heron			
virescens	0.00			
Calidris alpina	Dunlin			
Calidris mauri	Western			
	Sandpiper			
Calidris minutilla	Least Sandpiper			
Chen	Snow Goose			
caerulescens				
Chen rossii	Ross's Goose			
Chlidonias niger	Black Tern		Special Concern	BSSC - Second priority
Chroicocephalus philadelphia	Bonaparte's Gull			priority
Cistothorus	Marsh Wren			
palustris palustris				
Cygnus	Tundra Swan			
columbianus				
Egretta thula	Snowy Egret			
Fulica americana	American Coot			
Gallinago delicata	Wilson's Snipe			
Gallinula	Common Moorhen			
chloropus	0 "" 0			
Grus canadensis	Sandhill Crane			
Haliaeetus leucocephalus	Bald Eagle	Bird of Conservation Concern	Endangered	
Himantopus	Black-necked Stilt			
mexicanus				
Limnodromus	Long-billed			
scolopaceus	Dowitcher			
Lophodytes cucullatus	Hooded			
Megaceryle alcyon	Merganser Belted Kingfisher			
	•			
Mergus merganser	Common			
Numenius	Merganser Long-billed Curlew			
americanus	Long-billed Curiew			
Nycticorax	Black-crowned			
nycticorax	Night-Heron			
Oxyura	Ruddy Duck			
jamaicensis	•			
Pelecanus	American White		Special Concern	BSSC - First
erythrorhynchos	Pelican			priority
Phalacrocorax	Double-crested			
auritus	Cormorant			

Phalaropus tricolor	Wilson's Phalarope			
Plegadis chihi	White-faced Ibis		Watch list	
Podiceps	Eared Grebe			
nigricollis				
Podilymbus	Pied-billed Grebe			
podiceps				
Porzana carolina	Sora			
Rallus limicola	Virginia Rail			
Recurvirostra	American Avocet			
americana				
Setophaga	Yellow Warbler			BSSC - Second
petechia				priority
Tachycineta	Tree Swallow			
bicolor				
Tringa	Greater			
melanoleuca	Yellowlegs			
Tringa	Willet			
semipalmata				
Xanthocephalus	Yellow-headed		Special Concern	BSSC - Third
xanthocephalus	Blackbird			priority
CRUSTACEANS				
Calasellus	An Isopod		Special	
californicus	•			
Cambaridae fam.	Cambaridae fam.			
Cyprididae fam.	Cyprididae fam.			
Hyalella azteca	An Amphipod			
Hyalella spp.	Hyalella spp.			
HERPS	туанын эрр.			
Actinemys	Western Pond		Special Concern	ARSSC
marmorata	Turtle		Special Concern	ARSSC
marmorata	Turne			
Anaxyrus boreas	Boreal Toad			
boreas	Doleal Toau			
Dicamptodon	California Giant			ARSSC
ensatus	Salamander			AITOOO
Dicamptodon	Pacific Giant			
tenebrosus	Salamander			
Lithobates pipiens	Northern Leopard		Special Concern	ARSSC
	Frog			
Rana boylii	Foothill Yellow-	Under Review in	Special Concern	ARSSC
•	legged Frog	the Candidate or	'	
		Petition Process		
Rana draytonii	California Red-	Threatened	Special Concern	ARSSC
<u> </u>	legged Frog		-	
Taricha granulosa	Rough-skinned			
<u> </u>	Newt			
Taricha rivularis	Red-bellied Newt			ARSSC
Taricha torosa	Coast Range Newt		Special Concern	ARSSC
Thamnophis	Sierra			
couchii	Gartersnake			
Thamnophis	Common			
				i

Pseudacris regilla	Northern Pacific			
	Chorus Frog	<u> </u>		
Thamnophis	Mountain			Not on any status
elegans elegans INSECTS & OTHER	Gartersnake			lists
			0	
Dubiraphia brunnescens	Brownish Dubiraphian Riffle		Special	
brunnescens	Beetle			
Ablabesmyia spp.	Ablabesmyia spp.			
Acentrella spp.	Acentrella spp.			
Aeshnidae fam.	Aeshnidae fam.			
	Aesiiiidae iaiii.			Not on any status
Ambrysus mormon				Not on any status lists
Ampumixis dispar				Not on any status lists
Anopheles spp.	Anopheles spp.			
Baetidae fam.	Baetidae fam.			
Baetis adonis	A Mayfly			
Baetis spp.	Baetis spp.			
Berosus spp.	Berosus spp.			
Brachycentrus				Not on any status
occidentalis				lists
Brachycentrus	Brachycentrus			
spp.	spp.			
Caenis spp.	Caenis spp.			
Callibaetis spp.	Callibaetis spp.			
Cenocorixa				Not on any status
wileyae				lists
Centroptilum spp.	Centroptilum spp.			
Cheumatopsyche	Cheumatopsyche			
spp. Chironomidae	Spp.			
fam.	Chironomidae fam.			
Chironomus spp.	Chironomus spp.			
Chloroperlidae	Chloroperlidae			
fam.	fam.			
Coenagrionidae	Coenagrionidae			
fam.	fam.			
Corisella spp.	Corisella spp.			
Corixidae fam.	Corixidae fam.			
Cricotopus spp.	Cricotopus spp.			
Diphetor hageni	Hagen's Small			
. 5	Minnow Mayfly			
Dubiraphia spp.	Dubiraphia spp.			
Dytiscidae fam.	Dytiscidae fam.			
Enallagma spp.	Enallagma spp.			
Epeorus spp.	Epeorus spp.			
Ephemerella spp.	Ephemerella spp.			
Ephydridae fam.	Ephydridae fam.			
Fallceon quilleri	A Mayfly			
. anocorr quinori	,			

Glossosoma	A Coddiofly		
alascense	A Caddisfly		
Glossosoma spp.	Glossosoma spp.		
Goera archaon	A Caddisfly		
Haliplus spp.	Haliplus spp.		
Heptagenia spp.	Heptagenia spp.		
Heptageniidae	Heptageniidae		
fam.	fam.		
Hesperocorixa laevigata			Not on any status lists
Hesperocorixa	Hesperocorixa		
spp.	spp.		
Hesperoperla pacifica	Golden Stone		
Hetaerina	American		
americana	Rubyspot		
Hexagenia limbata	A Mayfly		
Hydropsyche alternans			Not on any status lists
Hydropsyche spp.	Hydropsyche spp.		
Hydroptila spp.	Hydroptila spp.		
Ischnura spp.	Ischnura spp.		
Isonychia			Not on any status
intermedia			lists
Isonychia spp.	Isonychia spp.		
Isonychia velma	A Mayfly		
Isoperla spp.	Isoperla spp.		
Laccophilus spp.	Laccophilus spp.		
Lepidostoma spp.	Lepidostoma spp.		
Libellula nodisticta	Hoary Skimmer		
Limnophyes spp.	Limnophyes spp.		
Liodessus			Not on any status
obscurellus			lists
Malenka spp.	Malenka spp.		
Micropsectra spp.	Micropsectra spp.		
Mideopsis spp.	Mideopsis spp.		
Nectopsyche spp.	Nectopsyche spp.		
Neophylax spp.	Neophylax spp.		
Neotrichia spp.	Neotrichia spp.		
Nixe kennedyi	A Mayfly		
Notonecta spp.	Notonecta spp.		
Ophiogomphus	Ophiogomphus		
spp.	spp.		
Optioservus canus	Pinnacles Optioservus Riffle Beetle	Special	
Optioservus			Not on any status
quadrimaculatus			lists
Optioservus spp.	Optioservus spp.		
Ordobrevia nubifera			Not on any status lists

Paraleptophlebia	Paraleptophlebia	
spp.	spp.	
Peltodytes		Not on any status
callosus		lists
Peltodytes spp.	Peltodytes spp.	
Petrophila spp.	Petrophila spp.	
Plathemis lydia	Common Whitetail	
Procladius spp.	Procladius spp.	
Protoptila		Not on any status
balmorhea		lists
Protoptila spp.	Protoptila spp.	
Psectrocladius	Psectrocladius	
spp.	spp.	
Psephenus falli		Not on any status lists
Pseudochironomu	Pseudochironomu	
s spp.	s spp.	
Pteronarcys	Giant Salmonfly	
californica		
Pteronarcys spp.	Pteronarcys spp.	
Rheotanytarsus	Rheotanytarsus	
spp.	spp.	
Rhithrogena spp.	Rhithrogena spp.	
Rhyacophila spp.	Rhyacophila spp.	
Sanfilippodytes	Sanfilippodytes	
spp.	spp.	
Serratella spp.	Serratella spp.	
Sialis spp.	Sialis spp.	
Sigara spp.	Sigara spp.	
Simulium anduzei		Not on any status lists
Simulium spp.	Simulium spp.	
Skwala americana	American Springfly	
Sperchon spp.	Sperchon spp.	
Stictotarsus spp.	Stictotarsus spp.	
Taeniopteryx nivalis	Boreal Willowfly	
Tanypus spp.	Tanypus spp.	
Tanytarsus spp.	Tanytarsus spp.	
Tricorythodes	A Mayfly	
explicatus	Awayny	
Tricorythodes spp.	Tricorythodes spp.	
Zaitzevia parvula		Not on any status
Zaitzevia spp.	Zaitzevia spp.	100
MAMMALS	rr	I
Castor canadensis	American Beaver	Not on any status
Lontra canadensis	North American	Not on any status
canadensis	River Otter	lists
Neovison vison	American Mink	Not on any status lists

Ondatra zibethicus	Common Muskrat		Not on any status
MOLLUSKS		I.	
Helisoma minus	A Freshwater Snail		E
Anodonta californiensis	California Floater	Special	
Ferrissia spp.	Ferrissia spp.		
Fluminicola turbiniformis	Turban Pebblesnail		V
Gonidea angulata	Western Ridged Mussel	Special	
Gyraulus spp.	Gyraulus spp.		
Hydrobiidae fam.	Hydrobiidae fam.		
Lanx klamathensis	Scale Lanx	Special	E
Lymnaea spp.	Lymnaea spp.	•	
Lymnaeidae fam.	Lymnaeidae fam.		
Margaritifera falcata	Western Pearlshell	Special	
Menetus opercularis	Button Sprite		CS
Physa spp.	Physa spp.		
Pisidium spp.	Pisidium spp.		
Sphaeriidae fam.	Sphaeriidae fam.		
Sphaerium spp.	Sphaerium spp.		
Valvata spp.	Valvata spp.		
PLANTS	valvata opp.		
Carex sheldonii	Sheldon's Sedge	Special	CRPR - 2B.2
Downingia laeta	Great Basin	Special	CRPR - 2B.2
_	Downingia Macoun's		CRPR - 2B.2
Ranunculus macounii		Special	CRPR - 2B.2
Scutellaria	Buttercup Hooded Skullcap	Special	CRPR - 2B.2
galericulata	Tiooded Okulicap	Орсска	ORT IX - ZB.Z
Alisma triviale	Northern Water- plantain		
Alopecurus aequalis	Short-awn Foxtail		
Alopecurus carolinianus	Tufted Foxtail		
Alopecurus	Meadow Foxtail		
geniculatus geniculatus			
Alopecurus pratensis	NA		
Alopecurus	Pacific Foxtail		
saccatus			
Arundo donax	NA		
Beckmannia	American		
syzigachne	Sloughgrass		
Bidens cernua	Nodding Beggarticks		

Callitriche	Large Water-			
heterophylla	starwort			
bolanderi	Starwort			
Callitriche palustris	Vernal Water-			
Camarone parastris	starwort			
Calochortus	Shortstem		Special	CRPR - 4.2
uniflorus	Mariposa Lily		Орсска	ORT 14 - 4.2
Carex integra	Smooth-beak			
Carex integra	Sedge			
Carex lasiocarpa	Slender Sedge		Special	CRPR - 2B.3
	Nebraska Sedge		Оресіаі	GRITC-2B.5
Carex nebrascensis	Nebraska Seuge			
	Maally Cadaa			
Carex pellita	Woolly Sedge			
Damasonium				Not on any status
californicum				lists
Downingia	Bacigalup's			
bacigalupii	Downingia			
Downingia	Toothed			
cuspidata	Calicoflower			
Downingia	NA			
elegans				
Downingia insignis	Parti-color			
	Downingia			
Elatine californica	California			
	Waterwort			
Elatine rubella	Southwestern			
	Waterwort			
Eleocharis	Least Spikerush			
acicularis				
acicularis				
Eleocharis	Creeping			
macrostachya	Spikerush			
Elodea	Broad Waterweed			
canadensis				
Epilobium	NA			Not on any status
campestre				lists
Epilobium				Not on any status
hallianum				lists
Eryngium	Inland Coyote-			
alismifolium	thistle			
Eryngium	California Eryngo			
aristulatum				
aristulatum				
Eryngium	Jointed Coyote-			
articulatum	thistle			
Eryngium	Mathias' Coyote-			
mathiasiae	thistle			
Euthamia	Western Fragrant			
occidentalis	Goldenrod			
Floerkea	False			
proserpinacoides	Mermaidweed			
Glyceria borealis	Small Floating			
•	Mannagrass			
		1	1	1

Gratiola	Bractless Hedge-		
ebracteata	hyssop		
Gratiola	Boggs Lake	Endangered	CRPR - 1B.2
heterosepala	Hedge-hyssop	Lituarigered	ORI IX - ID.2
Gratiola neglecta	Clammy Hedge-		
Oratiola riegicota	hyssop		
Juncus uncialis	Inch-high Rush		
Lemna minor	Lesser Duckweed		
Lemna minuta	Least Duckweed		
Limosella acaulis	Southern Mudwort		
Limosella aquatica	Northern Mudwort		
Ludwigia palustris	Marsh Seedbox		
Marsilea vestita	NA		Not on any status
vestita			lists
Mimulus latidens	Broad-tooth		
	Monkeyflower		
Myosurus apetalus	Bristly Mousetail		
Myosurus minimus	NA		
Navarretia	Tehama		
heterandra	Navarretia		
Navarretia	Needleleaf		
intertexta	Navarretia		
Navarretia	Least Navarretia		
leucocephala			
minima			
Perideridia	Oregon Yampah		
oregana			Not a second of
Persicaria			Not on any status
amphibia Persicaria			
			Not on any status
lapathifolia Persicaria	NA		Not on any status
maculosa	INA		lists
Phacelia distans	NA		lists
Phalaris	Reed Canarygrass		
arundinacea	Need Callalyglass		
Phyla nodiflora	Common Frog-fruit		
Pilularia	NA		
americana	INA		
Plagiobothrys	Alkali Popcorn-		
leptocladus	flower		
Pogogyne	NA		
douglasii			
Porterella	Western Porterella		
carnosula			
Potamogeton	Leafy Pondweed		
foliosus foliosus	. ,		
Potamogeton	Slender		
pusillus pusillus	Pondweed		
Psilocarphus	Dwarf Woolly-		
brevissimus	heads		
brevissimus			

Psilocarphus	Oregon Woolly-			
oregonus	heads			
Ranunculus	White Water			
aquatilis aquatilis	Buttercup			
Ranunculus aquatilis diffusus				Not on any status
	Dooley Mountain			lists
Rorippa curvipes	Rocky Mountain Yellowcress			
Rumex salicifolius salicifolius	Willow Dock			
Rumex triangulivalvis				Not on any status lists
Sagittaria cuneata	Wapatum Arrowhead			
Sagittaria latifolia	Broadleaf	-		
latifolia	Arrowhead			
Salix exigua exigua	Narrowleaf Willow			
Salix exigua				Not on any status
hindsiana				lists
Salix gooddingii	Goodding's Willow			
Salix laevigata	Polished Willow			
Salix lasiandra lasiandra				Not on any status
Salix lutea	Yellow Willow			
Schoenoplectus	Hardstem Bulrush			
acutus				
occidentalis	Small-fruit Bulrush			
Scirpus microcarpus				
Senecio	Sweet Marsh		Special	CRPR - 4.2
hydrophiloides	Ragwort			
Senecio hydrophilus	Great Swamp Ragwort			
Sidalcea oregana	Oregon Checker-			
oregana	mallow			
Spirodela	NA	-		
polyrhiza				
Stuckenia				Not on any status
pectinata				lists
Symphyotrichum	Alkali Aster			
frondosum				
Typha latifolia	Broadleaf Cattail			
Veronica	NA			
anagallis-aquatica				
Veronica catenata	NA			Not on any status lists

Attachment D

The Nature Conservancy

July 2019



IDENTIFYING GDES UNDER SGMA

Best Practices for using the NC Dataset

The Sustainable Groundwater Management Act (SGMA) requires that groundwater dependent ecosystems (GDEs) be identified in Groundwater Sustainability Plans (GSPs). As a starting point, the Department of Water Resources (DWR) is providing the Natural Communities Commonly Associated with Groundwater Dataset (NC Dataset) online¹ to help Groundwater Sustainability Agencies (GSAs), consultants, and stakeholders identify GDEs within individual groundwater basins. To apply information from the NC Dataset to local areas, GSAs should combine it with the best available science on local hydrology, geology, and groundwater levels to verify whether polygons in the NC dataset are likely supported by groundwater in an aquifer (Figure 1)2. This document highlights six best practices for using local groundwater data to confirm whether mapped features in the NC dataset are supported by groundwater.

Figure 1. Considerations for GDE identification. Source: DWR²

¹ NC Dataset Online Viewer: https://gis.water.ca.gov/app/NCDatasetViewer/

² California Department of Water Resources (DWR). 2018. Summary of the "Natural Communities Commonly Associated with Groundwater" Dataset and Online Web Viewer. Available at: https://water.ca.gov/-/media/DWR-Website/Web-Pages/Programs/Groundwater-Management/Data-and-Tools/Files/Statewide-Reports/Natural-Communities-Dataset-Summary-Document.pdf

The NC Dataset identifies vegetation and wetland features that are good indicators of a GDE. The dataset is comprised of 48 publicly available state and federal datasets that map vegetation, wetlands, springs, and seeps commonly associated with groundwater in California³. It was developed through a collaboration between DWR, the Department of Fish and Wildlife, and The Nature Conservancy (TNC). TNC has also provided detailed guidance on identifying GDEs from the NC dataset⁴ on the Groundwater Resource Hub⁵, a website dedicated to GDEs.

BEST PRACTICE #1. Establishing a Connection to Groundwater

Groundwater basins can be comprised of one continuous aquifer (Figure 2a) or multiple aquifers stacked on top of each other (Figure 2b). In unconfined aquifers (Figure 2a), using the depth-to-groundwater and the rooting depth of the vegetation is a reasonable method to infer groundwater dependence for GDEs. If groundwater is well below the rooting (and capillary) zone of the plants and any wetland features, the ecosystem is considered disconnected and groundwater management is not likely to affect the ecosystem (Figure 2d). However, it is important to consider local conditions (e.g., soil type, groundwater flow gradients, and aquifer parameters) and to review groundwater depth data from multiple seasons and water year types (wet and dry) because intermittent periods of high groundwater levels can replenish perched clay lenses that serve as the water source for GDEs (Figure 2c). Maintaining these natural groundwater fluctuations are important to sustaining GDE health.

Basins with a stacked series of aquifers (Figure 2b) may have varying levels of pumping across aquifers in the basin, depending on the production capacity or water quality associated with each aquifer. If pumping is concentrated in deeper aquifers, SGMA still requires GSAs to sustainably manage groundwater resources in shallow aquifers, such as perched aquifers, that support springs, surface water, domestic wells, and GDEs (Figure 2). This is because vertical groundwater gradients across aquifers may result in pumping from deeper aquifers to cause adverse impacts onto beneficial users reliant on shallow aquifers or interconnected surface water. The goal of SGMA is to sustainably manage groundwater resources for current and future social, economic, and environmental benefits. While groundwater pumping may not be currently occurring in a shallower aquifer, use of this water may become more appealing and economically viable in future years as pumping restrictions are placed on the deeper production aquifers in the basin to meet the sustainable yield and criteria. Thus, identifying GDEs in the basin should done irrespective to the amount of current pumping occurring in a particular aquifer, so that future impacts on GDEs due to new production can be avoided. A good rule of thumb to follow is: if groundwater can be pumped from a well - it's an aquifer.

_

³ For more details on the mapping methods, refer to: Klausmeyer, K., J. Howard, T. Keeler-Wolf, K. Davis-Fadtke, R. Hull, A. Lyons. 2018. Mapping Indicators of Groundwater Dependent Ecosystems in California: Methods Report. San Francisco, California. Available at: https://groundwaterresourcehub.org/public/uploads/pdfs/iGDE data paper 20180423.pdf

⁴ "Groundwater Dependent Ecosystems under the Sustainable Groundwater Management Act: Guidance for Preparing Groundwater Sustainability Plans" is available at: https://groundwaterresourcehub.org/gde-tools/gsp-quidance-document/

⁵ The Groundwater Resource Hub: <u>www.GroundwaterResourceHub.org</u>

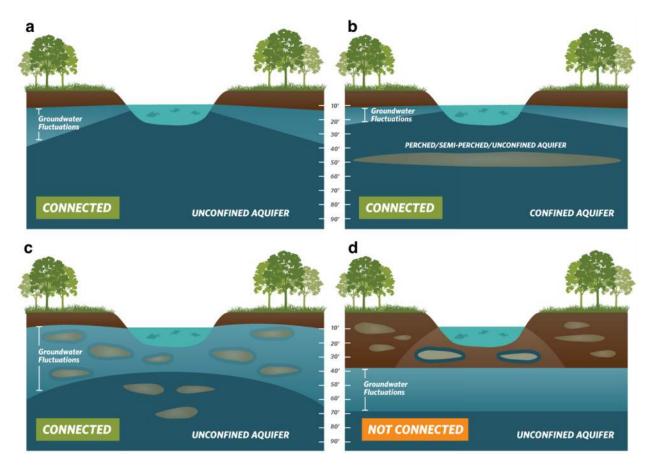


Figure 2. Confirming whether an ecosystem is connected to groundwater. Top: (a) Under the ecosystem is an unconfined aquifer with depth-to-groundwater fluctuating seasonally and interannually within 30 feet from land surface. (b) Depth-to-groundwater in the shallow aquifer is connected to overlying ecosystem. Pumping predominately occurs in the confined aquifer, but pumping is possible in the shallow aquifer. Bottom: (c) Depth-to-groundwater fluctuations are seasonally and interannually large, however, clay layers in the near surface prolong the ecosystem's connection to groundwater. (d) Groundwater is disconnected from surface water, and any water in the vadose (unsaturated) zone is due to direct recharge from precipitation and indirect recharge under the surface water feature. These areas are not connected to groundwater and typically support species that do not require access to groundwater to survive.

BEST PRACTICE #2. Characterize Seasonal and Interannual Groundwater Conditions

SGMA requires GSAs to describe current and historical groundwater conditions when identifying GDEs [23 CCR §354.16(g)]. Relying solely on the SGMA benchmark date (January 1, 2015) or any other single point in time to characterize groundwater conditions (e.g., depth-to-groundwater) is inadequate because managing groundwater conditions with data from one time point fails to capture the seasonal and interannual variability typical of California's climate. DWR's Best Management Practices document on water budgets⁶ recommends using 10 years of water supply and water budget information to describe how historical conditions have impacted the operation of the basin within sustainable yield, implying that a baseline⁷ could be determined based on data between 2005 and 2015. Using this or a similar time period, depending on data availability, is recommended for determining the depth-to-groundwater.

GDEs depend on groundwater levels being close enough to the land surface to interconnect with surface water systems or plant rooting networks. The most practical approach⁸ for a GSA to assess whether polygons in the NC dataset are connected to groundwater is to rely on groundwater elevation data. As detailed in TNC's GDE guidance document⁴, one of the key factors to consider when mapping GDEs is to contour depth-to-groundwater in the aquifer that is supporting the ecosystem (see Best Practice #5).

Groundwater levels fluctuate over time and space due to California's Mediterranean climate (dry summers and wet winters), climate change (flood and drought years), and subsurface heterogeneity in the subsurface (Figure 3). Many of California's GDEs have adapted to dealing with intermittent periods of water stress, however if these groundwater conditions are prolonged, adverse impacts to GDEs can result. While depth-to-groundwater levels within 30 feet⁴ of the land surface are generally accepted as being a proxy for confirming that polygons in the NC dataset are supported by groundwater, it is highly advised that fluctuations in the groundwater regime be characterized to understand the seasonal and interannual groundwater variability in GDEs. Utilizing groundwater data from one point in time can misrepresent groundwater levels required by GDEs, and inadvertently result in adverse impacts to the GDEs. Time series data on groundwater elevations and depths are available on the SGMA Data Viewer⁹. However, if insufficient data are available to describe groundwater conditions within or near polygons from the NC dataset, include those polygons in the GSP <u>until</u> data gaps are reconciled in the monitoring network (see Best Practice #6).

Figure 3. Example seasonality and interannual variability in depth-to-groundwater over time. Selecting one point in time, such as Spring 2018, to characterize groundwater conditions in GDEs fails to capture what groundwater conditions are necessary to maintain the ecosystem status into the future so adverse impacts are avoided.

⁶ DWR. 2016. Water Budget Best Management Practice. Available at: https://water.ca.gov/LegacyFiles/groundwater/sgm/pdfs/BMP_Water_Budget_Final_2016-12-23.pdf

⁷ Baseline is defined under the GSP regulations as "historic information used to project future conditions for hydrology, water demand, and availability of surface water and to evaluate potential sustainable management practices of a basin." [23 CCR §351(e)]

⁸ Groundwater reliance can also be confirmed via stable isotope analysis and geophysical surveys. For more information see The GDE Assessment Toolbox (Appendix IV, GDE Guidance Document for GSPs⁴).

⁹ SGMA Data Viewer: https://sgma.water.ca.gov/webgis/?appid=SGMADataViewer

BEST PRACTICE #3. Ecosystems Often Rely on Both Groundwater and Surface Water

GDEs are plants and animals that rely on groundwater for all or some of its water needs, and thus can be supported by multiple water sources. The presence of non-groundwater sources (e.g., surface water, soil moisture in the vadose zone, applied water, treated wastewater effluent, urban stormwater, irrigated return flow) within and around a GDE does not preclude the possibility that it is supported by groundwater, too. SGMA defines GDEs as "ecological communities and species that depend on groundwater emerging from aquifers or on groundwater occurring near the ground surface" [23 CCR §351(m)]. Hence, depth-to-groundwater data should be used to identify whether NC polygons are supported by groundwater and should be considered GDEs. In addition, SGMA requires that significant and undesirable adverse impacts to beneficial users of surface water be avoided. Beneficial users of surface water include environmental users such as plants or animals¹⁰, which therefore must be considered when developing minimum thresholds for depletions of interconnected surface water.

GSAs are only responsible for impacts to GDEs resulting from groundwater conditions in the basin, so if adverse impacts to GDEs result from the diversion of applied water, treated wastewater, or irrigation return flow away from the GDE, then those impacts will be evaluated by other permitting requirements (e.g., CEQA) and may not be the responsibility of the GSA. However, if adverse impacts occur to the GDE due to changing groundwater conditions resulting from pumping or groundwater management activities, then the GSA would be responsible (Figure 4).

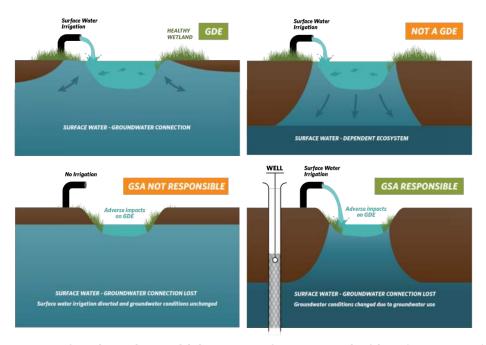


Figure 4. Ecosystems often depend on multiple sources of water. Top: (Left) Surface water and groundwater are interconnected, meaning that the GDE is supported by both groundwater and surface water. **(Right)** Ecosystems that are only reliant on non-groundwater sources are not groundwater-dependent. **Bottom: (Left)** An ecosystem that was once dependent on an interconnected surface water, but loses access to groundwater solely due to surface water diversions may not be the GSA's responsibility. **(Right)** Groundwater dependent ecosystems once dependent on an interconnected surface water system, but loses that access due to groundwater pumping is the GSA's responsibility.

¹⁰ For a list of environmental beneficial users of surface water by basin, visit: https://qroundwaterresourcehub.org/qde-tools/environmental-surface-water-beneficiaries/

BEST PRACTICE #4. Select Representative Groundwater Wells

Identifying GDEs in a basin requires that groundwater conditions are characterized to confirm whether polygons in the NC dataset are supported by the underlying aquifer. To do this, proximate groundwater wells should be identified to characterize groundwater conditions (Figure 5). When selecting representative wells, it is particularly important to consider the subsurface heterogeneity around NC polygons, especially near surface water features where groundwater and surface water interactions occur around heterogeneous stratigraphic units or aquitards formed by fluvial deposits. The following selection criteria can help ensure groundwater levels are representative of conditions within the GDE area:

- Choose wells that are within 5 kilometers (3.1 miles) of each NC Dataset polygons because they are more likely to reflect the local conditions relevant to the ecosystem. If there are no wells within 5km of the center of a NC dataset polygon, then there is insufficient information to remove the polygon based on groundwater depth. Instead, it should be retained as a potential GDE until there are sufficient data to determine whether or not the NC Dataset polygon is supported by groundwater.
- Choose wells that are screened within the surficial unconfined aquifer and capable of measuring the true water table.
- Avoid relying on wells that have insufficient information on the screened well depth interval for excluding GDEs because they could be providing data on the wrong aquifer. This type of well data should not be used to remove any NC polygons.

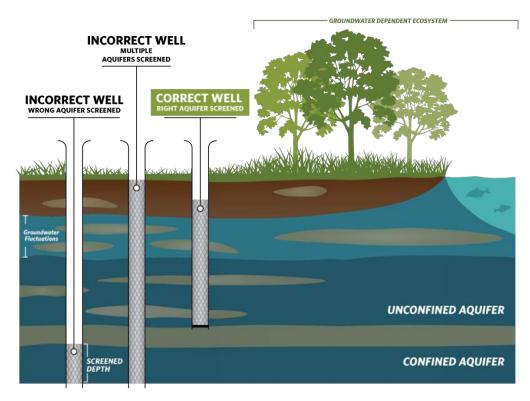
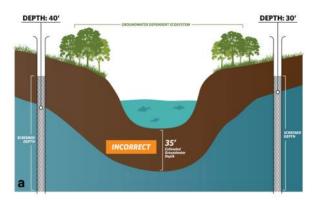


Figure 5. Selecting representative wells to characterize groundwater conditions near GDEs.

BEST PRACTICE #5. Contouring Groundwater Elevations

The common practice to contour depth-to-groundwater over a large area by interpolating measurements at monitoring wells is unsuitable for assessing whether an ecosystem is supported by groundwater. This practice causes errors when the land surface contains features like stream and wetland depressions because it assumes the land surface is constant across the landscape and depth-to-groundwater is constant below these low-lying areas (Figure 6a). A more accurate approach is to interpolate **groundwater elevations** at monitoring wells to get groundwater elevation contours across the landscape. This layer can then be subtracted from land surface elevations from a Digital Elevation Model (DEM)¹¹ to estimate depth-to-groundwater contours across the landscape (Figure b; Figure 7). This will provide a much more accurate contours of depth-to-groundwater along streams and other land surface depressions where GDEs are commonly found.



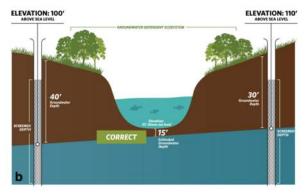


Figure 6. Contouring depth-to-groundwater around surface water features and GDEs. (a) Groundwater level interpolation using depth-to-groundwater data from monitoring wells. **(b)** Groundwater level interpolation using groundwater elevation data from monitoring wells and DEM data.

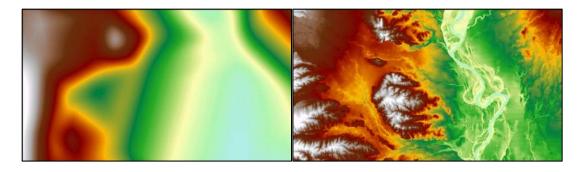


Figure 7. Depth-to-groundwater contours in Northern California. (Left) Contours were interpolated using depth-to-groundwater measurements determined at each well. **(Right)** Contours were determined by interpolating groundwater elevation measurements at each well and superimposing ground surface elevation from DEM spatial data to generate depth-to-groundwater contours. The image on the right shows a more accurate depth-to-groundwater estimate because it takes the local topography and elevation changes into account.

¹¹ USGS Digital Elevation Model data products are described at: https://www.usgs.gov/core-science-systems/ngp/3dep/about-3dep-products-services and can be downloaded at: https://iewer.nationalmap.gov/basic/

BEST PRACTICE #6. Best Available Science

Adaptive management is embedded within SGMA and provides a process to work toward sustainability over time by beginning with the best available information to make initial decisions, monitoring the results of those decisions, and using the data collected through monitoring programs to revise decisions in the future. In many situations, the hydrologic connection of NC dataset polygons will not initially be clearly understood if site-specific groundwater monitoring data are not available. If sufficient data are not available in time for the 2020/2022 plan, **The Nature Conservancy strongly advises that questionable polygons from the NC dataset be included in the GSP until data gaps are reconciled in the monitoring network.** Erring on the side of caution will help minimize inadvertent impacts to GDEs as a result of groundwater use and management actions during SGMA implementation.

KEY DEFINITIONS

Groundwater basin is an aquifer or stacked series of aquifers with reasonably well-defined boundaries in a lateral direction, based on features that significantly impede groundwater flow, and a definable bottom. 23 CCR §341(g)(1)

Groundwater dependent ecosystem (GDE) are ecological communities or species that depend on <u>groundwater emerging from aquifers</u> or on groundwater occurring <u>near the ground surface</u>. 23 CCR §351(m)

Interconnected surface water (ISW) surface water that is hydraulically connected at any point by a continuous saturated zone to the underlying aquifer and the overlying surface water is not completely depleted. 23 CCR §351(o)

Principal aquifers are aquifers or aquifer systems that store, transmit, and yield significant or economic quantities of groundwater to <u>wells, springs, or surface water systems.</u> 23 CCR §351(aa)

ABOUT US

The Nature Conservancy is a science-based nonprofit organization whose mission is to conserve the lands and waters on which all life depends. To support successful SGMA implementation that meets the future needs of people, the economy, and the environment, TNC has developed tools and resources (www.groundwaterresourcehub.org) intended to reduce costs, shorten timelines, and increase benefits for both people and nature.

Attachment E

Maps of representative monitoring sites in relation to key beneficial users

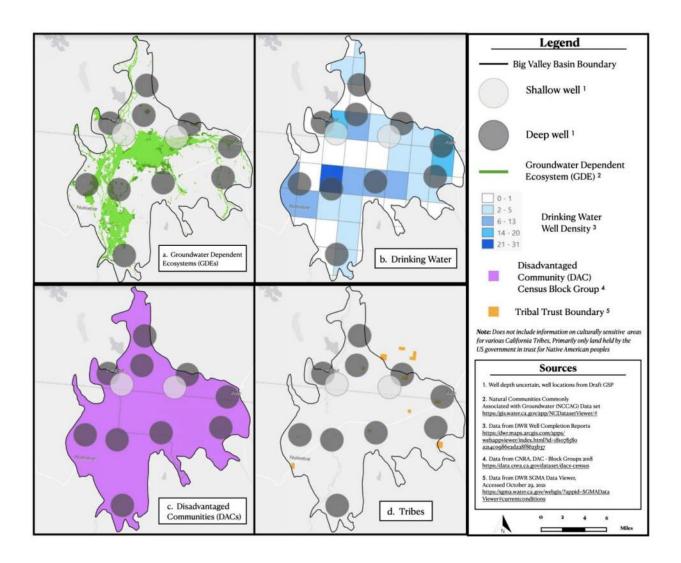


Figure 1. Groundwater elevation representative monitoring sites in relation to key beneficial users: a) Groundwater Dependent Ecosystems (GDEs), b) Drinking Water users, c) Disadvantaged Communities (DACs), and d) Tribes.

Letter 4

Nancy McAllister

From:

Land Use

Sent:

Thursday, October 7, 2021 2:05 PM

To:

The Nature Conservancy

Cc:

Gaylon Norwood; Tiffany Martinez (tiffanymartinez@co.modoc.ca.us); Nancy McAllister

Subject:

RE: Big Valley GSP Public comment period

Hi Paige,

As mentioned, the draft GSP is currently open for comment (see "Documents Open for Comment" at https://bigvalleygsp.org/) and it is anticipated that the end date for comment submittals will be determined at least 30 days in advance of the given date. A notice will be sent to our interested parties list once this end date has been established. As always, early comment submittals are greatly appreciated.

Thank you,

Land Use

Planning and Building Services 707 Nevada St. Suite 5 Susanville CA 96130 Phone: (530) 251-8269



From: The Nature Conservancy < tncgroundwater@gmail.com>

Sent: Tuesday, October 5, 2021 3:37 PM To: Land Use <landuse@co.lassen.ca.us>

Cc: Gaylon Norwood <GNorwood@co.lassen.ca.us>; Tiffany Martinez (tiffanymartinez@co.modoc.ca.us)

<tiffanymartinez@co.modoc.ca.us>; Nancy McAllister <nmcallister@co.lassen.ca.us>

Subject: Re: Big Valley GSP Public comment period

This message comes from an external sender. EXTERNAL SENDER WARNING!

Hi there,

Thank you for your response and this information. Our team intends to only comment on GSPs when they have been released for final public comments due to our goal of commenting on all medium and high priority basins. Will there be a release for a final public comment period after the committee meeting on 10/6? If not, I will keep an eye out for the 30-day notice end date of comment submissions.

Take care,

Paige

Operations Coordinator

On Eri	Oct 1	2021	2+ 1.02	DIVI	land	Hoo	danduca@ca	.lassen.ca.us> wrote	
OII FII,	OCL I,	ZUZI	at 4.05	FIVI	Lallu	OSE	< landuse (wco.	.idsseii.ca.us> wrote	

Hi Paige,

The Draft GSP that was presented to the Big Valley Groundwater Basin Advisory Committee (BVAC) on 9/9/21 (the version that is currently on the portal for comment - https://bigvalleygsp.org/) has been revised and the revised Draft GSP will be presented to the BVAC at their 10/6/21 meeting. This revised Draft GSP is contained in the meeting packet that was recently distributed to the BVAC members and posted for the public in the following locations:

https://bigvalleygsp.org/event/25

(under "Event Documents")

http://www.lassencounty.org/dept/planning-and-building-services/sustainable-groundwater-management-act/sgmadivision

(attached at bottom of page)

As this email address is on the interested parties list, you should have received a notice regarding the 10/6/21 meeting and location of the meeting materials. Please let us know if you are not receiving notices. The BVAC has not yet made a recommendation to the Lassen and Modoc County GSAs. **The document is currently open for comment** and comments are greatly appreciated during this early revision period. The BVAC was formed and has been holding public meetings since 2/3/20 so that interested parties could participate in shaping this document by providing useful comment throughout the process. An end date for the submittal of comments has not yet been determined. It is anticipated that this end date will be determined at least 30 days in advance of the given date. Please let us know if you have any other questions.

Thank you,

Land Use

Planning and Building Services

707 Nevada St. Suite 5

Susanville CA 96130

Phone: (530) 251-8269

Fax: (530) 251-8373



From: The Nature Conservancy < tncgroundwater@gmail.com >

Sent: Friday, October 1, 2021 11:57 AM

To: Land Use < landuse@co.lassen.ca.us >
Subject: Big Valley GSP Public comment period

This message comes from an external sender. EXTERNAL SENDER WARNING!

Hello,

I wanted to reach out to see when Lassen and Modoc County intend to release the Big Valley GSP for a public comment period. I see on the Big Valley portal all chapters have been released but I was informed that after the BVAC has made a recommendation on the draft GSP, it will be presented to the GSAs and the GSAs will then initiate a comment period. Do you know when this period will be?

Thank you,

Paige Hughes

Operations Coordinator

The Nature Conservancy

Nancy McAllister

From:

The Nature Conservancy < tncgroundwater@gmail.com>

Sent:

Thursday, September 16, 2021 9:43 AM

To:

Nancy McAllister

Cc:

Gaylon Norwood; Tiffany Martinez

Subject:

Re: Big Valley GSP drafts public comments deadline

This message comes from an external sender. EXTERNAL SENDER WARNING!

Thank you, Nancy! Yes, this is clear now. I will keep a lookout for when the GSAs have opened the public draft GSP for public comments.

Take care,

Paige

On Thu, Sep 16, 2021 at 9:25 AM Nancy McAllister < nmcallister@co.lassen.ca.us > wrote:

Hi Paige,

The attached schedule is only tentative and the timeline on the bottom of page 2 has not yet been reviewed or approved by the GSAs. That said, the expectation is that after the BVAC has made a recommendation on the draft GSP, it will be presented to the GSAs and the GSAs will then initiate a comment period. The exact dates for this comment period are currently unknown, but it will be set to end with enough time for comments to be considered and revisions made to the draft GSP in order for it to be approved by both GSAs prior to the January 31, 2022, deadline for submittal to DWR. The interested parties list will continue to receive updates on future meetings and developments. I hope that this information is helpful. Please let us know if you have any other questions.

Thank you,

Nancy J. McAllister

Associate Planner

Planning and Building Services

707 Nevada St. Suite 5

Susanville CA 96130

Phone: (530) 251-8269

Fax: (530) 251-8373



From: The Nature Conservancy < tncgroundwater@gmail.com >

Sent: Thursday, September 16, 2021 9:05 AM **To:** Nancy McAllister < nmcallister@co.lassen.ca.us>

Cc: Gaylon Norwood <GNorwood@co.lassen.ca.us>; Tiffany Martinez <tiffanymartinez@co.modoc.ca.us>

Subject: Re: Big Valley GSP drafts public comments deadline

This message comes from an external sender. EXTERNAL SENDER WARNING!

Thank you Nancy.

I was looking over the Tentative GSP schedule again, and it looks like there will be another public review starting on October 19th and ending December 3rd, could you confirm if this is still scheduled?

Paige

On Wed, Sep 15, 2021 at 4:26 PM Nancy McAllister <nmcallister@co.lassen.ca.us> wrote:

Hi Paige,

To be considered at the 10/6/21 BVAC meeting, comments must just be submitted prior to that date. If comments are submitted too late to be considered for the draft GSP revisions that will be presented at this meeting, the comments will be introduced separately during the meeting.

Nancy J. McAllister

Associate Planner

Planning and Building Services

707 Nevada St. Suite 5

Susanville CA 96130

Phone: (530) 251-8269

Fax: (530) 251-8373



From: The Nature Conservancy < tncgroundwater@gmail.com >

Sent: Wednesday, September 15, 2021 11:05 AM

To: Nancy McAllister <nmcallister@co.lassen.ca.us>

Cc: Gaylon Norwood < GNorwood@co.lassen.ca.us >; Tiffany Martinez < tiffanymartinez@co.modoc.ca.us >

Subject: Re: Big Valley GSP drafts public comments deadline

This message comes from an external sender. EXTERNAL SENDER WARNING!

Hi Nancy,

Thank you for this information. Is there an official deadline for when public comments are to be submitted?

Paige

On Wed, Sep 15, 2021 at 9:22 AM Nancy McAllister < nmcallister@co.lassen.ca.us > wrote:

Hi Paige,

The draft GSP is currently open for public comment and can be found at https://bigvalleygsp.org/ under the "Public Comments" section of the homepage. The draft GSP was introduced at the 9/9/21 Big Valley Groundwater Basin Advisory Committee (BVAC) meeting and contains the most current versions of all chapters. The goal is to revise this draft, considering all comments received in a timely manner by the BVAC and public, and bring it back to the October BVAC meeting. Again, we hope to address as many comments as possible in this revised GSP, in order for the BVAC to make a recommendation to the Groundwater Sustainability Agencies (GSAs). Please let us know if you have any other questions.

Thank you,

Nancy J. McAllister

Associate Planner

Planning and Building Services

707 Nevada St. Suite 5

Susanville CA 96130

Phone: (530) 251-8269

Fax: (530) 251-8373



From: The Nature Conservancy < tncgroundwater@gmail.com >

Sent: Wednesday, September 15, 2021 8:27 AM

To: Nancy McAllister < nmcallister@co.lassen.ca.us >

Cc: Gaylon Norwood <GNorwood@co.lassen.ca.us>; Tiffany Martinez <tiffanymartinez@co.modoc.ca.us> Subject: Re: Big Valley GSP drafts public comments deadline This message comes from an external sender. EXTERNAL SENDER WARNING! Good morning Nancy, I have been checking the Big Valley website and I see that all the chapters are available online but haven't received a notice about public comments on the complete draft. Thanks for your patience with me as I continue to check in on this, I just wanted to make sure I haven't missed anything about the public comment period. Since my team will be commenting on all medium and high priority GSPs, we haven't had the bandwidth to comment on Big Valley's chapters yet, but we intend to do a thorough review when the complete draft is open for comments. Thank you, Paige On Thu, Aug 19, 2021 at 8:06 AM Nancy McAllister <nmcallister@co.lassen.ca.us> wrote: Hi Page, Our goal is to have the complete draft GSP ready to introduce at the September 9, 2021, meeting of the Big Valley Groundwater Basin Advisory Committee (BVAC). If we are able to meet this goal, the GSP should be available online prior to the meeting date. Public comment on the draft GSP will be accepted starting as soon as it is released to the public, and ideally the bulk of comments would be submitted at this time, before we make our first round of revisions to the complete document. We hope to address as many comments as possible in the revised draft GSP that is scheduled to be presented to the BVAC in October, in order for the BVAC to make a recommendation to the Groundwater Sustainability Agencies (GSAs). As you are on the interested parties list, you will receive email notification regarding the upcoming meeting and materials available for review. Please let us know if you have any other questions. Thank you, Nancy J. McAllister Associate Planner

Planning and Building Services

707 Nevada St. Suite 5

Susanville CA 96130

Phone: (530) 251-8269

Fax: (530) 251-8373



From: The Nature Conservancy < tncgroundwater@gmail.com >

Sent: Wednesday, August 18, 2021 1:38 PM

To: Nancy McAllister < nmcallister@co.lassen.ca.us>

Subject: Re: Big Valley GSP drafts public comments deadline

This message comes from an external sender. EXTERNAL SENDER WARNING!

Good afternoon Nancy,

I'm reaching out to confirm the public comment period for the complete draft GSP. In the tentative GSP schedule it looks like mid-October will be the starting date - is this still the case?

Thank you, Paige Hughes

Operations Coordinator

The Nature Conservancy

On Fri, May 28, 2021 at 9:27 AM Nancy McAllister < nmcallister@co.lassen.ca.us > wrote:

Hi Paige,

Public comment will be accepted on all draft chapters of the Big Valley Groundwater Sustainability Plan (GSP) until the entire draft GSP has been completed. That said, we certainly encourage interested parties to review and comment on each "Public Draft" chapter as it is being actively reviewed by the Big Valley Groundwater Basin Advisory Committee (BVAC), so that comments can be efficiently considered prior to the BVAC "setting aside" the "Revised Draft" version. I have attached a flow chart that shows our local process for reviewing/revising GSP chapters. Once completed, a Public Draft chapter is typically included in the meeting packet for the next BVAC meeting, which is made available to the public on our websites one to two weeks ahead of said meeting (https://bigvalleygsp.org/; http://www.lassencounty.org/dept/planning-and-building-services/sustainablegroundwater-management-act-sgma). If public comment is received quickly enough, it can be considered during development of the Revised Draft chapter, which is typically introduced to the BVAC at the following meeting (these meetings have recently been occurring monthly). Once the BVAC has "set aside" a chapter, discussion of the chapter will no longer be placed on the agenda, and additional comments pertaining to that chapter will likely not be considered, until the entire draft GSP has been compiled. After the BVAC makes its recommendation to the Groundwater Sustainability Agencies (GSAs) regarding approval of the GSP, the entire Public Draft GSP will be circulated at the direction of the GSAs, prior to their final approval and subsequent submittal to the Department of Water Resources. For your reference, I have also attached the most recent version of our tentative GSP schedule, presented at the May BVAC meeting. Again, it is most helpful to receive comments early on. Please let us know if you have any other questions.

Thank you,

Nancy J. McAllister

Associate Planner

Planning and Building Services

707 Nevada St. Suite 5

Susanville CA 96130

Phone: (530) 251-8269

Fax: (530) 251-8373



From: The Nature Conservancy < tncgroundwater@gmail.com >

Sent: Thursday, May 27, 2021 9:24 AM

To: Nancy McAllister < nmcallister@co.lassen.ca.us >; tiffanymartinez@co.modoc.ca.us

Subject: Big Valley GSP drafts public comments deadline

This message comes from an external sender. EXTERNAL SENDER WARNING!

Good morning,

I see that the following Chapters are available for public comment:

Plan area

Hydrogeologic Conceptual Model

Groundwater Conditions

Water Budget

Sustainability Goal

Undesirable Results

Do you know when public comments are due for these chapters?

Thank you,

Paige Hughes


Operations Coordinator

The Nature Conservancy



GSP Development Process Chart

DEPARTMENT OF PLANNING AND BUILDING SERVICES 707 Nevada Street, Suite 5 · Susanville, CA 96130-3912 (530) 251-8269 · (530) 251-8373 (fax) www.co.lassen.ca.us

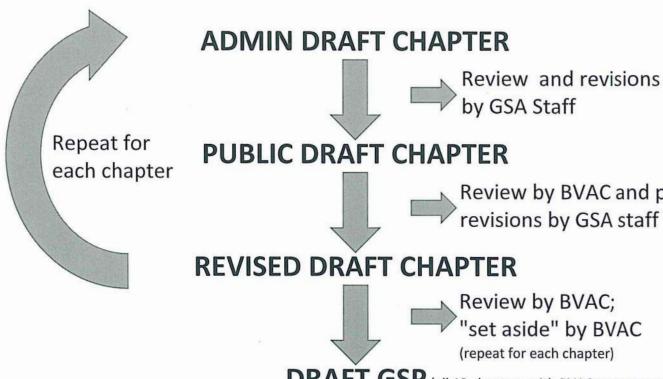

Review by BVAC and public; revisions by GSA staff Review by BVAC; "set aside" by BVAC (repeat for each chapter) DRAFT GSP (all 13 chapters with BVAC recommendation) Review by GSAs (BOSs); direction to circulate PUBLIC DRAFT GSP Review by public; revisions by GSA staff REVISED DRAFT GSP Review by GSAs (BOSs); approval by GSAs **FINAL GSP** Submittal to DWR by January 31, 2022 610

Tentative GSP and Meeting Schedule Proposed to the Big Valley Groundwater Advisory Committee (BVAC) on May 5, 2021

The intent of this document is to outline the meeting schedule of the Big Valley Groundwater Basin Advisory Committee (BVAC) in their effort to recommend a Groundwater Sustainability Plan (GSP) to the two Groundwater Sustainability Agencies (GSAs). This schedule outlines the anticipated remaining meetings for this effort (starting with the June 2, 2021, meeting). As of this date, the BVAC has "set aside" GSP Chapters One through Six. These "set aside" chapters will be considered again by the BVAC at one or more future meetings (starting with the October 6, 2021, meeting), after the entire draft GSP has been prepared. These "set aside" chapters are available on the project website: https://bigvalleygsp.org

The meeting dates and content indicated below are subject to change. Please visit the project website for the most current meeting information. In addition to the meetings listed below, a "special meeting" of the BVAC may be scheduled at any time. The agenda for any such special meeting will be published on the project website and posted in accordance with the Brown Act.

This schedule does not introduce all of the content that will be presented for any particular BVAC meeting. The intent of this document is to list, as accurately as possible, specific dates when it is anticipated that the various chapters of the GSP will be presented to the BVAC and public. Again, this schedule will be updated/confirmed as necessary.

The meeting dates provided below are followed by a "notes" section that further explain the anticipated review process and schedule. Dates presented in italics, on the second page of this document, after the dashed line, describe the steps required after BVAC involvement (i.e. after the BVAC has made a recommendation to the two GSAs).

Big Valley Groundwater Basin (BVAC) meeting dates:

<u>May 5, 2021</u> – Present Revised Draft Chapters 7 (Sustainable Management Criteria) to set aside; Introduce Public Draft Chapter 8 (Monitoring Networks); Start comment period for Public Draft Chapter 8

<u>June 2, 2021</u> – Discuss revisions to Chapter 8; Introduce Public Draft Chapters 9 and 10 (*Projects and Management Actions* and *Implementation Plan*); Start comment period for Public Draft Chapters 9 and 10

<u>July 7, 2021</u> – Present Revised Draft Chapter 8 to set aside; Discuss revisions to Chapters 9 and 10; Introduce Public Draft Chapters 11-13 (*Notice and Communications, Interagency Agreements*, & Reference List); Start comment period for Public Draft Chapters 11-13

<u>August 4, 2021</u> – Present Revised Draft Chapters 9 and 10 for BVAC to set aside; Discuss revisions to Chapters 11-13

Big Valley Groundwater Basin Advisory Committee (BVAC) Tentative GSP and Meeting Schedule May 5, 2021 Page 2 of 2

<u>September 1, 2021</u> – Present Revised Draft Chapters 11-13 for BVAC to set aside; Discuss additional revisions to all chapters previously set aside

October 6, 2021 – Present Revised Draft of Entire GSP; BVAC vote to recommend approval of "Draft GSP" (all Revised Draft Chapters) to GSAs

November 3, 2021 – special meeting if necessary

December 1, 2021 – special meeting if necessary

NOTES:

- The schedule above allows two months for each Chapter, including Chapters identified as requiring high input from stakeholders (i.e. Sustainable Management Criteria, Projects and Management Actions), to allow time for comments to be received and incorporated. This schedule references only the progression of the review of the individual Chapters of the GSP. In actuality, it is anticipated that some components of the GSP will be discussed at meetings prior to the date on which the associated Chapter is fully prepared and formally introduced. Discussion on additional information outside of the GSP chapters may also occur during the BVAC meetings. Those interested should consult the pertinent agenda.
- Meetings will be conducted at either the Adin Community Center (605 Highway 299, Adin, CA 96006) or at the Veterans Memorial Hall in Bieber (657-575 Bridge Street, Bieber, CA 96009). Please consult the appropriate agenda prior to any meeting.
- The meeting time for the above regularly scheduled meetings will be 2:00 p.m.

The GSA meeting dates proposed below are hypothetical, as they have not been approved by the GSAs. The dates are intended to present possible meeting dates, recognizing that the approved "Final GSP" must be submitted to the DWR by January 31, 2022.

October 19, 2021 – The Draft GSP will be presented to the two GSAs (Board packet to be available October 8, 2021); the two GSAs initiate a comment period for the "Public Draft GSP" and approve publication of a "Notice of Intent to Adopt the Big Valley Groundwater Basin Groundwater Sustainability Plan" no earlier than 90 days from Notice.

December 3, 2021 (45 days) – End of the comment period for the Public Draft GSP; potential Board agenda item for GSAs to discuss comments/edits; begin incorporation of comments for GSA approval of "Revised Draft GSP"

January 18, 2022 – Conduct public hearings for approval of the Final GSP by both GSAs (and direction to submit the Final GSP to the Department of Water Resources (DWR) by the **January 31, 2022** deadline (public hearing)

Letter 5

Doreen SmithPower

Alturas California 96101

10/5/2021

Big Valley Advisory Committee re: Ground Water Plan

RE: Meeting Date of October 6, 2021

Dear Committee Members:

I have summitted comments on previous chapters and Chapters 1-6 were previously approved for publication, and after that several and I mean several changes were made. I have read through all the chapters initially once.

General Comments: I commented earlier that there graphs and figures references and some are incorrectly referenced. If you simple pulled all graphs, figures, maps, & tables in other words all (referenced data) (which the legal community refers to as evidence) and put it in "Appendix of Referenced Data or Information" it would be much and I mean much easier to understand and read the text portion of the document. Also putting all referenced data in a separate document would eliminate the duplication of referenced data and would help clarify the referenced data that you have in place because all of the writers would have to refer to the same referenced data to prepare his/her or their agency segment. The TEXT of the document would simply refer to the Reference Appendix Data at page _____, and an Index of the Appendix of Referenced data would be prepared and should cross reference the page numbers in the text of the document. The committee indicated earlier that the plan would not be in print format and would only be available on line. However, the committee should make the "Appendix of Referenced Data available to all agencies and the public through a print shop and that should be published within the text of the document.

Another overall general comment: I have heard several people including committee members state that we don't fully understand "Recharge". Recharge in the document has been referred recharge areas and simply replenishing the water system.

<u>Recharge needs to be DEFINED</u> – replenish the water system yes—but in terms; state the objectives then the goal; and then the many outcomes –

- Into the river
- Into the wells (through plug and pull ponding rainwater replenishing treated before into wells) Referenced to the water quality well information data would be helpful.
- Into canals
- Into irrigation (healthy crops into water for ranching animals)
- Into drinking water ("systems" open and closed end uses and users to be notified of which)
- Water flows down hill and mountains generally have snow that flows down hill in creeks (some seasonal or rivers) the water is replenished naturally (mountains are terms recharge areas)
- Recharge is identified but not defined

The information thus far is valuable. I would like to see the information used as it was intended by participating agencies, and water users (yes that covers – who everybody). Thank you for your time. I will be attending the meeting via zoom.

Doreen SmithPower

Letter 6

Fairman, David

From: Tiffany Martinez <tiffanymartinez@co.modoc.ca.us>

Sent: Monday, November 29, 2021 10:15 AM

To: Fairman, David; Gaylon Norwood; Nancy McAllister; Laura Snell; David Lile; Maurice Anderson;

Petersen, Christian; Aaron Albaugh

Subject: [EXT] Fwd: Comment submission glitch

EXTERNAL EMAIL

Tiffany Martinez

Clerk of the Board/Assistant County Administrative Officer Modoc County

204 South Court Street Alturas, CA 96101 Office: (530) 233-6201

tiffanymartinez@co.modoc.ca.us

"The capacity to learn is a gift; the ability to learn is a skill; the willingness to learn is a choice."

Brian Herbert

CONFIDENTIALITY NOTICE: This communication with its contents may contain confidential and/or legally privileged information. It is solely for the use of the intended recipient(s). Unauthorized interception, review, use or disclosure is prohibited and may violate applicable laws including the Electronic Communications Privacy Act. If you are not the intended recipient, please contact the sender and destroy all copies of the communication

----- Forwarded message -----

From: Julie Dawson-Parlee < julie.parlee@gmail.com >

Date: Sun, Nov 28, 2021 at 10:56 PM Subject: Comment submission glitch

To: Tiffany Martinez < tiffanymartinez@co.modoc.ca.us >, < gcphelp@geiconsultants.com >


Hi Tiffany & GEI,

I've tried multiple times now to submit my list of comments on the GSP website tonight, and I have yet to get a confirmation email, so I assume none of my attempts have been successful. When I click the "I'm not a robot" button, the first time it didn't bring up a photo collage so I clicked "Submit" and it gave me an error message that I had to click the "I'm not a robot" button again. I've gone through this process four or five times and it's the same every time. Nothing I do can convince the program I'm not a robot, apparently. Or, because I took a while putting in multiple comments, the form might have timed out before I was done. Since the comment deadline is soon, I'm copying and pasting it into this email and you guys can figure out what's wrong with the website.

Additionally, I have a fairly long list of punctuation and grammar edits if anyone is still interested. I might just scan the list I've written out and send it once I've gotten through the whole document. It might be a little cryptic, but most things are pretty clear if you reference the page and line number. There are also inconsistencies that could be addressed, like the capitalization on the Acronyms & Abbreviations section: if they're not acronyms for proper nouns, the description doesn't have to be capitalized (IM, IWFM, LNAPL, LUST, MCL, MOU, MT, MTBE, NCAG, NR, NSP --unless Nonpoint Source Program is a proper name, OS, OWTS, SB, SMC, TMDL, WAA, WDR, WY). There are spacing issues that appeared on this draft, as well, on GIS, MO, MT, and SY. I'll try to finish the list and get it to you since I've marked the binder again, but it's far less than the first round and I don't want to give up this copy. Lol! Tiffany, it's been really helpful to have these copies of the Plan--thank you again!

Thanks,

Julie Parlee 530-260-0236

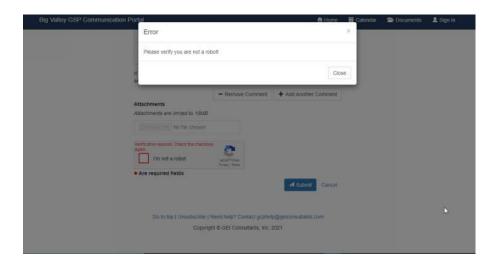

First Name

Last Name

Agency/Organization

Property Address [Property address -Only-]

City

Zip Code

Email

COMMENTS [BigValleyGSP_PublicReviewDraft_2021_10_28.pdf \/] BigValleyGSP_PublicReviewDraft_2021_10_28.pdf

[]

- BigValleyGSP_PublicReviewDraft_2021_10_28.pdf
- BigValleyGSP_PublicReviewDraft_2021_10_28_Appendices.pdf
- General Comment

Page Number(s)

Line Number(s)

With all the evidence of how inaccurate and unfair the Basin boundary is, it seems abrupt to just say that the GSAs will submit a Basin boundary modification. Perhaps it should say that the GSAs will continue to submit Basin boundary modification requests as long as DWR continues to ignore the science and updated information available. This section also needs to be specific in mentioning that the majority neighboring landholder to the Basin is the USFS, so accurate boundaries would increase the likelihood of cooperation and partnership in recharge projects.

If commenting on multiple documents or multiple sections of a document, please submit as separate comments.

COMMENTS [BigValleyGSP PublicReviewDraft 2021 10 28.pdf \/] BigValleyGSP PublicReviewDraft 2021 10 28.pdf 1 BigValleyGSP PublicReviewDraft 2021 10 28.pdf

- BigValleyGSP_PublicReviewDraft_2021_10_28_Appendices.pdf
- **General Comment**

Page Number(s)

Line Number(s) 2207-2211

Of the Action Levels listed, only the first one requires five years of measurable change, but the other two only require one year of decline, which seems like an error. One dry year hardly seems justification for drastic action, but this section seems to indicate that could be the case. But, on the other hand, it's also guite vague on line 2205 to say that "...actions may be considered, at the discretion of the GSAs..." and it seems to render the thresholds inconsequential if the GSAs don't want to take action.

If commenting on multiple documents or multiple sections of a document, please submit as separate comments.

Add Another CommentRemove Comment

COMMENTS [BigValleyGSP_PublicReviewDraft_2021_10_28.pdf \/] BigValleyGSP PublicReviewDraft 2021 10 28.pdf 1 BigValleyGSP PublicReviewDraft 2021 10 28.pdf BigValleyGSP_PublicReviewDraft_2021_10_28_Appendices.pdf

General Comment

Line Number(s) 2596-2626

Page Number(s)

RE: AgMAR -- What constitutes "excess surface water"—how is "excess" defined? Will there be expedited processes and money awarded for citizens to build safer water storage options that do not require them to endanger themselves by manually replacing boards in diversions during high water events in order to capture surface water? There needs to be discussion in this section of the report about the necessity of a dam further upstream to regulate the flow of this "excess" water in order for it to be slowed enough to be captured for future use and recharge. Currently, high water events saturate the valley and flow downstream out of Big Valley, leaving very little actual stored water. Additionally, existing water regulations require discharge of captured excess surface water after 30 days, but that limits our ability to actually use surface water toward groundwater recharge. With the unpredictable timing of winter storms, it means that water captured in March won't be available in May, when it might actually be useful to use for irrigation, thus reducing the dependence on groundwater. Historically, the highest water events in Big Valley have happened in February and March, too early to be used when it's time to irrigate. Will new policies be considered as a result of SGMA to assist stakeholders in actually achieving recharge? However, early capture of excess surface water could lead to saturation of water storage areas and an elevated risk of flooding should another high water event occur when storage areas are already full. The unintended risks and

If commenting on multiple documents or multiple sections of a document, please submit as separate comments.

Add Another CommentRemove Comment

consequences of recharge projects need to be acknowledged.

COMMENTS [BigValleyGSP_PublicReviewDraft_2021_10_28.pdf \/]
BigValleyGSP_PublicReviewDraft_2021_10_28.pdf

BigValleyGSP_PublicReviewDraft_2021_10_28.pdf
BigValleyGSP_PublicReviewDraft_2021_10_28_Appendices.pdf
General Comment

Page Number(s)

Line Number(s) 2628-2638

RE: Drainage or Basin Recharge -- The same risk applies to capturing water to fill storage areas, then causing excessive flooding if a big storm hits. Legal action was taken years ago in Big Valley by a landowner whose land was damaged by a neighbor's water management that caused flooding; will there be protection for landowners participating in this kind of recharge if it has unintended consequences? What recourse will there be for neighbors affected by recharge projects gone awry?

If commenting on multiple documents or multiple sections of a document, please submit as separate comments.

Add Another CommentRemove Comment

COMMENTS [BigValleyGSP_PublicReviewDraft_2021_10_28.pdf \/] BigValleyGSP_PublicReviewDraft_2021_10_28.pdf []

- BigValleyGSP_PublicReviewDraft_2021_10_28.pdf
- BigValleyGSP PublicReviewDraft 2021 10 28 Appendices.pdf
- General Comment

Page Number(s)

Line Number(s) 2640-2671

RE: Aquifer Storage and Recovery and Injection Wells -- Again, worth asking: WHERE WILL THE RECHARGE WATER COME FROM, WHO CONTROLS IT, WHO PAYS & HOW MUCH, AND HOW WILL STAKEHOLDERS ACCESS IT? And what could be some unintended consequences of adding chlorine to our groundwater? Would others affected by this action be able to sue if it's found to be detrimental to the overall groundwater quality?

If commenting on multiple documents or multiple sections of a document, please submit as separate comments.

Add Another CommentRemove Comment

COMMENTS [BigValleyGSP_PublicReviewDraft_2021_10_28.pdf \/] BigValleyGSP_PublicReviewDraft_2021_10_28.pdf

ſ .

- BigValleyGSP_PublicReviewDraft_2021_10_28.pdf
- BigValleyGSP_PublicReviewDraft_2021_10_28_Appendices.pdf
- General Comment

Page Number(s)

Line Number(s) 2580-2594

For every recharge method, it must be asked and answered: WHERE WILL THE RECHARGE WATER COME FROM, WHO CONTROLS IT, WHO PAYS & HOW MUCH, AND HOW WILL STAKEHOLDERS ACCESS IT? Otherwise, this document is just a

theoretical fantasy (which it largely is due to the acknowledged data gaps and uncertain outcomes of everything except Allen Camp Dam).

If commenting on multiple documents or multiple sections of a document, please submit as separate comments.

Add Another CommentRemove Comment

COMMENTS [BigValleyGSP_PublicReviewDraft_2021_10_28.pdf \/] BigValleyGSP_PublicReviewDraft_2021_10_28.pdf

[]

- BigValleyGSP_PublicReviewDraft_2021_10_28.pdf
- BigValleyGSP_PublicReviewDraft_2021_10_28_Appendices.pdf
- General Comment

Page Number(s)

Line Number(s) 2757-2778

9.3.1 Expanding Existing Reservoirs -- Given the very small number of beneficiaries currently controlling and receiving water from the existing reservoirs in Big Valley, how could this option be used to benefit a greater number of stakeholders and effectively contribute to groundwater recharge? To refill Roberts Reservoir during high water events, the water must be pumped from the Pit. Who would incur that cost? How will this be achieved if the watermaster is already being told by DWR not to put the headgate in this year to capture what little rain we've already had, after a record dry year when there's no guarantee of more rain this season? How can we as a local community control the water needed to achieve recharge? Will additional funding be made available to encourage private water storage projects, and will permits be expedited and new policies implemented to allow for more effective water capture and storage? Without assistance and accommodations, this valley is being asked to complete these tasks with our hands tied.

If commenting on multiple documents or multiple sections of a document, please submit as separate comments.

Add Another CommentRemove Comment

COMMENTS [BigValleyGSP_PublicReviewDraft_2021_10_28.pdf \/] BigValleyGSP PublicReviewDraft 2021 10 28.pdf

- BigValleyGSP PublicReviewDraft 2021 10 28.pdf
- BigValleyGSP_PublicReviewDraft_2021_10_28_Appendices.pdf
- General Comment

Page Number(s)

1

Line Number(s) 2783-2813

9.3.2 Allen Camp Dam: The Allen Camp Dam project is widely acknowledged to be the one action that would make the most significant difference in Big Valley's water situation and solve virtually all the problems the GSP outlines, yet it gets very little support in this document as a top priority. With the Federal Government releasing record amounts of spending on "infrastructure" right now, it seems worth adding as much support as possible for moving forward with Allen Camp. Costs and government regulations are typically cited as the reason the Dam isn't aggressively pursued, but looking realistically at the money proposed for just the studies and smaller alternative recharge projects, it seems a case could be made for putting that energy, effort, and expense into a solution that will actually fix the problem for the long term. Additionally, the economic impact study that effectively killed the Dam project in 1981 was an inadequate, incompetent, and not-in-good-faith effort, which did not really even consider any possible economic benefit beyond Big Valley. The mathematical formula used to justify abandoning the Dam plan was wholly inadequate to portray any realistic economic impact. We need to point out the

multitude of benefits to the entire region that could come from a sizable lake's recreation area, wildlife habitat, downstream users, power generation, constant and controllable flow of the Pit River year-round, and potential benefit to users all the way down the state.

If commenting on multiple documents or multiple sections of a document, please submit as separate comments.

Add Another CommentRemove Comment

COMMENTS [BigValleyGSP_PublicReviewDraft_2021_10_28.pdf V]
BigValleyGSP_PublicReviewDraft_2021_10_28.pdf

| BigValleyGSP_PublicReviewDraft_2021_10_28.pdf
| BigValleyGSP_PublicReviewDraft_2021_10_28.pdf
| BigValleyGSP_PublicReviewDraft_2021_10_28.pdf

Page Number(s)

Line Number(s) 2816-2855

General Comment

9.4.1 Forest Health / Conifer and Juniper Thinning: The point needs to be made that prompt and beneficial action from the USFS and other government agencies is essential for Big Valley to be successful in reaching its recharge goals. If DWR is holding Big Valley water users to these standards of water management, then the government agencies who are our neighbors need to do their part in managing resources appropriately to help toward the same goals. Which USFS actions (or lack of action) cause recharge not to happen as effectively? What recourse do we as a community have to point out problems and expect results in order to achieve recharge?