

# **Big Valley Groundwater Basin Advisory Committee (BVAC)**

## **Unapproved Meeting Minutes**

### **BVAC Members:**

**Lassen County BVAC** – Aaron Albaugh, Board Representative; Gary Bridges, Alt. Board Representative; Kevin Mitchell, Public Representative; Duane Conner, Public Representative  
**Modoc County BVAC** – Geri Byrne, Board Representative; Ned Coe, Alt. Board Representative; Jimmy Nunn, Public Representative; John Ohm, Public Representative

---

Thursday, September 9, 2021

2:00 PM

Adin Community Center  
605 Highway 299  
Adin, CA 96006

---

BVAC Convene in Special Session.

Present: Committee Members: Byrne, Albaugh, Conner, Ohm, and Nunn.  
Absent: Committee Members: Mitchell

Also in attendance: BVAC Staff Tiffany Martinez  
BVAC Staff Gaylon Norwood (designated BVAC Secretary)  
BVAC Recorder Brooke Suarez  
Alt. Board Representative Gary Bridges

BVAC Chairman Byrne called the meeting to order at 2:06 p.m. She read the public comment rules for the meeting.

**Flag Salute:** Chairman Byrne requested Representative Nunn lead the Pledge of Allegiance.

**General Update by Secretary:** None

**Matters Initiated by Committee Members:** Nunn asked if GEI was using data from Stone Coal. David Fairman responded that data from Stone Coal is available from 2010-2020 but prior to that it is in paper form and will be difficult to obtain.

Representative Mitchell subsequently arrived at 2:08.

**Correspondence** (unrelated to a specific agenda item): G. Norwood stated that the correspondence is related to subject #3 and will be brought up then.

## **Approval of Minutes (July 7, 2021) –**

**A motion was made by Vice-Chairman Albaugh to approve BVAC meeting minutes from July 7, 2021. The motion was seconded by Representative Nunn. The motion was carried by the following vote:**

**Aye:** 6 – Byrne, Albaugh, Mitchell, Conner, Ohm, and Nunn.

Laura Snell facilitated the meeting.

### **SUBJECT #1:**

Introduction of public comments received on GSP chapters during the August 14, 2021, Groundwater and Watershed Health Workshop

### **ACTION REQUESTED:**

1. Receive reports from the BVAC Secretary, Staff, and/or Consultant.
2. Receive public comment.

L. Snell gave a brief recap of the workshop that was held August 14, 2021 in Bieber. The workshop received more ideas for projects from those in attendance. They had presenters and took comments.

Presenters were: Claire York and Laura Snell gave background GSP project.  
Shari Stevenson from the Pitt River RCD gave a lot of suggestions for projects.  
Pam Jacomini gave a presentation on the Irrigated Lands Regulatory Program, which is a fee program.  
Ian Espinoza of DWR gave presentation on the Aero-electromagnetic (AEM) survey that will be done in Big Valley.

Comments were pertaining to: Watershed health  
Wells  
Conservation  
Resources available  
Water storage  
Concerns about the future of Big Valley

Committee members comments: Vice-Chairman Albaugh said the team did a great job at the workshop. Representative Nunn asked if the AEM has been scheduled or if a flight plan has been determined. L. Snell said the neither has been established.

Online public comment: None

Public comment: None

**SUBJECT #2:**

Introduction of the Public Draft Groundwater Sustainability Plan (GSP – *all chapters*)

**ACTION REQUESTED:**

1. Receive reports from the pertinent ad hoc committees, BVAC Secretary, Staff, and/or Consultant.
2. Receive public comment.

G. Norwood reviewed the GSP time schedule and the approval process of the GSP. Chapter sections were identified; Chapters 1-3 give the background, Chapters 4-6 are the science chapters and the GSAs had to rely on GEI Consultants for this data, Chapters 7-9 were the planning chapters and where the GSAs had the most input, and Chapters 10-12 are the project implementation chapters. He also recapped the changes to the GSP “set aside” chapters.

Detailed review of Chapters 1-3 was presented by T. Martinez.

Committee comment: Committee members had many verbiage and grammar changes.

Vice-Chairman Albaugh commented that the GSP needs to be consistent regarding the data numbers used throughout. He pointed out that the wildlife area is NOT a managed area. He wanted an addition to the GSP goal to be to make the basin a “low priority basin.” He stated that the GSP has to be scientific but DWR can have a subjective scoring system, i.e. using a 60-year-old map to identify the basin boundary. He wants DWR’s flaws, data gaps, and inconsistencies pointed out in the GSP, especially as they relate to the basin boundary lines.

Representative Mitchell was concerned with the single principle aquifer as written in the GSP. D. Fairman responded that by having one aquifer it reduces future work that will need to be done (thresholds and monitoring).

Chairman Byrne was pointing out that the verbiage and grammar should be correct at this stage of the GSP. D. Fairman said that the GSP is currently under going editing by GEI staff.

Online public comment: I. Espinoza of DWR stated the EAM is not scheduled yet.

Julie commented that the inventory of wells drilled to current standards in Adin is incomplete. There are at least 50 wells in the Adin main block. The concept that the majority of wells here are “hand-dug,” deficient because they are less than 100’ deep, or substandard because they don’t have a modern sanitary seal appears to discount the importance of maintaining an adequate groundwater resource here. D. Smith-Powers wanted to know where to write comments that the committee would see, that there was no packet on the portal, she wants feedback on comments, she thought chapters 1-6 were passed for publishing so she wanted to know why we were reviewing. She also had comments on wells.

Public comment: Gary Monchamp was concerned with the single aquafer and how does that relate to one person having water and another having no water. How will one aquafer be managed? He would also like to see an economic impact report of the GSP.

Detailed review of Chapters 4-6 was presented by D. Fairman.

Committee comment: Committee members had many verbiage and grammar changes.

T. Martinez said that Figures 4-9 through 4-11 should include information outside the basin. She also did not like Figure 4-12. Chairman Byrne and Vice-Chairman Albaugh both said to take that table out if not needed.

Discussion was held on subsidence in Chapter 5. Subsidence should be presented in a way to show minimal subsidence. Section 5.6 needs to be reviewed in an ad hoc committee meeting. GEI will continue to work on Chapter 5.

D. Fairman explained some of the gross estimates that went into the water budget in Chapter 6. Discussion was held on the accuracy of the maps. Vice-Chairman Albaugh asked L. Snell and D. Lile if the water budget worked for them. The response was that with so many assumptions, the budget will definitely change in the 5-year update. T. Martinez wanted the word “estimated” added to all of the diagrams and maps so that all the maps and tables are not considered set in stone.

Online public comment: D. Smith-Powers wrote that the total number of wells in Big Valley needs to be defined. She also suggested that maps be certified by the preparer and be attached to the appendix of evidence. She asked if a title company could review the maps and certify by parcel number.

Public comment: None



Detailed review of Chapters 7-9 was presented by D. Lile. He recapped the planning and implementation topics of these three chapters. He went over the various project ideas and where they came from and that there may be various funding sources available.

Committee comment: Committee members had many verbiage and grammar changes.

Vice-Chairman Albaugh wanted to add the undesirable result of Big Valley stays as a high priority basin.

Online public comment: D. Smith-Powers had comments on wells and defined acre feet. It is hard to comment online. Julie wants the deadline for submitting comments on the revision of the plan so they can be considered by the GSA. Julie also asked on what grounds are we economically disadvantaged?

Public comment: None

**SUBJECT #3:**

Introduction of the draft “Notice of Intent to Adopt the Big Valley Groundwater Basin Groundwater Sustainability Plan”

**ACTION REQUESTED:**

1. Receive report from the BVAC Secretary, Staff, and/or Consultant.
2. Receive public comment.
3. Possible recommendation to the GSAs regarding language for the notice.

G. Norwood presented “Exhibit A” which was the correspondence regarding the adoption of the Big Valley Groundwater Sustainability Plan. He reviewed the requirements of notice being sent out.

Committee comment: None

Online public comment: None

Public comment: None

**Matters Initiated by the General Public** (regarding subjects not on the agenda): None

**Establish next meeting date:** October 6, 2021 at 2:00 pm in Bieber.

**Adjournment:** There being no further business, Chairman Byrne adjourned the meeting at 6:43 pm.

RESOLUTION NO. \_\_\_\_\_

RESOLUTION OF THE BIG VALLEY GROUNDWATER BASIN ADVISORY COMMITTEE  
MAKING RECOMMENDATION TO THE LASSEN AND MODOC COUNTY  
GROUNDWATER SUSTAINABILITY AGENCIES REGARDING A GROUNDWATER  
SUSTAINABILITY PLAN.

WHEREAS, in September 2014, the Governor signed into law a legislative package (three bills), collectively known as the Sustainable Groundwater Management Act (SGMA), which requires local agencies with land use and/or water management or water supply authority to do certain things to reach sustainability of medium and high priority groundwater basins as designated by the State of California Department of Water Resources (DWR). SGMA became effective on January 1, 2015; and

WHEREAS, the Big Valley Groundwater Basin (BVGB) has been designated a medium priority basin by the DWR; and

WHEREAS, the Lassen and Modoc County Board of Supervisors adopted resolutions (17-013 and 2017-09 respectively) declaring themselves to be the Groundwater Sustainability Agency (GSA) for the portion of the BVGB within their respective jurisdictions; and

WHEREAS, GSAs are required to develop Groundwater Sustainability Plans (GSP) for all medium and high priority basins, and said GSP for the BVGB is to be submitted to the DWR by January 31, 2022; and

WHEREAS, the Big Valley Groundwater Basin Advisory Committee (BVAC) was formed through a memorandum of understanding (MOU) to advise both the Lassen and Modoc County GSAs on the preparation of a GSP for the basin; and

WHEREAS, the BVAC has held approximately fifteen public meetings to review and propose draft text for a GSP and to receive and consider public comment from local stakeholders; and

WHEREAS, a revised draft GSP has been assembled with BVAC guidance.

NOW, THEREFORE, BE IT RESOLVED AS FOLLOWS:

1. The BVAC hereby recommends that the GSAs receive the Draft Groundwater Sustainability Plan, including incorporation of all edits and corrections identified at the October 6, 2021, meeting of the BVAC.
2. The BVAC hereby recommends that the GSAs (or GSA staff) initiate a 45-day public comment period for the Draft Groundwater Sustainability Plan.

3. The BVAC hereby recommends that each GSA conduct at least one public hearing to consider adoption of said Groundwater Sustainability Plan, as is required by the Sustainable Groundwater Management Act.
4. The BVAC hereby recommends that the GSAs provide direction to staff, consultants or others to make any edits or corrections the GSAs may identify and adopt and submit the final Groundwater Sustainability Plan to the Department of Water Resources by January 31, 2022.

PASSED AND ADOPTED at a regular meeting of the Big Valley Groundwater Basin Advisory Committee, on the 6<sup>th</sup> day of October 2021, by the following vote:

AYES: \_\_\_\_\_

NOES: \_\_\_\_\_

ABSTAIN: \_\_\_\_\_

ABSENT: \_\_\_\_\_

\_\_\_\_\_  
Chairman  
Big Valley Groundwater Basin Advisory Committee

ATTEST:

\_\_\_\_\_  
Maurice L. Anderson, Secretary  
Big Valley Groundwater Basin Advisory Committee

## Big Valley Groundwater Sustainability Plan GSP Regulations Checklist (Elements Guide) for Public Draft GSP: August 26, 2021

This checklist of the GSP Elements and indicates where in the GSP each element of the regulations is addressed.

Article 5. Plan Contents for Big Valley Groundwater Basin			GSP Document References				Notes
			Page Numbers of Plan	Or Section Numbers	Or Figure Numbers	Or Table Numbers	
§ 354.		<b>Introduction to Plan Contents</b>					
		This Article describes the required contents of Plans submitted to the Department for evaluation, including administrative information, a description of the basin setting, sustainable management criteria, description of the monitoring network, and projects and management actions.					
		Note: Authority cited: Section 10733.2, Water Code.					
		Reference: Section 10733.2, Water Code.					
SubArticle 1.		<b>Administrative Information</b>					
§ 354.2.		<b>Introduction to Administrative Information</b>					
		This Subarticle describes information in the Plan relating to administrative and other general information about the Agency that has adopted the Plan and the area covered by the Plan.					
		Note: Authority cited: Section 10733.2, Water Code.					
		Reference: Section 10733.2, Water Code.					
§ 354.4.		<b>General Information</b>					
		Each Plan shall include the following general information:					
(a)		An executive summary written in plain language that provides an overview of the Plan and description of groundwater conditions in the basin.		ES			
(b)		A list of references and technical studies relied upon by the Agency in developing the Plan. Each Agency shall provide to the Department electronic copies of reports and other documents and materials cited as references that are not generally available to the public.		12			
		Note: Authority cited: Section 10733.2, Water Code.					
		Reference: Sections 10733.2 and 10733.4, Water Code.					
§ 354.6.		<b>Agency Information</b>					
		When submitting an adopted Plan to the Department, the Agency shall include a copy of the information provided pursuant to Water Code Section 10723.8, with any updates, if necessary, along with the following information:					
(a)		The name and mailing address of the Agency.		2.1			
(b)		The organization and management structure of the Agency, identifying persons with management authority for implementation of the Plan.		2.2, 2.3			
(c)		The name and contact information, including the phone number, mailing address and electronic mail address, of the plan manager.		2.3			
(d)		The legal authority of the Agency, with specific reference to citations setting forth the duties, powers, and responsibilities of the Agency, demonstrating that the Agency has the legal authority to implement the Plan.		2.4			
(e)		An estimate of the cost of implementing the Plan and a general description of how the Agency plans to meet those costs.		10.6,10.7		10-4, 10-5	
		Note: Authority cited: Section 10733.2, Water Code.					
		Reference: Sections 10723.8, 10727.2, and 10733.2, Water Code.					
§ 354.8.		<b>Description of Plan Area</b>					

"X" indicates that the element has been addressed.

The page number will be filled in once the entire GSP is compiled.

Article 5. Plan Contents for Big Valley Groundwater Basin			GSP Document References				Notes
			Page Numbers of Plan	Or Section Numbers	Or Figure Numbers	Or Table Numbers	
		Each Plan shall include a description of the geographic areas covered, including the following information:					
(a)		One or more maps of the basin that depict the following, as applicable:					
	(1)	The area covered by the Plan, delineating areas managed by the Agency as an exclusive Agency and any areas for which the Agency is not an exclusive Agency, and the name and location of any adjacent basins.		3.1	3-1		
	(2)	Adjudicated areas, other Agencies within the basin, and areas covered by an Alternative.	N/A	3.1			There are no no adjudicated areas or areas covered by an Alternative.
	(3)	Jurisdictional boundaries of federal or state land (including the identity of the agency with jurisdiction over that land), tribal land, cities, counties, agencies with water management responsibilities, and areas covered by relevant general plans.		3.2	3-2		
	(4)	Existing land use designations and the identification of water use sector and water source type.		3.3	3-3, 3-4	3-1, 3-2	
	(5)	The density of wells per square mile, by dasymetric or similar mapping techniques, showing the general distribution of agricultural, industrial, and domestic water supply wells in the basin, including de minimis extractors, and the location and extent of communities dependent upon groundwater, utilizing data provided by the Department, as specified in Section 353.2, or the best available information.		3.4	3-5, 3-6, 3-7	3-3	
(b)		A written description of the Plan area, including a summary of the jurisdictional areas and other features depicted on the map.		3.1, 3.2	3-1, 3-2		
(c)		Identification of existing water resource monitoring and management programs, and description of any such programs the Agency plans to incorporate in its monitoring network or in development of its Plan. The Agency may coordinate with existing water resource monitoring and management programs to incorporate and adopt that program as part of the Plan.		3.5	3-8, 3-9, 3-10, 3-11	3-4, 3-5	
(d)		A description of how existing water resource monitoring or management programs may limit operational flexibility in the basin, and how the Plan has been developed to adapt to those limits.		3.5.5			
(e)		A description of conjunctive use programs in the basin.		3.6			No formally established conjunctive use programs are operating in the Basin
(f)		A plain language description of the land use elements or topic categories of applicable general plans that includes the following:					
	(1)	A summary of general plans and other land use plans governing the basin.		3.7	3-12		
	(2)	A general description of how implementation of existing land use plans may change water demands within the basin or affect the ability of the Agency to achieve sustainable groundwater management over the planning and implementation horizon, and how the Plan addresses those potential effects		3.7.4, 3.7.5			
	(3)	A general description of how implementation of the Plan may affect the water supply assumptions of relevant land use plans over the planning and implementation horizon.		3.7.5			
	(4)	A summary of the process for permitting new or replacement wells in the basin, including adopted standards in local well ordinances, zoning codes, and policies contained in adopted land use plans.		3.7.6			

Article 5. Plan Contents for Big Valley Groundwater Basin			GSP Document References				Notes
			Page Numbers of Plan	Or Section Numbers	Or Figure Numbers	Or Table Numbers	
	(5)	To the extent known, the Agency may include information regarding the implementation of land use plans outside the basin that could affect the ability of the Agency to achieve sustainable groundwater management.		3.7.7			
(g)		A description of any of the additional Plan elements included in Water Code Section 10727.4 that the Agency determines to be appropriate.		3.9		3-6	
		Note: Authority cited: Section 10733.2, Water Code.					
		Reference: Sections 10720.3, 10727.2, 10727.4, 10733, and 10733.2, Water Code.					
<b>§ 354.10.</b>		<b>Notice and Communication</b>					
		Each Plan shall include a summary of information relating to notification and communication by the Agency with other agencies and interested parties including the following:					
(a)		A description of the beneficial uses and users of groundwater in the basin, including the land uses and property interests potentially affected by the use of groundwater in the basin, the types of parties representing those interests, and the nature of consultation with those parties.		11.4			
(b)		A list of public meetings at which the Plan was discussed or considered by the Agency.		11.5		11-1	Also Appendix 11A
(c)		Comments regarding the Plan received by the Agency and a summary of any responses by the Agency.		11.7			Also Appendix 11C
(d)		A communication section of the Plan that includes the following:					
	(1)	An explanation of the Agency's decision-making process.		11.6	11-1		
	(2)	Identification of opportunities for public engagement and a discussion of how public input and response will be used.		11.5, 11.7			
	(3)	A description of how the Agency encourages the active involvement of diverse social, cultural, and economic elements of the population within the basin.		11.4			
	(4)	The method the Agency shall follow to inform the public about progress implementing the Plan, including the status of projects and actions.		11.8			
		Note: Authority cited: Section 10733.2, Water Code.					
		Reference: Sections 10723.2, 10727.8, 10728.4, and 10733.2, Water Code					
<b>SubArticle 2.</b>		<b>Basin Setting</b>					
<b>§ 354.12.</b>		<b>Introduction to Basin Setting</b>					
		This Subarticle describes the information about the physical setting and characteristics of the basin and current conditions of the basin that shall be part of each Plan, including the identification of data gaps and levels of uncertainty, which comprise the basin setting that serves as the basis for defining and assessing reasonable sustainable management criteria and projects and management actions. Information provided pursuant to this Subarticle shall be prepared by or under the direction of a professional geologist or professional engineer.					
		Note: Authority cited: Section 10733.2, Water Code.					
		Reference: Section 10733.2, Water Code.					
<b>§ 354.14.</b>		<b>Hydrogeologic Conceptual Model</b>					
(a)		Each Plan shall include a descriptive hydrogeologic conceptual model of the basin based on technical studies and qualified maps that characterizes the physical components and interaction of the surface water and groundwater systems in the basin.		4			

Article 5. Plan Contents for Big Valley Groundwater Basin			GSP Document References				Notes
			Page Numbers of Plan	Or Section Numbers	Or Figure Numbers	Or Table Numbers	
(b)		The hydrogeologic conceptual model shall be summarized in a written description that includes the following:					
	(1)	The regional geologic and structural setting of the basin including the immediate surrounding area, as necessary for geologic consistency.		4.2	4-2		
	(2)	Lateral basin boundaries, including major geologic features that significantly affect groundwater flow.		4.2.1	4-2		
	(3)	The definable bottom of the basin.		4.4.3			
	(4)	Principal aquifers and aquitards, including the following information:					
	(A)	Formation names, if defined.		4.4.1	4-3,4-4		
	(B)	Physical properties of aquifers and aquitards, including the vertical and lateral extent, hydraulic conductivity, and storativity, which may be based on existing technical studies or other best available information.		4.4.5		4-2	
	(C)	Structural properties of the basin that restrict groundwater flow within the principal aquifers, including information regarding stratigraphic changes, truncation of units, or other features.		4.4.4	4-8		
	(D)	General water quality of the principal aquifers, which may be based on information derived from existing technical studies or regulatory programs.		4.7	4-13		
	(E)	Identification of the primary use or uses of each aquifer, such as domestic, irrigation, or municipal water supply.		4.6			
	(5)	Identification of data gaps and uncertainty within the hydrogeologic conceptual model		4.11			
(c)		The hydrogeologic conceptual model shall be represented graphically by at least two scaled cross-sections that display the information required by this section and are sufficient to depict major stratigraphic and structural features in the basin.		4.4.2	4-6,4-7		
(d)		Physical characteristics of the basin shall be represented on one or more maps that depict the following:					
	(1)	Topographic information derived from the U.S. Geological Survey or another reliable source.		4.1	4-1		
	(2)	Surficial geology derived from a qualified map including the locations of cross-sections required by this Section.		4.2,4.3	4-2,4-3,4-4		
	(3)	Soil characteristics as described by the appropriate Natural Resources Conservation Service soil survey or other applicable studies.		4.5	4-9,4-10,4-11		
	(4)	Delineation of existing recharge areas that substantially contribute to the replenishment of the basin, potential recharge areas, and discharge areas, including significant active springs, seeps, and wetlands within or adjacent to the basin.		4.8	4-14		
	(5)	Surface water bodies that are significant to the management of the basin.		4.9	4-14		
	(6)	The source and point of delivery for imported water supplies.	N/A				No water is imported to the BVGB
		Note: Authority cited: Section 10733.2, Water Code.					
		Reference: Sections 10727.2, 10733, and 10733.2, Water Code.					
§ 354.16.		<b>Groundwater Conditions</b>					
		Each Plan shall provide a description of current and historical groundwater conditions in the basin, including data from January 1, 2015, to current conditions, based on the best available information that includes the following:					
(a)		Groundwater elevation data demonstrating flow directions, lateral and vertical gradients, and regional pumping patterns, including:					



Article 5. Plan Contents for Big Valley Groundwater Basin			GSP Document References				Notes
			Page Numbers of Plan	Or Section Numbers	Or Figure Numbers	Or Table Numbers	
	(1)	Groundwater elevation contour maps depicting the groundwater table or potentiometric surface associated with the current seasonal high and seasonal low for each principal aquifer within the basin.		5.1.3	5-5,5-6		Also Appendix 5B
	(2)	Hydrographs depicting long-term groundwater elevations, historical highs and lows, and hydraulic gradients between principal aquifers.		5.1.1,5.1.2	5-2,5-3,5-4		Also Appendix 5A
(b)		A graph depicting estimates of the change in groundwater in storage, based on data, demonstrating the annual and cumulative change in the volume of groundwater in storage between seasonal high groundwater conditions, including the annual groundwater use and water year type.		5.2	5-7	5-2	
(c)		Seawater intrusion conditions in the basin, including maps and cross-sections of the seawater intrusion front for each principal aquifer.	N/A	5.3			Not applicable due to inland location.
(d)		Groundwater quality issues that may affect the supply and beneficial uses of groundwater, including a description and map of the location of known groundwater contamination sites and plumes.		5.4	5-8:5-15	5-3,5-4	
(e)		The extent, cumulative total, and annual rate of land subsidence, including maps depicting total subsidence, utilizing data available from the Department, as specified in Section 353.2, or the best available information.		5.5	5-16,5-17		
(f)		Identification of interconnected surface water systems within the basin and an estimate of the quantity and timing of depletions of those systems, utilizing data available from the Department, as specified in Section 353.2, or the best available information.		5.6	5-18		
(g)		Identification of groundwater dependent ecosystems within the basin, utilizing data available from the Department, as specified in Section 353.2, or the best available information.		5.7	5-19:5-22	5-5	
		Note: Authority cited: Section 10733.2, Water Code.					
		Reference: Sections 10723.2, 10727.2, 10727.4, and 10733.2, Water Code.					
<b>§ 354.18.</b>		<b>Water Budget</b>					
(a)		Each Plan shall include a water budget for the basin that provides an accounting and assessment of the total annual volume of groundwater and surface water entering and leaving the basin, including historical, current and projected water budget conditions, and the change in the volume of water stored. Water budget information shall be reported in tabular and graphical form.		6			
(b)		The water budget shall quantify the following, either through direct measurements or estimates based on data:					
	(1)	Total surface water entering and leaving a basin by water source type.		6.2	6-7		Also Appendix 6B and 6C
	(2)	Inflow to the groundwater system by water source type, including subsurface groundwater inflow and infiltration of precipitation, applied water, and surface water systems, such as lakes, streams, rivers, canals, springs and conveyance systems.		6.2	6-8		Also Appendix 6B and 6C
	(3)	Outflows from the groundwater system by water use sector, including evapotranspiration, groundwater extraction, groundwater discharge to surface water sources, and subsurface groundwater outflow.		6.2	6-8		Also Appendix 6B and 6C
	(4)	The change in the annual volume of groundwater in storage between seasonal high conditions.		6.2	6-8		Also Appendix 6B and 6C

Article 5. Plan Contents for Big Valley Groundwater Basin			GSP Document References				Notes
			Page Numbers of Plan	Or Section Numbers	Or Figure Numbers	Or Table Numbers	
	(5)	If overdraft conditions occur, as defined in Bulletin 118, the water budget shall include a quantification of overdraft over a period of years during which water year and water supply conditions approximate average conditions.		6.2	6-8		Also Appendix 6B and 6C
	(6)	The water year type associated with the annual supply, demand, and change in groundwater stored.		6.2	6-3		
	(7)	An estimate of sustainable yield for the basin.		6.2	6-8		
(c)		Each Plan shall quantify the current, historical, and projected water budget for the basin as follows:					
	(1)	Current water budget information shall quantify current inflows and outflows for the basin using the most recent hydrology, water supply, water demand, and land use information.		6.2, 6.3	6-4, 6-6:6-8		Also Appendix 6B and 6C
	(2)	Historical water budget information shall be used to evaluate availability or reliability of past surface water supply deliveries and aquifer response to water supply and demand trends relative to water year type. The historical water budget shall include the following:					
	(A)	A quantitative evaluation of the availability or reliability of historical surface water supply deliveries as a function of the historical planned versus actual annual surface water deliveries, by surface water source and water year type, and based on the most recent ten years of surface water supply information.		6.2			
	(B)	A quantitative assessment of the historical water budget, starting with the most recently available information and extending back a minimum of 10 years, or as is sufficient to calibrate and reduce the uncertainty of the tools and methods used to estimate and project future water budget information and future aquifer response to proposed sustainable groundwater management practices over the planning and implementation horizon.		6.2	6-4:6-7		Also Appendix 6B and 6C
	(C)	A description of how historical conditions concerning hydrology, water demand, and surface water supply availability or reliability have impacted the ability of the Agency to operate the basin within sustainable yield. Basin hydrology may be characterized and evaluated using water year type.		6.2			
	(3)	Projected water budgets shall be used to estimate future baseline conditions of supply, demand, and aquifer response to Plan implementation, and to identify the uncertainties of these projected water budget components. The projected water budget shall utilize the following methodologies and assumptions to estimate future baseline conditions concerning hydrology, water demand and surface water supply availability or reliability over the planning and implementation horizon:					
	(A)	Projected hydrology shall utilize 50 years of historical precipitation, evapotranspiration, and streamflow information as the baseline condition for estimating future hydrology. The projected hydrology information shall also be applied as the baseline condition used to evaluate future scenarios of hydrologic uncertainty associated with projections of climate change and sea level rise.		6.4	6-10, 6-11		

Article 5. Plan Contents for Big Valley Groundwater Basin			GSP Document References				Notes
			Page Numbers of Plan	Or Section Numbers	Or Figure Numbers	Or Table Numbers	
		(B)	Projected water demand shall utilize the most recent land use, evapotranspiration, and crop coefficient information as the baseline condition for estimating future water demand. The projected water demand information shall also be applied as the baseline condition used to evaluate future scenarios of water demand uncertainty associated with projected changes in local land use planning, population growth, and climate.	6.4	6-10, 6-11		
		(C)	Projected surface water supply shall utilize the most recent water supply information as the baseline condition for estimating future surface water supply. The projected surface water supply shall also be applied as the baseline condition used to evaluate future scenarios of surface water supply availability and reliability as a function of the historical surface water supply identified in Section 354.18(c)(2)(A), and the projected changes in local land use planning, population growth, and climate.	6.4	6-10, 6-11		
(d)			The Agency shall utilize the following information provided, as available, by the Department pursuant to Section 353.2, or other data of comparable quality, to develop the water budget:				
	(1)		Historical water budget information for mean annual temperature, mean annual precipitation, water year type, and land use.	6.2	6-3		
	(2)		Current water budget information for temperature, water year type, evapotranspiration, and land use.	6.2, 6.3			
	(3)		Projected water budget information for population, population growth, climate change, and sea level rise.	6.4			
(e)			Each Plan shall rely on the best available information and best available science to quantify the water budget for the basin in order to provide an understanding of historical and projected hydrology, water demand, water supply, land use, population, climate change, sea level rise, groundwater and surface water interaction, and subsurface groundwater flow. If a numerical groundwater and surface water model is not used to quantify and evaluate the projected water budget conditions and the potential impacts to beneficial uses and users of groundwater, the Plan shall identify and describe an equally effective method, tool, or analytical model to evaluate projected water budget conditions.	6			
(f)			The Department shall provide the California Central Valley Groundwater-Surface Water Simulation Model (C2VSIM) and the Integrated Water Flow Model (IWFM) for use by Agencies in developing the water budget. Each Agency may choose to use a different groundwater and surface water model, pursuant to Section 352.4.	N/A			C2VSIM does not apply to this Basin
			Note: Authority cited: Section 10733.2, Water Code.				
			Reference: Sections 10721, 10723.2, 10727.2, 10727.6, 10729, and 10733.2, Water Code.				
§ 354.20. Management Areas							
(a)			Each Agency may define one or more management areas within a basin if the Agency has determined that creation of management areas will facilitate implementation of the Plan. Management areas may define different minimum thresholds and be operated to different measurable objectives than the basin at large, provided that undesirable results are defined consistently throughout the basin.	7.4			No management areas were created for this GSP.
(b)			A basin that includes one or more management areas shall describe the following in the Plan:				

Article 5. Plan Contents for Big Valley Groundwater Basin			GSP Document References				Notes
			Page Numbers of Plan	Or Section Numbers	Or Figure Numbers	Or Table Numbers	
	(1)	The reason for the creation of each management area.		7.4			No management areas were created for this GSP.
	(2)	The minimum thresholds and measurable objectives established for each management area, and an explanation of the rationale for selecting those values, if different from the basin at large.		7.4			No management areas were created for this GSP.
	(3)	The level of monitoring and analysis appropriate for each management area.		7.4			No management areas were created for this GSP.
	(4)	An explanation of how the management area can operate under different minimum thresholds and measurable objectives without causing undesirable results outside the management area, if applicable.		7.4			No management areas were created for this GSP.
(c)		If a Plan includes one or more management areas, the Plan shall include descriptions, maps, and other information required by this Subarticle sufficient to describe conditions in those areas.		7.4			No management areas were created for this GSP.
		Note: Authority cited: Section 10733.2, Water Code.					
		Reference: Sections 10733.2 and 10733.4, Water Code.					
<b>SubArticle 3. Sustainable Management Criteria</b>							
<b>§ 354.22. Introduction to Sustainable Management Criteria</b>							
		This Subarticle describes criteria by which an Agency defines conditions in its Plan that constitute sustainable groundwater management for the basin, including the process by which the Agency shall characterize undesirable results, and establish minimum thresholds and measurable objectives for each applicable sustainability indicator.					
		Note: Authority cited: Section 10733.2, Water Code.					
		Reference: Section 10733.2, Water Code.					
<b>§ 354.24. Sustainability Goal</b>							
		Each Agency shall establish in its Plan a sustainability goal for the basin that culminates in the absence of undesirable results within 20 years of the applicable statutory deadline. The Plan shall include a description of the sustainability goal, including information from the basin setting used to establish the sustainability goal, a discussion of the measures that will be implemented to ensure that the basin will be operated within its sustainable yield, and an explanation of how the sustainability goal is likely to be achieved within 20 years of Plan implementation and is likely to be maintained through the planning and implementation horizon.		1.4			
		Note: Authority cited: Section 10733.2, Water Code.					
		Reference: Sections 10721, 10727, 10727.2, 10733.2, and 10733.8, Water Code.					
<b>§ 354.26. Undesirable Results</b>							
(a)		Each Agency shall describe in its Plan the processes and criteria relied upon to define undesirable results applicable to the basin. Undesirable results occur when significant and unreasonable effects for any of the sustainability indicators are caused by groundwater conditions occurring throughout the basin.		7.3			
(b)		The description of undesirable results shall include the following:					
	(1)	The cause of groundwater conditions occurring throughout the basin that would lead to or has led to undesirable results based on information described in the basin setting, and other data or models as appropriate.		7.3			

Article 5. Plan Contents for Big Valley Groundwater Basin			GSP Document References				Notes
			Page Numbers of Plan	Or Section Numbers	Or Figure Numbers	Or Table Numbers	
	(2)	The criteria used to define when and where the effects of the groundwater conditions cause undesirable results for each applicable sustainability indicator. The criteria shall be based on a quantitative description of the combination of minimum threshold exceedances that cause significant and unreasonable effects in the basin.		7.3			
	(3)	Potential effects on the beneficial uses and users of groundwater, on land uses and property interests, and other potential effects that may occur or are occurring from undesirable results.		7.3			
(c)		The Agency may need to evaluate multiple minimum thresholds to determine whether an undesirable result is occurring in the basin. The determination that undesirable results are occurring may depend upon measurements from multiple monitoring sites, rather than a single monitoring site.		7.3			
(d)		An Agency that is able to demonstrate that undesirable results related to one or more sustainability indicators are not present and are not likely to occur in a basin shall not be required to establish criteria for undesirable results related to those sustainability indicators.		7.3			
		Note: Authority cited: Section 10733.2, Water Code.					
		Reference: Sections 10721, 10723.2, 10727.2, 10733.2, and 10733.8, Water Code.					
<b>§ 354.28. Minimum Thresholds</b>							
(a)		Each Agency in its Plan shall establish minimum thresholds that quantify groundwater conditions for each applicable sustainability indicator at each monitoring site or representative monitoring site established pursuant to Section 354.36. The numeric value used to define minimum thresholds shall represent a point in the basin that, if exceeded, may cause undesirable results as described in Section 354.26.		7.3			
(b)		The description of minimum thresholds shall include the following:					
	(1)	The information and criteria relied upon to establish and justify the minimum thresholds for each sustainability indicator. The justification for the minimum threshold shall be supported by information provided in the basin setting, and other data or models as appropriate, and qualified by uncertainty in the understanding of the basin setting.		7.3			
	(2)	The relationship between the minimum thresholds for each sustainability indicator, including an explanation of how the Agency has determined that basin conditions at each minimum threshold will avoid undesirable results for each of the sustainability indicators.		7.3			
	(3)	How minimum thresholds have been selected to avoid causing undesirable results in adjacent basins or affecting the ability of adjacent basins to achieve sustainability goals.		7.3			
	(4)	How minimum thresholds may affect the interests of beneficial uses and users of groundwater or land uses and property interests.		7.3			
	(5)	How state, federal, or local standards relate to the relevant sustainability indicator. If the minimum threshold differs from other regulatory standards, the Agency shall explain the nature of and basis for the difference.		7.3			
	(6)	How each minimum threshold will be quantitatively measured, consistent with the monitoring network requirements described in Subarticle 4.		7.3			
(c)		Minimum thresholds for each sustainability indicator shall be defined as follows:					

Article 5. Plan Contents for Big Valley Groundwater Basin			GSP Document References				Notes
			Page Numbers of Plan	Or Section Numbers	Or Figure Numbers	Or Table Numbers	
	(1)	Chronic Lowering of Groundwater Levels. The minimum threshold for chronic lowering of groundwater levels shall be the groundwater elevation indicating a depletion of supply at a given location that may lead to undesirable results. Minimum thresholds for chronic lowering of groundwater levels shall be supported by the following:					
	(A)	The rate of groundwater elevation decline based on historical trends, water year type, and projected water use in the basin.		7.3.1, 5.1.1			Also Appendix 5A
	(B)	Potential effects on other sustainability indicators.		7.3.1			
	(2)	Reduction of Groundwater Storage. The minimum threshold for reduction of groundwater storage shall be a total volume of groundwater that can be withdrawn from the basin without causing conditions that may lead to undesirable results. Minimum thresholds for reduction of groundwater storage shall be supported by the sustainable yield of the basin, calculated based on historical trends, water year type, and projected water use in the basin.		7.3.2			
	(3)	Seawater Intrusion. The minimum threshold for seawater intrusion shall be defined by a chloride concentration isocontour for each principal aquifer where seawater intrusion may lead to undesirable results. Minimum thresholds for seawater intrusion shall be supported by the following:					
	(A)	Maps and cross-sections of the chloride concentration isocontour that defines the minimum threshold and measurable objective for each principal aquifer.	N/A	7.3.3			Seawater Intrusion is not applicable to the Basin and this section states that it does not and will not occur in the future.
	(B)	A description of how the seawater intrusion minimum threshold considers the effects of current and projected sea levels.	N/A	7.3.3			Seawater Intrusion is not applicable to the Basin and this section states that it does not and will not occur in the future.
	(4)	Degraded Water Quality. The minimum threshold for degraded water quality shall be the degradation of water quality, including the migration of contaminant plumes that impair water supplies or other indicator of water quality as determined by the Agency that may lead to undesirable results. The minimum threshold shall be based on the number of supply wells, a volume of water, or a location of an isocontour that exceeds concentrations of constituents determined by the Agency to be of concern for the basin. In setting minimum thresholds for degraded water quality, the Agency shall consider local, state, and federal water quality standards applicable to the basin.	N/A	7.3.4			No MT or MO established
	(5)	Land Subsidence. The minimum threshold for land subsidence shall be the rate and extent of subsidence that substantially interferes with surface land uses and may lead to undesirable results. Minimum thresholds for land subsidence shall be supported by the following:					
	(A)	Identification of land uses and property interests that have been affected or are likely to be affected by land subsidence in the basin, including an explanation of how the Agency has determined and considered those uses and interests, and the Agency's rationale for establishing minimum thresholds in light of those effects.	N/A	7.3.5			No MT or MO established
	(B)	Maps and graphs showing the extent and rate of land subsidence in the basin that defines the minimum threshold and measurable objectives.	N/A	7.3.5			No MT or MO established

Article 5. Plan Contents for Big Valley Groundwater Basin			GSP Document References				Notes
			Page Numbers of Plan	Or Section Numbers	Or Figure Numbers	Or Table Numbers	
	(6)	Depletions of Interconnected Surface Water. The minimum threshold for depletions of interconnected surface water shall be the rate or volume of surface water depletions caused by groundwater use that has adverse impacts on beneficial uses of the surface water and may lead to undesirable results. The minimum threshold established for depletions of interconnected surface water shall be supported by the following:					
	(A)	The location, quantity, and timing of depletions of interconnected surface water.	N/A	7.3.6			Not enough information available
	(B)	A description of the groundwater and surface water model used to quantify surface water depletion. If a numerical groundwater and surface water model is not used to quantify surface water depletion, the Plan shall identify and describe an equally effective method, tool, or analytical model to accomplish the requirements of this Paragraph.	N/A	7.3.6			Not enough information available
(d)		An Agency may establish a representative minimum threshold for groundwater elevation to serve as the value for multiple sustainability indicators, where the Agency can demonstrate that the representative value is a reasonable proxy for multiple individual minimum thresholds as supported by adequate evidence.	N/A	7.3.6			No MT or MO established
(e)		An Agency that has demonstrated that undesirable results related to one or more sustainability indicators are not present and are not likely to occur in a basin, as described in Section 354.26, shall not be required to establish minimum thresholds related to those sustainability indicators.		7.3			Seawater Intrusion is not applicable to the Basin and this section states that it does not and will not occur in the future.
		Note: Authority cited: Section 10733.2, Water Code.					
		Reference: Sections 10723.2, 10727.2, 10733, 10733.2, and 10733.8, Water Code.					
<b>§ 354.30.</b>		<b>Measurable Objectives</b>					
(a)		Each Agency shall establish measurable objectives, including interim milestones in increments of five years, to achieve the sustainability goal for the basin within 20 years of Plan implementation and to continue to sustainably manage the groundwater basin over the planning and implementation horizon.		7.3			
(b)		Measurable objectives shall be established for each sustainability indicator, based on quantitative values using the same metrics and monitoring sites as are used to define the minimum thresholds.		7.3			
(c)		Measurable objectives shall provide a reasonable margin of operational flexibility under adverse conditions which shall take into consideration components such as historical water budgets, seasonal and long-term trends, and periods of drought, and be commensurate with levels of uncertainty.		7.3			
(d)		An Agency may establish a representative measurable objective for groundwater elevation to serve as the value for multiple sustainability indicators where the Agency can demonstrate that the representative value is a reasonable proxy for multiple individual measurable objectives as supported by adequate evidence.		7.3			
(e)		Each Plan shall describe a reasonable path to achieve the sustainability goal for the basin within 20 years of Plan implementation, including a description of interim milestones for each relevant sustainability indicator, using the same metric as the measurable objective, in increments of five years. The description shall explain how the Plan is likely to maintain sustainable groundwater management over the planning and implementation horizon.		7.3			

Article 5. Plan Contents for Big Valley Groundwater Basin			GSP Document References				Notes
			Page Numbers of Plan	Or Section Numbers	Or Figure Numbers	Or Table Numbers	
(f)		Each Plan may include measurable objectives and interim milestones for additional Plan elements described in Water Code Section 10727.4 where the Agency determines such measures are appropriate for sustainable groundwater management in the basin.		7.3			
(g)		An Agency may establish measurable objectives that exceed the reasonable margin of operational flexibility for the purpose of improving overall conditions in the basin, but failure to achieve those objectives shall not be grounds for a finding of inadequacy of the Plan.		7.3			
		Note: Authority cited: Section 10733.2, Water Code.					
		Reference: Sections 10727.2, 10727.4, and 10733.2, Water Code.					
<b>SubArticle 4. Monitoring Networks</b>							
<b>§ 354.32. Introduction to Monitoring Networks</b>							
		This Subarticle describes the monitoring network that shall be developed for each basin, including monitoring objectives, monitoring protocols, and data reporting requirements. The monitoring network shall promote the collection of data of sufficient quality, frequency, and distribution to characterize groundwater and related surface water conditions in the basin and evaluate changing conditions that occur through implementation of the Plan.					
		Note: Authority cited: Section 10733.2, Water Code.					
		Reference: Section 10733.2, Water Code.					
<b>§ 354.34. Monitoring Network</b>							
(a)		Each Agency shall develop a monitoring network capable of collecting sufficient data to demonstrate short-term, seasonal, and long-term trends in groundwater and related surface conditions, and yield representative information about groundwater conditions as necessary to evaluate Plan implementation.		8.2			
(b)		Each Plan shall include a description of the monitoring network objectives for the basin, including an explanation of how the network will be developed and implemented to monitor groundwater and related surface conditions, and the interconnection of surface water and groundwater, with sufficient temporal frequency and spatial density to evaluate the affects and effectiveness of Plan implementation. The monitoring network objectives shall be implemented to accomplish the following:					
	(1)	Demonstrate progress toward achieving measurable objectives described in the Plan.		8.1			
	(2)	Monitor impacts to the beneficial uses or users of groundwater.		8.1,8.2			
	(3)	Monitor changes in groundwater conditions relative to measurable objectives and minimum thresholds.		8.1,8.2			
	(4)	Quantify annual changes in water budget components.		8.1,8.2			
(c)		Each monitoring network shall be designed to accomplish the following for each sustainability indicator:					
	(1)	Chronic Lowering of Groundwater Levels. Demonstrate groundwater occurrence, flow directions, and hydraulic gradients between principal aquifers and surface water features by the following methods:					



Article 5. Plan Contents for Big Valley Groundwater Basin			GSP Document References				Notes
			Page Numbers of Plan	Or Section Numbers	Or Figure Numbers	Or Table Numbers	
	(A)	A sufficient density of monitoring wells to collect representative measurements through depth-discrete perforated intervals to characterize the groundwater table or potentiometric surface for each principal aquifer.		8.2.1			
	(B)	Static groundwater elevation measurements shall be collected at least two times per year, to represent seasonal low and seasonal high groundwater conditions.		8.2.1			
	(2)	Reduction of Groundwater Storage. Provide an estimate of the change in annual groundwater in storage.		8.2.1, 8.2.4			
	(3)	Seawater Intrusion. Monitor seawater intrusion using chloride concentrations, or other measurements convertible to chloride concentrations, so that the current and projected rate and extent of seawater intrusion for each applicable principal aquifer may be calculated.	N/A				Seawater intrusion not applicable to the BVGB
	(4)	Degraded Water Quality. Collect sufficient spatial and temporal data from each applicable principal aquifer to determine groundwater quality trends for water quality indicators, as determined by the Agency, to address known water quality issues.		8.2.2			
	(5)	Land Subsidence. Identify the rate and extent of land subsidence, which may be measured by extensometers, surveying, remote sensing technology, or other appropriate method.		8.2.3			
	(6)	Depletions of Interconnected Surface Water. Monitor surface water and groundwater, where interconnected surface water conditions exist, to characterize the spatial and temporal exchanges between surface water and groundwater, and to calibrate and apply the tools and methods necessary to calculate depletions of surface water caused by groundwater extractions. The monitoring network shall be able to characterize the following:					
	(A)	Flow conditions including surface water discharge, surface water head, and baseflow contribution.	N/A				No SMCs established for interconnected surface water.
	(B)	Identifying the approximate date and location where ephemeral or intermittent flowing streams and rivers cease to flow, if applicable.	N/A				No SMCs established for interconnected surface water.
	(C)	Temporal change in conditions due to variations in stream discharge and regional groundwater extraction.	N/A				No SMCs established for interconnected surface water.
	(D)	Other factors that may be necessary to identify adverse impacts on beneficial uses of the surface water.	N/A				No SMCs established for interconnected surface water.
(d)		The monitoring network shall be designed to ensure adequate coverage of sustainability indicators. If management areas are established, the quantity and density of monitoring sites in those areas shall be sufficient to evaluate conditions of the basin setting and sustainable management criteria specific to that area.		8.2			
(e)		A Plan may utilize site information and monitoring data from existing sources as part of the monitoring network.		8.2			
(f)		The Agency shall determine the density of monitoring sites and frequency of measurements required to demonstrate short-term, seasonal, and long-term trends based upon the following factors:					
	(1)	Amount of current and projected groundwater use.		6.2, 6.4			
	(2)	Aquifer characteristics, including confined or unconfined aquifer conditions, or other physical characteristics that affect groundwater flow.		4.4			

Article 5. Plan Contents for Big Valley Groundwater Basin			GSP Document References				Notes
			Page Numbers of Plan	Or Section Numbers	Or Figure Numbers	Or Table Numbers	
	(3)	Impacts to beneficial uses and users of groundwater and land uses and property interests affected by groundwater production, and adjacent basins that could affect the ability of that basin to meet the sustainability goal.		8.2			
	(4)	Whether the Agency has adequate long-term existing monitoring results or other technical information to demonstrate an understanding of aquifer response.		8.2			
(g)		Each Plan shall describe the following information about the monitoring network:					
	(1)	Scientific rationale for the monitoring site selection process.		8.2			
	(2)	Consistency with data and reporting standards described in Section 352.4. If a site is not consistent with those standards, the Plan shall explain the necessity of the site to the monitoring network, and how any variation from the standards will not affect the usefulness of the results obtained.		8.2			
	(3)	For each sustainability indicator, the quantitative values for the minimum threshold, measurable objective, and interim milestones that will be measured at each monitoring site or representative monitoring sites established pursuant to Section 354.36.		8.2			
(h)		The location and type of each monitoring site within the basin displayed on a map, and reported in tabular format, including information regarding the monitoring site type, frequency of measurement, and the purposes for which the monitoring site is being used.		8.2	8-1:8-3	8-1, 8-3	
(i)		The monitoring protocols developed by each Agency shall include a description of technical standards, data collection methods, and other procedures or protocols pursuant to Water Code Section 10727.2(f) for monitoring sites or other data collection facilities to ensure that the monitoring network utilizes comparable data and methodologies.		8.2.1.4, 8.2.2.1, 8.2.3.1			
(j)		An Agency that has demonstrated that undesirable results related to one or more sustainability indicators are not present and are not likely to occur in a basin, as described in Section 354.26, shall not be required to establish a monitoring network related to those sustainability indicators.		8.2			
		Note: Authority cited: Section 10733.2, Water Code.					
		Reference: Sections 10723.2, 10727.2, 10727.4, 10728, 10733, 10733.2, and 10733.8, Water Code					
§ 354.36.		<b>Representative Monitoring</b>					
		Each Agency may designate a subset of monitoring sites as representative of conditions in the basin or an area of the basin, as follows:					
(a)		Representative monitoring sites may be designated by the Agency as the point at which sustainability indicators are monitored, and for which quantitative values for minimum thresholds, measurable objectives, and interim milestones are defined.		8.2.1			
(b)		(b) Groundwater elevations may be used as a proxy for monitoring other sustainability indicators if the Agency demonstrates the following:					
	(1)	Significant correlation exists between groundwater elevations and the sustainability indicators for which groundwater elevation measurements serve as a proxy.		8.2.1			
	(2)	Measurable objectives established for groundwater elevation shall include a reasonable margin of operational flexibility taking into consideration the basin setting to avoid undesirable results for the sustainability indicators for which groundwater elevation measurements serve as a proxy.		8.2.1			

Article 5. Plan Contents for Big Valley Groundwater Basin			GSP Document References				Notes
			Page Numbers of Plan	Or Section Numbers	Or Figure Numbers	Or Table Numbers	
(c)		The designation of a representative monitoring site shall be supported by adequate evidence demonstrating that the site reflects general conditions in the area.		8.2.1			
		Note: Authority cited: Section 10733.2, Water Code.					
		Reference: Sections 10727.2 and 10733.2, Water Code					
<b>§ 354.38.</b>		<b>Assessment and Improvement of Monitoring Network</b>					
(a)		Each Agency shall review the monitoring network and include an evaluation in the Plan and each five-year assessment, including a determination of uncertainty and whether there are data gaps that could affect the ability of the Plan to achieve the sustainability goal for the basin.		8.2.1.5, 8.2.2.2, 8.2.3.2		8-2	
(b)		Each Agency shall identify data gaps wherever the basin does not contain a sufficient number of monitoring sites, does not monitor sites at a sufficient frequency, or utilizes monitoring sites that are unreliable, including those that do not satisfy minimum standards of the monitoring network adopted by the Agency.		8.2.1.5, 8.2.2.2, 8.2.3.2		8-2	
(c)		If the monitoring network contains data gaps, the Plan shall include a description of the following:					
	(1)	The location and reason for data gaps in the monitoring network.		8.2.1.5, 8.2.2.2, 8.2.3.2		8-2	
	(2)	Local issues and circumstances that limit or prevent monitoring.		8.2.1.5, 8.2.2.2, 8.2.3.2		8-2	
(d)		Each Agency shall describe steps that will be taken to fill data gaps before the next five-year assessment, including the location and purpose of newly added or installed monitoring sites.		8.2.1.5, 8.2.2.2, 8.2.3.2		8-2, 8-4	
(e)		Each Agency shall adjust the monitoring frequency and density of monitoring sites to provide an adequate level of detail about site-specific surface water and groundwater conditions and to assess the effectiveness of management actions under circumstances that include the following:					
	(1)	Minimum threshold exceedances.		8.2		8-1	
	(2)	Highly variable spatial or temporal conditions.		8.2		8-1	
	(3)	Adverse impacts to beneficial uses and users of groundwater.		8.2			
	(4)	The potential to adversely affect the ability of an adjacent basin to implement its Plan or impede achievement of sustainability goals in an adjacent basin.	N/A				No basins adjacent to Big Valley
		Note: Authority cited: Section 10733.2, Water Code.					
		Reference: Sections 10723.2, 10727.2, 10728.2, 10733, 10733.2, and 10733.8, Water Code					
<b>§ 354.40.</b>		<b>Reporting Monitoring Data to the Department</b>					
		Monitoring data shall be stored in the data management system developed pursuant to Section 352.6. A copy of the monitoring data shall be included in the Annual Report and submitted electronically on forms provided by the Department.					
		Note: Authority cited: Section 10733.2, Water Code.					
		Reference: Sections 10728, 10728.2, 10733.2, and 10733.8, Water Code.					
<b>SubArticle 5.</b>		<b>Projects and Management Actions</b>					
<b>§ 354.42.</b>		<b>Introduction to Projects and Management Actions</b>					

Article 5. Plan Contents for Big Valley Groundwater Basin			GSP Document References				Notes
			Page Numbers of Plan	Or Section Numbers	Or Figure Numbers	Or Table Numbers	
		This Subarticle describes the criteria for projects and management actions to be included in a Plan to meet the sustainability goal for the basin in a manner that can be maintained over the planning and implementation horizon.					
		Note: Authority cited: Section 10733.2, Water Code.					
		Reference: Section 10733.2, Water Code.					
<b>§ 354.44.</b>		<b>Projects and Management Actions</b>					
(a)		Each Plan shall include a description of the projects and management actions the Agency has determined will achieve the sustainability goal for the basin, including projects and management actions to respond to changing conditions in the basin.		9		9-3	
(b)		Each Plan shall include a description of the projects and management actions that include the following:					
	(1)	A list of projects and management actions proposed in the Plan with a description of the measurable objective that is expected to benefit from the project or management action. The list shall include projects and management actions that may be utilized to meet interim milestones, the exceedance of minimum thresholds, or where undesirable results have occurred or are imminent. The Plan shall include the following:					
	(A)	A description of the circumstances under which projects or management actions shall be implemented, the criteria that would trigger implementation and termination of projects or management actions, and the process by which the Agency shall determine that conditions requiring the implementation of particular projects or management actions have occurred.		9		9-3	
	(B)	The process by which the Agency shall provide notice to the public and other agencies that the implementation of projects or management actions is being considered or has been implemented, including a description of the actions to be taken.		9		9-3	
	(2)	If overdraft conditions are identified through the analysis required by Section 354.18, the Plan shall describe projects or management actions, including a quantification of demand reduction or other methods, for the mitigation of overdraft.				9-3	
	(3)	A summary of the permitting and regulatory process required for each project and management action.		9		9-3	
	(4)	The status of each project and management action, including a time-table for expected initiation and completion, and the accrual of expected benefits.				9-3	
	(5)	An explanation of the benefits that are expected to be realized from the project or management action, and how those benefits will be evaluated.		9		9-3	
	(6)	An explanation of how the project or management action will be accomplished. If the projects or management actions rely on water from outside the jurisdiction of the Agency, an explanation of the source and reliability of that water shall be included.		9		9-3	
	(7)	A description of the legal authority required for each project and management action, and the basis for that authority within the Agency.		9		9-3	
	(8)	A description of the estimated cost for each project and management action and a description of how the Agency plans to meet those costs.		9		9-3	
	(9)	A description of the management of groundwater extractions and recharge to ensure that chronic lowering of groundwater levels or depletion of supply during periods of drought is offset by increases in groundwater levels or storage during other periods.		9			

Article 5. Plan Contents for Big Valley Groundwater Basin			GSP Document References				Notes
			Page Numbers of Plan	Or Section Numbers	Or Figure Numbers	Or Table Numbers	
(c)		Projects and management actions shall be supported by best available information and best available science.		9			
(d)		An Agency shall take into account the level of uncertainty associated with the basin setting when developing projects or management actions.		9			
		Note: Authority cited: Section 10733.2, Water Code.					
		Reference: Sections 10727.2, 10727.4, and 10733.2, Water Code.					

# **Big Valley Groundwater Basin**

## **Groundwater Sustainability Plan**

**REVISED DRAFT**

September 22, 2021



Prepared for:  
Lassen County Groundwater Sustainability Agency  
Modoc County Groundwater Sustainability Agency

**REVISED DRAFT**

# **Big Valley Groundwater Basin**

## **Groundwater Sustainability Plan**

Prepared for:

Lassen County Groundwater Sustainability Agency  
Modoc County Groundwater Sustainability Agency

Prepared by:

GEI Consultants  
2868 Prospect Park Drive, Suite 400  
Sacramento, CA 95670

**REVISED DRAFT** September 22, 2021

# Table of Contents

---

Table of Contents .....	i
List of Figures .....	iii
List of Tables .....	v
List of Appendices .....	vi
Acronyms and Abbreviations .....	ii
<b>1. Introduction § 354.2-4 .....</b>	<b>1-1</b>
1.1 Introduction .....	1-1
1.2 Sustainability Goal .....	1-4
1.3 Background of Basin Prioritization .....	1-5
1.4 Description of Big Valley Groundwater Basin .....	1-8
<b>2. Agency Information § 354.6 .....</b>	<b>2-1</b>
2.1 Agency Names and Mailing Addresses .....	2-1
2.2 Agency Organization and Management Structure .....	2-1
2.3 Contact Information for Plan Manager .....	2-2
2.4 Authority of Agencies .....	2-2
<b>3. Plan Area § 354.8 .....</b>	<b>3-1</b>
3.1 Area of the Plan .....	3-1
3.2 Jurisdictional Areas .....	3-3
3.3 Land and Water Use .....	3-6
3.4 Inventory and Density of Wells .....	3-12
3.5 Existing Monitoring, Management and Regulatory Programs .....	3-17
3.6 Conjunctive Use Programs .....	3-29
3.7 Land Use Plans .....	3-29
3.8 Management Areas .....	3-34
3.9 Additional GSP Elements, if Applicable .....	3-35
<b>4. Hydrogeologic Conceptual Model §354.14 .....</b>	<b>4-1</b>
4.1 Basin Setting .....	4-1
4.2 Regional Geology and Structure .....	4-2
4.3 Local Geology .....	4-6
4.4 Principal Aquifer .....	4-10
4.5 Soils .....	4-17
4.6 Beneficial Uses of Principal Aquifer .....	4-23
4.7 General Water Quality .....	4-24
4.8 Groundwater Recharge and Discharge Areas .....	4-25
4.9 Surface Water Bodies .....	4-27
4.10 Imported Water Supplies .....	4-27
4.11 Data Gaps in the Hydrogeologic Conceptual Model .....	4-27
<b>5. Groundwater Conditions §354.16 .....</b>	<b>5-1</b>
5.1 Groundwater Elevations .....	5-1
5.2 Change in Storage .....	5-10
5.3 Seawater Intrusion .....	5-10
5.4 Groundwater Quality Conditions .....	5-10
5.5 Subsidence .....	5-24



5.6	Interconnected Surface Water .....	5-28
5.7	Groundwater-Dependent Ecosystems .....	5-28
<b>6.</b>	<b>Water Budget § 354.18 .....</b>	<b>6-1</b>
6.1	Water Budget Data Sources .....	6-2
6.2	Historical Water Budget .....	6-3
6.3	Current Water Budget .....	6-9
6.4	Projected Water Budget .....	6-9
<b>7.</b>	<b>Sustainable Management Criteria § 354.20 .....</b>	<b>7-1</b>
7.1	Process for Establishing SMCs .....	7-3
7.2	Sustainability Goal .....	7-3
7.3	Undesirable Results .....	7-3
7.4	Management Areas .....	7-12
<b>8.</b>	<b>Monitoring Networks § 354.34 .....</b>	<b>8-1</b>
8.1	Monitoring Objectives .....	8-1
8.2	Monitoring Network .....	8-1
<b>9.</b>	<b>Projects and Management Actions §354.44 .....</b>	<b>9-1</b>
9.1	Basin Recharge Projects .....	9-7
9.2	Research and Data Development .....	9-9
9.3	Increased Surface Water Storage Capacity .....	9-13
9.4	Improved Hydrologic Function and Upland Recharge .....	9-17
9.5	Water Conservation .....	9-19
9.6	Public Education and Outreach .....	9-21
<b>10.</b>	<b>Implementation Plan .....</b>	<b>10-1</b>
10.1	GSA Administration and Public Outreach .....	10-1
10.2	GSP Annual Reporting .....	10-2
10.3	Data Management System .....	10-4
10.4	Periodic Evaluations of GSP (5-Year Updates) .....	10-10
10.5	Implementation Schedule .....	10-10
10.6	Cost of Implementation .....	10-10
10.7	Funding Alternatives .....	10-14
<b>11.</b>	<b>Notice and Communications §354.10 .....</b>	<b>11-1</b>
11.1	Background .....	11-1
11.2	Challenges of Developing GSP During COVID Pandemic .....	11-2
11.3	Goals of Communication and Engagement .....	11-3
11.4	Stakeholder Identification .....	11-3
11.5	Venues and Tools .....	11-4
11.6	Decision-Making Process .....	11-7
11.7	Comments and Incorporation of Feedback .....	11-7
11.8	Communication and Engagement During Plan Implementation .....	11-7
<b>12.</b>	<b>References .....</b>	<b>12-1</b>

## List of Figures

Figure 1-1	Big Valley Groundwater Basin, Surrounding Basins and GSAs.....	1-10
Figure 3-1	Area Covered by the GSP .....	3-2
Figure 3-2	Jurisdictional Areas .....	3-4
Figure 3-3	Upper Pit IRWMP, Watershed and BVGB Boundaries .....	3-5
Figure 3-4	Land Use by Water Use Sector .....	3-8
Figure 3-5	Water Sources .....	3-11
Figure 3-6	Density of Domestic Wells .....	3-14
Figure 3-7	Density of Production Wells.....	3-15
Figure 3-8	Density of Public Supply Wells .....	3-16
Figure 3-9	Water Level Monitoring Network .....	3-18
Figure 3-10	Water Quality Monitoring .....	3-19
Figure 3-11	Surface Water and Climate Monitoring Network .....	3-23
Figure 3-12	Annual Precipitation at the McArthur CIMIS Station.....	3-24
Figure 3-13	Lassen County General Plan Land Use Map .....	3-32
Figure 4-1	Topography.....	4-3
Figure 4-2	Regional Geologic Map .....	4-4
Figure 4-3	GeothermEx 1975 Local Geologic Map .....	4-7
Figure 4-4	DWR 1963 Local Geologic Map .....	4-8
Figure 4-5	DWR 1963 Upland Recharge Areas and Areas of Confining Conditions .....	4-9
Figure 4-6	Geologic Cross Section A-A' .....	4-12
Figure 4-7	Geologic Cross Section B-B' .....	4-13
Figure 4-8	Local Faults .....	4-16
Figure 4-9	Taxonomic Soils Classifications .....	4-18
Figure 4-10	Hydrologic Soils Group Classifications.....	4-20
Figure 4-11	SAGBI Classifications.....	4-22
Figure 4-12	Piper Diagram showing major cations and anions .....	4-24
Figure 4-13	Recharge, Discharge and Major Surface Water Bodies .....	4-26
Figure 5-1	Water Level Monitoring.....	5-2
Figure 5-2	Hydrograph of Well 17K1 .....	5-5
Figure 5-3	Hydrograph of Well 32A2 .....	5-5
Figure 5-4	Average Water Level Change Since 2000 Using Spring Measurements .....	5-7
Figure 5-5	Groundwater Elevation Contours and Flow Direction Spring 2018.....	5-8
Figure 5-6	Groundwater Elevation Contours and Flow Direction Fall 2018 .....	5-9
Figure 5-7	Precipitation, Pumping and Change in Groundwater Storage .....	5-12
Figure 5-8	Arsenic Trends.....	5-17
Figure 5-9	Iron Trends .....	5-17
Figure 5-10	Manganese Trends.....	5-18
Figure 5-11	Distribution of Elevated Specific Conductance.....	5-19
Figure 5-12	Distribution of Elevated TDS Concentrations .....	5-20
Figure 5-13	Specific Conductance Trends.....	5-21
Figure 5-14	TDS Trends .....	5-21
Figure 5-15	Location of Known Potential Groundwater Contamination Sites.....	5-23
Figure 5-16	Vertical Displacement at CGPS P347 .....	5-26
Figure 5-17	InSAR Change in Ground Elevation 2015 to 2019.....	5-27
Figure 5-18	Potentially Interconnected Surface Water .....	5-29
Figure 5-19	Potential Groundwater Dependent Ecosystems.....	5-32
Figure 6-1	Hydrologic Cycle.....	6-1
Figure 6-2	Water Budget Components and Systems .....	6-2
Figure 6-3	Annual and Cumulative Precipitation and Water Year Types 1984 to 2018 .....	6-4
Figure 6-4	Average Total Basin Water Budget 1984-2018 (Historic) .....	6-4
Figure 6-5	Primary Applied Water Sources .....	6-6

Figure 6-6	Average Land System Water Budget 1984-2018 (Historic) .....	6-7
Figure 6-7	Average Surface Water System Water Budget 1984-2018 (Historic) .....	6-7
Figure 6-8	Average Groundwater System Water Budget 1984 to 2018 (Historic) .....	6-8
Figure 6-9	Cumulative Groundwater Change in Storage 1984 to 2018 (Historic).....	6-8
Figure 6-10	Projected Total Basin Water Budget 2019-2068 (Future Baseline) .....	6-10
Figure 6-11	Cumulative Groundwater Change in Storage 1984 to 2068 (Future Baseline).....	6-10
Figure 6-12	Projected Total Basin Water Budget 2019-2068 (Future with Climate Change).....	6-11
Figure 6-13	Cumulative Groundwater Change in Storage 1984 to 2068 (Future with Climate Change) .....	6-11
Figure 7-1	Illustration of the relationship among the sustainability indicators .....	7-2
Figure 7-2	Relationship among the MTs, MOs and IMs for a hypothetical basin .....	7-2
Figure 7-3	Analysis of Wells That Could Potentially Go Dry at Different Depths .....	7-6
Figure 7-4	Domestic Well Density and Representative Groundwater Level Wells.....	7-7
Figure 8-1	Water Level Monitoring Networks .....	8-3
Figure 8-2	Water Quality Monitoring Network.....	8-9
Figure 8-3	Surface Water and Climate Monitoring Network .....	8-14
Figure 9-1	Big Valley Watershed Boundary.....	9-2
Figure 9-2	Current and Proposed Stream Gages.....	9-11
Figure 9-3	Robert's Reservoir Scenarios.....	9-14
Figure 9-4	Allen Camp Dam Drawing .....	9-16
Figure 9-5	Canopy cover percentage of forested areas within the Big Valley watershed .....	9-17
Figure 10-1	Excel Water Level Tool.....	10-6
Figure 10-2	Excel Water Budget Tool.....	10-7
Figure 10-3	GIS Database .....	10-8
Figure 10-4	Implementation Schedule .....	10-11
Figure 11-1	GSP Development Process.....	11-8

## **List of Tables**

Table 1-1	Big Valley Groundwater Basin Prioritization .....	1-7
Table 3-1	Available DWR Land Use Surveys .....	3-7
Table 3-2	2016 Land Use Summary by Water Use Sector .....	3-7
Table 3-3	Well Inventory in the BVGB .....	3-12
Table 3-4	Water Quality Monitoring Programs .....	3-20
Table 3-5	Datasets Available from State Water Board's GAMA Groundwater Information System .....	3-21
Table 3-6	Annual Precipitation at Bieber from 1985 to 1995 .....	3-26
Table 3-7	Monthly Climate Data from CIMIS Station in McArthur (1984-2018) .....	3-26
Table 3-8	Plan Elements from CWC Section 10727.4 .....	3-35
Table 4-1	Well Depths .....	4-14
Table 4-2	Aquifer Test Results .....	4-17
Table 5-1	Historic Water Level Monitoring Wells .....	5-3
Table 5-2	Change in Storage 1983-2018 .....	5-11
Table 5-3	Water Quality Statistics .....	5-15
Table 5-4	Known Potential Groundwater Contamination Sites in the BVGB .....	5-22
Table 5-5	Big Valley Common Plant Species Rooting Depths .....	5-31
Table 8-1	Big Valley Groundwater Basin Water Level Monitoring Network .....	8-2
Table 8-2	Summary of Best Management Practices, Groundwater Level Monitoring Well Network and Data Gaps .....	8-7
Table 8-3	Big Valley Groundwater Basin Water Quality Monitoring Network .....	8-10
Table 8-4	Summary of Groundwater Quality Monitoring, Best Management Practices and Data Gaps .....	8-11
Table 9-1	Available Funding Supporting Water Conservation .....	9-3
Table 9-2	Projects and Potential Implementation Timeline .....	9-4
Table 9-3	Required Elements for Projects and Management Actions .....	9-5
Table 10-1	Annual Report DMS Data Types .....	10-4
Table 10-2	GSP Update DMS Data Types .....	10-5
Table 10-3	GSP Implementation Cost Statistics for 2020 GSPs in California .....	10-12
Table 10-4	Summary of Big Valley Cost Estimates .....	10-14
Table 10-5	Summary of GSP Funding Mechanisms .....	10-15
Table 11-1	Pre-GSP Development Outreach Efforts .....	11-1

## **List of Appendices**

Appendix 1A	Background Information
Appendix 2A	Resolutions Establishing Lassen and Modoc Counties as the GSAs for the BVGB
Appendix 2B	MOU Establishing the Big Valley Groundwater Advisory Committee
Appendix 4A	Aquifer Test Results
Appendix 5A	Water Level Hydrographs
Appendix 5B	Groundwater Elevation Contours 1983 to 2018
Appendix 5C	Transducer Data from Monitoring Well Clusters 1 and 4
Appendix 6A	Water Budget Components
Appendix 6B	Water Budget Details
Appendix 6C	Water Budget Bar Charts
Appendix 7A	Pumping Cost Calculations
Appendix 8A	Water Level Monitoring Well Details
Appendix 8B	New Monitoring Well As-Built Drawings
Appendix 8C	Selection from DWR Monitoring BMP
Appendix 11A	GSA Letters to Governor and Legislature
Appendix 11B	List of Public Meetings
Appendix 11C	Brochure Summarizing the Big Valley GSP May 2021
Appendix 11D	Comment Matrix

# Acronyms and Abbreviations

---

ACWA	Ash Creek Wildlife Area
AF	acre-feet
AFY	acre-feet per year
AgMAR	Agriculture Managed Aquifer Recharge
ASR	Aquifer Storage and Recovery
Basin	Big Valley Groundwater Basin
Basin Plan	Water Quality Control Plan
bgs	below ground surface
BIA	U.S. Bureau of Indian Affairs
Big Valley	Big Valley Groundwater Basin
BLM	U.S. Bureau of Land Management
BMO	Basin Management Objective
BMP	Best Management Practices
BVGB	Big Valley Groundwater Basin
BVAC	Big Valley Groundwater Basin Advisory Committee
BVWUA	Big Valley Water Users Association
C&E	communication and engagement
CAL FIRE	California Department of Forestry and Fire Protection
CASGEM	California Statewide Groundwater Elevation Monitoring
CDEC	California Data Exchange Center
CDFA	California Dept of Food and Agriculture
CDFW	California Department of Fish and Wildlife
CEQA	California Environmental Quality Act
CFCC	California Financing Coordinating Committee
CGPS	continuous global positioning system
CIMIS	California Irrigation Management Information System
CRP	conservation reserve program
CWA	Clean Water Act
CWC	California Water Code

DDW	State Water Resources Control Board’s Division of Drinking Water
District	Lassen-Modoc County Flood Control and Water Conservation District
DMS	Data Management System
DOI	Department of the Interior
DTW	depth to water
DWR	California Department of Water Resources
EC	electrical conductivity
EQIP	Environmental Quality Incentives Program
ET	evapotranspiration
ETo	reference evapotranspiration
°F	degrees Fahrenheit
Forest Service	U.S. Forest Service
ft/yr	foot or feet per year
GAMA	Groundwater Ambient Monitoring and Assessment Program
GAMA GIS	GAMA Groundwater Information System
GDE	groundwater dependent ecosystem
General Order	Statewide ASR General Order
GIS	geographic information system
GP	General Plan
gpm	gallons per minute
GSA	Groundwater Sustainability Agency
GSP	Groundwater Sustainability Plan
HCM	hydrogeologic conceptual model
HSG	Hydrologic Soils Group
IC	institutional controls
ILRP	Irrigated Lands Regulatory Program
IM	Interim Milestone
in/hr	inches per hour
InSAR	Interferometric Synthetic Aperture Radar, a technology used to detect subsidence
IRWMP	Upper Pit Integrated Regional Water Management Plan
IWFM	Integrated Water Flow Model

LCGMP	Lassen County Groundwater Management Plan
LNAPL	Light non-aqueous phase liquid (found in petroleum hydrocarbons)
LUST	Leaking underground storage tank
M	million
MCL	Maximum Contaminant Level
Mn	manganese
MO	Measurable Objective
MOU	Memorandum of Understanding
msl	mean sea level
MT	Minimum Threshold
MTBE	Methyl tert-butyl ether
NCCAG	Natural Communities Commonly Associated with Groundwater
North Cal-Neva	North Cal-Neva Resource Conservation and Development Council
NCWA	Northern California Water Association
NECWA	Northeastern California Water Association
NEPA	National Environmental Policy Act
NOAA	National Oceanic and Atmospheric Administration
NPDES	National Pollutant Discharge Elimination System
NR	Natural Resources
NRCS	Natural Resources Conservation Service
NSP	Nonpoint Source Program
OS	Open Space
OWTS	Onsite Water Treatment System
PFAS	per/polyfluoroalkyl substances
PG&E	Pacific Gas and Electric
Plan	Groundwater Sustainability Plan
Reclamation	United States Bureau of Reclamation
RWMG	Regional Water Management Group
RWQCB	Regional Water Quality Control Board
RWQCB-R5	Regional Water Quality Control Board Region 5
SAGBI	Soil Agricultural Groundwater Banking Index



SB	Senate Bill
SC	specific conductance
SGMA	Sustainable Groundwater Management Act of 2014
SMC	Sustainable Management Criteria
SRI	Sacramento River Index of water year types
SSURGO	Soil Survey Geographic Database
State Water Board	California State Water Resources Control Board
SVE	Surprise Valley Electric
SVWQC	Sacramento Valley Water Quality Coalition
SWEEP	State Water Efficiency and Enhancement Program
SY	specific yield
TBA	tert-Butyl alcohol
TDS	total dissolved solids
TMDL	Total Maximum Daily Load Program
TNC	The Nature Conservancy
UCCE	University of California Cooperative Extension
U.S.	United States
USDA	U.S. Department of Agriculture
USFS	U.S. Forest Service
USGS	United States Geologic Survey
UST	Underground Storage Tank
WAA	Water Availability Analysis
WCR	well completion report
WDR	Waste Discharge Requirement
WRP	wetland reserve project
WY	Water Year (October 1 – September 30)

# 1. Introduction § 354.2-4

---

## 1.1 Introduction

The Big Valley Groundwater Basin (BVGB, Basin, or Big Valley) is located in one of the most remote and untouched areas of California. The sparsely populated Big Valley has a rich biodiversity of wildlife and native species who feed, live and raise young primarily on the irrigated lands throughout the Basin. The Basin has multiple streams which enter from the North, East and West. The Pit River is the only surface water outflow and exits at the southern tip of the Basin. The streams that enter the Basin are some of the most remote, least improved and most pristine surface waters in all of California. The snow-fed high desert streams entering the Basin have seasonal hydrographs with natural periods of reduced flows or complete cessation of flows late in the summer season. The Pit River is the largest stream and is so named because of the practice, employed by the Achumawi and other Native American bands that are now part of the Pit River Tribe, of digging pits to trap game that came to water at the river. In addition to the Pit River, the Basin is also fed by Ash Creek year-round, along with Willow Creek and many seasonal streams and springs.

Farming and ranching in Big Valley date back to the late 19<sup>th</sup> and early 20<sup>th</sup> centuries when families immigrated to Big Valley and made use of the existing water resources. A large amount of the land in the Basin is still owned and farmed by the families that homesteaded here. The surnames on the tombstones at any of the three cemeteries are the same names that can be overheard during a visit to the Bieber Market or the Adin Supply store, local institutions and gathering places for the residents of this tight-knit community. These stores are remaining evidence of a much more vibrant time in Big Valley.

Following World War II, with the advent and widespread use of vertical turbine pumps, farmers and ranchers began using groundwater to irrigate the land, supplementing their surface water supplies to make a living in the Big Valley. The local driller, Conner's Well Drilling, has drilled the majority of wells in Big Valley and the third-generation driller, Duane Conner has been on the advisory committee during the development of this Groundwater Sustainability Plan (GSP or Plan). (Conner 2021)

Historically, agriculture was supplemented by a robust timber industry, a key component of the economy for Big Valley, which supported four lumber mills. Due to regulations and policies imposed by state and federal government, the timber industry has been diminished over time which has caused a great economic hardship to the Big Valley communities. Stakeholders realize that the Sustainable Groundwater Management Act of 2014 (SGMA) will unfortunately cause a similar decline to agriculture. The loss of jobs due to the closure of all four lumber mills and the reduction of timber yield tax, which had provided financial support to the small rural schools and roads, is evident in the many vacant buildings which once had thriving businesses. In addition to the loss of jobs, the reduced student enrollment in local schools has caused an economic hardship to the school district which is struggling to remain viable. The change in land management has transformed once thriving communities in the Basin to "disadvantaged" and "severely disadvantaged" communities as defined by the California Department

37 of Water Resources (DWR). The addition of SGMA will increase the severity of the disadvantaged and  
38 severely disadvantaged status in the Basin due to increased regulatory costs and potential actions that  
39 must be taken to comply with SGMA and is likely to intensify rural decline in this area. With the  
40 increased cost of this unfunded mandate for monitoring, annual reports and GSP updates, land values  
41 will likely decline and lower the property tax base.

42 The two counties that overlie the BVGB are fulfilling their unfunded, mandated role as the Groundwater  
43 Sustainability Agencies (GSAs) since there are no other viable entities that can serve as GSAs. Both  
44 counties have severe financial struggles as their populations and tax base are continually declining. The  
45 counties not only lack the tax revenue generated out of Big Valley to implement SGMA, but they have  
46 no buffer from revenue generated county-wide to cover such costs. As such, the GSAs are depending  
47 almost solely on outside funding sources for development and implementation of this Plan.

48 With the demise of a timber industry, agriculture has been the only viable industry remaining to support  
49 residents living and working in the Basin, with many of the families who ranch and farm today having  
50 cultivated the land for over a century. These families are fighting to maintain the viability and  
51 productivity of their land so that their children and grandchildren can continue to pursue the rural  
52 lifestyle that their forebearers established.

53 The ranchers and farmers have developed strategies to enhance the land with not only farming and  
54 ranching in mind, but also partnerships with state and federal agencies as well as local non-  
55 governmental agencies (NGOs). The purpose of these partnerships is to maintain and improve the  
56 condition of privately-owned land for the enhancement of plant and animal populations while addressing  
57 invasive plant and pest concerns.

58 The Ash Creek Wildlife Area (ACWA) is an example of a local rancher who provided land for  
59 conservation efforts with an understanding that managed lands promote wildlife enhancement for the  
60 enjoyment of all. The California Department of Fish and Wildlife (CDFW) has largely left the property  
61 unmanaged. While the ACWA does offer some refuge, most species graze and rear their young on the  
62 private lands around the Basin which are actively being cultivated because those lands offer better  
63 forage and protection from predators. Below is an account of how the ACWA property has fared since  
64 being sold to the government. (Stadtler 2007)

65           The government bought the ranch as a refuge for birds and wildlife. When  
66           I was running cattle on that ranch it was alive with waterfowl. They fed  
67           around and amongst the cattle. It was a natural refuge. The cattle kept the  
68           feed down so the birds didn't have to worry about predators, and they could  
69           feed on the new growth grass. After the government got their hands on it all  
70           the fences were removed, at taxpayer expense. In the years since, the  
71           meadows have turned into a jungle -- old dead feed and tules. The birds are  
72           gone, moved to other ranches where they get protection from skunks and  
73           coyotes and other predators that work on waterfowl and wildlife. Under the  
74           management of the U.S. Fish and Wildlife the value of the land has been  
75           completely destroyed. All those acres of wonderful grass and the irrigation  
76           system that for generations have produced food for the people of this  
77           country now *produce nothing*.

78 The BVGB differs from many of California’s groundwater basins because the climate sees extreme cold.  
79 On average there are fewer warm temperature days, making the growing season considerably shorter  
80 than in other parts of the state. Ground elevations in the Basin range from about 4,100 to over 5,000 feet  
81 and along with its northerly latitude in the state, creates conditions where snow can fall in any month of  
82 the year. According to the Farmer’s Almanac, the average growing season for the Big Valley Basin is  
83 about 101 days. The typical crops for the Big Valley Basin are low land use intensity and low value  
84 crops such as native pasture, grass hay, alfalfa hay and rangeland.

85 The vast majority of the farmed land utilizes low impact farming, employing no-till methods to grow  
86 nitrogen-fixing crops which require little to no fertilizer or pesticide application. While this climate and  
87 range of viable crops is a challenge to farmers and ranchers, it helps maintain the pristine nature of  
88 surface water and groundwater. As an example of how local landowners have been good stewards of  
89 their water resources, they have participated in the Natural Resources Conservation Service’s (NRCS’s)  
90 Environmental Quality Incentives Program (EQIP), drilling wells away from streams to encourage  
91 watering of cattle outside of riparian corridors. Now these additional wells have increased the inventory  
92 of wells in the Basin, one of the criteria used by DWR to categorize Big Valley as medium priority and  
93 subject to the SGMA mandate of developing a GSP. (Albaugh 2021)

94 The GSAs are also aware of poor stewardship, such as illegal water uses (i.e., unlicensed marijuana  
95 growers). These operations may utilize groundwater, are known to have illegal diversions of surface  
96 water and have negative impact on water quality. However, the counties have not received the state and  
97 federal support needed to identify and eliminate these operations.

98 The Big Valley Basin has a population of 1,046 residents and a projected slow growth of 1,086 by 2030.  
99 (DWR 2021a). The largest town (unincorporated community) within the Basin is Adin, California which  
100 had a population of 272 residents according to the 2010 Census. (USCB 2021). Located in Modoc  
101 County, Adin had a 2.43 percent decline in population from 2017 to 2018. Both Modoc and Lassen are  
102 experiencing a decline in population county-wide. (USCB 2021)

103 As detailed in this GSP, there are three major beneficial uses of groundwater: agriculture,  
104 municipal/domestic and environmental. However, the importance of agriculture to Big Valley cannot be  
105 overstated, as it is the economic base upon which municipal/domestic users rely and provides the habitat  
106 for many species important to healthy wildlife and biodiversity. Both groundwater and surface water are  
107 important to maintaining this habitat. Other plans, policies and ordinances unrelated to this GSP attempt  
108 to diversify the economic base of the community. Economic diversity of Big Valley is not the purview  
109 of this GSP, but it is acknowledged that at present and for the foreseeable future, the Big Valley  
110 communities rely almost solely on farming and ranching to support its residents. The financial and  
111 regulatory impact of implementing SGMA will affect this disadvantaged community. Therefore,  
112 minimizing the GSP’s impact to agriculture while complying with SGMA and working to enhance water  
113 supply in Big Valley is the thrust of this GSP.

## 1.2 Sustainability Goal

The GSAs are developing this GSP to comply with SGMA mandates, maintain local control and preclude intervention by the State Water Resources Control Board (State Water Board). Satisfying the requirements of SGMA generally requires four activities:

1. Formation of at least one GSA to fully cover a basin. Multiple GSAs are acceptable and Big Valley has two GSAs
2. Development of a GSP that fully covers the basin
3. Implementation of the GSP and management to achieve quantifiable objectives
4. Regular reporting to DWR

The two GSAs were established in the Basin; County of Modoc GSA and County of Lassen GSA; each cover the portion of the Basin in their respective jurisdictions. This document is a single GSP, developed jointly by both GSAs for the entire Basin. This GSP describes the BVGB, develops quantifiable management criteria that accounts for the interests of the Basin's legal beneficial groundwater uses and users, and identifies projects and management actions to ensure sustainability.

The Lassen and Modoc GSAs developed a Memorandum of Understanding (MOU) which detailed the coordination between the two GSAs. The MOU stated a Big Valley Advisory Committee (BVAC) was to be established to provide local input and direction on the development of a GSP. The counties solicited applicants to be members of the BVAC through public noticing channels. Big Valley landowners and residents submitted applications to the County Boards of Supervisors, who then appointed the members of the BVAC. The BVAC is comprised of one county board member from each county, one alternate board member from each county and two public applicants from each county. The BVAC and county staff have dedicated countless hours to reviewing the data and content of the GSP, largely uncompensated. After careful consideration of the available data and community input from the BVAC and interested parties, the GSAs have developed the following sustainability goal:

The sustainability goal for the Big Valley Groundwater Basin is to maintain a locally governed, economically feasible, sustainable groundwater basin and surrounding watershed for existing and future legal beneficial uses with a concentration on agriculture. Sustainable management will be conducted in context with the unique culture of the basin, character of the community, quality of life of the Big Valley residents and the vested right of agricultural pursuits through the continued use of groundwater and surface water.

The BVGB sustainability goal will be culminated through DWR's better understanding of the surface water and groundwater conditions over time and the implementation of projects and management actions described in this GSP. Several areas of identified data gaps have been established and while an estimated future water budget has been completed, its accuracy is uncertain since many assumptions had to be made due to the lack of available data. The monitoring network established under this Plan includes new and existing monitoring wells, inflow/outflow measurement of surface water, groundwater quality, land subsidence, understanding upland recharge and an improved estimate of crop water use.

152 This monitoring will provide the GSAs and DWR a better understanding of the Basin water budget and  
153 timely information regarding any changes or trends.

154 The implementation of projects such as winter recharge studies currently in progress will help establish  
155 the feasibility of immediate actions the GSAs can take to improve Basin conditions. A detailed off-  
156 season water budget has not been conducted on the Upper Pit River watershed and this has been  
157 identified as a data gap within the Basin. The GSAs are working to locate funds to conduct an off-season  
158 and storage capacity water accounting which will provide the amount of available surface water for  
159 potential winter recharge in the Basin. Additional research will be conducted on the available use of  
160 non-active surface water rights for storage. An additional stream gage is being installed where the Pit  
161 River enters the Basin and will provide a more accurate accounting of the amount of surface water  
162 entering the Big Valley Basin from the Pit River. While better accounting is needed, it should be noted  
163 that SGMA and this GSP should not affect existing water rights in the Basin.

164 The understanding that has been gained by the GSAs is that with proper management and coordination  
165 with and support from federal landowner partners, the Big Valley Basin, which is not currently at risk of  
166 overdraft, will remain sustainable for the benefit of all interested parties.

### 167 **1.3 Background of Basin Prioritization**

168 The Big Valley GSAs are being forced to develop this GSP after exhausting its challenges to the  
169 California Department of Water Resources' (DWR's) determination that Big Valley qualifies as a  
170 medium-priority basin. DWR first prioritized the state's basins in 2014, at which time Big Valley was  
171 the lowest-ranked medium priority basin that had to develop a GSP. In 2019, DWR changed their  
172 prioritization process and criteria and issued draft and final prioritizations. In the end, Big Valley is still  
173 the lowest-ranked medium priority basin.

174 From the draft to final re-prioritization, the Big Valley GSAs recognize the scoring revisions made by  
175 DWR for Component 8.b, "Other Information Deemed Relevant by the Department." However, the  
176 GSAs continue to firmly believe that the all-or-nothing scoring for Component 7.a, regarding  
177 documented declining groundwater levels, is inconsistent with the premise of SGMA: that prioritization  
178 levels recognize different levels of impact and conditions across the basins of the state. DWR's  
179 adherence to treating all declines the same, assigning a fixed 7.5 points for any amount of documented  
180 groundwater level decline, renders meaningless the degrees of groundwater decline and penalizes those  
181 basins experiencing minor levels of decline, including Big Valley which has only experienced  
182 approximately 0.53 feet per year of groundwater level decline on average in the last 38 years.

183 Additionally, the GSAs recognize the adjustments made to Component 7.d, overall total water quality  
184 degradation. Noting that degradation implies a lowering from human-caused conditions, the Big Valley  
185 GSAs urge DWR to further refine the groundwater quality scoring process for Secondary Maximum  
186 Contamination Levels (MCLs) - which are not tied to public health concerns, but rather aesthetic issues  
187 such as taste and odor. Secondary MCLs which are due to naturally occurring minerals should not be  
188 factored into the scoring process. Here, the water quality conditions reflect the natural baseline and are  
189 not indicative of human-caused degradation and cannot be substantially improved through better  
190 groundwater management.



191 The Basin boundary was drawn with a regional scale map (CGS 1958) and was not drawn with as much  
192 precision as subsequent geologic maps. Additionally, the “upland” areas outside the Basin boundary are  
193 postulated to be recharge areas interconnected to the Basin, which is contrary to DWR’s definition of a  
194 lateral basin boundary as being, “...features that significantly impede groundwater flow” (DWR 2016c).  
195 The GSAs submitted a request to DWR for basin boundary modification, to integrate planning at the  
196 watershed level and leverage a wider array of multi-benefit water management options and strategies  
197 within the Basin and larger watershed. DWR’s denial of the boundary modification request greatly  
198 hampers jurisdictional opportunities to protect groundwater recharge areas in higher elevations. The  
199 final boundary significantly curtails management options to increase supply through upland recharge,  
200 requiring that groundwater levels be addressed primarily through demand restrictions. *See Appendix 1A*  
201 for communications with DWR regarding Basin prioritization ranking and boundary modification. The  
202 GSAs may consider future Basin boundary modification requests to DWR.

203 Development of this GSP by the GSAs, in partnership with the BVAC and members of the community,  
204 does not constitute agreement with DWR’s classification as a medium-priority basin – nor does it  
205 preclude the possibility of other actions by the GSAs or by individuals within the Basin seeking  
206 regulatory relief.

### 207 **1.3.1 Timeline**

208 In September 2014, the state of California enacted SGMA. This law requires medium- and high-priority  
209 groundwater basins in California to take actions to ensure they are managed sustainably. DWR is tasked  
210 with prioritizing all 515 defined groundwater basins in the state as high, medium, low and very low  
211 priority. Prioritization establishes which basins need to go through the process of developing a GSP.  
212 When SGMA was passed, basins had already been prioritized under the California Statewide  
213 Groundwater Elevation Monitoring (CASGEM) program, and that existing ranking process was used as  
214 the initial priority baseline for SGMA.

215 DWR was required to develop its rankings for SGMA based on the first seven criteria listed in **Table**  
216 **1-1**. For the final SGMA scoring process (DWR, 2019), groundwater basins with a score of 14 or greater  
217 (up to a score of 21) ranked as medium priority basins. Big Valley scored 13.5 and DWR chose to round  
218 the score up to put it in the medium priority category as the lowest ranked Basin in the state required to  
219 develop a GSP. Lassen County reviewed the 2014 ranking process and criteria that were used and found  
220 some potentially erroneous data. The county made a request to DWR for the raw data that was used,  
221 which were eventually provided, and verified the error that would have put the BVGB into the low  
222 priority category. However, because the comment period for these rankings had already expired in 2014  
223 (prior to the passage of SGMA), DWR would not revise their ranking. County staff were mis-led  
224 because when the rankings were first publicized, SGMA had not yet existed, and county staff were told  
225 that being ranked as a medium priority basin was insignificant and would actually be a benefit to the  
226 counties.

227 Once SGMA was passed and the onerous repercussions of being ranked as medium priority were better  
228 understood (and the counties identified erroneous data), DWR did not offer any recourse, simply saying  
229 the Big Valley Basin would remain ranked as medium priority and that the basins would soon be re-  
230 prioritized anyway.

231 **Table 1-1 Big Valley Groundwater Basin Prioritization**

Criteria	2014	2018	2019	Comments
2010 Population	1	1	1	
Population Growth	0	0	0	
Public Supply Wells	1	1	1	
Total # of Wells	1.5	2	2	Existing information inaccurate, and includes all types of wells, including newly constructed stockwatering wells under EQIP
Irrigated Acreage	4	3	3	
Groundwater Reliance	3	3.5	3.5	
Impacts	3	3	2	Declining water levels, water quality
Other Information	0	7	2	Streamflow, habitat and “other information determined to be relevant”
<b>Total Score</b>	<b>13.5</b>	<b>20.5</b>	<b>14.5</b>	<b>Medium priority each year</b>

Source: DWR 2019

232 In 2016, Lassen County submitted a request for a basin boundary modification as allowed under SGMA.  
 233 The request was to extend the boundaries of the BVGB to the boundary of the watershed. The purpose  
 234 of the proposed modification was to enhance management by including the volcanic areas surrounding  
 235 the valley sediments, including federally managed timberlands and rangelands, that have an impact on  
 236 groundwater recharge. The modification was proposed on a scientific basis but was denied by DWR  
 237 because the request, “...did not include sufficient detail and/or required components necessary and  
 238 evidence was not provided to substantiate the connection [of volcanic rock] to the porous permeable  
 239 alluvial basin, nor were conditions presented that could potentially support radial groundwater flow as  
 240 observed in alluvial basins.”

241 In 2018, DWR released an updated draft basin prioritization based on the eight components shown in  
 242 **Table 1-1** using slightly different data and methodology than previously used. For this prioritization,  
 243 Big Valley’s score increased from 13.5 to 20.5, primarily because of an addition of 5 ranking points  
 244 awarded under the category of “other information determined to be relevant” by DWR. DWR’s  
 245 justification for the five points was poorly substantiated as “Headwaters for Pit River/Central Valley  
 246 Project – Lake Shasta.” Lassen and Modoc counties sent a joint comment letter questioning DWR’s  
 247 justification and inconsistent assessment of these five points as well as their methodology for awarding  
 248 the same number of points for water level and water quality impacts to basins throughout the state  
 249 regardless of the severity of the impacts.

250 In 2019, DWR released their final prioritization with the BVGB score reduced to 14.5, but still ranked as  
 251 medium priority and subject to the development of a GSP. DWR’s documentation of the 2019  
 252 prioritization can be viewed on their website (DWR 2019).



Meanwhile, throughout this time, Lassen and Modoc counties began moving forward to comply with SGMA mandates through a public process that established them as the GSAs in 2017. The establishing resolutions forming the GSAs adopted findings that it was in the public interest of both counties to maintain local control by declaring themselves the GSA for the respective portion of the Basin. The Water Resources Control Board would become the regulating agency if the counties did not agree to be the GSAs since there were no other local agencies in a position or qualified to assume GSA responsibility. The counties obtained state grant funding to develop the GSP in 2018 and began the GSP development process and associated public outreach in 2019.

## 1.4 Description of Big Valley Groundwater Basin

The BVGB is identified by DWR in Bulletin 118 as Basin No. 5-004 (DWR, 2016a). The Basin boundary was drawn by DWR using a 1:250,000 scale geologic map produced by the California Geological Survey (CGS 1958) along the boundary between formations labeled as volcanic and those labeled as alluvial. The Basin boundary was not drawn with as much precision as subsequent geologic maps, and because of this the “uplands” areas outside the Basin boundary are postulated to be recharge areas interconnected to the Basin. The 60-year old map being used to define the Basin boundary is inadequate and contrary to DWR’s definition of a lateral basin boundary as being “features that significantly impede groundwater flow” (DWR 2016c).

The Basin is one of many small, isolated basins in the north-eastern region of California, an area with widespread volcanic formations, many of which produce large quantities of groundwater and are not included within the defined groundwater basin due to their classification as “volcanic” rather than “alluvial”.


The boundary between Lassen and Modoc counties runs west-east across the Basin. Each county formed a GSA for its respective portion of the Basin and the counties are working together to manage the Basin under a single GSP. The Basin, shown on **Figure 1-1**, encompasses an area of approximately 144 square miles with Modoc County comprising 40 square miles (28%) on the north and Lassen County comprising 104 square miles (72%) on the south. The Basin includes the towns of Adin and Lookout in Modoc County and the towns of Bieber and Nubieber in Lassen County. The ACWA is located along the boundary of both counties, occupying 22.5 square miles in the center of the Basin in the marshy/swampy areas along Ash Creek.

The BVGB, as drawn by DWR, is isolated and does not share a boundary with another groundwater basin. However, Ash Creek flows into Big Valley from the Round Valley Groundwater Basin at the town of Adin. Despite the half-mile gap of alluvium which may provide subsurface flow between the two basins, DWR doesn’t consider them interconnected due to the manner in which the basin boundary was defined.

The surface expression of the Basin boundary is defined as the contact of the valley sedimentary deposits with the surrounding volcanic rocks. The sediments in the Basin are comprised of mostly Plio-Pleistocene alluvial deposits and Quaternary lake deposits eroded from the volcanic highlands and some volcanic layers interbedded within the alluvial and lake deposits. The Basin is surrounded by Tertiary- and Miocene-age volcanic rocks of andesitic, basaltic and pyroclastic composition. These volcanic

292 deposits may be underlain by alluvial deposits in these upland areas. The boundary between the BVGB  
293 and the surrounding volcanic rocks generally correlates with change in topography along the margin of  
294 the valley.

295 However, throughout the development of this GSP, the inaccuracies of the Basin boundary have become  
296 clear and revisions to the boundary are needed. The hydrogeology of Big Valley is complex, and  
297 requiring an all or nothing (inside or outside Basin Boundary), one size fits all approach to the Basin  
298 under SGMA does not sit well with stakeholders and will be difficult to implement by the GSAs.

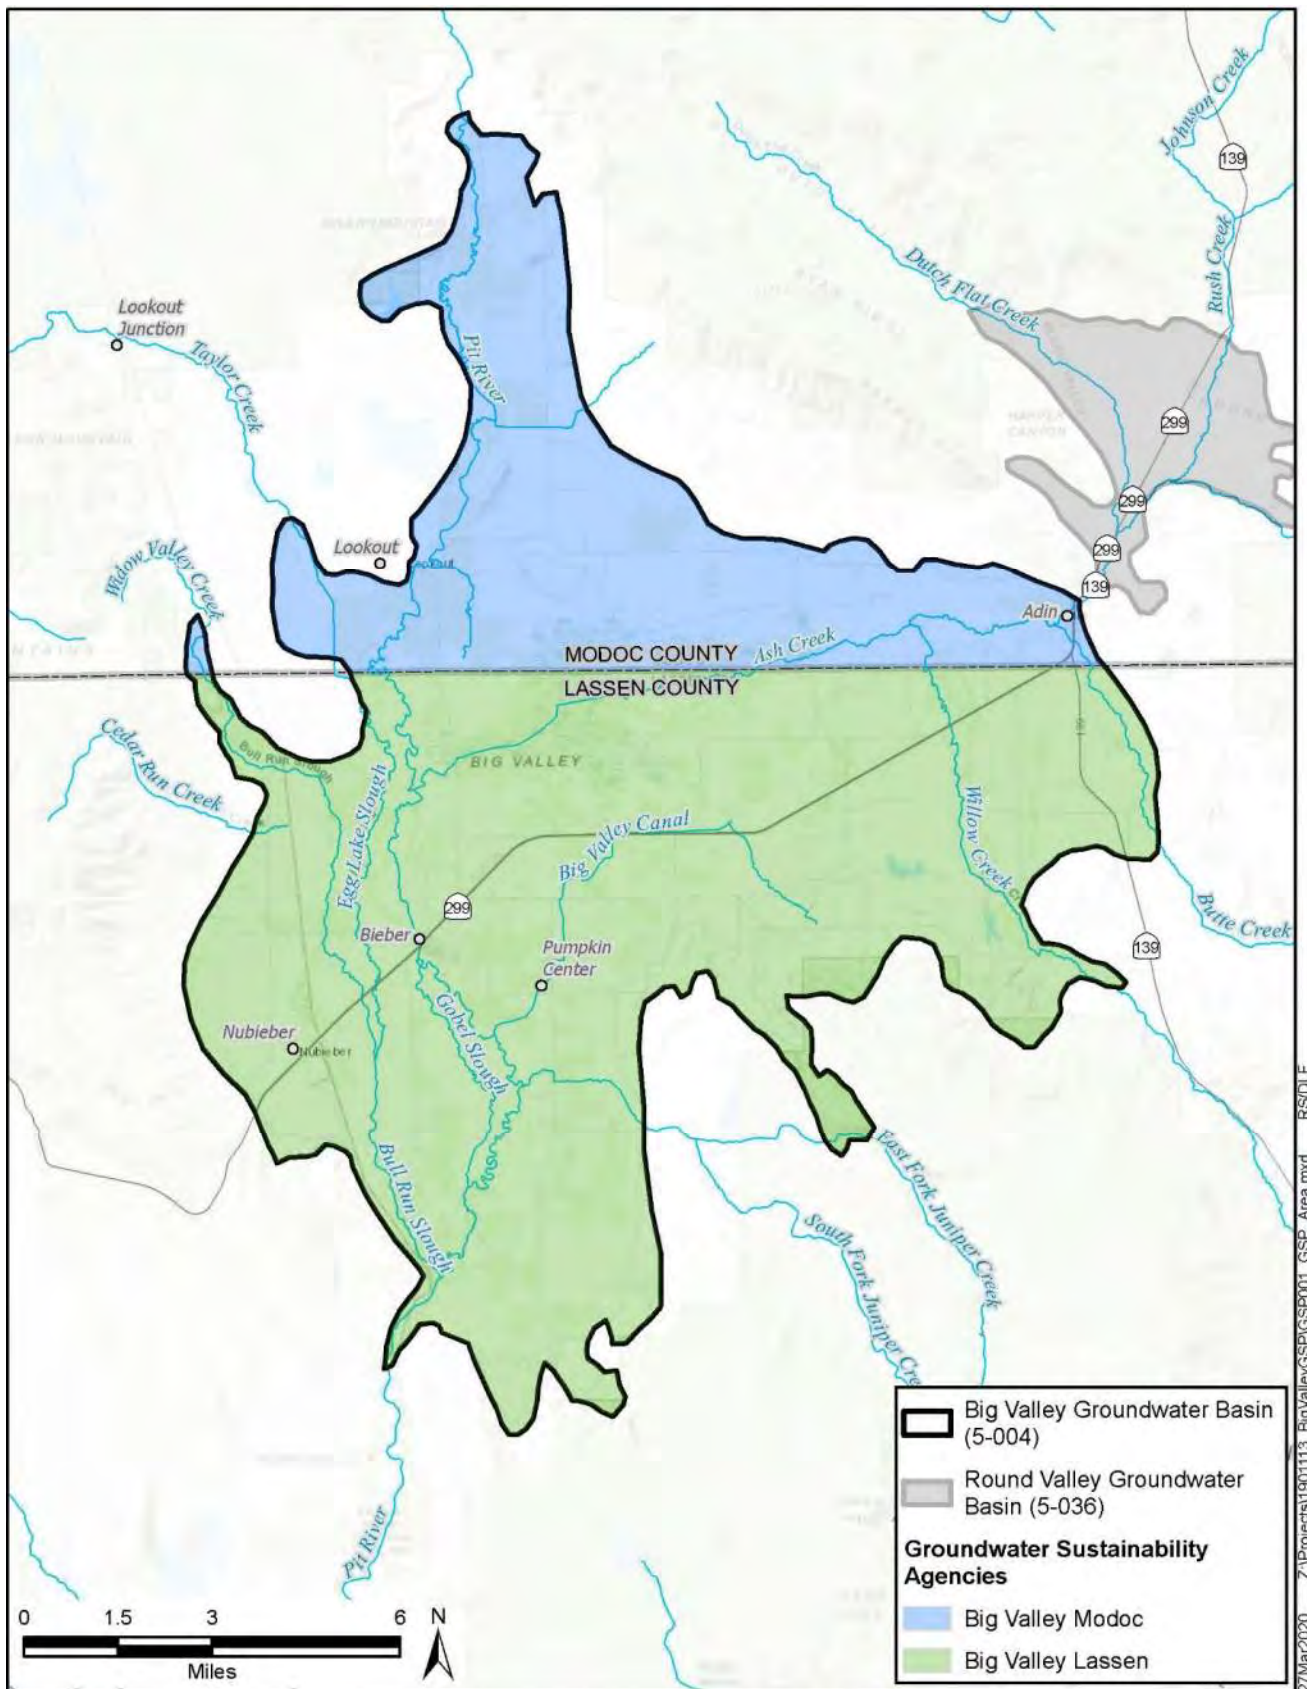

**Figure 1-1 Big Valley Groundwater Basin, Surrounding Basins and GSAs**

Source: DWR 2018d

## 2. Agency Information § 354.6

---

The two Big Valley GSAs were established for the entire BVGB to jointly develop, adopt and implement a single mandated GSP for the BVGB pursuant to SGMA and other applicable provisions of law.

### 2.1 Agency Names and Mailing Addresses

The following contact information is provided for each GSA pursuant to California Water Code (CWC) §10723.8.

Modoc County  
204 S. Court Street  
Alturas, CA 96101  
(530) 233-6201  
tiffanymartinez@co.modoc.ca.us

Lassen County  
Department of Planning and Building Services  
707 Nevada Street, Suite 5  
Susanville, CA 96130  
(530) 251-8269  
landuse@co.lassen.ca.us

### 2.2 Agency Organization and Management Structure

The two GSAs, Lassen and Modoc counties, were established in 2017 as required by SGMA, mandated legislation. **Appendix 2A** contains the resolutions forming the two agencies. Each GSA is governed by a five-member Board of Supervisors. In 2019, the two GSAs established the BVAC through a MOU, included as **Appendix 2B**. The membership of the BVAC is comprised of:

- One member of the Lassen County Board of Supervisors selected by said Board
- One alternate member of the Lassen County Board of Supervisors selected by said Board
- One member of the Modoc County Board of Supervisors selected by said Board
- One alternate member of the Modoc County Board of Supervisors selected by said Board
- Two public members selected by the Lassen County Board of Supervisors. Said members must either reside or own property within the Lassen County portion of the BVGB
- Two public members selected by the Modoc County Board of Supervisors. Said members must either reside or own property within the Modoc County portion of the BVGB

The decisions made by the BVAC are not binding, but the committee serves the important role of providing formalized, local stakeholder input and guidance to the GSA governing bodies, GSA staff and consultants in developing and implementing the GSP.

## 325 **2.3 Contact Information for Plan Manager**

326 The plan manager is from Lassen County and can be contacted at:

327 Gaylon Norwood

328 Assistant Director

329 Lassen County Department of Planning and Building Services

330 707 Nevada Street, Suite 5

331 Susanville, CA 96130

332 (530) 251-8269

333 gnorwood@co.lassen.ca.us

## 334 **2.4 Authority of Agencies**

335 The GSAs were formed in accordance with the requirements of CWC §10723 et seq. Both GSAs are  
336 local public agencies organized as general law counties under the State Constitution and have land use  
337 responsibility for their respective portions of the Basin. The resolutions of formation for the GSAs are  
338 included in **Appendix 2B**.

### 339 **2.4.1 Memorandum of Understanding**

340 In addition to the MOU establishing the BVAC, the two GSAs may enter into an agreement to jointly  
341 implement the GSP for the Basin. However, this agreement is not a SGMA requirement .

## 3. Plan Area § 354.8

---

### 3.1 Area of the Plan

This GSP covers the BVGB, which is located within Modoc and Lassen counties and is approximately 92,057 acres (about 144 square miles). The Basin is a broad, flat plain extending about 13 miles north to south and 15 miles east to west and consists of depressed fault blocks surrounded by tilted fault-block ridges. The BVGB is designated as basin number 5-004 by the DWR and was most recently described in the 2003 update of Bulletin 118 (DWR 2003):

The basin is bounded to the north and south by Pleistocene and Pliocene basalt and Tertiary pyroclastic rocks of the Turner Creek Formation, to the west by Tertiary rocks of the Big Valley Mountain volcanic series and to the east by the Turner Creek Formation.


The Pit River enters the Basin from the north and exits at the southernmost tip of the valley through a narrow canyon gorge. Ash Creek flows into the valley from Round Valley and disperse into Big Swamp. Near its confluence with the Pit River, Ash Creek reforms as a tributary at the western edge of Big Swamp. Annual precipitation ranges from 13 to 17 inches.

Communities in the Basin are Nubieber, Bieber, Lookout and Adin which are categorized as census-designated places. Highway 299 is the most significant east to west highway in the Basin, with Highway 139 at the eastern border of the Basin. **Figure 3-1** shows the extent of the GSP area (the BVGB) as well as the significant water bodies, communities and highways.

Lassen and Modoc counties were established as the exclusive GSAs for their respective portions of the Basin in 2017. **Figure 3-1** shows the two GSAs within the Basin. Round Valley Basin (5-036) is a very low-priority basin to the northeast; DWR does not consider it to be connected to Big Valley Basin, but there is a half-mile-wide gap of alluvium between the basins. The ACWA occupies 14,583 acres in the center of Big Valley.

No other GSAs are associated with the Basin, nor are there any areas of the Basin that are adjudicated or covered by an alternative to a GSP. **Landowners have the right to extract and use groundwater beneath their property.**



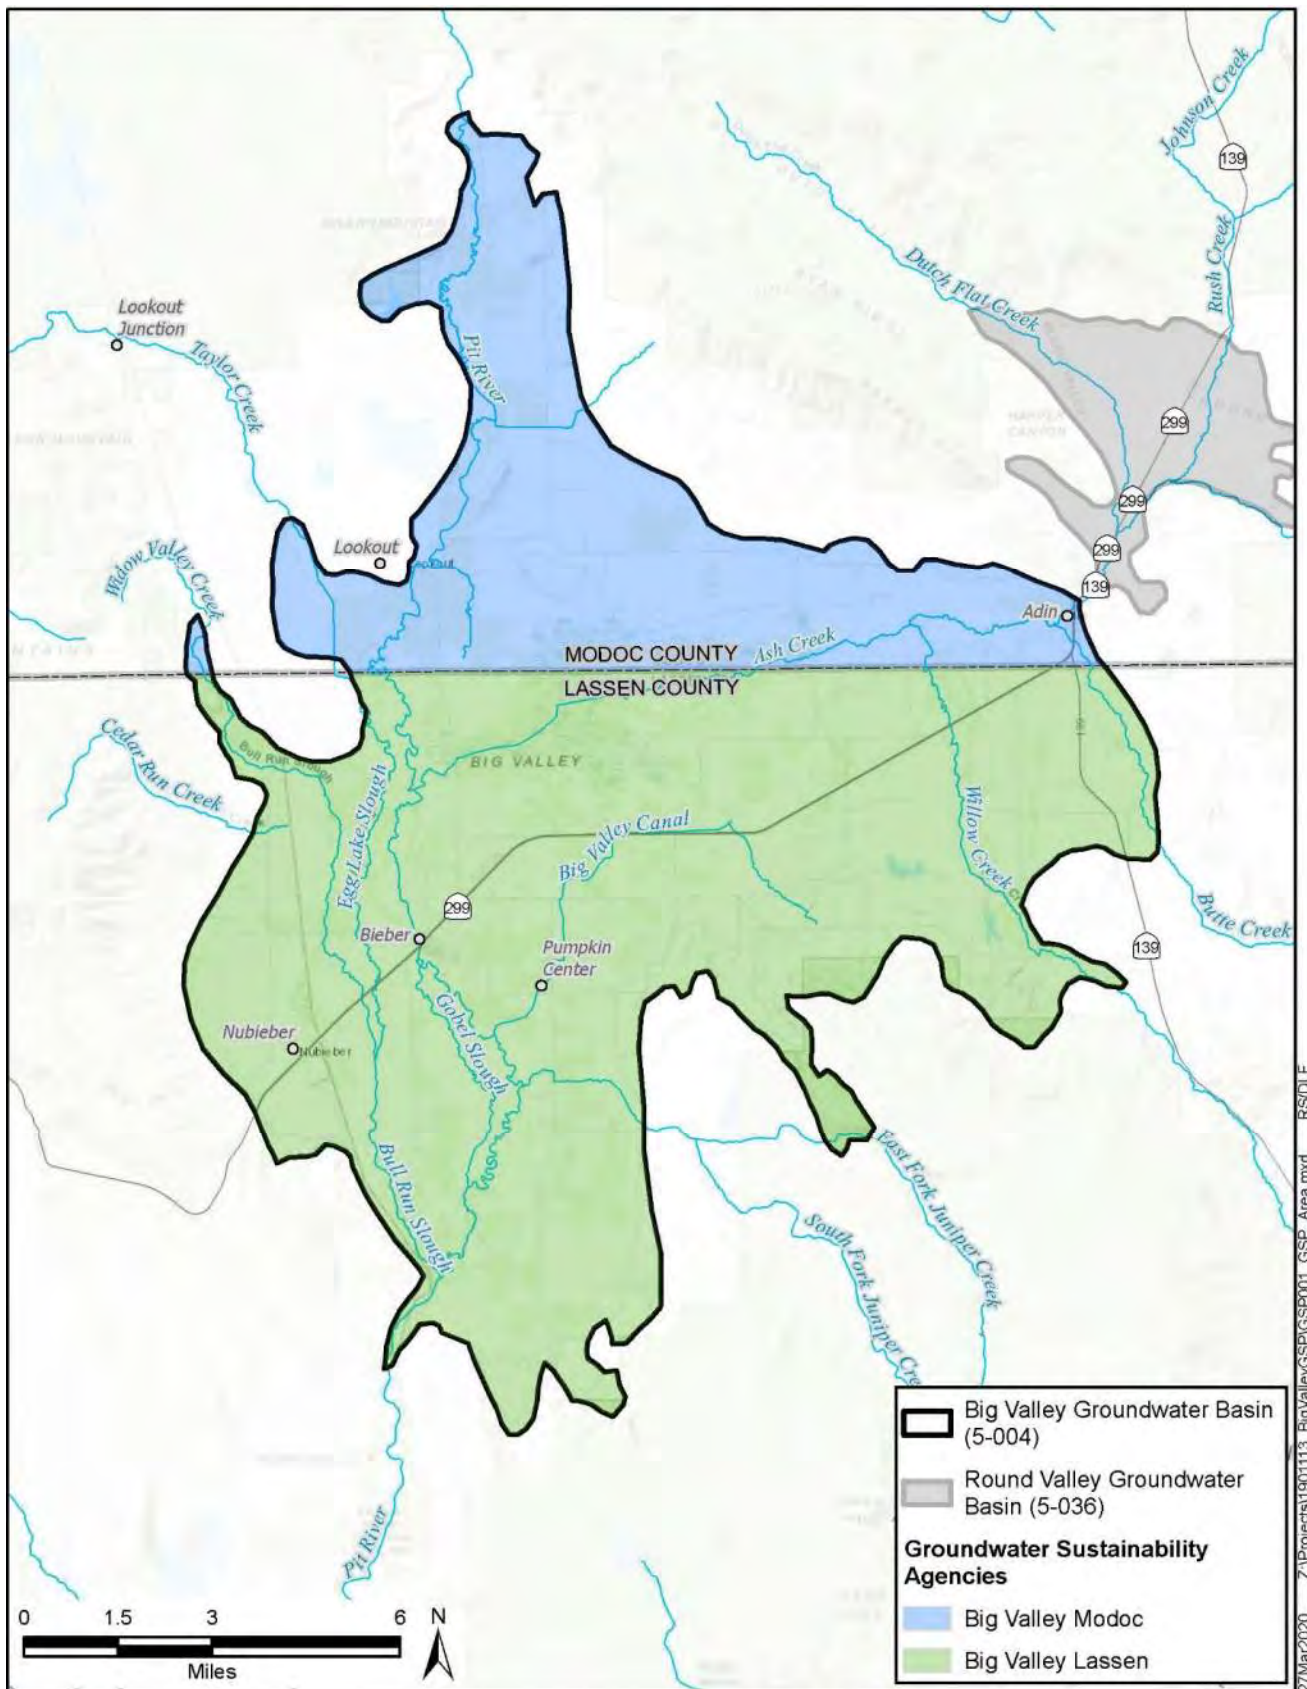

**Figure 3-1 Area Covered by the GSP**  
 Source: DWR 2018d

## 3.2 Jurisdictional Areas

In addition to the GSAs, other entities have water management authority or planning responsibilities in the Basin, as discussed below. A map of the jurisdictional areas within the Basin is shown on **Figure 3-2**.

### 3.2.1 Superior Courts

Need text here...

### 3.2.2 Federal Jurisdictions

The U.S. Bureau of Land Management (BLM) and the U.S. Forest Service (USFS or Forest Service) have jurisdiction over land within the Basin including portions of the Modoc National Forest, shown on **Figure 3-2**. Information on their Land and Resource Management Plan is described in Section 3.8. The Forest Service Ranger Station in Adin is a non-community public water supplier with a groundwater well, identified as Water System No. CA2500547. (SWRCB 2021)

### 3.2.3 Tribal Jurisdictions

The U.S. Bureau of Indian Affairs (BIA) Land Area Representations database identifies one tribal property in the BVGB (BIA 2020a). Lookout Rancheria, shown on **Figure 3-2**, is associated with the Pit River Tribe. There are other “public domain allotments” or lands held in trust for the exclusive use of individual tribal members within the Basin not shown. (BIA 2020b)

### 3.2.4 State Jurisdictions

The CDFW has jurisdiction over the ACWA, as shown on **Figure 3-2**.

### 3.2.5 County Jurisdictions


The County of Modoc and the County of Lassen have jurisdiction over the land within the Basin in their respective counties as shown on **Figure 3-1** and **Figure 3-2**. Information on their respective General Plans is provided in Section 3.8 – Management Areas. Within the Basin, Modoc County includes the census-designated community of Adin and part of the community of Lookout. Within the Basin, Lassen County contains the census-designated communities of Bieber and Nubieber.

### 3.2.6 Agencies with Water Management Responsibilities


#### Upper Pit Integrated Regional Water Management Plan

Big Valley lies within the area of the Upper Pit Integrated Regional Water Management Plan (IRWMP), which was developed by the Regional Water Management Group (RWMG). The IRWMP is managed by the North Cal-Neva Resource Conservation and Development Council (North Cal-Neva), a member of the RWMG along with 27 other stakeholders. Other stakeholders include community organizations, environmental stewards, water purveyors, numerous local, county, state and federal agencies, industry, the University of California, and the Pit River Tribe. The IRWMP addresses a 3-million-acre watershed across four counties in northeastern California. **Figure 3-3** shows the Upper Pit



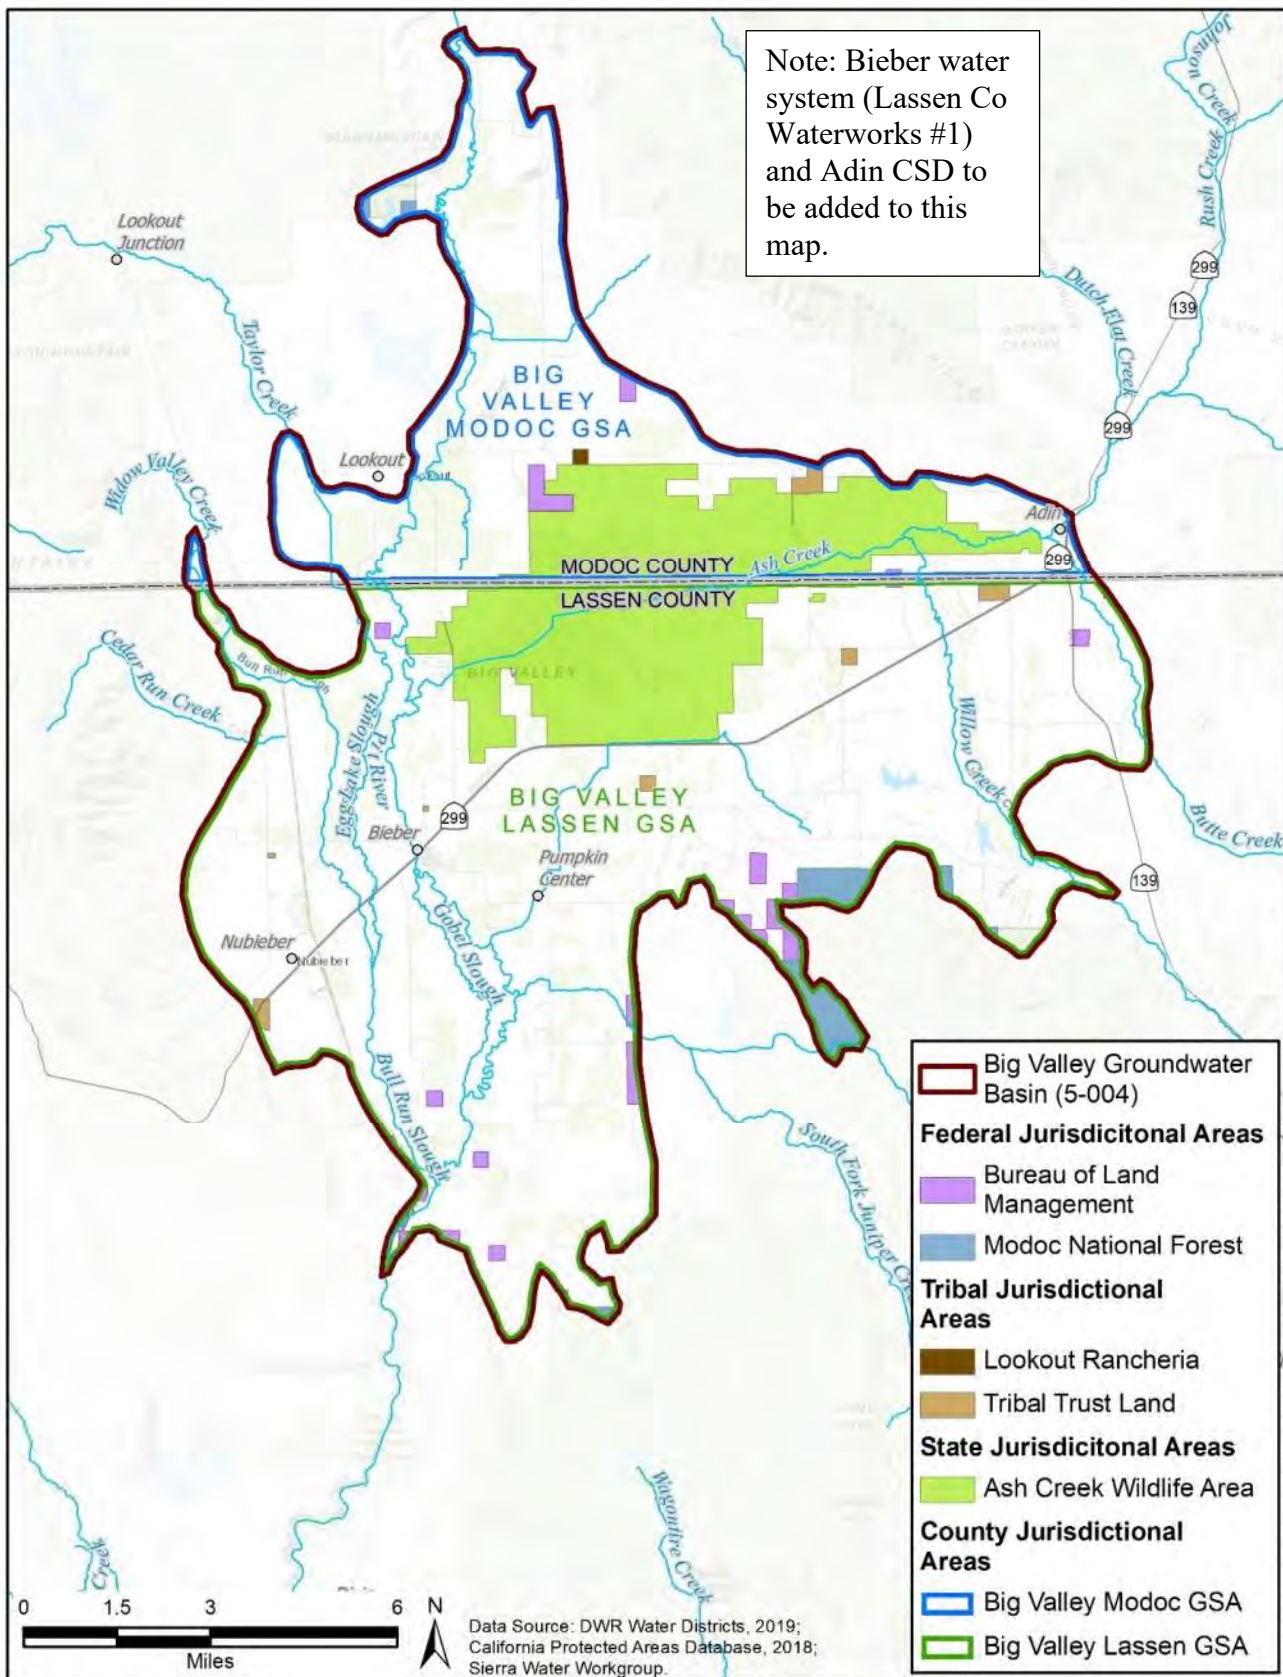

**Figure 3-2 Jurisdictional Areas**

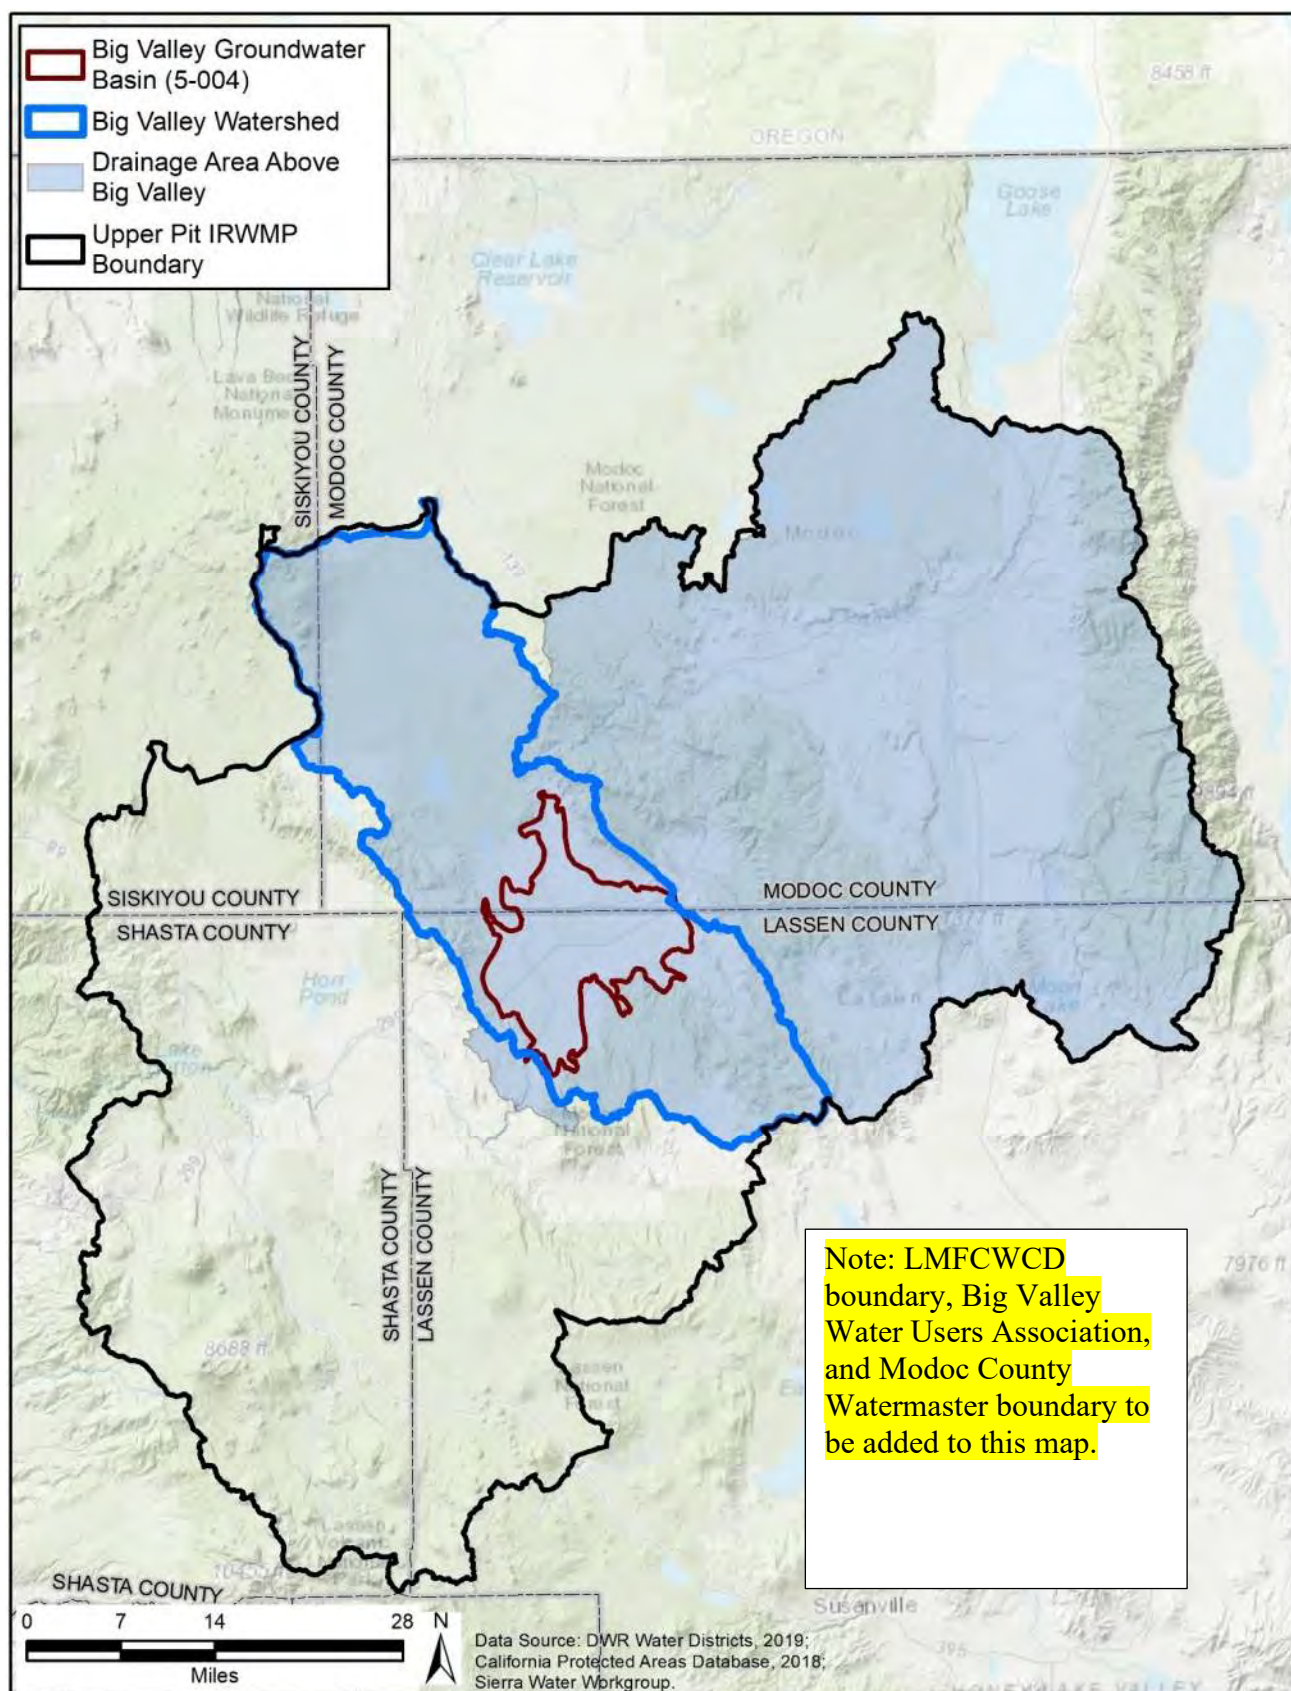

**Figure 3-3 Upper Pit IRWMP, Watershed and BVGB Boundaries**



413 IRWMP boundary and the BVGB's location in the center of the IRWMP area. **Figure 3-3** also shows  
414 the complete watershed that flows into the BVGB and the local watershed area. At 92,057 acres, the  
415 BVGB comprises about 3 percent of the IRWMP area at its center.

416 The IRWMP was established under the Integrated Regional Water Management Act (Senate Bill  
417 [SB]1672) which was passed in 2002 to foster local management of water supplies to improve  
418 reliability, quantity and quality and to enhance environmental stewardship. Several propositions were  
419 subsequently passed by voters to provide funding grants for planning and implementation. Beginning in  
420 early 2011, an IRWMP was developed for the Upper Pit River area and was adopted in late 2013.  
421 During 2017 and 2018, the IRWMP was revised according to 2016 guidelines.

#### 422 **Lassen-Modoc County Flood Control and Water Conservation District**

423 The Lassen-Modoc County Flood Control and Water Conservation District (District) was established in  
424 1959 by the California Legislature and was activated in 1960 by the Lassen County Board of  
425 Supervisors (LAFCo 2018). The entirety of the Lassen and Modoc counties portions of the Basin is  
426 covered by the District, extending from the common boundary northward beyond Canby and Alturas, as  
427 shown on **Figure 3-3**. In 1965, the District established Zone 2 in a nearly 1000-square mile area  
428 encompassing and surrounding Big Valley and, in 1994, the District designated the same boundaries for  
429 Zone 2 as management Zone 2A for, "...groundwater management including the exploration of the  
430 feasibility of replenishing, augmenting and preventing interference with or depletion of the subterranean  
431 supply of waters used or useful or of common benefit to the lands within the zone."

#### 432 **Lassen County Waterworks District #1**

433 Lassen County Waterworks District #1 provides water and sewer services to the town of Bieber. The  
434 waterworks district boundary is shown on **Figure 3-2**.

#### 435 **Adin Community Services District**

436 Adin Community Services District provides wastewater services to the town of Adin. The district  
437 boundary is shown on **Figure 3-2**.

### 438 **3.3 Land and Water Use**

439 This section describes land use in the BVGB, water use sectors and water source types using the best  
440 available data. The most recent, best available data for distinguishing surface water and groundwater  
441 uses comes from DWR land use datasets. This data is developed by DWR "to serve as a basis for  
442 calculating current and projected water uses." Surveys performed prior to 2014 were developed by  
443 DWR using some aerial imagery with significant field verification. These surveys also included DWR's  
444 estimate of water source.

445 Since 2014, DWR has developed more sophisticated methods of performing the surveys with a higher  
446 reliance on remote sensing information. These more recent surveys do not make available the water  
447 source. **Table 3-1** is a listing of the years for which surveys are available.

448

**Table 3-1 Available DWR Land Use Surveys**

Year	Modoc County	Lassen County	Water Source Included
1997	Yes	Yes	Yes
2011	Yes	No	Yes
2013	No	Yes	Yes
2014	Yes	Yes	No
2016	Yes	Yes	No <sup>a</sup>
<u>Note:</u> <sup>a</sup> DWR provided the GSAs hybrid a hybrid dataset with the 2011 and 2013 water sources superimposed onto the 2016 land use Source: DWR 2020d			


449

450 Land use in the BVGB is organized into the water use sectors listed in **Table 3-2**. These sectors differ  
451 from DWR's water use sectors identified in Article 2 of the GSP regulations because DWR's sectors  
452 don't adequately describe the uses in Big Valley. **Figure 3-4** shows the 2016 distribution of land uses  
453 and **Table 3-2** summarizes the acreages of each. Several data sources were used to designate land uses  
454 as described below, including information provided by DWR through a remote sensing process  
455 developed by Land IQ. (DWR 2016d) Other data sources are described below.

456

**Table 3-2 2016 Land Use Summary by Water Use Sector**

Water Use Sector	Acres	Percent of Total
Community <sup>a</sup>	250	<1%
Industrial	196	<1%
Agricultural	22,246	24%
State Wildlife Area <sup>b</sup>	14,583	16%
Managed Recharge	-	0%
Native Vegetation and Rural Domestic <sup>c</sup>	54,782	60%
<b>Total</b>	<b>92,057</b>	<b>100%</b>
<u>Notes:</u> <sup>a</sup> Includes the use in the communities of Bieber, Nubieber and Adin <sup>b</sup> Made up of a combination of wetlands and non-irrigated upland areas <sup>c</sup> Includes the large areas of land in the Valley which have domestic wells interspersed Source: Modified from DWR 2020d		

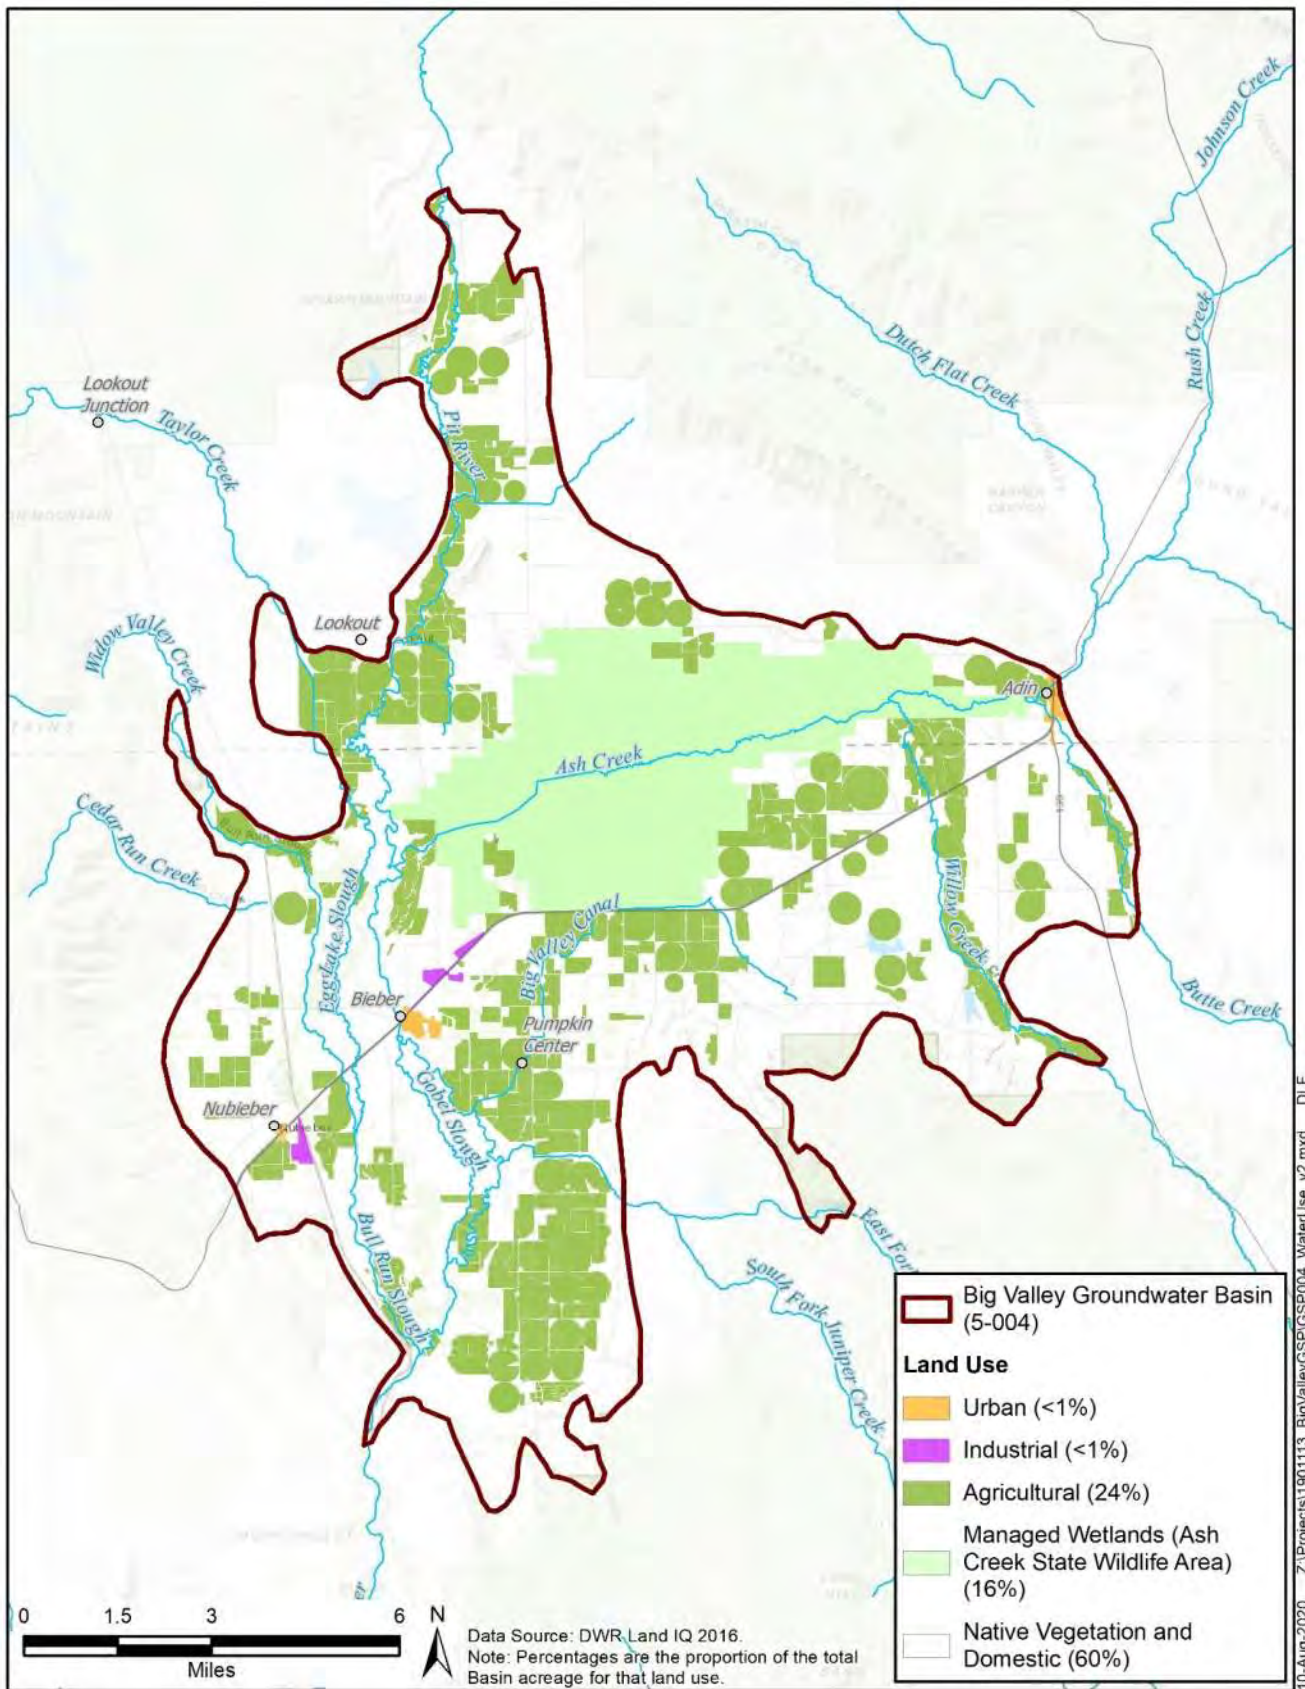

10-Aug-2020 Z:\Projects\1901113\_BigValleyGSP\GSP004\_WaterUse\_v2.mxd DLF

**Figure 3-4 Land Use by Water Use Sector**

- **Community** This is non-agricultural, non-industrial water use in the census-designated places of Bieber, NuBieber and Adin, although some of these areas may also have some minor industrial uses. These community areas were delineated using the areas designated as “urban” by DWR (2016d). DWR’s data included the areas north and northeast of Bieber (area of the former mill and medical center) as “urban.” For this GSP, those areas were re-categorized from urban to industrial, as that is more descriptive of the actual land use. In addition, parcels that make up the core of Nubieber were included as community.
- **Industrial** There is limited industrial use in the Basin. The DWR well log inventory shows 6 industrial wells, all located at the inactive mill in Bieber. The areas north and northeast of Bieber, including the former mill and the medical center have been categorized as industrial. In addition, the parcels associated with railroad operations in Nubieber were added. There is some industrial use associated with agriculture but that is included under the agricultural water use sector.
- **Agricultural** Agricultural use is spread across the Basin and was delineated using DWR’s (2016g) land use data<sup>1</sup>.
- **State Wildlife Area** The area delineated in **Figure 3-4** is the boundary of the ACWA, located within the center of the Basin. The area includes some wetlands created by the seasonal flow of 6 streams and year-round flow from Ash Creek. The area also has upland habitat.
- **Managed Recharge** Flood irrigation of some fields and natural flooding of lowland areas provides recharge to the Basin even though it is not of a formalized nature that would put it into this managed recharge category. Some of the future projects and management actions in this GSP include managed recharge.
- **Native Vegetation** Native vegetation is widespread throughout the Basin. Many of the areas under this category also have domestic users. Native vegetation and domestic land uses are categorized together because it is not possible to distinguish between the two with readily available data.
- **Domestic** This sector includes water use for domestic purposes, which aren’t located in a community service district. Domestic use generally occurs in conjunction with agricultural and native vegetation and is best represented on the map categorized with native vegetation, as most of the agricultural area is delineated by field and does not include residences.
- **Conservation Reserve Project (CRP) and Wetlands Reserve Program (WRP)** [Need text here.](#)

The Big Valley GSAs are aware of illegal land use activity within the Basin (i.e., unlicensed marijuana growers) which is likely having a negative impact on surface water quality and quantity within the Basin. This illegal activity is occurring both within the alluvial portion of the Basin and the upstream watershed and often includes groundwater use and illegal diversions of surface water. Lassen and Modoc counties have limited staff to monitor and report this situation and enforcement action is within the purview of state and federal agencies. These agencies include the Bureau of Cannabis Control,

<sup>1</sup> This dataset has been identified as being inaccurate and has been included as a data gap.

498 CDFW, State Water Board and the BLM. To date, these state and federal agencies have not taken  
499 aggressive enforcement action against this illegal activity and according to county staff (Norwood  
500 2021), the problem is getting noticeably worse over time. The timing and volume of these illegal  
501 diversions cannot be quantified at this time.

### 502 **3.3.1 Water Source Types**


503 The Basin has two water source types: groundwater and surface water. Recycled water<sup>2</sup> and desalinated  
504 water are not formally utilized in the Basin nor is stormwater used as a formal supplemental water  
505 supply at the time of the development of this GSP. Informal reuse of irrigation water occurs with capture  
506 and reuse of tail water by farmers and ranchers. Storm water is stored in reservoirs for future use as a  
507 formal water source. **Figure 3-5** and shows an estimate of the distribution of water sources to lands  
508 throughout the Basin. Chapter 6 – Water Budget provides details on how the sources were mapped for  
509 this figure.

510 There are three public water suppliers (as designated by the State Water Board) in the Basin use  
511 groundwater: Lassen County Waterworks District #1 in Bieber, the Forest Service Ranger Station in  
512 Adin and the California Department of Forestry and Fire Protection (CAL FIRE) conservation camp  
513 west of the BVGB. The conservation camp is located outside the Basin boundary, but their supply well  
514 is inside the Basin and the water is pumped up to the camp. Many domestic users have groundwater  
515 wells, but there are some surface water rights from Ash Creek and the Pit River that are designated for  
516 domestic use. The ACWA is fundamentally supported by surface water, but the CDFW does have three  
517 wells that are utilized in the fall for habitat enhancement.

---

<sup>2</sup> Recycled water generally refers to treated urban wastewater that is used more than once before it passes back into the water cycle. (WateReuse Association, 2020)



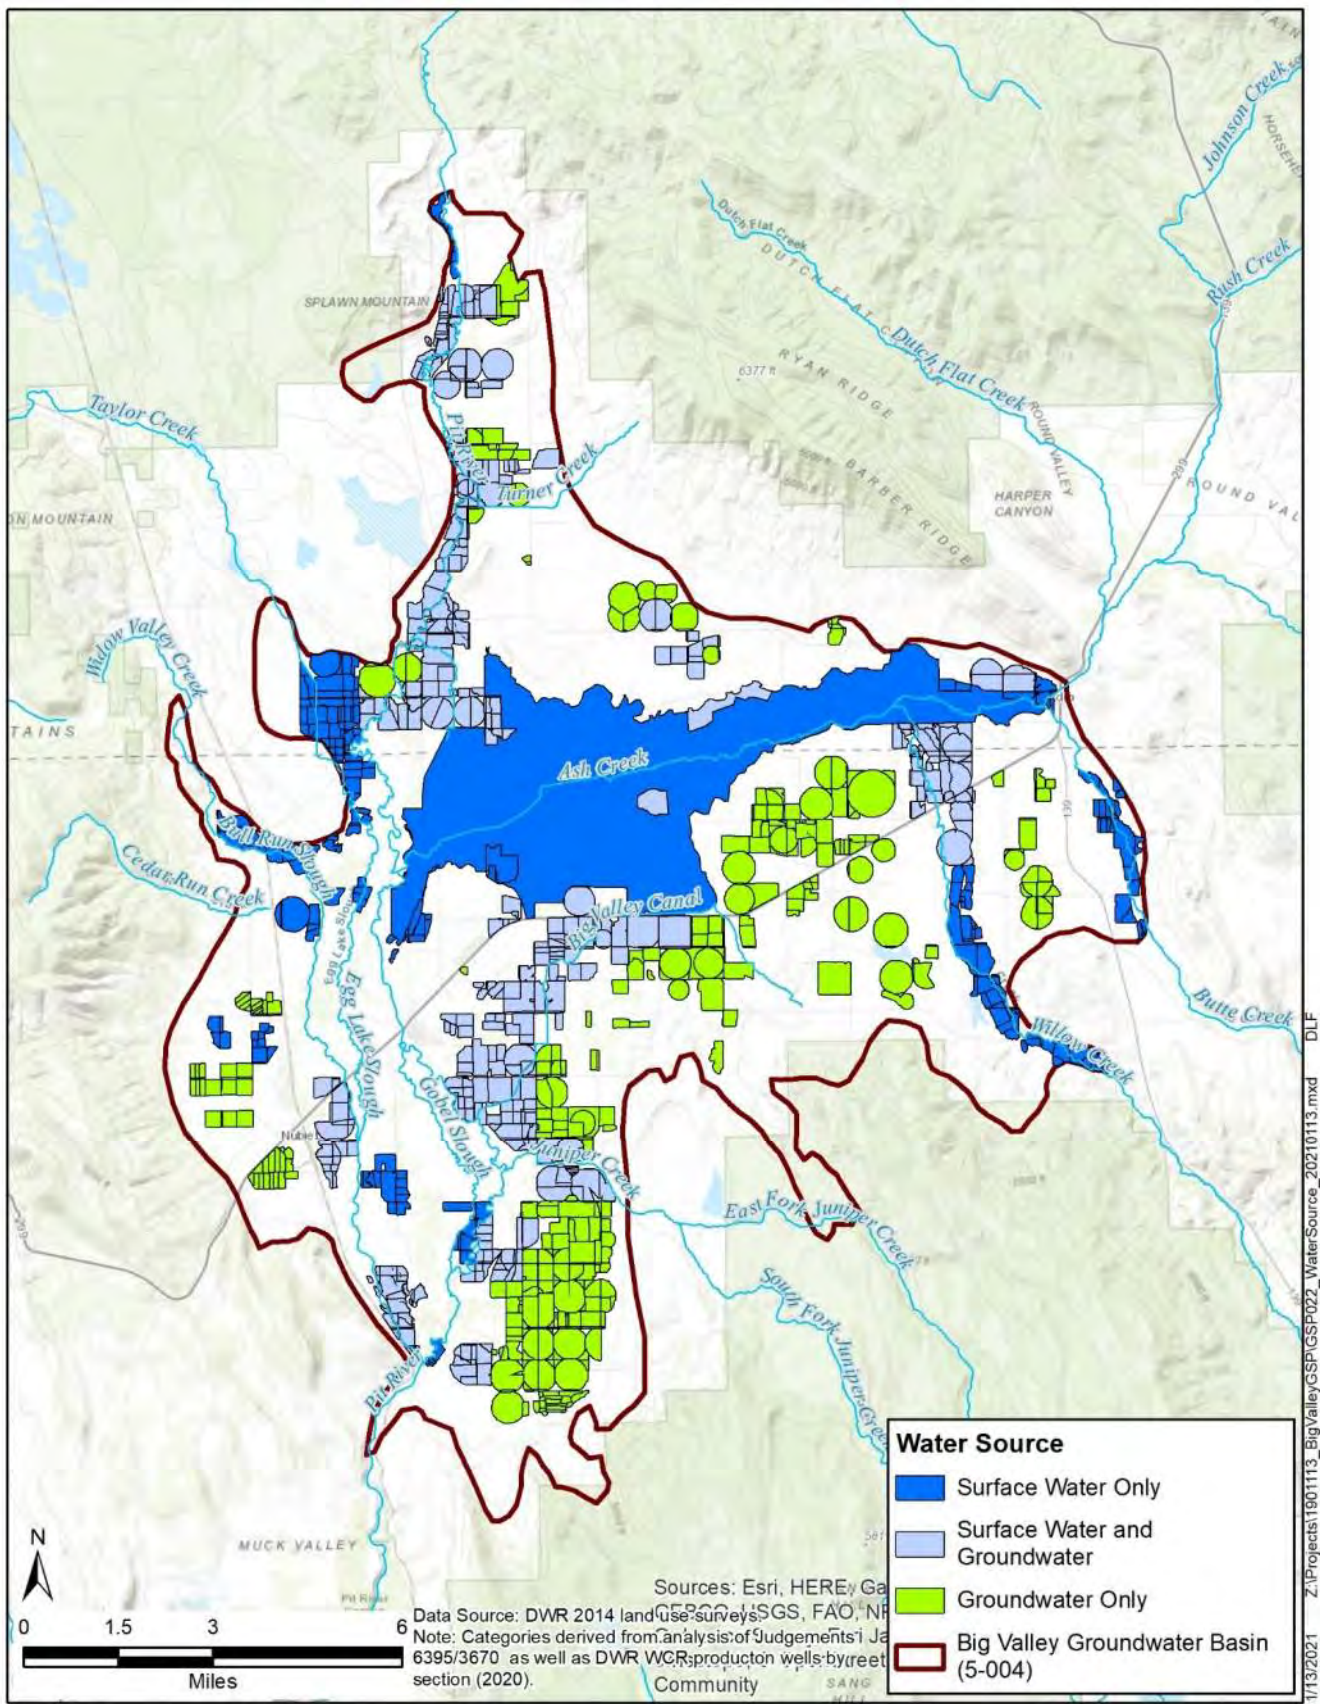

Z:\Projects\1901113\_BigValleyGSP\GSP022\_WaterSource\_20210113.mxd DLF 1/13/2021

**Figure 3-5 Water Sources**



## 3.4 Inventory and Density of Wells

### 3.4.1 Well Inventory

The best available information about the number, distribution and types of wells in Big Valley comes from well completion reports (WCRs) maintained by DWR<sup>3</sup>. The most recent catalog of WCRs was provided through their website (DWR, 2018c) as a statewide map layer. This data includes an inventory and statistics about the number of wells in each section<sup>4</sup> under three categories: domestic, production, or public supply. **Table 3-3** shows the unverified number of wells in the BVGB for each county from this data. Many may be inactive or abandoned and this data gap will need to be filled over time. Once this data gap is filled, Basin priority could be affected.

**Table 3-3 Well Inventory in the BVGB**

WCR 2018 DWR Map Layer			DWR 2015 and 2017 WCR Inventory		
Type of Well <sup>a</sup>	Lassen County Total Wells	Modoc County Total Wells	Proposed Use of Well <sup>b</sup>	Lassen County Total Wells	Modoc County Total Wells
Domestic	136	81	Domestic	142	79
Production	177	76	Irrigation	157	65
			Stock	11	5
			Industrial	6	0
Public Supply	5	1	Public	5	1
<b>Subtotal =476</b>	<b>318</b>	<b>158</b>	<b>Subtotal = 471</b>	<b>321</b>	<b>150</b>
			Monitor	55	0
			Test	25	29
			Other	7	2
			Unknown	27	7
<b>Total =476</b>	<b>318</b>	<b>158</b>	<b>Total = 623</b>	<b>435</b>	<b>188</b>

Source:

<sup>a</sup> DWR 2018 Statewide Well Completion Report Map Layer; downloaded April 2019.

<sup>b</sup> DWR Well Completion Report Inventories from DWR data provided to the counties in 2015 and 2017

Prior to 2018, the counties had requested and received WCRs for their respective areas from DWR during 2015 and 2017, which also included an inventory of the wells. This data source had additional well categories included as shown in **Table 3-3**, which are more closely tied to the categories identified by the well drillers when each WCR is submitted and provides additional information about the use of the wells.

The correlation between the 2018 WCR map layer categories and the categories in the 2015 and 2017 WCR inventory provided to the counties is indicated in **Table 3-3** by the grey shading. The table shows similar totals from the two datasets for the number of domestic, production and public supply wells. It is

<sup>3</sup> All water well drillers with a C57 drilling license in California are required to submit a well completion report to DWR whenever a well is drilled, modified, or destroyed.

<sup>4</sup> A section is defined through the public land survey system as a 1 mile by 1 mile square of land.

unknown why these two datasets don't match exactly, but both datasets are provided to represent the data available for this GSP. As stated earlier, verification of the data in this table needs to occur. This table shows that more than 600 wells have been drilled, of which 476 are of a type that could involve extraction (i.e., domestic, production, or public supply)<sup>5</sup>. It is unknown how many wells are actively used, as some portion of them are likely abandoned. Abandoned wells no longer in use should be formally destroyed by state well standards. The 2015 and 2017 inventory of WCRs showed six well destructions, all on the Lassen County side of the Basin. It should be noted that some of the recent wells in the Basin were drilled in cooperation with state programs to provide stock watering outside of the riparian area for improvement of water quality.

### 3.4.2 Well Density

**Figure 3-6, Figure 3-7 and Figure 3-8** show the density of wells in the Basin per square mile for domestic, production and public supply, respectively, based on the 2018 WCR DWR map layer. These maps provide an approximation of extraction well distributions and give a general sense of where groundwater use occurs.


**Figure 3-6** shows that domestic wells are located in 74 of the 180 sections (including partial sections) that comprise the BVGB. The density varies from 0 to 18 wells per square mile with a median value of two wells per section and an average of three wells per section. The highest densities of domestic wells are located near Adin, Bieber and Lookout and in a section to the east of Lookout and a section south of Adin. In addition, 22 wells are present in the four sections around the town of Nubieber.

**Figure 3-7** shows that production wells (primarily for irrigation) are located in 93 of the 180 sections with a maximum density of nine wells per section (median: 2 wells per section, average: nearly 3 wells per section). The highest densities of production wells are located between the towns of Bieber and Adin, to the southeast of Bieber and one section northeast of Lookout.

**Figure 3-8** shows that public supply wells have been drilled in four sections. It should be noted that the designation as a public supply well that is depicted on the map is from the designation provided in the WCR by the driller when it was drilled. The State Water Board identifies three public water suppliers in the BVGB: Lassen County Waterworks District #1 which is a community system with two wells serve Bieber; the Forest Service station in Adin which maintains a well for non-community supply to its employees and visitors; and the CAL FIRE conservation camp west of the Basin. These public suppliers account for three of the six public wells with WCRs. The other three are either inactive or aren't designated as State Water Board public supply. The CAL FIRE conservation camp well does not show up as a public supply well in the WCR inventory, but its location is shown on **Figure 3-8**.


---

<sup>5</sup> It should be noted that the majority of the stock watering wells were drilled in the 2009 to 2014 timeframe as part of the EQIP program to move watering of stock away from stream channels and that this increase in the inventory of wells in the Basin was used by DWR to put Big Valley into the medium prioritization category.

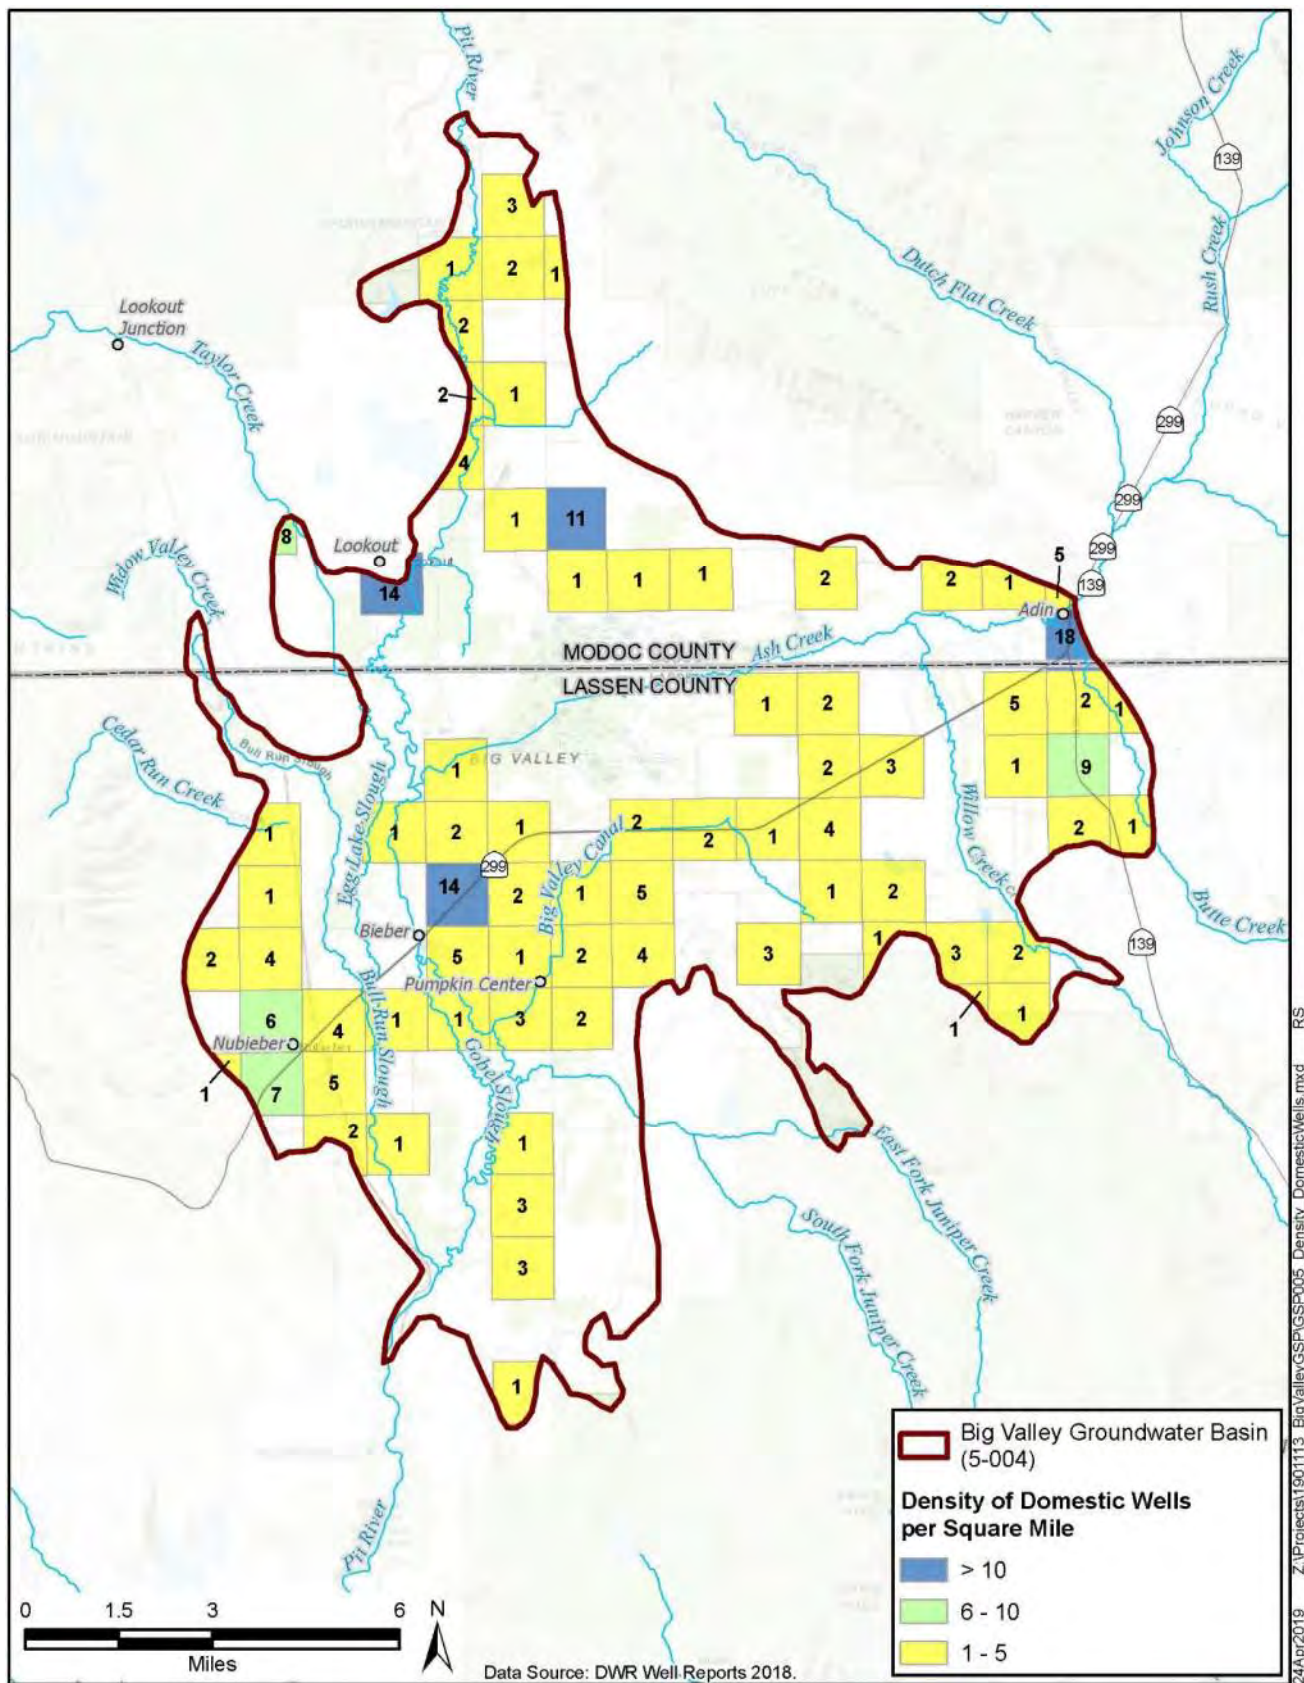


**Figure 3-6 Density of Domestic Wells**



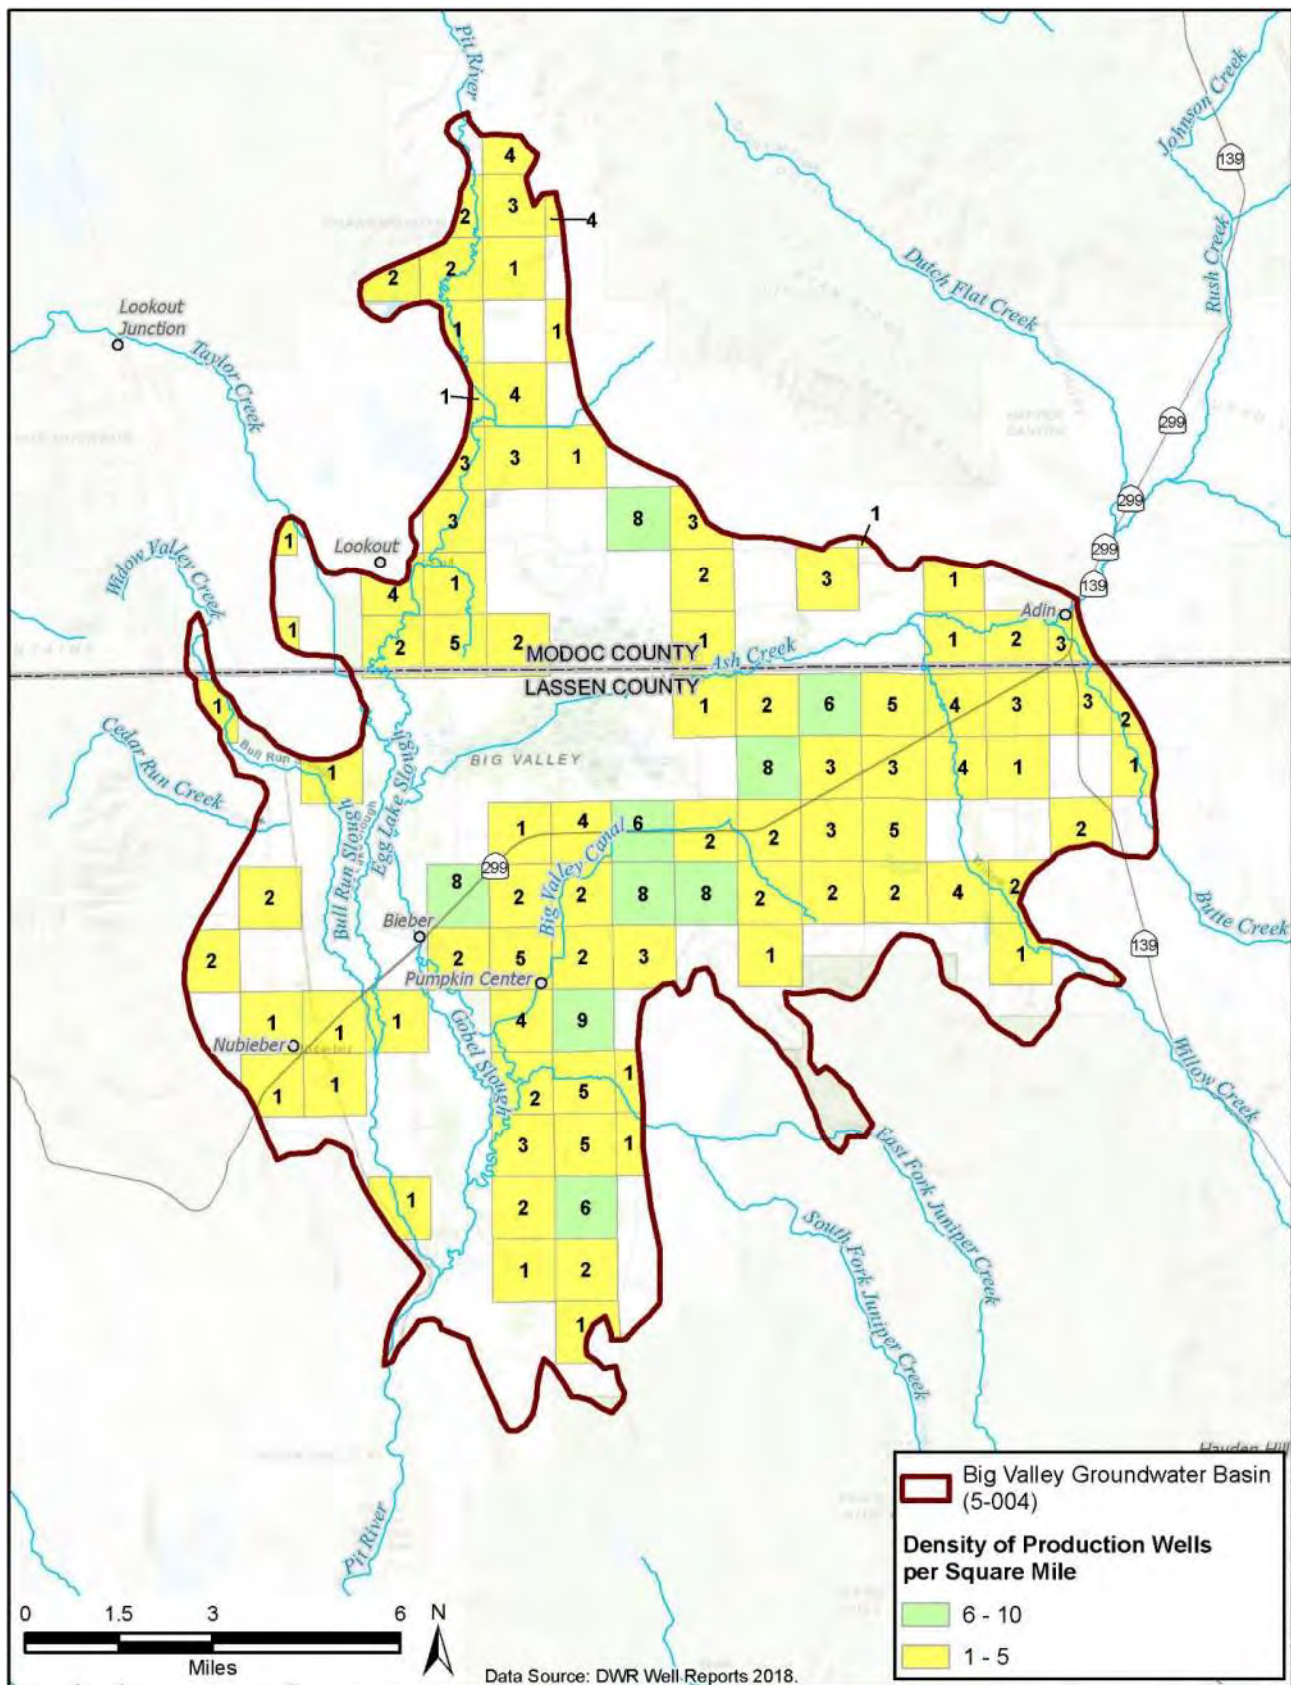

24Apr2019 Z:\Projects\1901113\_BigValleyGSP\GSP006\_Density\_ProductionWells.mxd RS

**Figure 3-7 Density of Production Wells**

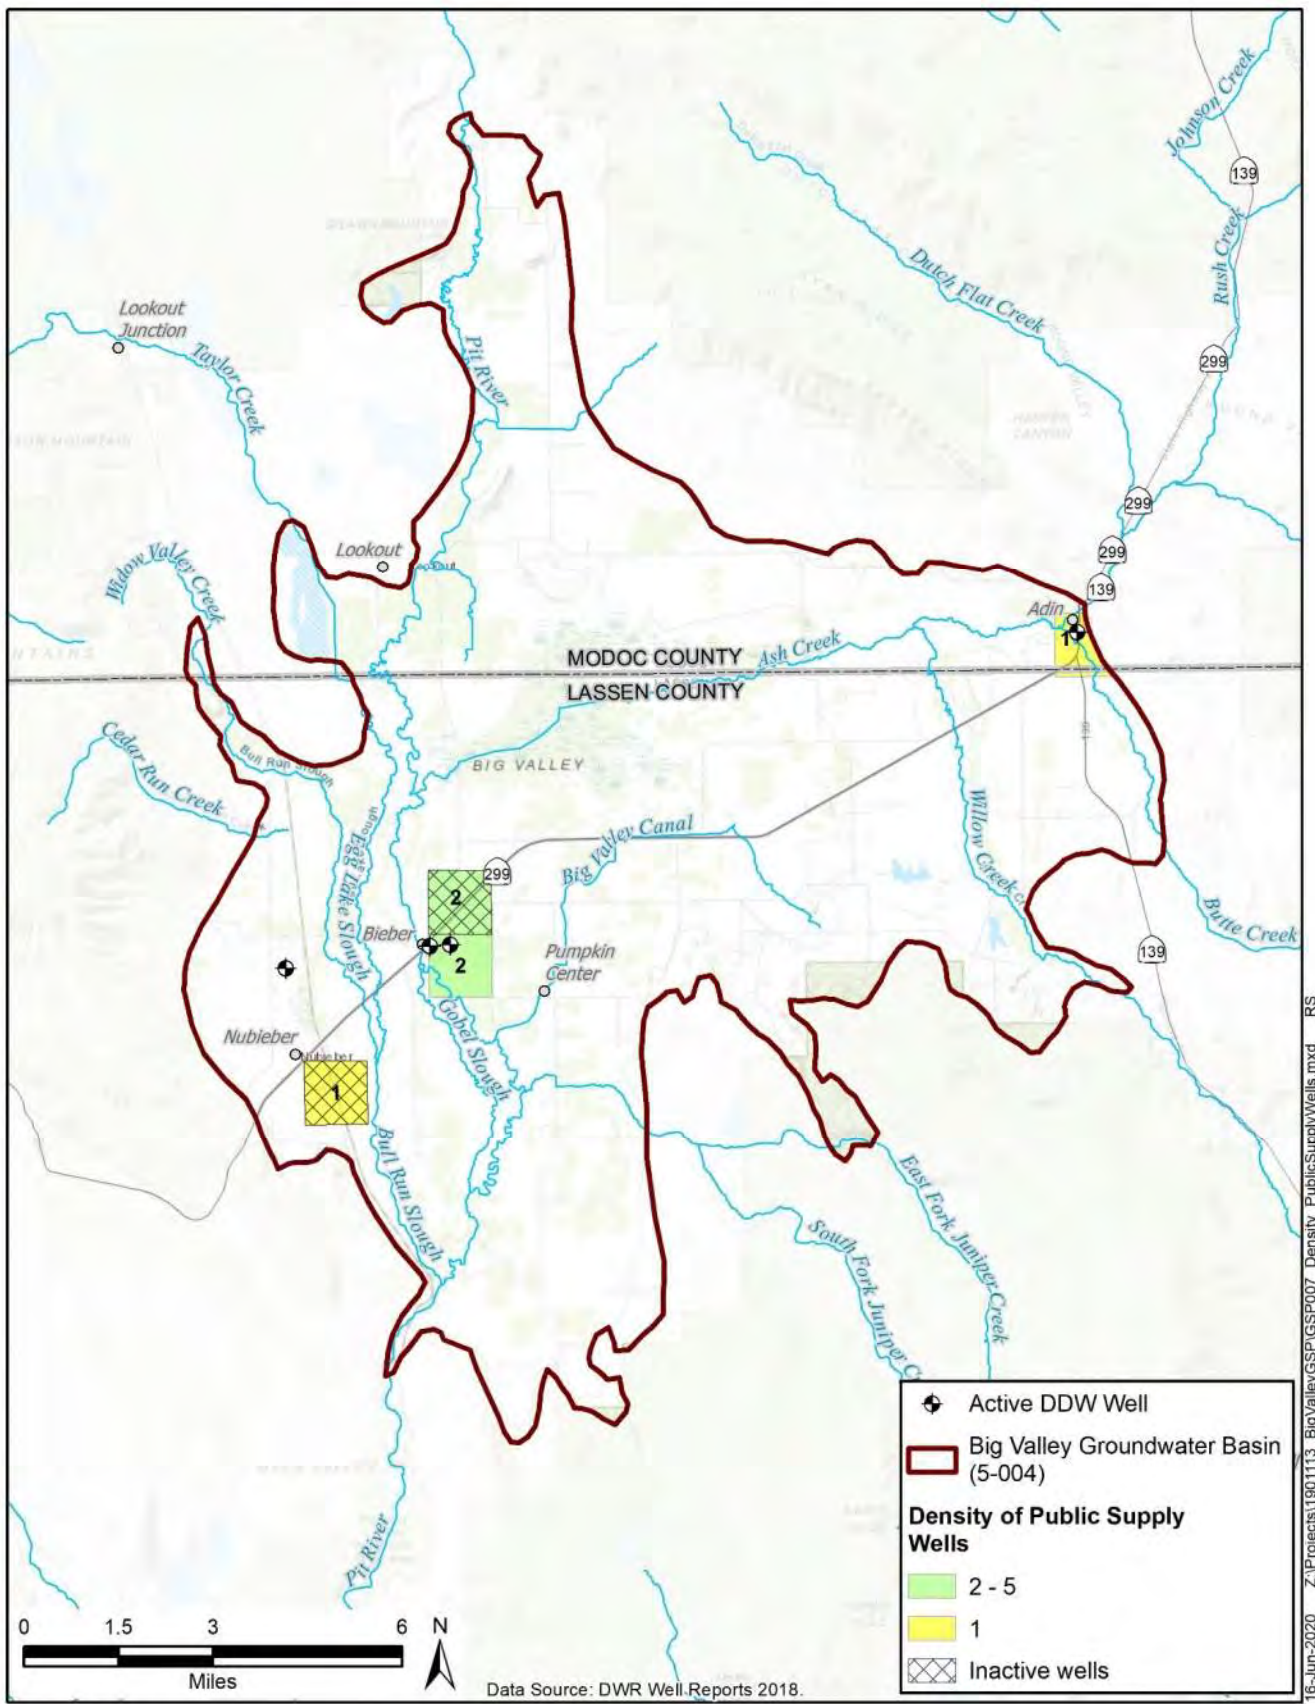

16-Jun-2020 Z:\Projects\1901113\_BigValleyGSP\GSP007\_Density\_PublicSupplyWells.mxd RS

**Figure 3-8 Density of Public Supply Wells**



## 3.5 Existing Monitoring, Management and Regulatory Programs

### 3.5.1 Monitoring Programs

This section describes the existing monitoring programs for data used in this GSP and describes sources that can be used for the GSP monitoring networks.

#### 3.5.1.1 Groundwater Monitoring Levels

Lassen and Modoc counties are the monitoring entities for the CASGEM program. Each county has an approved CASGEM monitoring plan which provides for water level measurements twice a year (spring and fall) at 21 wells. The monitoring is performed by staff from DWR on behalf of the counties. All but one of the wells have depth information ranging from 73 to 800 feet below ground surface [ft bgs], (median: 270 ft bgs, mean: 335 ft bgs)<sup>6</sup>. **Figure 3-9** shows the locations of the 21 CASGEM wells and one additional well which has historic data, but measurements were discontinued in the 1990's.

Lassen and Modoc counties drilled five monitoring well clusters between 2019 and 2020. Each cluster consists of three shallow wells and one deep well. The locations of these clusters and the depth of the deep well at each site is shown on **Figure 3-9**.

#### Quality

Water quality is regulated and monitored under a myriad of programs. **Table 3-4** describes the programs relevant to Big Valley. The State Water Board makes groundwater data from many of these programs available on their Groundwater Ambient Monitoring and Assessment (GAMA) Groundwater Information System (GAMA GIS) website (State Water Board 2019). **Table 3-5** lists and describes the groundwater programs from which historic data is available on GAMA GIS. The locations of wells with historic water quality data from GAMA GIS are shown on **Figure 3-10**.


Along with the many programs that monitor surface water quality, the following are currently in place to monitor groundwater quality on an ongoing basis:

- Public Drinking Water Systems (State Water Board's Division of Drinking Water [DDW])
- Monitoring associated with Underground Storage Tanks (USTs) and Waste Discharge Requirement

The BVGB contains three active public water suppliers regulated by the DDW: Lassen County Water District #1 in Bieber, the Forest Service station in Adin and the CAL FIRE conservation camp west of the Basin. Water quality monitoring at their wells through the DDW can be used for ongoing monitoring in the Basin and their locations are shown on **Figure 3-10**. The five newly constructed monitoring well clusters were sampled for water quality after construction and are shown on **Figure 3-10**.

---


<sup>6</sup> Well depth indicates depth to where the wells are cased.

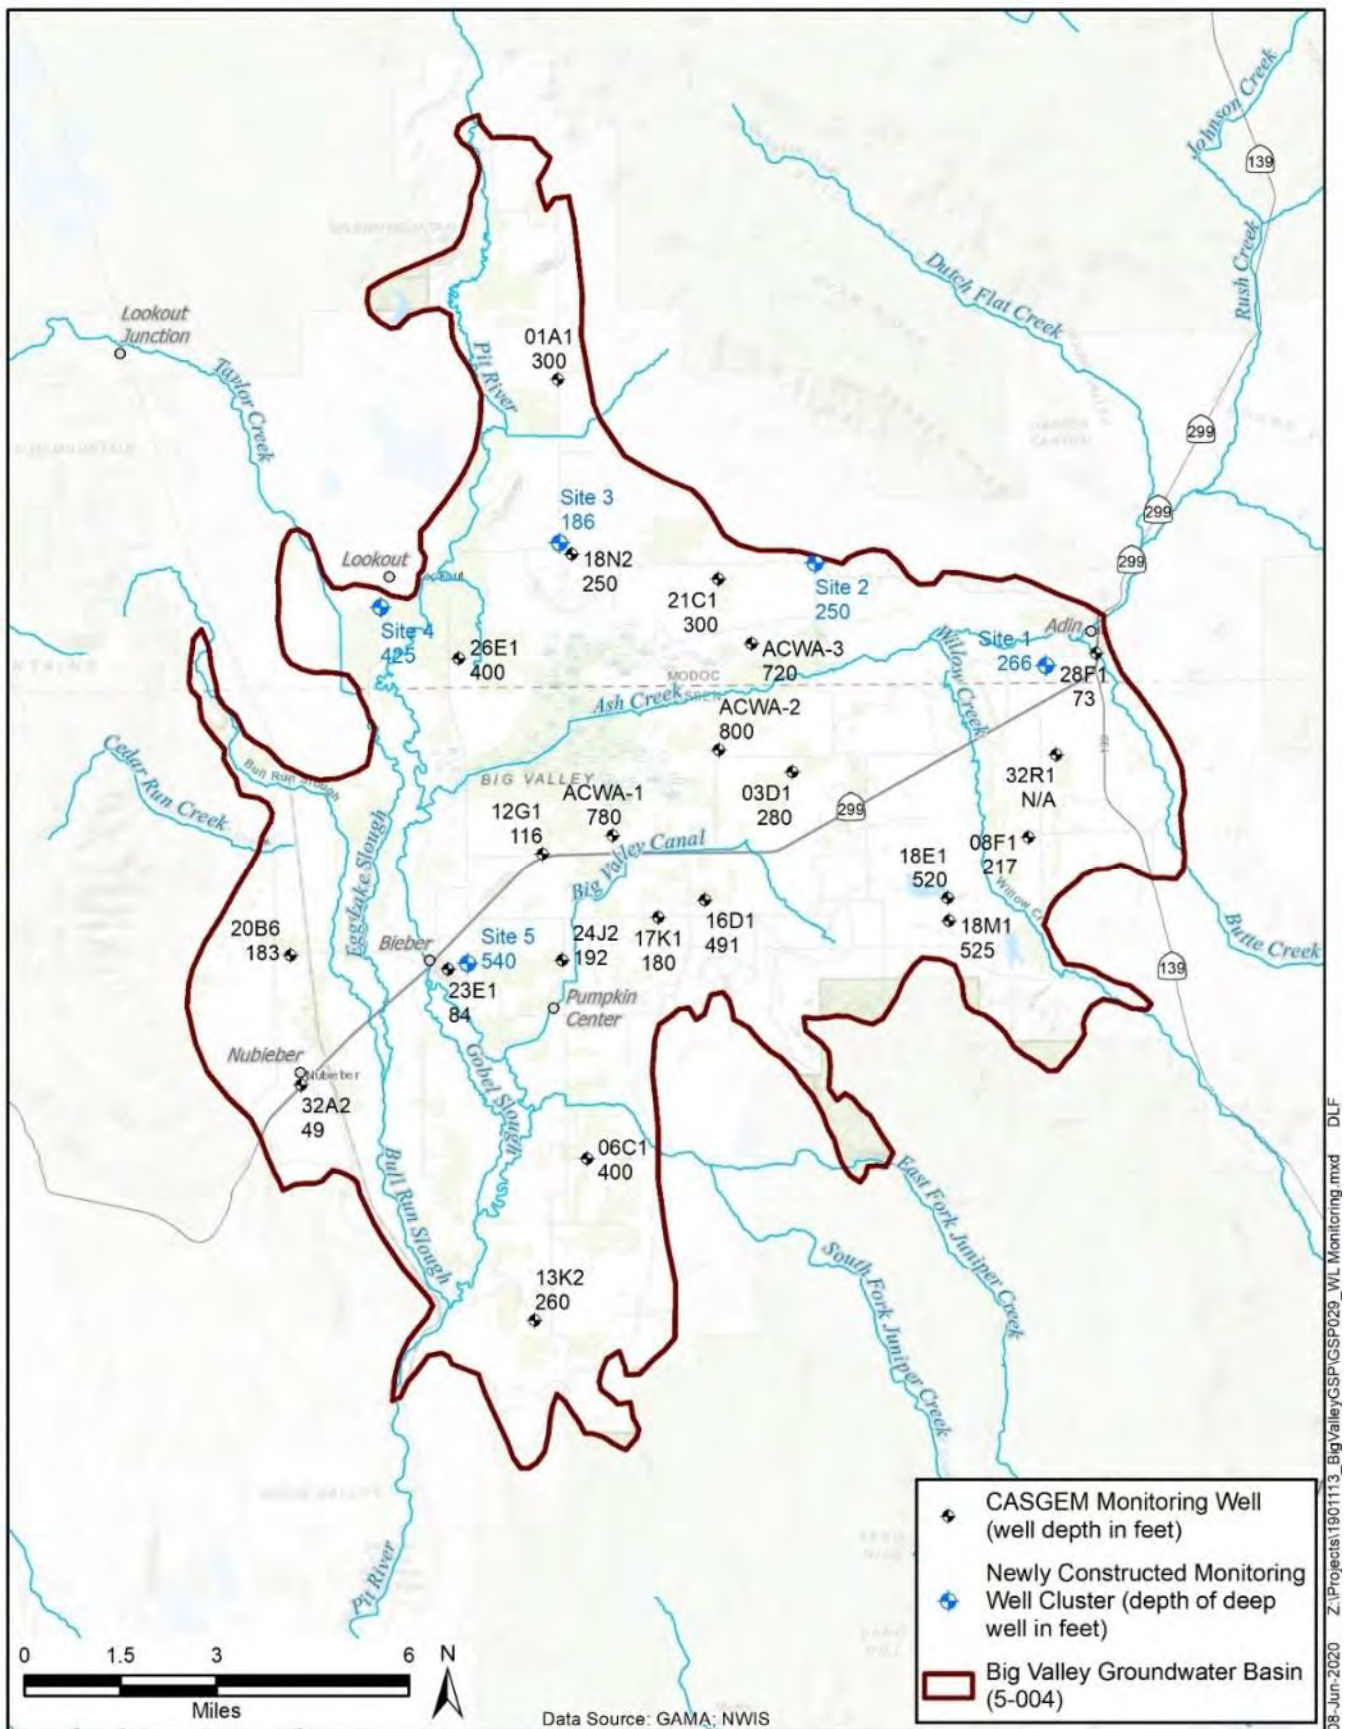

08-Jun-2020 Z:\Projects\1901113\_BigValleyGSP\GSP029\_WL Monitoring.mxd DLF

**Figure 3-9 Water Level Monitoring Network**



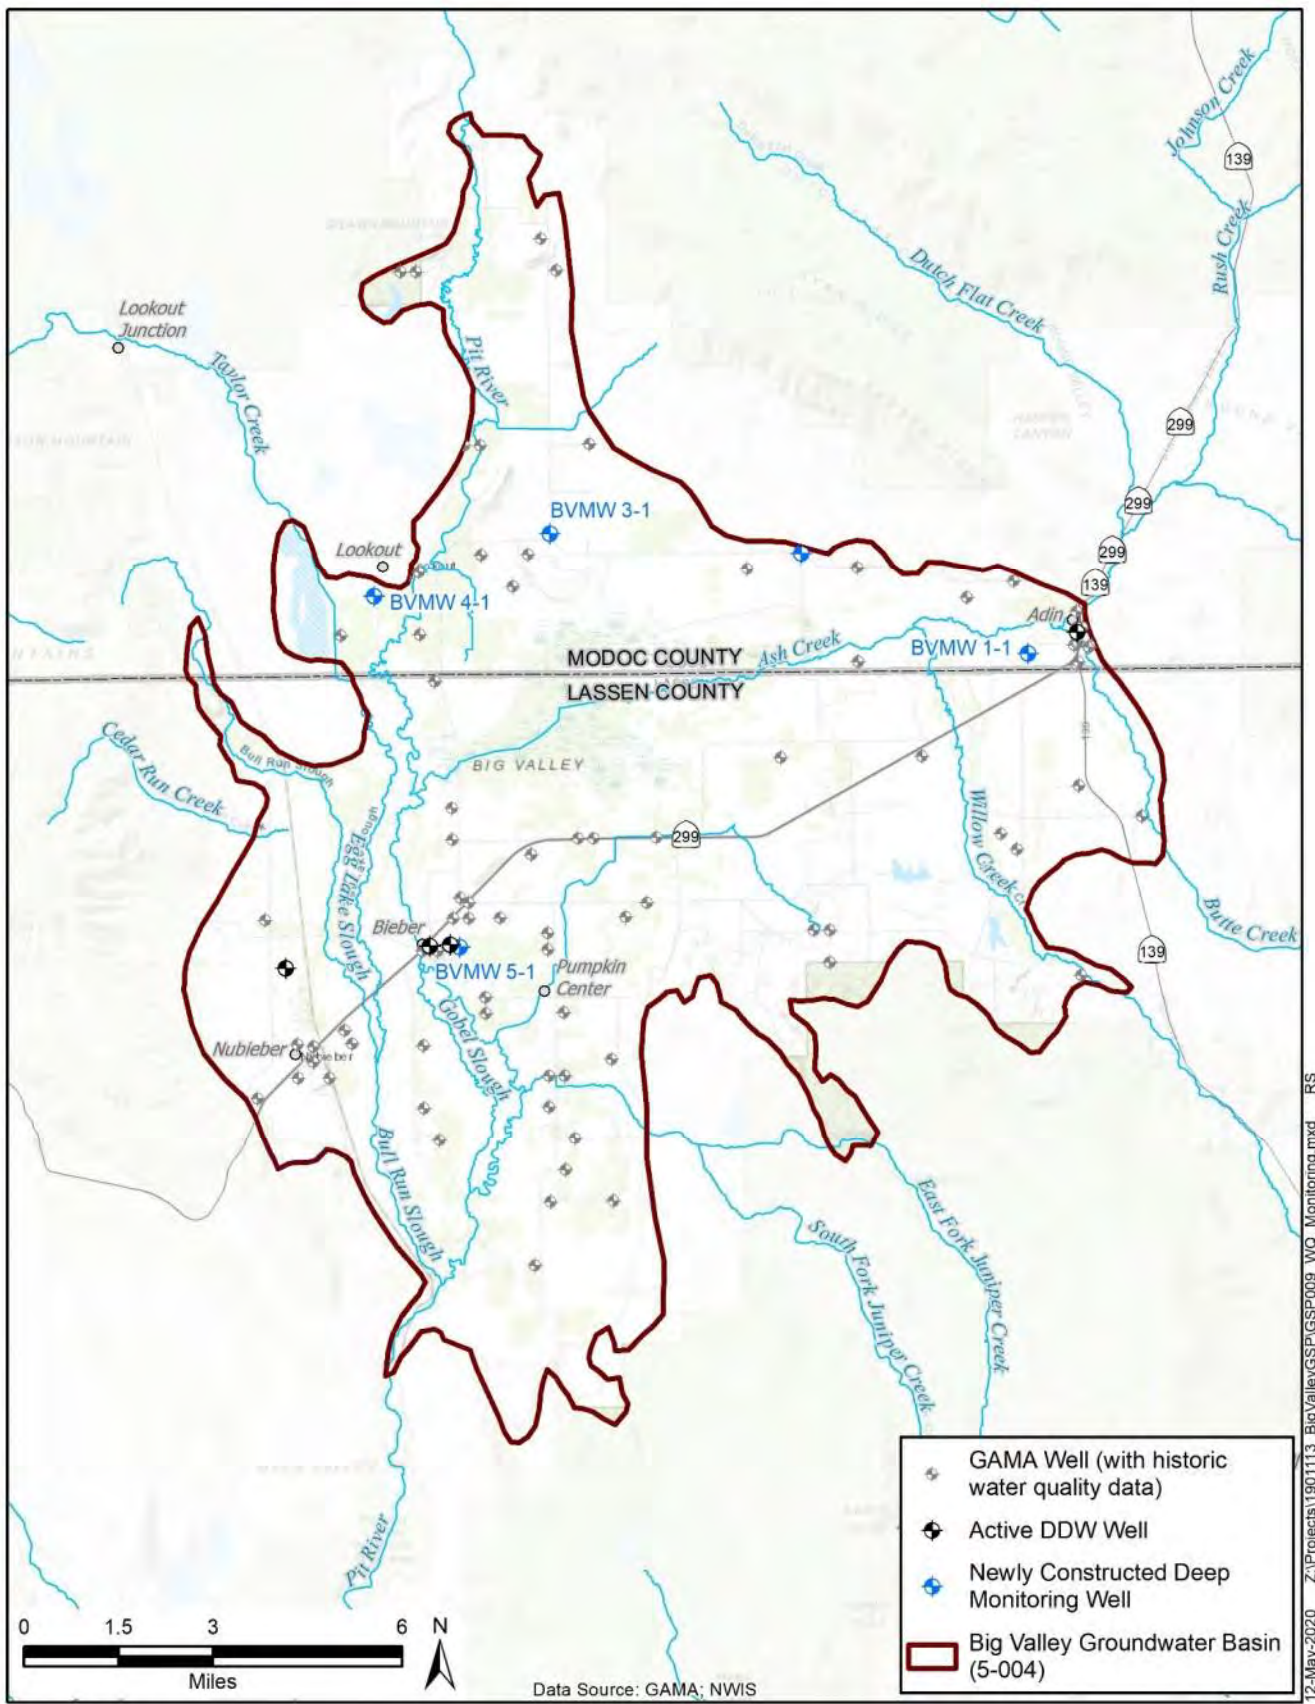

12-May-2020 Z:\Projects\1901113\_BigValleyGSP\GSP009\_WQ\_Monitoring.mxd RS

611  
612

**Figure 3-10 Water Quality Monitoring**



613 **Table 3-4 Water Quality Monitoring Programs**

Program	Description
Irrigated Lands Regulatory Program (ILRP)	Initiated in 2003 to prevent agricultural runoff from impairing surface waters, and in 2012 groundwater regulations were added to the program. To comply with the ILRP, Big Valley growers were forced to join the Northeastern California Water Association (NECWA), which is a sub-watershed coalition of the Northern California Water Association. Growers pay increasing fees to NECWA for monitoring and compliance with the ILRP even though Big Valley farmers grow low intensity crops that generally don't require nitrogen application or cause water quality degradation.
Waste Discharge Requirements (WDR) Program	Also known as the Non-Chapter 15 Permitting, Surveillance and Enforcement Program, is a mandated program issuing WDRs to regulate the discharge of municipal, industrial, commercial and other wastes to land that will or have the potential to affect groundwater.
Central Valley Salinity Coalition (CVSC)	Represents the stakeholder groups working with the State Water Board in the CV-SALTS collaborative basin planning process.
RWQCB Basin Plan	Adopted by the Regional Water Board and approved by the State Water Board and the Office of Administrative Law. The U.S. Environmental Protection Agency approves the water quality standards contained in the Basin Plan, as required by the Clean Water Act (CWA).
Public Drinking Water Regulations	Effective July 1, 2018, various sections of California Code of Regulations, Title 27 were revised. Revisions to Title 27 were necessary in order to reorganize, update and incorporate new parameters for administering the Unified Program and accomplishing the objectives of coordination, consolidation and consistency in the protection of human health, safety and the environment.
Total Maximum Daily Load Program (TMDL) Program	TMDLs are established at the level necessary to implement the applicable water quality standards.
Local Agency Management Programs	These programs regulate Onsite Water Treatment Systems (OWTSs) and the programs is designed to "correct and prevent system failures due to poor siting and design and excessive OWTS densities." (RWQCB 2021)
Underground Storage Tank Site Cleanup Program (UST)	The purpose of the UST Program is to protect the public health and safety and the environment from releases of petroleum and other hazardous substances from USTs
National Pollutant Discharge Elimination System (NPDES)	The NPDES permit program, created in 1972 by the CWA, helps address water pollution by regulating point sources that discharge pollutants to waters of the U.S.. The permit provides two levels of control: technology-based limits and water quality-based limits (if technology-based limits are not sufficient to provide protection of the water body).
Nonpoint Source Program (NSP)	NSP focuses and expands the state's efforts over the next 13 years to prevent and control nonpoint source pollution. Its long-term goal is to implement management measures by the year 2013 to ensure the protection and restoration of the state's water quality, existing and potential beneficial uses, critical coastal areas and pristine areas. The state's nonpoint source program addresses both surface and ground water quality.
Other	Water quality samples are required when a property is sold and when a foster child is placed.

614

615  
616

**Table 3-5 Datasets Available from State Water Board's GAMA Groundwater Information System**

Name	Source
DDW	Division of Drinking Water, State Water Board
DPR	Department of Pesticide Regulation
DWR	California Department of Water Resources
GAMA_USGS	Groundwater Ambient Monitoring and Assessment Program performed by USGS
USGS_NWIS	USGS National Water Information System
WB_CLEANUP	Water Board Cleanup
WB_ILRP	Water Board Irrigated Lands Regulatory Program

617 The Basin has five active groundwater cleanup sites in various stages of assessment and remediation, all  
618 located in the town of Bieber. These sites are not appropriate for ongoing monitoring for groundwater  
619 resources in the Basin, as they monitor only the shallow aquifer and represent a localized condition that  
620 may not be representative of the overall quality of groundwater resources in the Basin. One of the open  
621 sites is the Bieber Class II Solid Waste Municipal Landfill which has ongoing water quality monitoring.  
622 The Lookout Transfer Station also has ongoing water quality monitoring but is located outside the  
623 boundaries of the BVGB.

624 Growers in Big Valley are required to participate in the ILRP, which imposes a fee per acre, through the  
625 Sacramento Valley Water Quality Coalition (SVWQC). The SVWQC Monitoring and Reporting Plan  
626 does not include any wells within the BVGB. Basin residents have expressed concerns with regulatory  
627 programs that involve costs, especially ongoing costs, particularly in light of the disadvantaged status of  
628 the Basin. The Goose Lake Basin, which has similar land use and land use practices, has been exempted  
629 from the ILRP.

### 630 **3.5.1.2 Surface Water Monitoring**

#### 631 **Streamflow**

632 Streamflow gages have historically been constructed and monitored within the BVGB, but active,  
633 maintained streamflow gages for streams in BVGB are limited. For the Pit River, the closest active gage  
634 that monitors stage and streamflow is located at Canby, 20 miles upstream of Big Valley. Flow on Ash  
635 Creek was measured at a gage in Adin from 1981 to 1999 and was reactivated in Fall 2019 to provide  
636 stream stage data at 15-minute intervals. There is a gage where the Pit River exits the Basin in the south  
637 at the diversion for the Muck Valley Hydro Power Plant. Stream gages are shown on **Figure 3-11**.

#### 638 **Diversions**

639 Surface water diversions greater than 10 AFY must be reported to the State Water Board in compliance  
640 with state legislation (SB-88). The Big Valley Water Users Association (BVWUA) employs a  
641 watermaster service to measure diversions from the Pit River for submittal to the State Water Board.  
642 However, many claimants on the river do their own measurements and reporting. Ash Creek and Willow  
643 Creek diversions are monitored by the Modoc County Watermaster Department.

644 **3.5.1.3 Climate Monitoring**

645 The National Oceanic and Atmospheric Administration (NOAA) has two stations located in the Basin:  
646 Bieber 4 NW and Adin RS. Both of these stations are no longer active, thus only contain historic data.  
647 Annual precipitation at the Bieber station is shown for 1985 to 1995 in **Table 3-6**.

648 The closest California Irrigation Management Information System (CIMIS) station, number 43, is in  
649 McArthur, CA, and measures several climatic factors that allow a calculation of daily reference  
650 evapotranspiration for the area. This station is approximately 10 miles southwest of the western  
651 boundary of the Basin.

652 **Table 3-7** provides a summary of average monthly rainfall, temperature and reference  
653 evapotranspiration (ET<sub>o</sub>) for the Basin, and **Figure 3-12** shows annual rainfall for 1984 through 2018.  
654 The locations of all climate monitoring stations are shown on **Figure 3-11**. Climate monitoring is a data  
655 gap that could be filled with a CIMIS station located in the Basin.

656 **3.5.1.4 Subsidence Monitoring**

657 Subsidence monitoring is available in the BVGB at a single continuous global positioning satellite  
658 station (P347) on the south side of Adin. P347 began operation in September 2007 and provides daily  
659 readings. The five monitoring well clusters constructed in 2019-2020 were surveyed and a benchmark  
660 established at each site. These sites can be reoccupied in the future to determine subsidence at those  
661 points if needed.


662 In addition, DWR has provided data processed from InSAR collected by the European Space Agency.  
663 The InSAR data currently available provides vertical displacement information between January 2015  
664 and September 2019. InSAR is a promising, cost-effective technique, and DWR will likely provide  
665 additional data and information going forward.





15-Aug-2020 Z:\Projects\1901113\_BigValleyGSP\010\_SW\_Climate\_Monitoring.mxd RS/DLF

**Figure 3-11 Surface Water and Climate Monitoring Network**

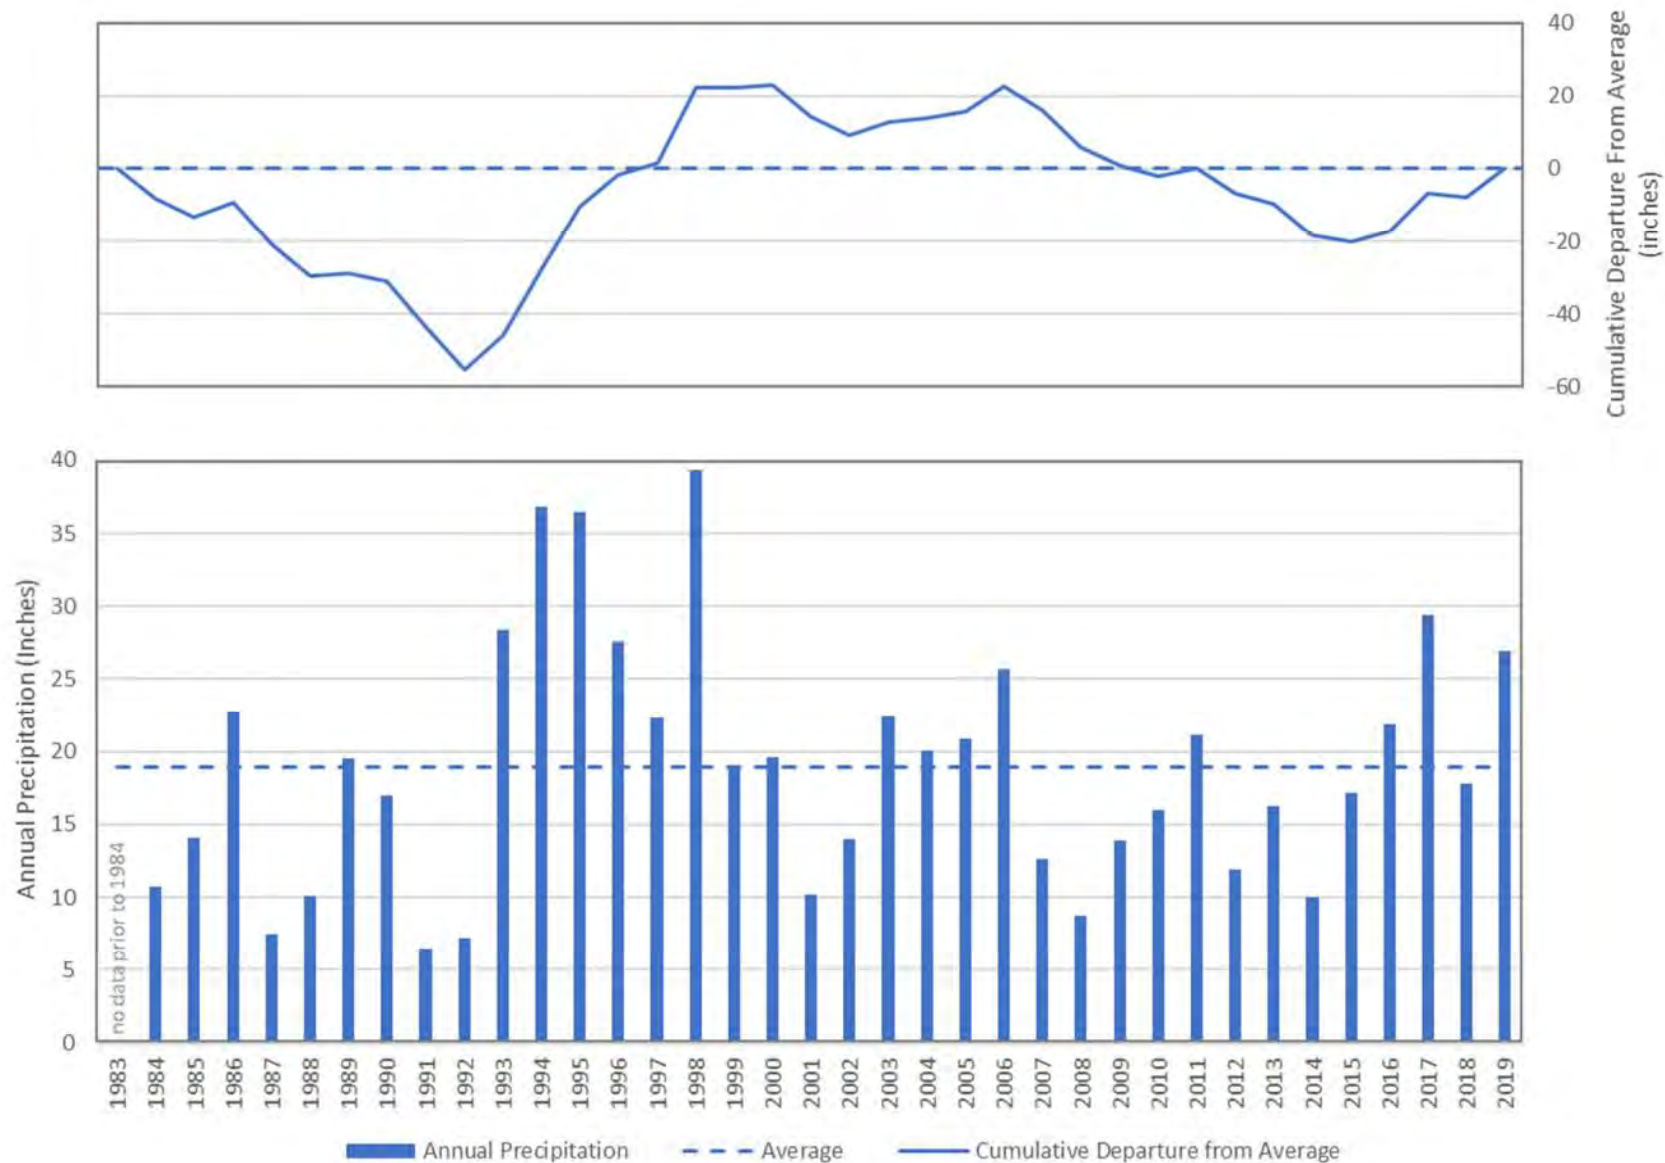

**Figure 3-12 Annual Precipitation at the McArthur CIMIS Station**

670

671  
672

[This page is intentionally blank.]

673 **Table 3-6 Annual Precipitation at Bieber from 1985 to 1995**

Water Year	Precipitation at Station ID: BBR (inches)
1985	14.1
1986	25.4
1987	11.6
1988	10.9
1989	20.2
1990	16.1
1991	16.5
1992	10.4
1993	28.2
1994	16.3
1995	31.8
Minimum	10.4
Maximum	31.8
Average	18.3

Source: DWR 2021b

674

675 **Table 3-7 Monthly Climate Data from CIMIS Station in McArthur (1984-2018)**

Month	Average Rainfall (inches)	Average ET <sub>o</sub> (inches)	Average Daily Temperature (°F)
October	1.4	3.02	49.5
November	2.3	1.21	38.2
December	2.9	0.75	32.1
January	2.5	0.89	32.5
February	2.6	1.57	36.8
March	2.4	3.01	42.4
April	1.8	4.39	48.2
May	1.6	5.93	55.1
June	0.7	7.24	62.8
July	0.2	8.17	69.1
August	0.2	7.18	66.1
September	0.4	5.02	59.5
Monthly Average	1.6	4.03	49.4
Average Water Year	18.8	48.3	49.4

Source: DWR 2020c

676



### 3.5.2 Water Management Plans

Two water management plans exist that cover the BVGB: the Lassen County Groundwater Management Plan (LCGMP) and the Upper Pit River IRWMP.

#### Lassen County Groundwater Management Plan

The LCGMP was completed in 2007 and covers all groundwater basins in Lassen County, including the Lassen County portion of the BVGB. The goal of the LCGMP is to, "...maintain or enhance groundwater quantity and quality, thereby providing a sustainable, high-quality supply for agricultural, environmental and urban use..." (Brown and Caldwell 2007). The LCGMP achieves this through the implementation of Basin Management Objectives<sup>7</sup> (BMOs), which establish key wells for monitoring groundwater levels and define "action levels," which, when exceeded, activate stakeholder engagement to determine actions to remedy the exceedance. Action levels are similar to minimum thresholds in the SGMA. A BMO ordinance was passed by Lassen County in 2011.

#### Upper Pit River Watershed IRWMP

The Upper Pit IRWMP was adopted by the RWMG in 2013. Twenty-five regional entities were involved in the plan development, which included water user groups, federal, state and county agencies, tribal groups and conservation groups. The management of the IRWMP has now transferred to the North Cal-Neva who has been working to update the IRWMP. The goal of the IRWMP is to:

...maintain or improve water quality within the watershed; maintain availability of water for irrigation demands and ecological needs (both ground and surface water); sustain/improve aquatic, riparian and wetland communities; sustain and improve upland vegetation and wildlife communities; control & prevent the spread of invasive noxious weeds; strengthen community watershed stewardship; reduce river and stream channel erosion and restore channel morphology; support community sustainability by strengthening natural-resource-based economies; support and encourage better coordination of data, collection, sharing and reporting in the watershed; improve domestic drinking water supply efficiency/reliability; address the water-related needs of disadvantaged communities; conserve energy, address the effects of climate variability and reduce greenhouse gas emissions.

The Upper Pit IRWMP contains the entire Watershed above Burney and extends past Alturas to the northeast. The area includes the entire BVGB. This GSP has been identified as a "Project" in the IRWMP.

### 3.5.3 Groundwater Regulatory Programs

The Basin is located within the jurisdiction of the Regional Water Quality Control Board (RWQCB) Region 5 (R5) and subject to a Basin Plan, which is required by the CWC (Section 13240) and supported by the federal Clean Water Act. The Basin Plan for the Sacramento River Basin and the San

---

<sup>7</sup> Codified as Chapter 17.02 of Lassen County Code.



714 Joaquin River Basin was first adopted by the RWQCB-R5 in 1975. The current version of the Basin Plan  
715 was adopted in 2018. The Porter-Cologne Water Quality Control Act requires that basin plans address  
716 beneficial uses, water quality objectives and a program of implementation for achieving water quality  
717 objectives. Water Quality Objectives for both groundwater (drinking water and irrigation) and surface  
718 water are provided in Chapter 3 of the Basin Plan. (State Water Board, 2020c)

### 719 **Lassen County Water Well Ordinance**

720 Lassen County adopted a water well ordinance in 1988 to provide for the construction, repair,  
721 modification and destruction of wells in such a manner that the groundwater of Lassen County aquifers  
722 will not be contaminated or polluted. The ordinance ensured that water obtained from wells will be  
723 suitable for beneficial use and will not jeopardize the health, safety or welfare of the people of Lassen  
724 County. The ordinance includes requirements for permits, fees, appeals, standards and specifications,  
725 inspection, log of the well (lithology and casing), abandonment, stop work, enforcement and violations  
726 and well disinfection. Lassen County Environmental Health Department is responsible for the code  
727 enforcement related to wells.

728 In 1999, Lassen County adopted an ordinance requiring a permit for export of groundwater outside the  
729 county (Lassen County Code 17.01).

### 730 **Modoc County Water Well Requirements**

731 Modoc County Environmental Health Department established its requirements for the permitting of  
732 work on water wells in 1990, based on the requirements of the CWC (Section 13750.5). The fee  
733 structure was last revised in 2018. Modoc County also has an ordinance prohibiting the extraction of  
734 groundwater for use outside of the groundwater basin from which it was extracted. (Title 20 Chapter  
735 20.04)

### 736 **California DWR Well Standards**

737 DWR is responsible for setting the minimum standards for the construction, alteration and destruction of  
738 wells in California to protect groundwater quality, as allowed by CWC Sections 13700 to 13806. DWR  
739 began this effort in 1949 and has published several versions of standards in Bulletin 74, beginning in  
740 1962 and is working on a significant update for 2021. Current requirements are provided in Bulletin 74-  
741 81, Water Well Standards: state of California and in Bulletin 74-90 (Supplement). (DWR 2021c) Cities,  
742 counties and water agencies have regulatory authority over wells and can adopt local well ordinances  
743 that meet or exceed the state standards. Lassen and Modoc Counties are the well permitting agencies for  
744 their respective portions of the Basin.

### 745 **Title 22 Drinking Water Program**

746 The DDW was established in 2014 when the regulatory responsibilities were transferred from the  
747 California Department of Public Health. DDW regulates public water systems that provide, "...water for  
748 human consumption through pipes or other constructed conveyances that has 15 or more service  
749 connections or regularly serves at least 25 individuals daily at least 60 days out of the year," as defined  
750 by the Health and Safety Code (Section 116275 (h)). DDW further defines public water systems as:

- Community: Serves at least 15 service connections used by year-round residents or regularly serves 25-year-round residents. Lassen County Water District #1 provides residents with groundwater in Bieber.
- Non-Transient Non-Community: Serves at least the same 25 non-residential individuals during 6 months of the year. The Adin Ranger Station utilizes a well for its water supply.
- Transient Non-Community: Regularly serves at least 25 non-residential individuals (transient) during 60 or more days per year.

Private domestic wells, industrial wells and irrigation wells are not regulated by the DDW.

The State Water Board-DDW enforces the monitoring requirements established in Title 22 of the California Code of Regulations for public water system wells and all the data collected must be reported to the DDW. Title 22 designates the regulatory limits (e.g., MCLs) for various constituents, including naturally occurring inorganic chemicals and metals and general characteristics; and limits for man-made contaminants, including volatile and non-volatile organic compounds, pesticides, herbicides, disinfection byproducts and other parameters.

### **3.5.4 Incorporation Into GSP**

Information in these and other various and numerous programs may be incorporated into this GSP and used during the preparation of Sustainability Management Criteria (minimum thresholds, measurable objectives, interim milestones) and will be considered during development of Projects and Management Actions.

### **3.5.5 Limits to Operational Flexibility**

While some of the existing management programs and ordinances may have the potential to affect operational flexibility, they are not likely to be a factor in the Basin. For example, runoff and stormwater quality is of high quality and would not constrain recharge options. Similarly, groundwater export requirements by Lassen County and Modoc County would be considered for any sustainable groundwater management decisions in the Basin.

## **3.6 Conjunctive Use Programs**

Formally established conjunctive use programs are not currently operating within the Basin.

## **3.7 Land Use Plans**

The following sections provide a general description of the land use plans and how implementation may affect groundwater. Section 3.2 – Jurisdictional Areas, describes the jurisdictional areas within the BVGB and many of these entities have developed land use plans for their respective jurisdictions. This includes the general plans (GPs) for Modoc County and Lassen County and the Modoc National Forest Land and Resource Management Plan.

### 3.7.1 Modoc County General Plan

The 1988 Modoc County GP was developed to meet a state requirement and to serve as the “constitution” for the community development and use of land. The GP discusses the mandatory elements of a GP, including land use, housing, circulation (transportation), conservation and open space, noise and safety, as well as economic development and an action program in the county. The GP was intended to serve as a guide for growth and change in Modoc County. Under the Conservation Element, Modoc County recognizes the importance of “use-capacity” for groundwater, among other issues, and the minimization of “adverse resource-use,” such as “groundwater mining.” The Water Resources section advocates the “wise and prudent” management of groundwater resources to support a sustainable economy as well as maintaining adequate supplies for domestic wells for rural subdivisions. Groundwater quality was recognized as generally good to excellent within the numerous basins.

Policy items from the Modoc GP related to groundwater include:

- Cooperate with responsible agencies and organizations to solve water quality problems
- Work with the agricultural community to resolve any groundwater overdraft problems
- Require adequate domestic water supply for all rural subdivisions

The action program included several general statements for water, including:

- Initiate a cooperative effort among state and local agencies and special districts to explore appropriate actions necessary to resolve long-term water supply and quality problems in the counties
- Require as a part of the review of any subdivision approval a demonstration to the satisfaction of the county that the following conditions exist for every lot in the proposed development:
  - An adequate domestic water supply
  - Suitable soil depth, slope and surface acreage capable of supporting an approved sewage disposal system

In 2018, a GP amendment was adopted to update the housing element section.

### 3.7.2 Lassen County General Plan

The Lassen County GP 2000 was adopted in 1999 by the Lassen County Board of Supervisors (Resolution 99-060) to address the requirements of California Government Code Section 65300 et seq and related provisions of California law pertaining to GPs. The GP reflects the concerns and efforts of the County to efficiently and equitably address a wide range of development issues which confront residents, property owners and business operators. Many of these issues also challenge organizations and agencies concerned with the management of land and resources and the provisions of community services within Lassen County.

The goals of the GP are to:

- Protect the rural character and culture of Lassen County life


- 819 • Maintain economic viability for existing industries such as agriculture, timber and mining
- 820 • Promote new compatible industries to provide a broader economic base
- 821 • Create livable communities through carefully planned development which efficiently utilize
- 822 natural resources and provide amenities for residents
- 823 • Maintain and enhance natural wildlife communities and recreational opportunities
- 824 • Sustain the beauty and open space around use in this effort

825 The GP addresses the mandatory elements (land use, circulation, housing, conservation, open space,  
826 noise and safety) *via* several GP documents and alternate element titles. The 1999 GP elements include  
827 land use, natural resources (conservation), agriculture, wildlife, open space, circulation and safety.  
828 Separate documents were produced for housing, noise and energy. The land use element designates the  
829 proposed general distribution and intensity of uses of the land, serves as the central framework for the  
830 entire GP and correlates all land use issues into a set of coherent development policies. The GP land use  
831 map from 1999 is shown in **Figure 3-13** shows intensive agriculture as the dominant land use within the  
832 Big Valley area, along with scattered population (small) centers. Otherwise, Extensive Agriculture is the  
833 dominant land use.

834 Groundwater is addressed in several elements, including agriculture, land use and natural resources. The  
835 GP identified the BVGB as a ‘major ground water basin’ due to the operation of wells at over  
836 100 gallons per minute [gpm]. Moreover, the GP expressed concern about water transfers and their  
837 impact on local water needs and environmental impacts due to the possibility of water marketers either  
838 pumping groundwater from the BVGB into the Pit River and selling it to downstream water districts or  
839 municipalities, or using groundwater to augment summer flow through the Delta. The GP recognized  
840 that safe yield is dependent on recharge and that overdraft pumping would increase operating costs due  
841 to a greater pumping lift. The GP also recognized that overdraft pumping could result in subsidence and  
842 water quality degradation. In addition, the GP referred to 1980s legislation that authorized the formation  
843 of water districts in Lassen County to manage and regulate the use of groundwater resources and to the  
844 1959 Lassen-Modoc County Flood Control and Water Conservation District, as discussed above. The  
845 SGMA process established the requirements for a GSP in the BVGB and creation of the two GSAs.


846 The land use element identified several issues related to groundwater, including public services where  
847 62 percent of rural, unincorporated housing units relied on individual (domestic) wells for their water.  
848 Another issue included open space and the managed production of resources, which includes areas for  
849 recharge of groundwater among others. The GP referred to the 1972 Open Space Plan, which required  
850 that residential sewage disposal systems would not contaminate groundwater supplies. The agriculture  
851 element identified an issue with incompatible land uses where agricultural pumping lowers the  
852 groundwater level and impacts the use of domestic wells. The wildlife element recognized that changes  
853 in groundwater storage could impact wet meadow habitat and threaten fish and wildlife species.



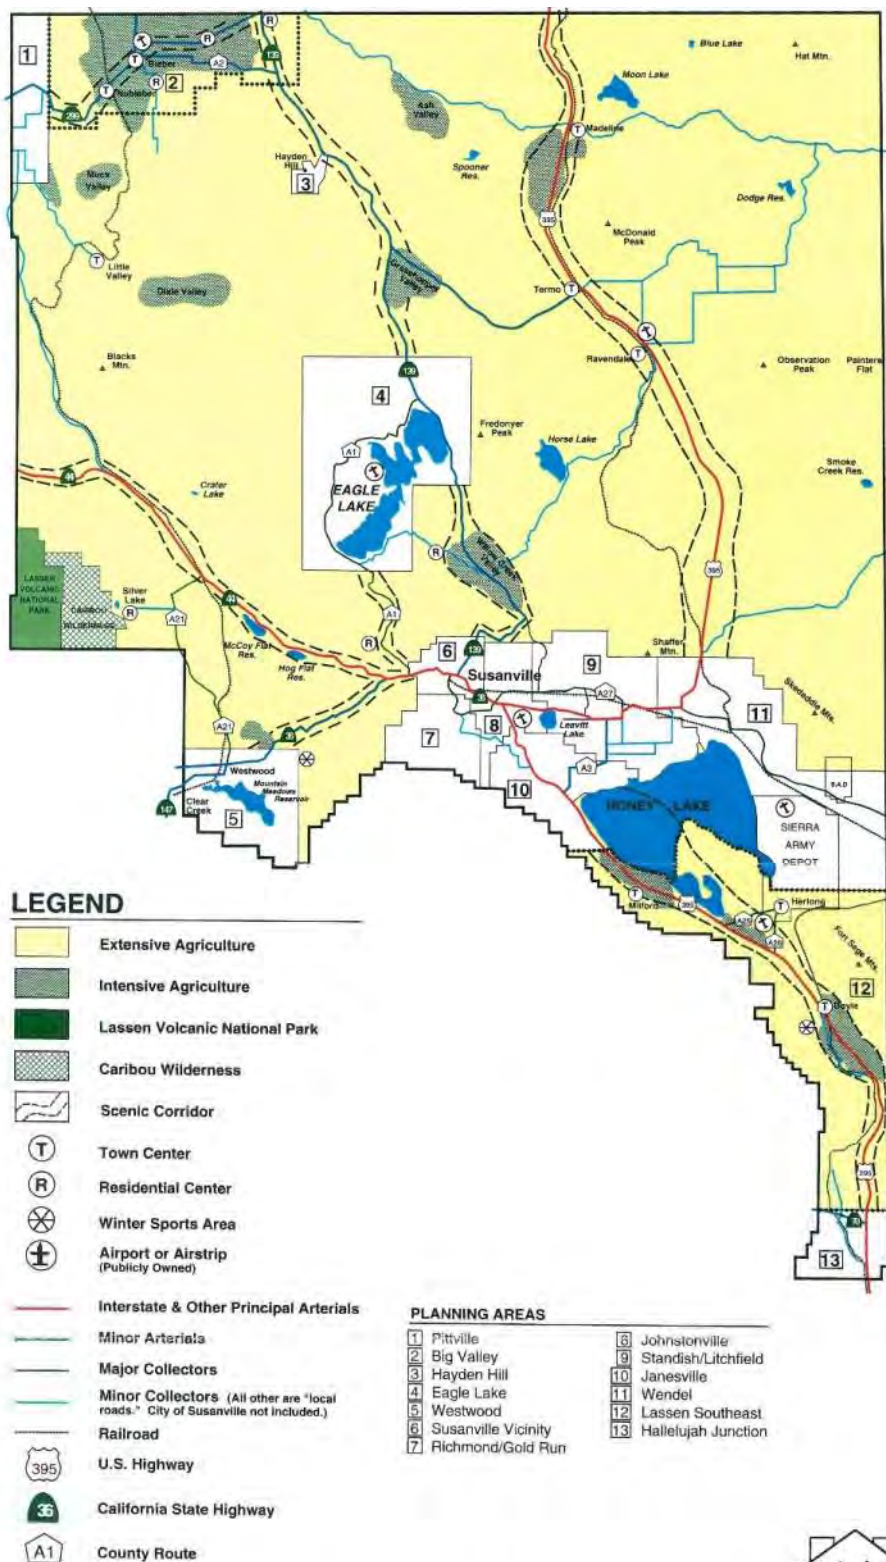

# Lassen County General Plan Land Use Map

SEPTEMBER 1999



**Figure 3-13 Lassen County General Plan Land Use Map**

Groundwater is included in polices under the water resources section of the Natural Resources (NR) and Open Space (OS) Elements, as listed below:

- NR15 POLICY: Lassen County advocates the cooperation of state and federal agencies, including the State Water Board and its regional boards, in considering programs and actions to protect the quality of ground water and surface water resources.
- NR17 POLICY: Lassen County supports measures to protect and ensure the integrity of water supplies and is opposed to proposals for the exportation of ground water and surface waters from ground water basins and aquifers located in Lassen County (in whole or part) to areas outside those basins.
  - Implementation Measure:  
NR-H: Lassen County will maintain ground water ordinances and other forms of regulatory authority to protect the integrity of water supplies in the county and regulate the exportation of water from ground water basins and aquifers in the county to areas outside those basins.
- NR19 POLICY: Lassen County supports control of water resources at the local level, including the formation of local ground water management districts to appropriately manage and protect the long-term viability of ground water resources in the interest of county residents and the county's resources.
- OS27 POLICY: Lassen County recognizes that its surface and ground water resources are especially valuable resources which deserve and need appropriate measures to protect their quality and quantity.
- OS28 POLICY: Lassen County shall, in conjunction with the Water Quality Control Board, adopt specific resource policies and development restrictions to protect specified water resources (e.g., Eagle Lake, Honey Lake, special recharge areas, etc.) to support the protection of those resources from development or other damage which may diminish or destroy their resource value.
  - Implementation Measure:  
OS-N: When warranted, Lassen County shall consider special restrictions to development in and around recharge areas of domestic water sources and other special water resource areas to prevent or reduce possible adverse impacts to the quality or quantity of water resources.

### 3.7.3 Modoc National Forest Land and Resource Management Plan

Modoc National Forest lies in the mountain areas surrounding Big Valley to the south and northeast. A small portion of the National Forest extends into the Basin boundary in the south as shown in **Figure 3-2**. The U.S. Forest Service developed their Land and Resource Management Plan in 1991 to, "...guide natural resource management activities and establish management standards and guidelines." With regard to water resources, the Modoc National Forest Land and Resource Management Plan seeks to "maintain and improve the quality of surface water" through the implementation of Best Management

894 Practices (BMPs) among other goals. The plan is available on the Modoc National Forest website (USFS  
895 1991).

### 896 **3.7.4 GSP Implementation Effects on Existing Land Use**

897 The implementation of this GSP is not expected to affect existing designation of land use.

### 898 **3.7.5 GSP Implementation Effects on Water Supply**

899 The implementation of this GSP is not expected to influence water supply. Prior to the development of  
900 this GSP, the counties had established several policies and ordinances for the management of water and  
901 land use in the BVGB. This GSP will incorporate the previous work and will establish sustainable  
902 management criteria to continue the successful use of the groundwater resources during SGMA  
903 implementation period and beyond.

### 904 **3.7.6 Well Permitting**

905 Lassen and Modoc counties both require a permit to install a well as discussed above. The Lassen  
906 County Municipal Code (Section 7.28.030) states that, "...no person, firm, corporation, governmental  
907 agency or any other legal entity shall, within the unincorporated area of Lassen County, construct,  
908 repair, modify or destroy any well unless a written permit has first been obtained from the health officer  
909 of the county." Further, Modoc County Code (Section 13.12.020) states that, "...No person shall dig,  
910 bore, drill, deepen, modify, repair or destroy a water well ... without first applying for and receiving a  
911 permit..."

### 912 **3.7.7 Land Use Plans Outside of the Basin**

913 Areas inside and outside the Basin are subject to the Lassen and Modoc County General Plans or the  
914 Modoc National Forest Land Resource and Management Plan. Other land use plans by organizations  
915 such as the BLM also exist in the watershed.

## 916 **3.8 Management Areas**

917 Because the GSP is still under development, the GSAs have not defined management areas within the  
918 BVGB. SGMA allows for the Basin to be delineated into management areas which:

919 "...may be defined by natural or jurisdictional boundaries, and may be  
920 based on differences in water use sector, water source type, geology, or  
921 aquifer characteristics. Management areas may have different minimum  
922 thresholds and measurable objectives than the basin at large and may be  
923 monitored to a different level. However, GSAs in the basin must provide  
924 descriptions of why those differences are appropriate for the management  
925 area, relative to the rest of the basin."(DWR 2017)

926 It should be noted that minimum thresholds and measurable objectives can vary throughout the Basin  
927 even without established management areas. In deciding whether to implement management areas, the  
928 GSAs will need to weigh the added degree of complexity management areas bring to the GSP. For the  
929 final GSP, this section will be rewritten to reflect the GSAs decisions related to management areas.

### 3.9 Additional GSP Elements, if Applicable

The plan elements from CWC Section 10727.4 require GSPs to address numerous components listed in **Table 3-8**. The table lists the agency or department with whom the GSA will coordinate or where it will be addressed in the GSP.

**Table 3-8 Plan Elements from CWC Section 10727.4**

Element of Section 10727.4	Approach
(a) Control of saline water intrusion	Not applicable
(b) Wellhead protection areas and recharge areas	To be coordinated with county environmental health departments
(c) Migration of contaminated groundwater	Coordinated with RWQCB
(d) A well abandonment and well destruction program	To be coordinated with county environmental health departments
(e) Replenishment of groundwater extractions	Chapter 9, Projects and Management Actions
(f) Activities implementing, opportunities for and removing impediments to, conjunctive use or underground storage	Chapter 9, Projects and Management Actions
(g) Well construction policies	To be coordinated with county environmental health departments
(h) Measures addressing groundwater contamination cleanup, groundwater recharge, in-lieu use, diversions to storage, conservation, water recycling, conveyance and extraction projects	Coordinated with RWQCB and in Chapter 9, Projects and Management Actions
(i) Efficient water management practices, as defined in Section 10902, for the delivery of water and water conservation methods to improve the efficiency of water use	To be coordinated with county farm advisors
(j) Efforts to develop relationships with state and federal regulatory agencies	Chapter 8, Plan Implementation
(k) Processes to review land use plans and efforts to coordinate with land use planning agencies to assess activities that potentially create risks to groundwater quality or quantity	To be coordinated with appropriate county departments.
(l) Impacts on groundwater dependent ecosystems	Chapter 5, Groundwater Conditions



## 4. Hydrogeologic Conceptual Model §354.14

---

A hydrogeologic conceptual model (HCM) is a description of the physical characteristics of a groundwater basin related to the hydrology and geology and defines the principal aquifer, based on the best available information. The HCM provides the context for the development of a water budget (Chapter 6), sustainable management criteria (Chapter 7) and monitoring network (Chapter 8).

This chapter presents the HCM for the BVGB and was developed by GEI Consultants Inc. (GEI) for the Lassen and Modoc GSAs. This HCM supports the development of the monitoring network, water budget and the sustainable management criteria of this GSP. The content of this HCM is defined by the regulations of SGMA – Chapter 1.5, Article 5, Subarticle 2: 354.14.

Groundwater characteristics and dynamics in the Basin are variable. Located in a sparsely populated area, the amount of existing data and literature to support this HCM is limited, with the most thorough studies being conducted prior to the 1980's. This HCM presents the best available information, data and analyses and provides some limited new data and analyses that further the understanding. With that said, there are many data gaps in the HCM that have been identified in this chapter. The HCM presents best available information and expert opinion to form the basis for descriptions of elements of this GSP: basin boundary; confining conditions; definable bottom, nature of flows near or across faults, soil permeability and recharge potential. Significant uncertainty exists in this HCM and stakeholders have expressed concern about the possible regulatory repercussions associated with making decisions using incomplete and/or uncertain information that become less relevant in the future as the regulatory framework changes.

Recommendations and options for prioritizing and addressing the data gaps are part of this document. The stakeholders in the disadvantaged communities of the BVGB have limited financial means to address data gaps, so the data gaps presented at the end of this chapter are contingent on outside funding.

### 4.1 Basin Setting

BVGB is located in Lassen and Modoc counties in northeastern California, 50 miles north-northwest of Susanville and 70 miles east-northeast of Redding (road distances are greater). Most of BVGB is in Lassen County (60%) with the remainder in Modoc County. At its widest points, the BVGB is approximately 21 miles long (north-south) in the vicinity of the Pit River and 15 miles wide (east-west) south of ACWA. The Basin has an irregular shape totaling 144 square miles or 92,057 acres. (DWR 2004) The topography of BVGB is relatively flat within the central area with increasing elevations along the perimeter, particularly in the eastern portions where Willow and Ash creeks enter the Basin. Ground surface elevations range from about 4,100 feet above mean sea level (msl) near the south end of BVGB to over 4,500 feet msl at the eastern edge of the Basin. In the north central portion of the Basin, two buttes protrude from the valley (Pilot and Roberts buttes). The Pit River enters the BVGB at an elevation of 4,150 feet msl and leaves the Basin at 4,100 feet msl over the course of about 30 river miles, giving the Pit River a gradient of less than 2 feet per mile. By contrast, the Pit River above and below Big

972 Valley has a gradient over 50 feet per mile. This low gradient in the Basin results in a meandering river  
973 morphology and widespread flooding during large storm events. Ash Creek enters the Basin at Adin at  
974 an elevation of 4,200 feet msl, eventually joining the Pit River when flows are sufficient to make it past  
975 Big Swamp. **Figure 4-1** shows the ground topography for the BVGB.

976 Topographic maps (7.5-minute) for the BVGB area include the following towns (north-south, west-  
977 east):

978	Donica Mountain	Halls Canyon	
979	Lookout	Big Swamp	Adin
980	Bieber	Hog Valley	Letterbox Hill

981 **4.2 Regional Geology and Structure**

982 The regional geology is depicted on the Alturas Sheet, a 1:250,000 scale map with an excerpt shown on  
983 **Figure 4-2**. (CGS 1958) The BVGB is in the central area of the Modoc Plateau geomorphic province.  
984 According to the California Geological Survey (CGS 2002), the Modoc Plateau is, "...a volcanic table  
985 land" broken into blocks by north-south faults. The Basin is underlain by a thick sequence of lava flows  
986 and tuffs. The volcanic material is variable in composition as described below, is Miocene to Holocene  
987 age<sup>8</sup> and erupted into sediment-filled basins between the block-faulted mountain ranges (Norris and  
988 Webb 1990).

989 According to MacDonald (1966), the Modoc Plateau is transitional between two provinces: block  
990 faulting of the Basin and Cascade Range (range) and volcanism of the range. This can be observed on  
991 **Figure 4-2** with the faults trending north-northwest surrounding Big Valley and the most recent center  
992 of volcanism (indicated by the numerous cinders centered around Medicine Lake, with several eruptions  
993 about 1000 years before present) about 30 miles northwest of Big Valley. Moreover, the historic  
994 volcanism and tectonics occurred concurrently, which disrupted the drainage from the province and  
995 resulted in the formation of numerous lakes, including an ancestral lake in Big Valley. Volcanic material  
996 was deposited as lava flows, ignimbrites (hot ash flows), subaerial and water-laid layers of ash (cooler)  
997 and mudflows combined with sedimentary material, although thick sections of rock can be either  
998 entirely sedimentary or volcanic. The composition of the lava flows is primarily basalt<sup>9</sup> and basaltic  
999 andesite<sup>10</sup>, while pyroclastic<sup>11</sup> ash deposits are rhyolitic<sup>12</sup> composition.

<sup>8</sup> Miocene is 23 million to 5.3 million years ago; Holocene is 12,000 years ago to present.


<sup>9</sup> Basalt is an extrusive (volcanic) rock with relatively low silica content and high iron and magnesium content.

<sup>10</sup> Andesite is an extrusive rock with intermediate silica content and intermediate iron and magnesium content.

<sup>11</sup> Pyroclastic means formed from volcanic eruptions, typically not from lava flows, but from material (clasts) ejected from the eruption such as ash, blocks, or "bombs."

<sup>12</sup> Rhyolitic rocks are extrusive with relatively high silica content and low iron and magnesium. Rhyolites are the volcanic equivalent of granite.



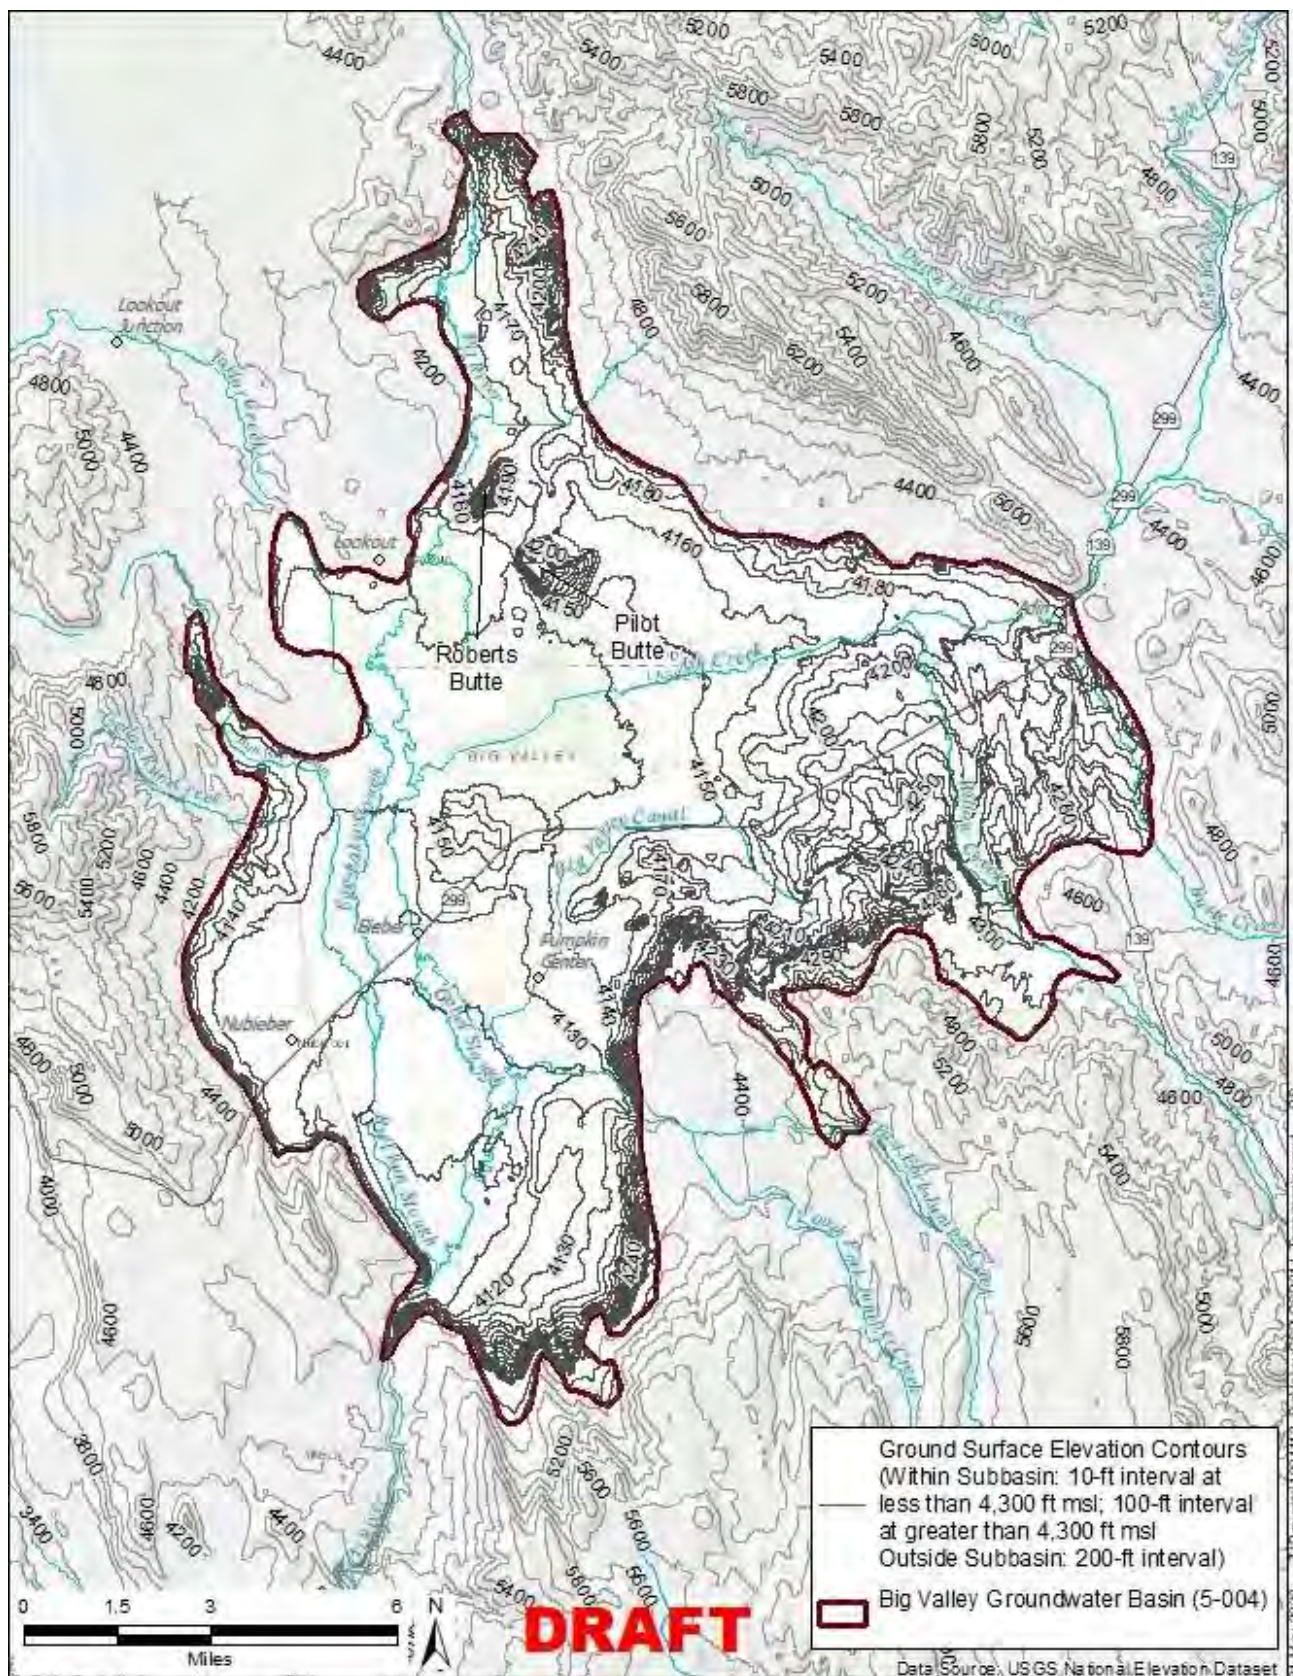

**Figure 4-1 Topography**

Source: USGS 2016





1005

1006  
1007

[This page is intentionally blank.]



## 4.2.1 Lateral Basin Boundaries

A 60-year-old map (CGS 1958) (**Figure 4-2**) was used by DWR to draw the BVGB boundary. The CGS map has proven to be inaccurate in many places, and more recent, more accurate geologic maps are available. (DWR 1963, GeothermEx 1975) The lateral boundaries of BVGB are described by DWR (2004) as, "...bounded to the north and south by Pleistocene and Pliocene basalt and Tertiary pyroclastic rocks of the Turner Creek Formation, to the west by Tertiary rocks of the Big Valley Mountain volcanic series, and to the east by the Turner Creek Formation." In general, the boundary drawn by DWR can be described as the contact between the valley alluvial deposits and the surrounding volcanic rocks. Because this boundary was drawn using a regional-scale map from 1958 that was drawn with the surface expression of geologic units, it may be necessary to modify the boundary at a future date with more precision to include the aquifer materials which may extend outside of the current boundary. This includes consideration of including the "upland recharge areas" described by DWR (1963).

Additionally, the Basin boundary may be inaccurate in the southeastern portion of the Basin where two fingers extend into the uplands area. The narrower of the two fingers appears to extend too far into the upland elevations and intersects with East Fork Juniper Creek which doesn't drain into the finger, as shown in **Figure 4-1**. A more thorough mapping of the elevations and geologic contacts in this area would help to refine the boundary between alluvium and upland volcanics. In particular, a finger of the boundary extends up to East Fork Juniper Creek in the south-central part of the Basin and includes elevations and areas that are clearly not alluvial deposits.


In the northeastern portion of the Basin, the boundary curves around the base of the Barber Ridge and Fox Mountain. The CGS contact between the alluvium and volcanics here is well below the change in slope of the mountain range. More recent mapping and geology (GeothermEx 1975) extends alluvium 1.5 miles further upslope as shown on **Figure 4-3**.

## 4.3 Local Geology

Several geologic maps were available at a more detailed scale than the CGS (1958) map. Two of them had accompanying studies that more thoroughly described the geology. Although relatively old studies, they both provide useful information. However, they differ slightly on some details, particularly the surficial geology and further refinement of their contacts may be necessary. The two maps are shown on **Figure 4-3** and **Figure 4-4**.

The two different reports were written for different purposes, with DWR (1963) being developed as a general investigation of the potential of groundwater resources and GeothermEx (1975) as an investigation specifically performed to evaluate hydrothermal groundwater resources. All reviewed sources agree that the BVGB is surrounded by mountain blocks of volcanic rocks of somewhat variable composition, but primarily basalt. Although these mountains are outside of the groundwater basin, they may be underlain by alluvial formations. The mountains capture and accumulate precipitation, which produces runoff that flows into BVGB. Moreover, DWR (1963) suggested that these mountains serve as "upland recharge areas" and provide subsurface recharge to the BVGB. These recharge areas suggested by DWR are shown in red shading on **Figure 4-5** and correlate with Pliocene



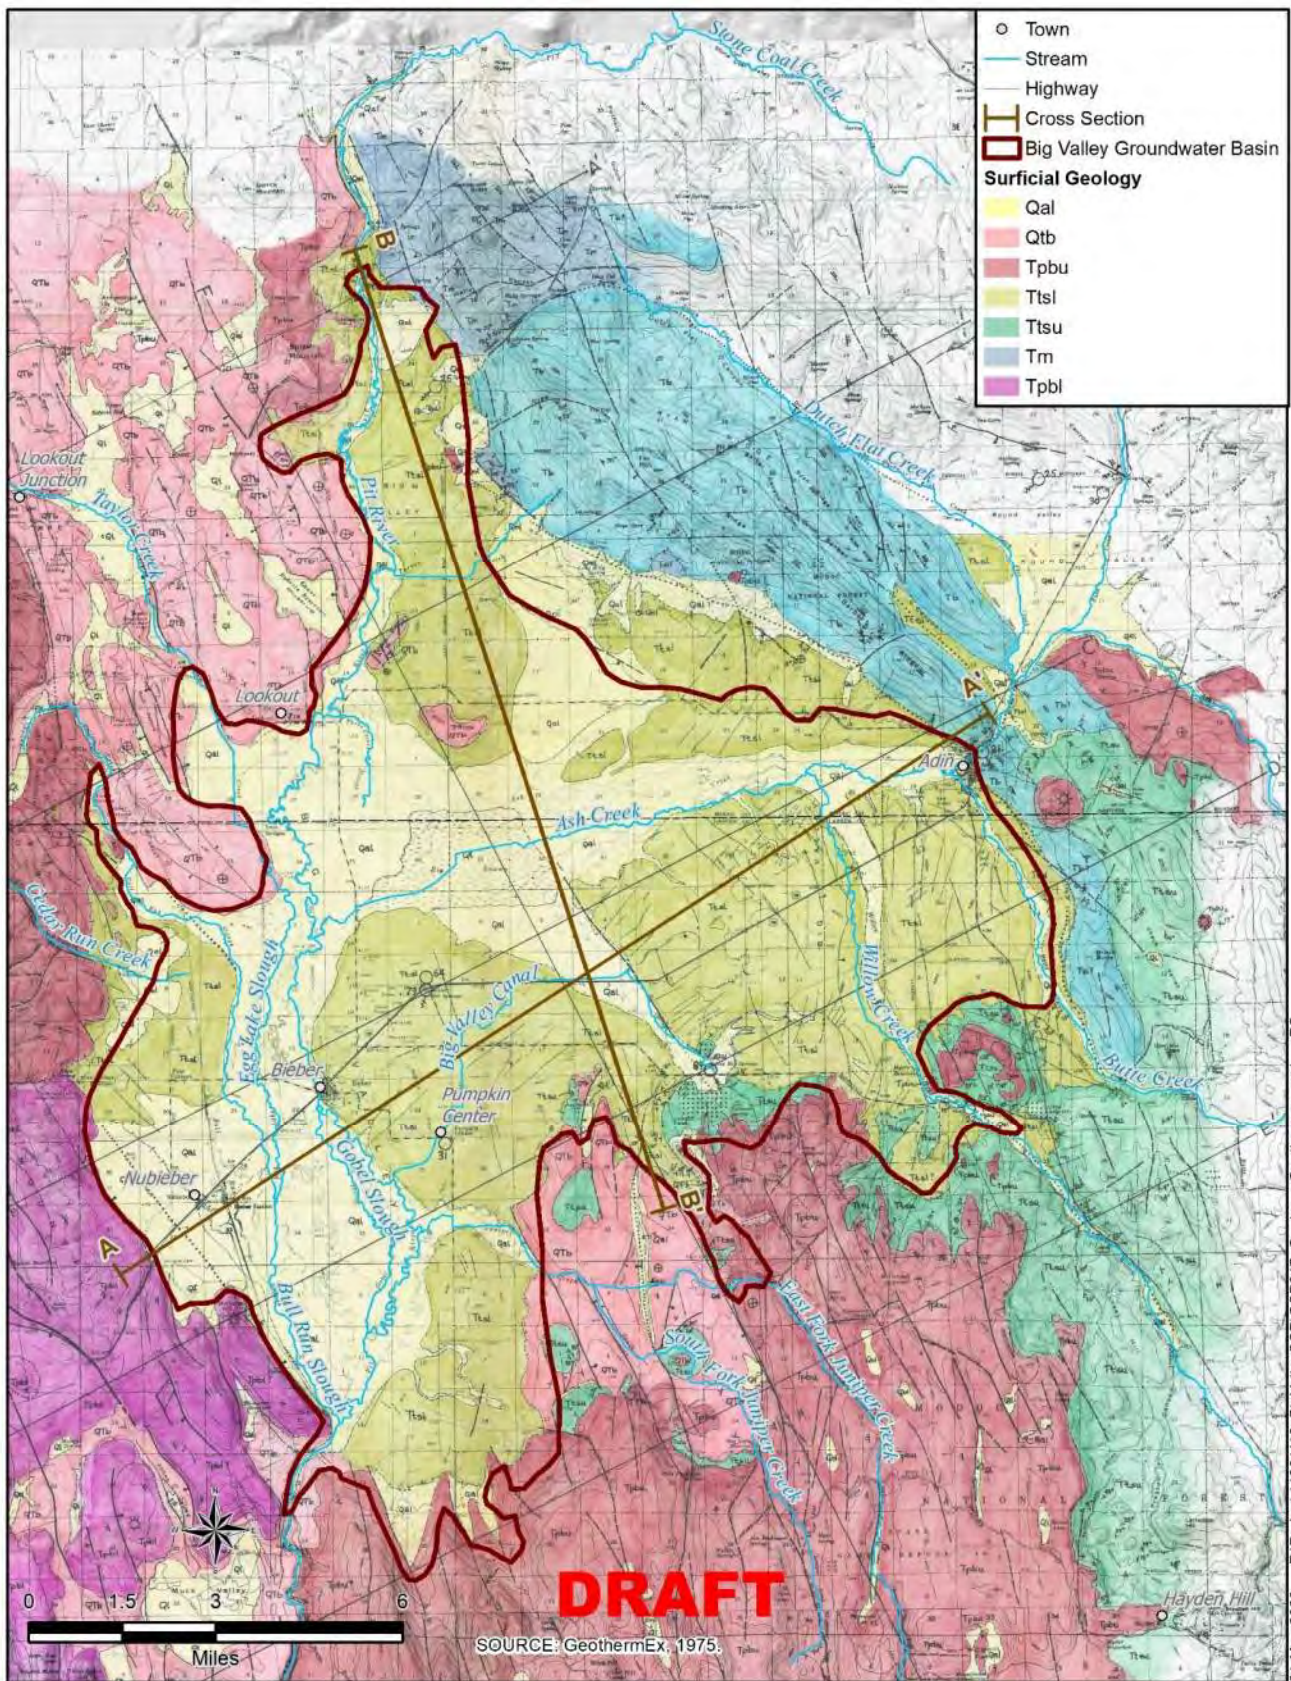

**Figure 4-3 GeothermEx 1975 Local Geologic Map**




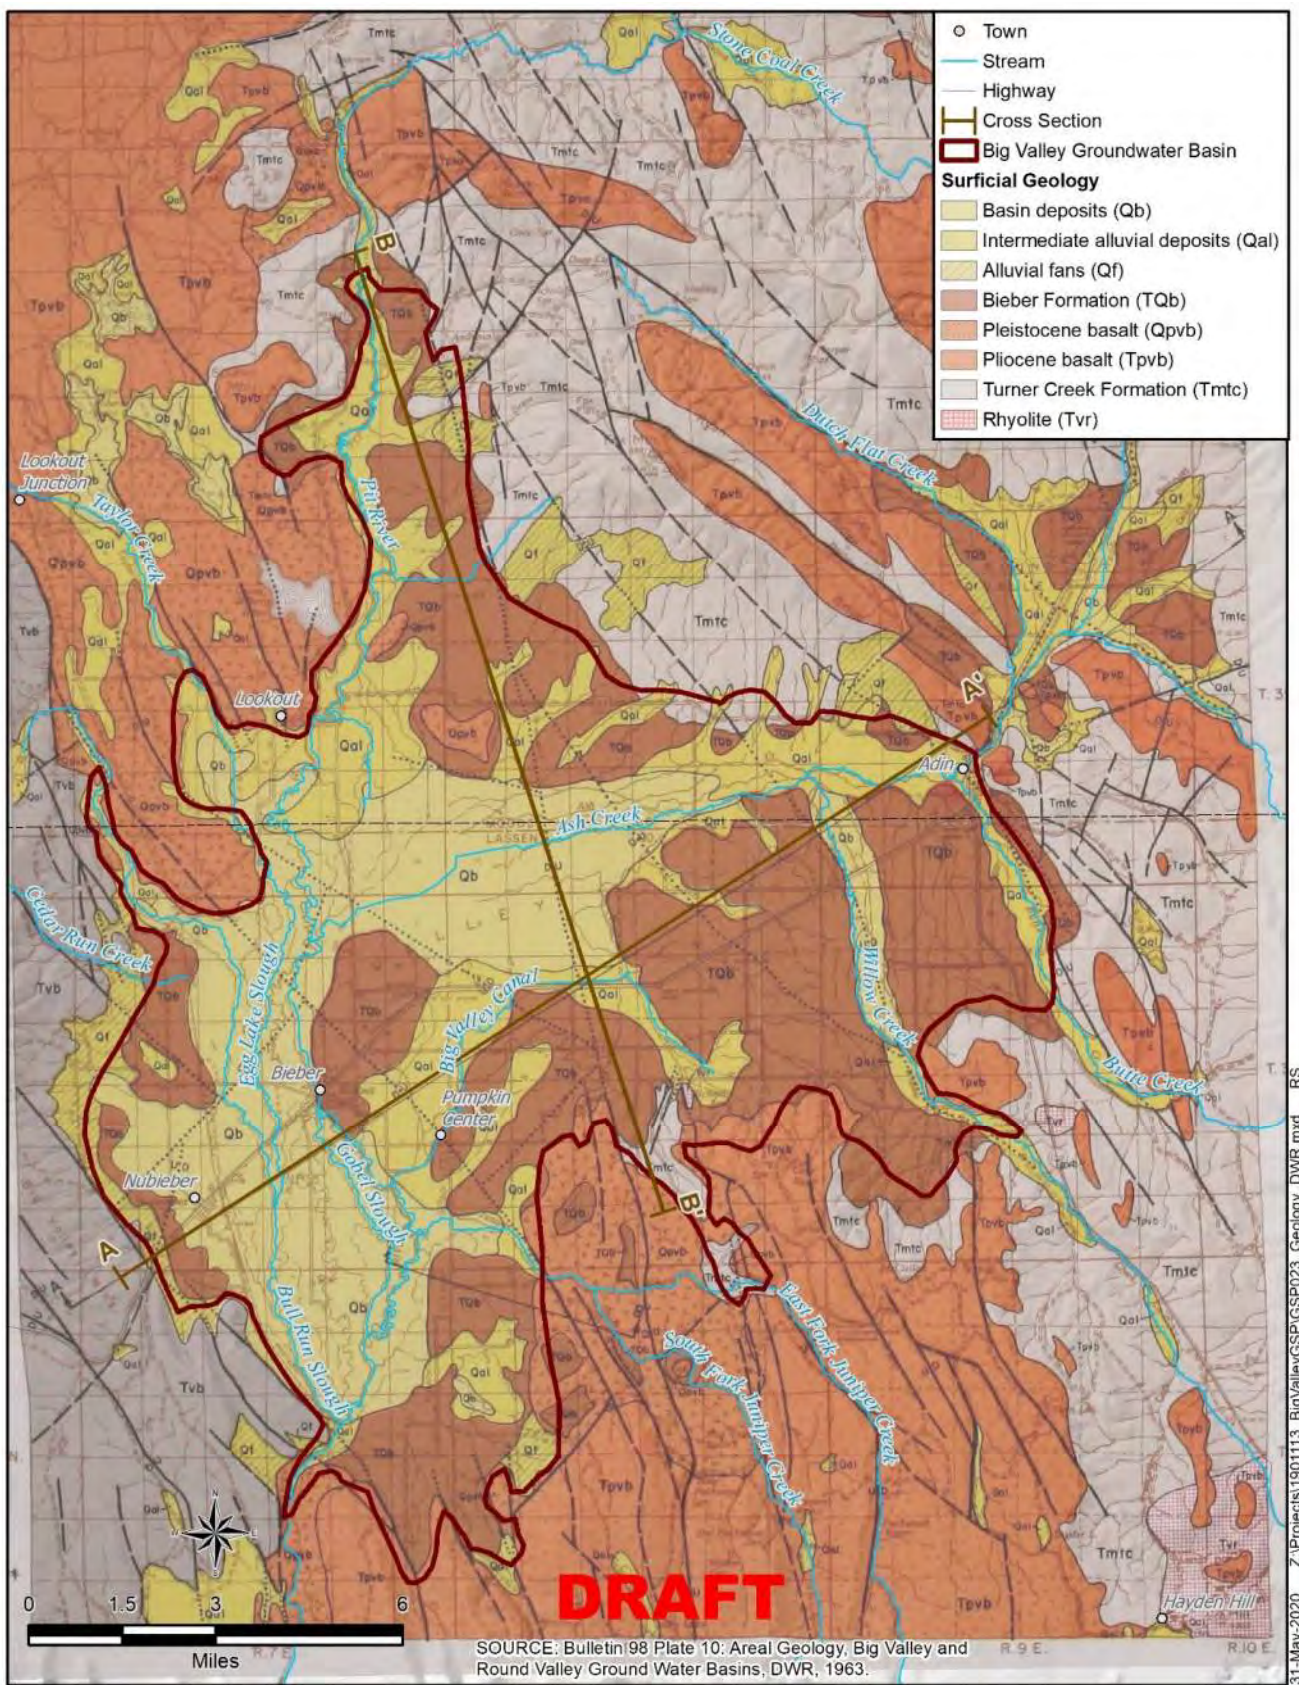


Figure 4-4 DWR 1963 Local Geologic Map





**Figure 4-5 DWR 1963 Upland Recharge Areas and Areas of Confining Conditions**

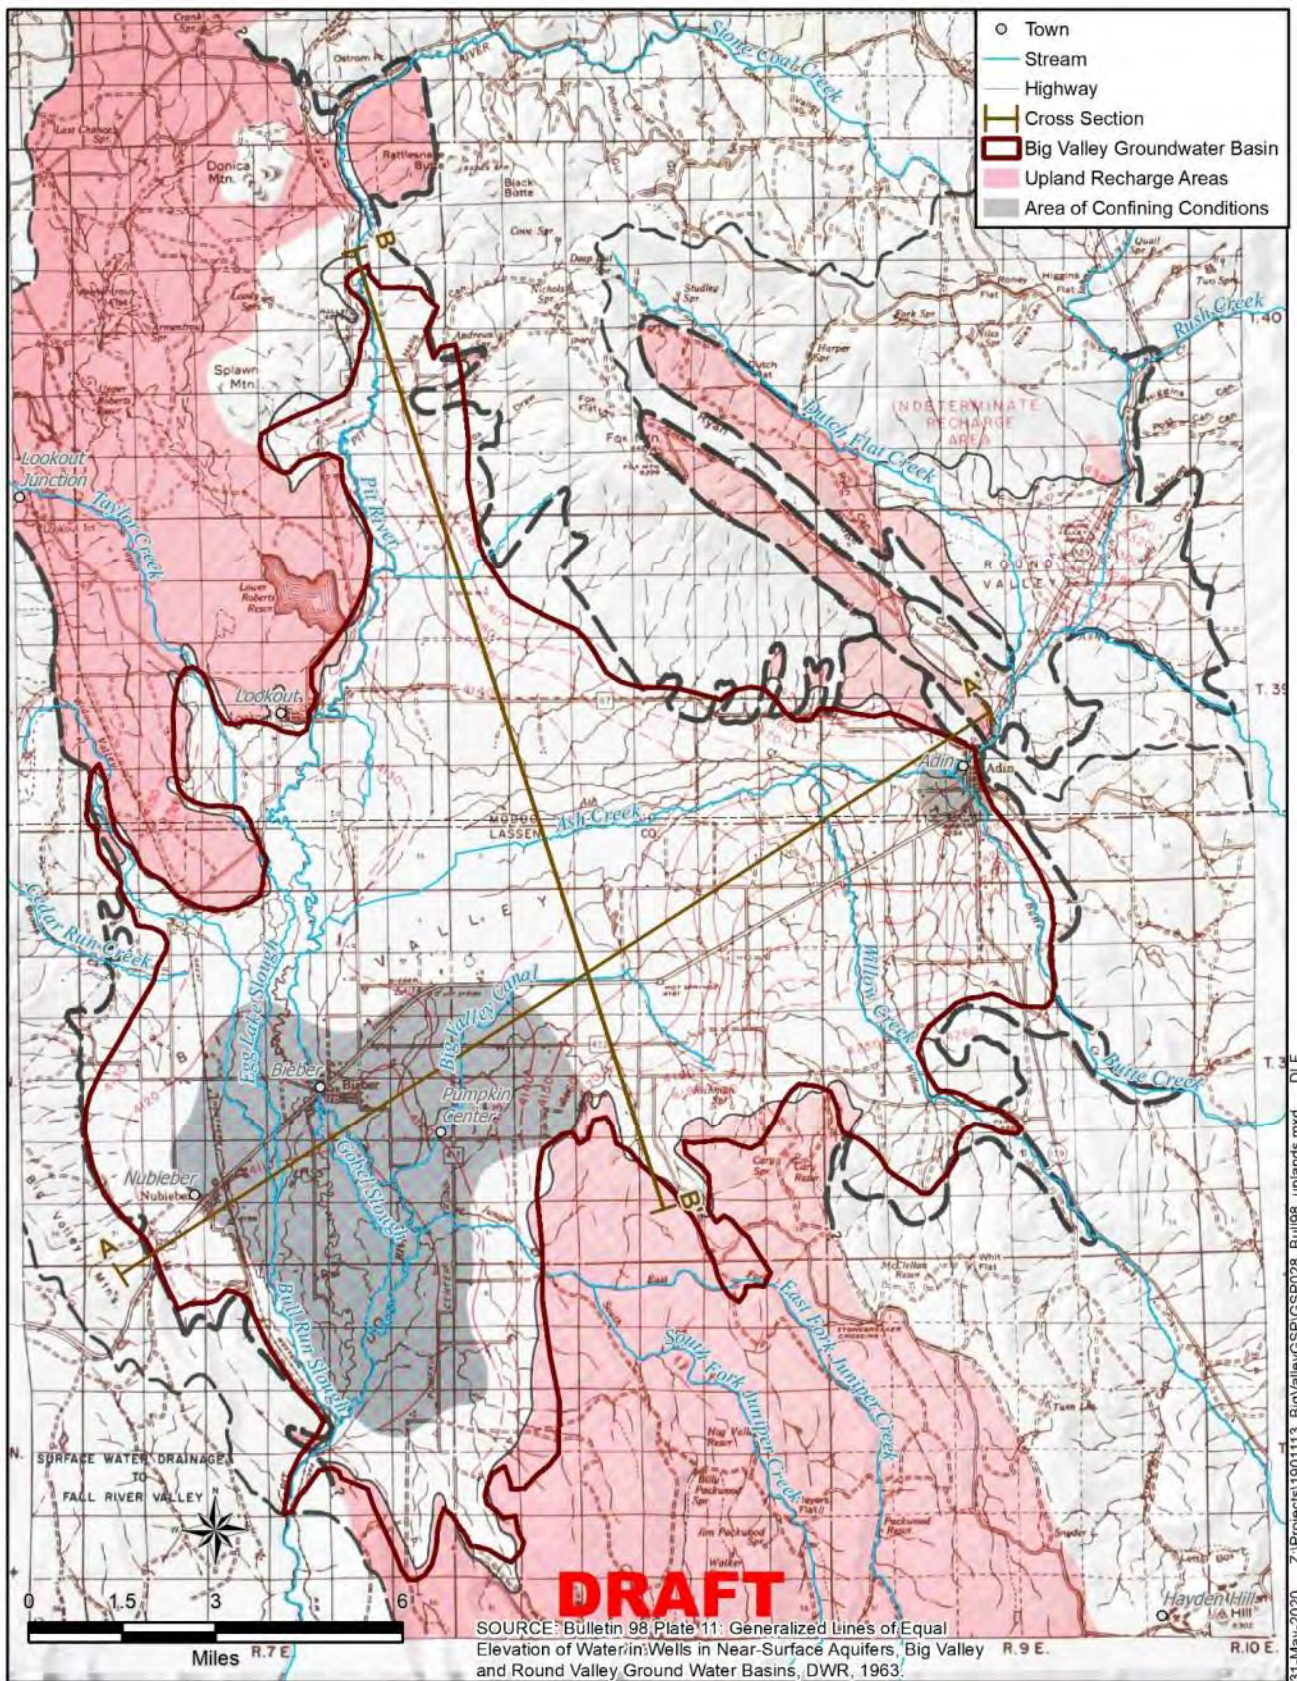

to Pleistocene<sup>13</sup> basalts (Tpbv and Qpbv). These units are mapped by DWR (1963) outside the Basin to the northwest and southeast as well as along the crests of Barber and Ryan Ridges to the northeast of Big Valley.<sup>14</sup> GeothermEx (1975) generally concurs with this mapping, except for the areas along Barber and Ryan Ridges, which they map as a much older unit (Miocene) which is corroborated by a radiometric age date measured at 13.8 million years. This distinction is important because an older unit is more likely to underlie the Basin sediments and is less likely to be hydraulically connected to the BVGB. At the northwestern end of Barber Ridge, GeothermEx mapped the oldest unit in the BVGB area (Tm) of Andesitic composition. This unit contains the site of the Shaw Pit quarry.

## 4.4 Principal Aquifer

### 4.4.1 Formation Names

The Pliocene-Pleistocene<sup>15</sup> age Bieber Formation (TQb) is the main formation of aquifer material defined within BVGB and DWR (1963) estimates that it ranges in thickness from a thin veneer to over 1,000 feet. It meets the ground surface around the perimeter of the Basin, especially on the southeast side (DWR, 1963). The formation was deposited in a lacustrine (lake) environment and is comprised of unconsolidated to semi-consolidated layers of interbedded clay, silt, sand, gravel and diatomite<sup>16</sup>. Layers of black sand and white sand (pumiceous) were identified as highly permeable but discontinuous and mostly thin. GeothermEx (1975) did not embrace the DWR name and identified this formation as an assemblage of tuffaceous, diatomaceous lacustrine and fluvial sediments (Ttsu, Ttsl). Both investigations identified the formation in the same overall location, based on a comparison of the two geologic maps, but the GeothermEx map provides more detail and resolution than the DWR map. For the purposes of the GSP, the name Bieber Formation will be used.

Recent Holocene<sup>17</sup> deposits (labeled with Q) were mapped within the center of the Basin and along drainage courses from the upland areas and are identified by DWR (1963) as alluvial fans (Qf), intermediate alluvium (Qal) and Basin deposits (Qb). The composition of these unconsolidated deposits varies from irregular layers of gravel, sand and silt with clay to poorly sorted silt and sand with minor clay and gravel (Qal) to interbedded silt, clay and “organic muck” (Qb). The latter two deposits occur in poorly drained, low-lying areas where alkali<sup>18</sup> could accumulate. The thickness of these sediments is estimated to be less than 150 feet. GeothermEx (1975) identified these deposits as older valley fill (Qol), lake and swamp deposits (Ql), fan deposits (Qf) as well as undifferentiated alluvium (Qal). All these recent deposits are aquifer material<sup>19</sup> and are part of the Big Valley principal aquifer. There is discrepancy between the two maps in the northeastern portion of the Basin, where GeothermEx

---

<sup>13</sup> 5.3 million years to 11,700 years ago.

<sup>14</sup> The GSAs specifically requested a basin boundary modification to include these upland recharge areas within the Basin boundary. The request was denied by DWR as not being sufficiently substantiated. (See **Appendix 1A**)

<sup>15</sup> 5.3 million to 12 thousand years old.

<sup>16</sup> Diatomite is a fine-grained sedimentary rock made primarily of silica. It is formed from the deposition of diatoms who make their microscopic shells from silica.

<sup>17</sup> Recent geologic period from 11,700 years old to present.

<sup>18</sup> Alkali means relatively high in alkali and alkali earth metals (primarily sodium, potassium, calcium and magnesium) and generally results in a high pH (greater than 7 or 8).

<sup>19</sup> Meaning they contain porous material with recoverable water.

1083 extends the alluvial sediments much further upslope toward Barber Ridge and Fox Mountain as  
1084 discussed in Section 4.3 – Local Geology.

1085 The principal aquifer consists of the Bieber Formation (TQb and recent deposits (Qal, Qg, Qb). While  
1086 DWR (1963) delineates an “area of confining conditions” in the southwest area of the Basin on **Figure**  
1087 **4-5**, the data to support the confinement and the definition of a broad-scale, well-defined aquitard<sup>20</sup> is  
1088 not currently available.

1089 As described above and below, aquifer conditions vary greatly throughout the Basin. However, clearly  
1090 defined, widespread distinct aquifer units have not been identified, and with the data currently available  
1091 all the water bearing units in the Basin will be defined as a single principal aquifer for this GSP.

## 1092 **4.4.2 Geologic Profiles**

1093 **Figure 4-6** and **Figure 4-7** show cross-sections across Big Valley. The locations of the cross-sections  
1094 are shown on **Figure 4-3**, **Figure 4-4** and **Figure 4-5**. The locations of these sections were drawn to be  
1095 similar to those drawn by DWR (1963) and GeothermEx (1975) and characterize the aquifers in two  
1096 directions (southwest-northeast and northwest-southeast). The sections show the lithology of numerous  
1097 wells across the valley. Very little geological correlation could be made across each section which is  
1098 likely to be related to the concurrent block faulting and volcanic and alluvial depositional input from  
1099 various highland areas flowing radially into Big Valley. These complex structural and depositional  
1100 variables result in great stratigraphic variation over short distances. The pertinent information from  
1101 cross-sections presented by DWR (1963) and GeothermEx (1975) are shown on the sections.

## 1102 **4.4.3 Definable Bottom**

1103 The SGMA and DWR’s GSP regulations do not provide clear guidance for what constitutes a “definable  
1104 bottom” of a basin. However, DWR’s (2016a) Bulletin 118 Interim Update describe the “physical  
1105 bottom” as where the porous sediments contact the underlying bedrock and the “effective bottom” as the  
1106 depth below which water is unusable because it is brackish or saline.


1107 The “physical bottom” of BVGB is difficult to define because few borings have been drilled deeper than  
1108 1200 ft and the compositions of the alluvial and bedrock formations are similar (derived from active  
1109 volcanism), with contacts that are gradational. Also, some of the lavas probably flowed into Big Valley  
1110 forming lava lenses that are now interlayered below, above and laterally with permeable aquifer  
1111 sediments. Moreover, the base of the aquifer system is likely variable across BVGB due to the  
1112 concurrent volcanism and horst/graben faulting of the bedrock.

1113


---

<sup>20</sup> Layer of low permeability that prevents significant flow, except at very slow rates.



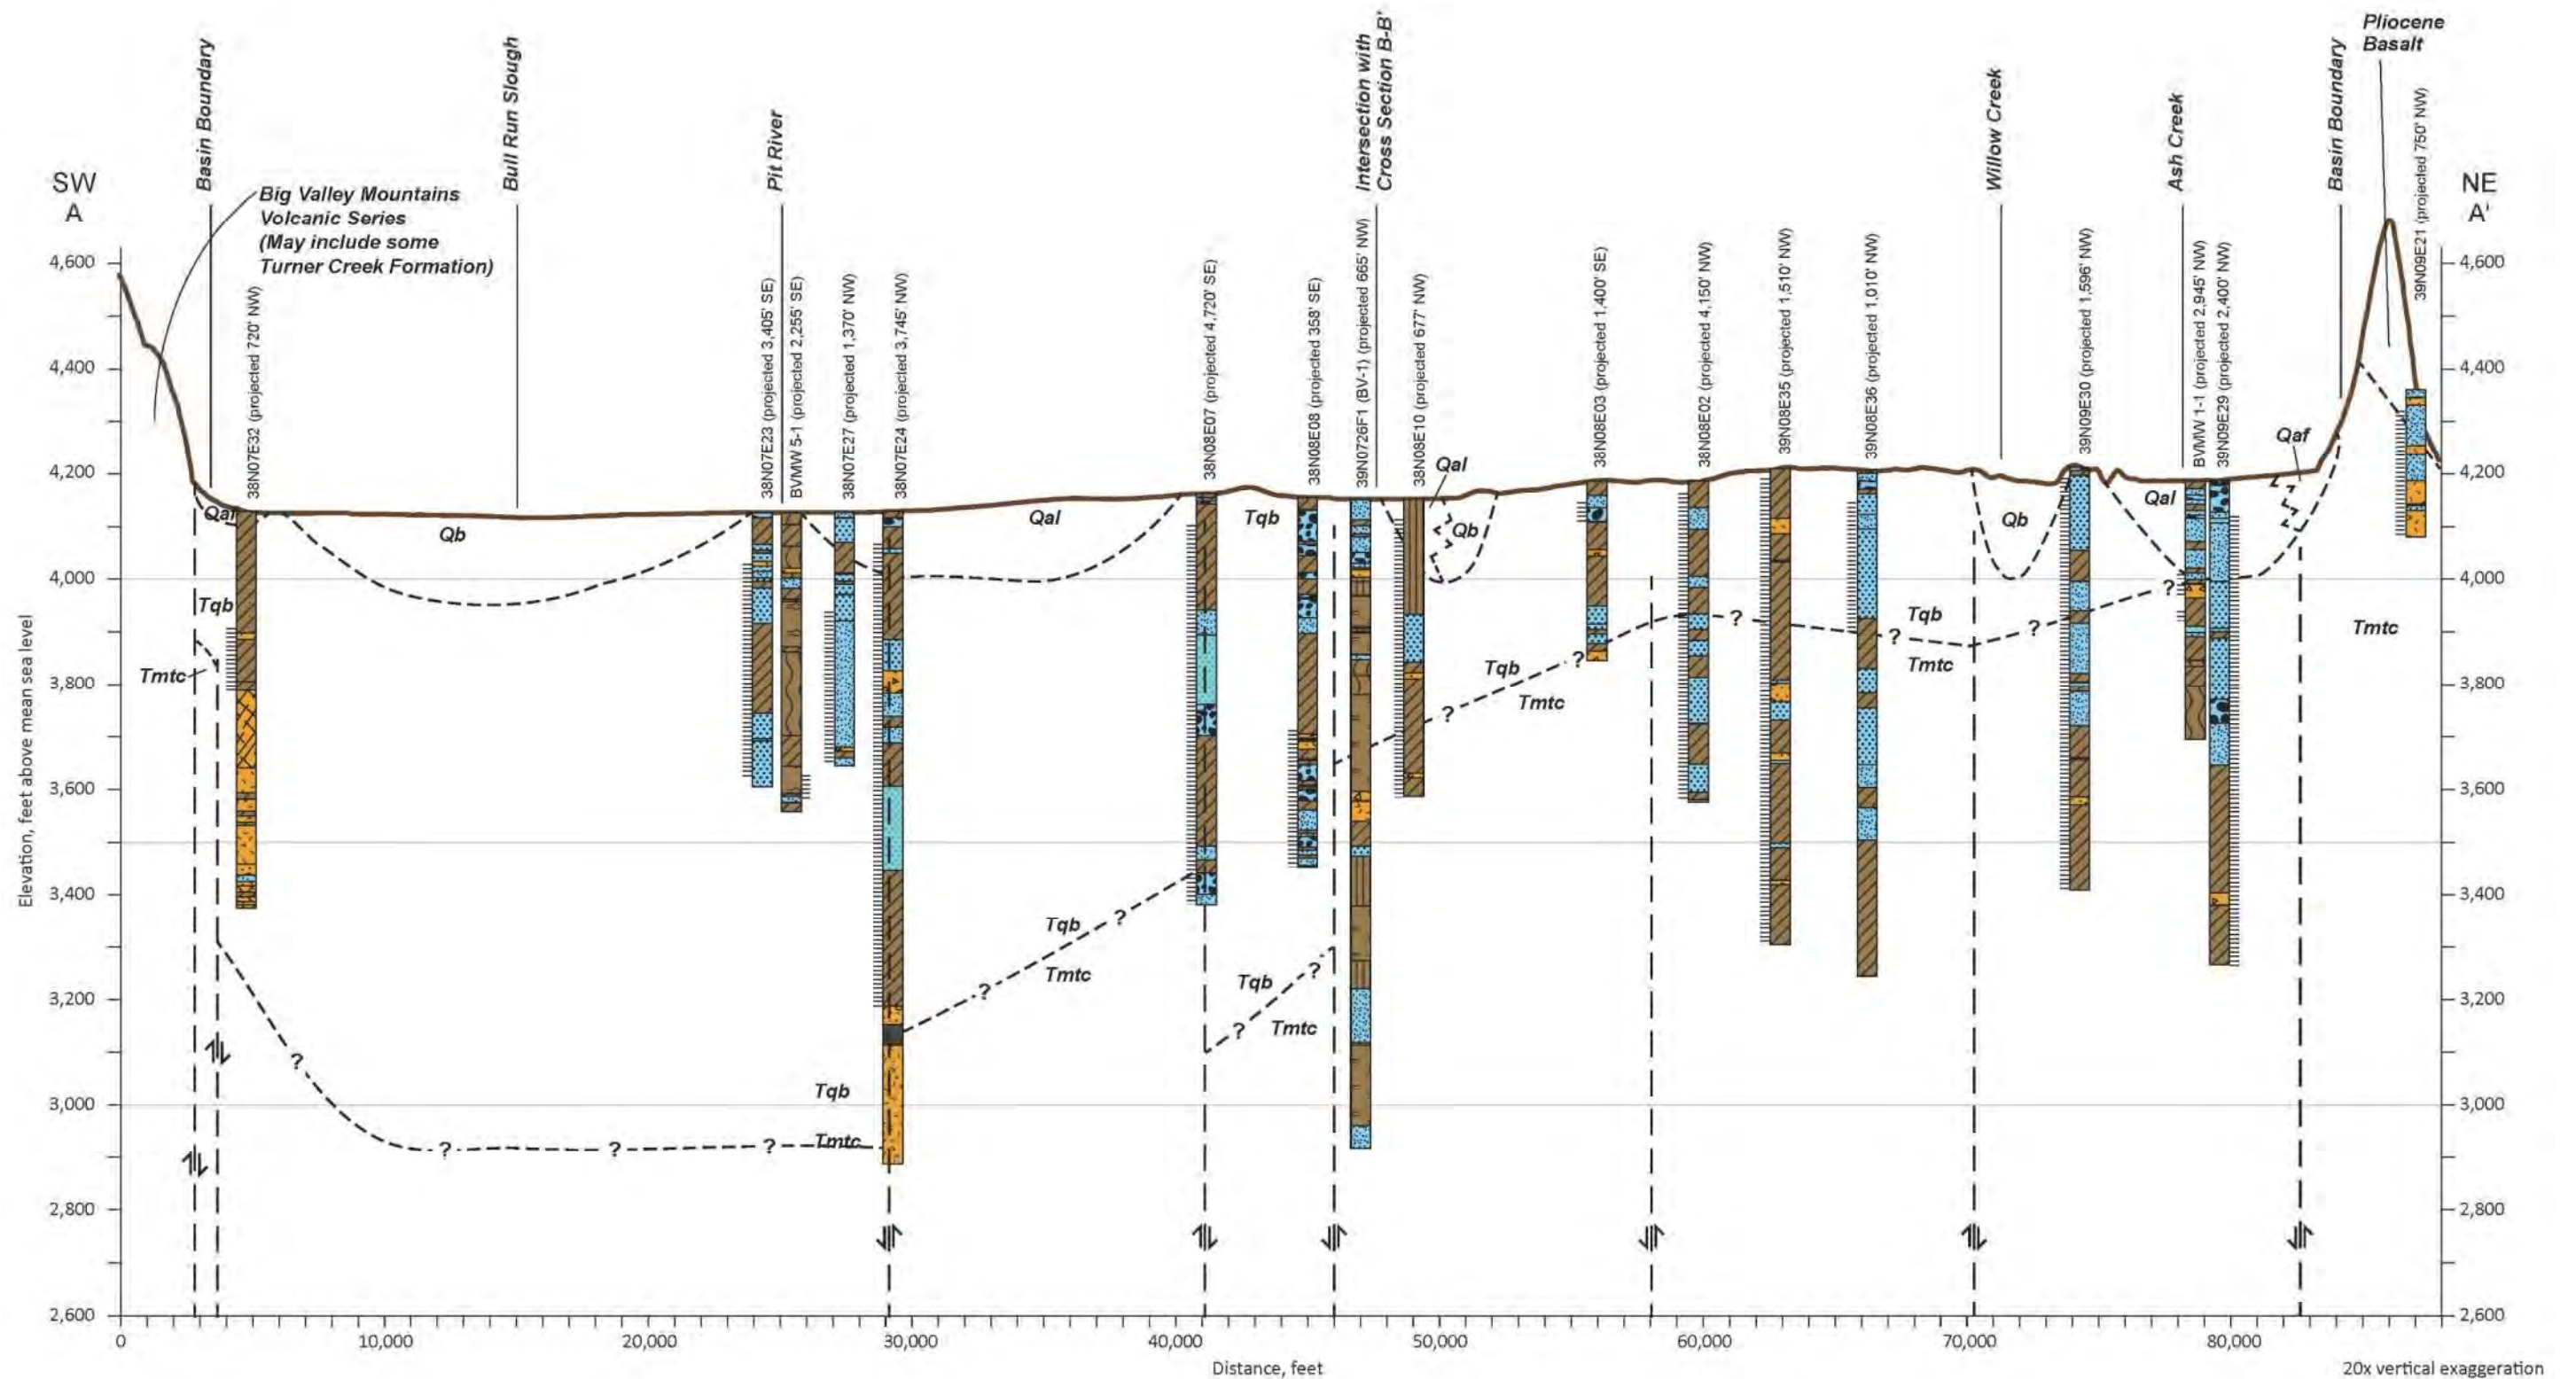

**Figure 4-6 Geologic Cross Section A-A'**  
 Note: Key to lithologic symbologies is in development and will be included in future draft(s)

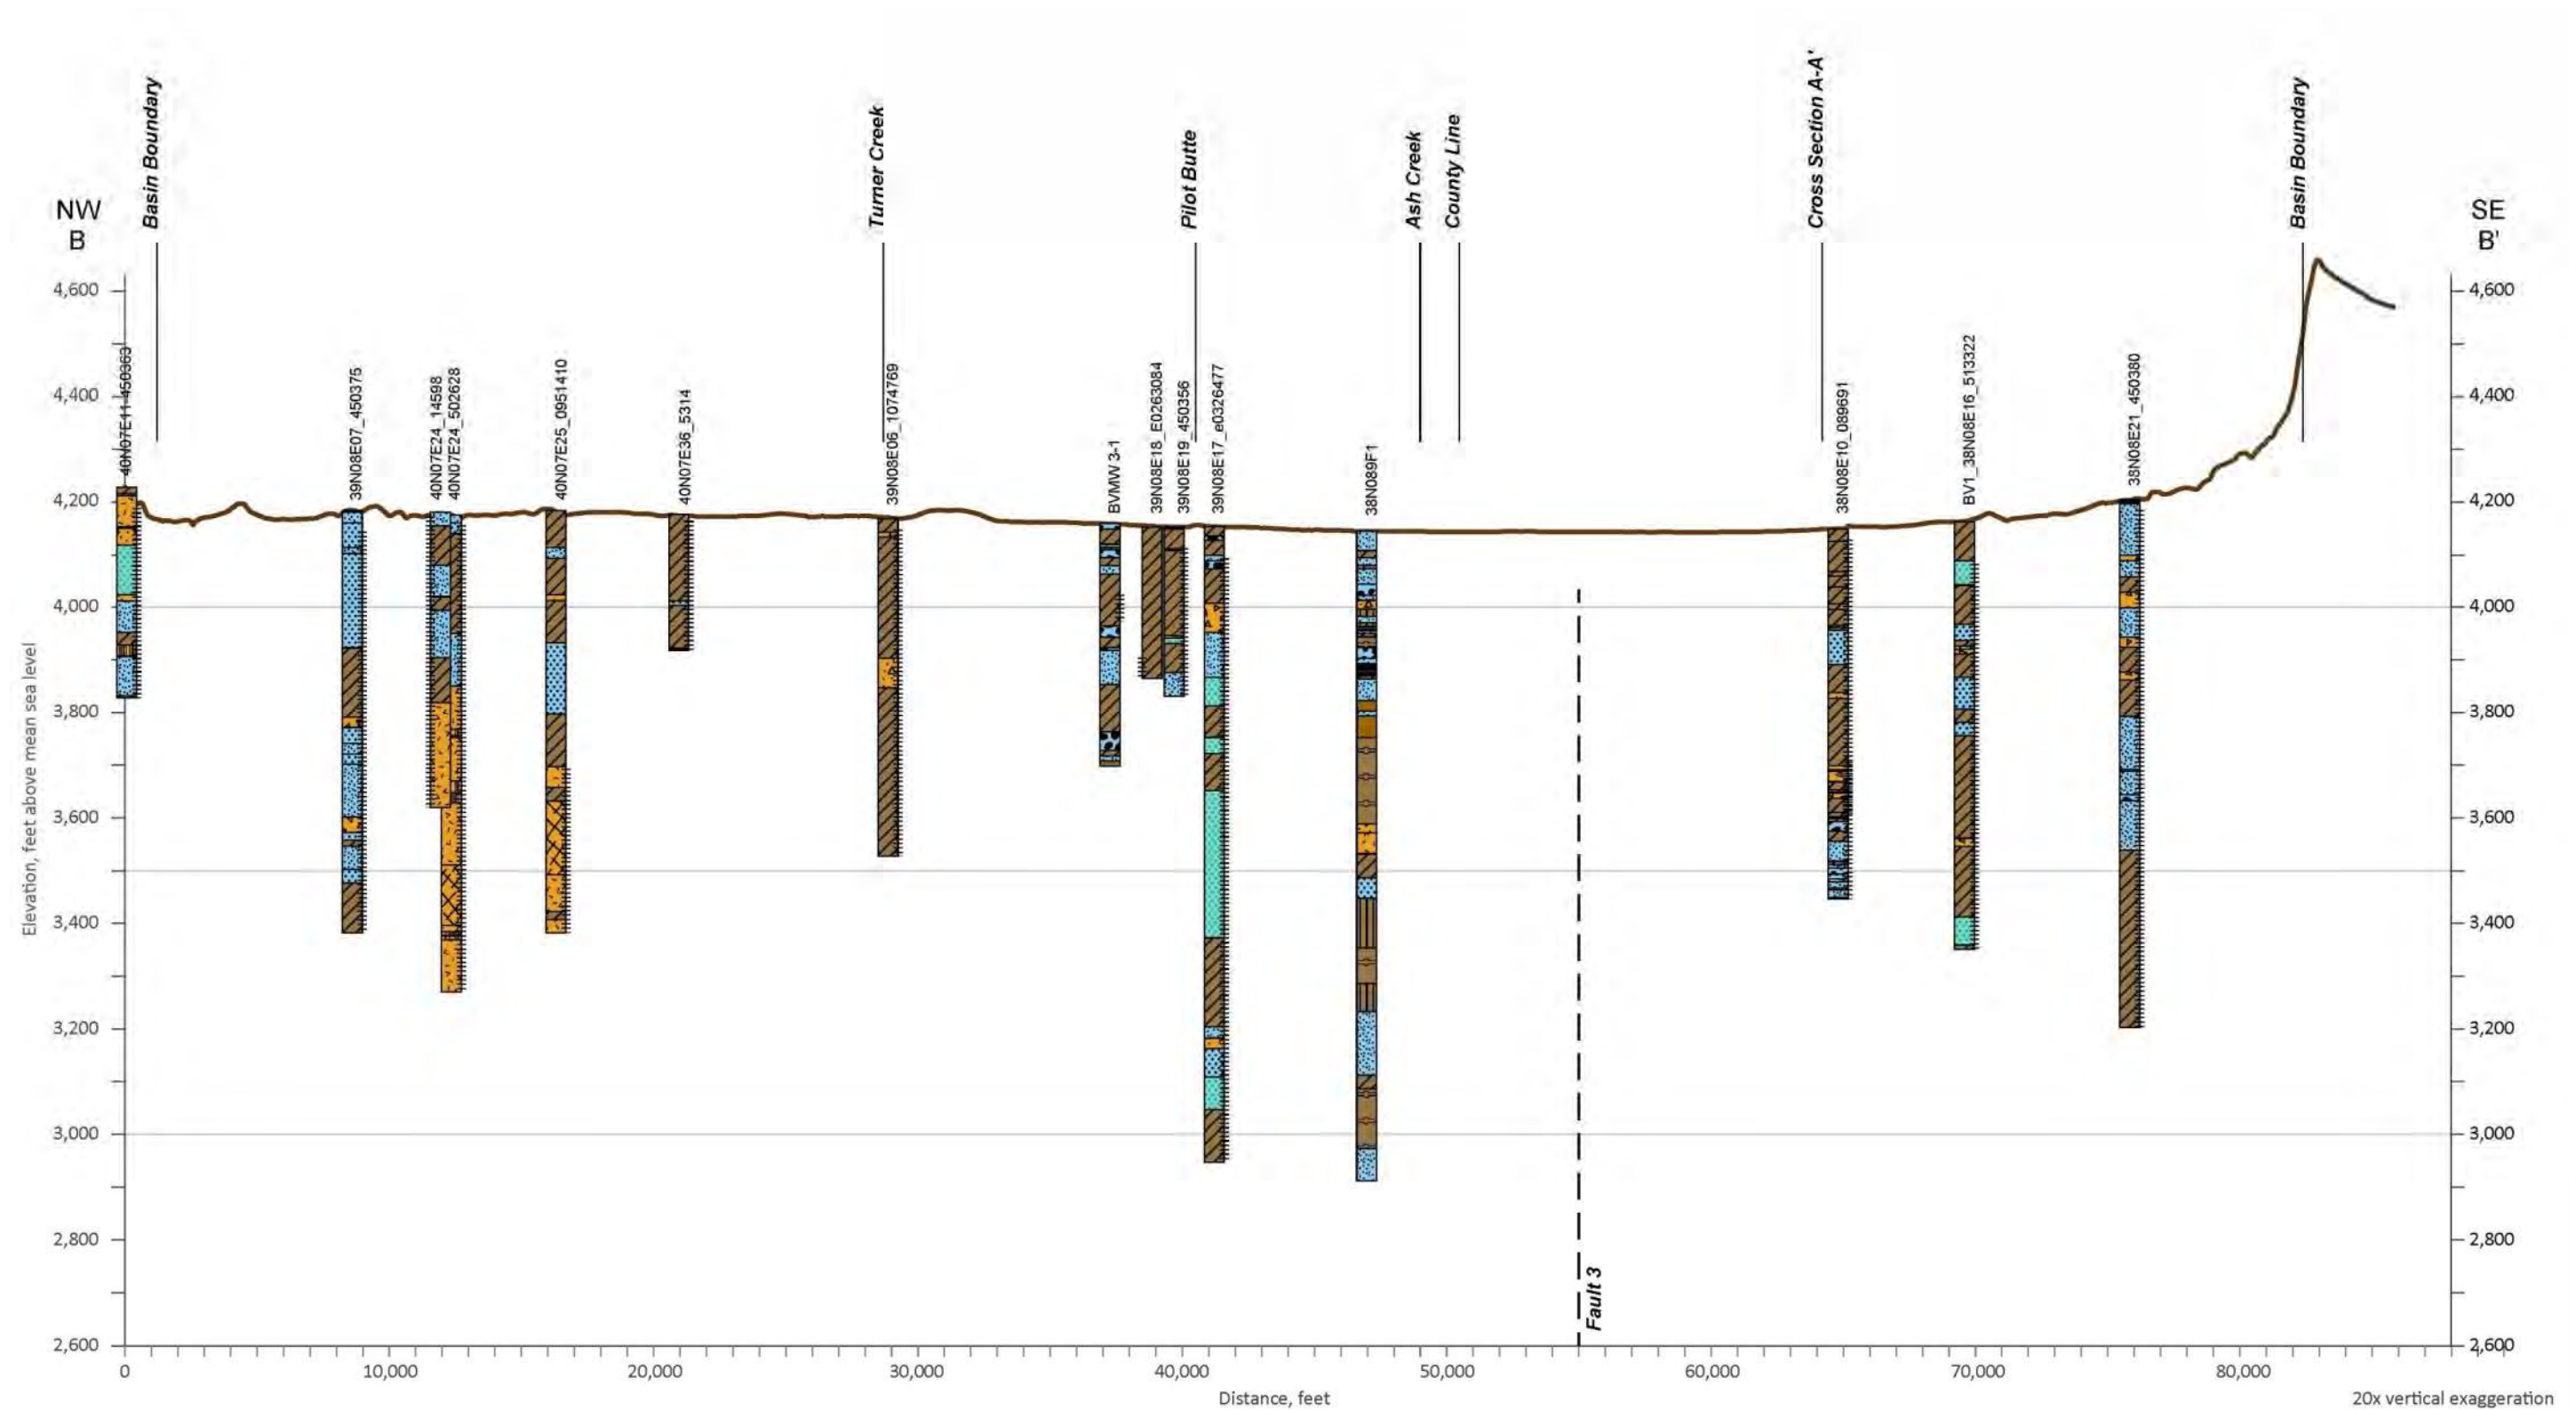

**Figure 4-7 Geologic Cross Section B-B'**  
 Note: Key to lithologic symbolologies is in development and will be included in future draft(s)

1120 The deepest wells drilled in the Basin include two test borings by DWR to depths of 1843 and 1231 feet  
 1121 and two geothermal test wells near Bieber to depths of 2125 and 7000 feet. The deepest 7000 foot well  
 1122 is east of Bieber, but only has lithologic descriptions to a depth of 4100 feet. These descriptions indicate  
 1123 aquifer-type materials (sands) throughout. The other three deep well lithologies give similar indication  
 1124 of aquifer material to their total depth.

1125 The two geothermal wells also had temperature logs and some water quality. Water temperatures  
 1126 increased to over 100°F beyond depths of about 2000 to 3000 feet. The Bieber School Well had water  
 1127 quality samples collected from the 1665- to 2000-foot interval and indicated water quality higher in total  
 1128 dissolved solids (632 milligrams per liter) than is present in shallower portions of the Basin

1129 The information from these two wells indicated that temperature and water quality concerns increase  
 1130 with depth, but a clear delineation of where water becomes unusable cannot be determined with the data  
 1131 available. With no scientific evidence to clearly define a physical or effective bottom of the aquifer, an  
 1132 approach to define a practical bottom is being used to satisfy the GSP Regulations which require the  
 1133 aquifer bottom to be defined (§ 354.14(a)(1)), as described below.

1134 The approach for defining the practical bottom is to ensure that all known water wells are included  
 1135 within the aquifer. DWR’s well log inventory shows that over 600 wells have been installed in the  
 1136 BVGB. Although DWR’s well log inventory does not completely and precisely assess the total number  
 1137 or status of the wells (i.e., abandoned), it is the only readily available data. The well inventory has been  
 1138 identified as a data gap within this GSP. Wells in this inventory with known depths are summarized in  
 1139 **Table 4-1**. The only wells drilled deeper than 1,200 feet are the two DWR test borings and geothermal  
 1140 wells discussed above.

1141 **Table 4-1 Well Depths**

Depth Interval (ft bgs)	Deepest Well per Section <sup>a</sup>		Count of All Wells
< 200	10%		41%
200 – 400	16%	43%	25%
400 – 600	27%		17%
600 – 800	28%	42%	12%
800 – 1000	14%		4%
1000 – 1200	4%		1%
> 1200 <sup>b</sup>	1%		< 1%

Notes:

<sup>a</sup> A section is a 1 mile by 1 mile square. There are 134 sections in the BVGB

<sup>b</sup> Test borings: BV-1 and BV-2 are only water wells drilled deeper than 1200 ft

1142 For this GSP, the “practical bottom” of the aquifer is set at 1200 feet but may extend to 4,100 or deeper.  
 1143 This delineation of 1200 feet is consistent with DWR’s approach, established over 50 years ago which  
 1144 declared a practical bottom of 1000 feet. 1200 feet encompasses the levels where groundwater can be  
 1145 accessed and monitored for beneficial use but does not preclude drilling and pumping from greater  
 1146 depths.



#### 4.4.4 Structural Properties with Potential to Restrict Groundwater Flow

Faults can sometimes affect flow, but sufficient evidence has not been gathered and analyzed to determine whether any of the faults in Big Valley restrict or facilitate flow. The mountains around BVGB are heavily faulted, with older basalt units more faulted than younger basalt units.

Most of the faults trend to the north/northwest with some perpendicular faulting oriented northeasterly. **Figure 4-8** is an excerpt of the regional fault map by the California Geological Survey (2010). Faults on the western side of BVGB are shown to be Quaternary in age while faults on the eastern side are pre-Quaternary (older than 2.6 million years). Note that numerous faults to the west of BVGB were identified as later Quaternary to Holocene-age faults (displacement during the last 700,000 or within the last 11,700 years, respectively).

Some of the faults extend across the Basin, concealed beneath the alluvial materials. Two hot springs are located in the Basin near these faults. DWR (1963) acknowledged the potential restriction of groundwater flow by faults but did not provide specific information. However, such fault impacts on groundwater flow cannot be determined with certainty at this time given the limited number of widely spaced wells with groundwater level data and the absence of a pumping test to verify restricting conditions.

#### 4.4.5 Physical Properties and Hydraulic Characteristics

The physical properties of a groundwater system are typically defined by the hydraulic conductivity<sup>21</sup>, transmissivity<sup>22</sup> and storativity<sup>23</sup> of the aquifer. The preferred method of defining hydraulic characteristics is a pumping test with pumping rates and water levels monitored (either in the pumping well or preferably a nearby monitoring well) throughout the test. Such pumping tests were performed after the construction of five sets of monitoring wells in late 2019 and early 2020.

The tests were performed by pumping each 2.5-inch-diameter well for 1 hour at a rate of 8 gpm while measuring water level drawdown in the pumping well. A well efficiency<sup>24</sup> of 70 percent was assumed, and the length of the well screen was used as a proxy for the aquifer thickness (b). **Table 4-2** shows the results of the Theis<sup>25</sup> solution that best matched the drawdown curve at each well. Storativity (S) ranged from highly confined ( $3.0 \times 10^{-6}$  at BVMW 3-1) to unconfined ( $1.5 \times 10^{-1}$  at BVMW 4-1). Hydraulic

---


<sup>21</sup> Hydraulic conductivity (K) is defined as the volume of water that will move in a unit of time under a unit hydraulic gradient through a unit area. It is a measure of how easily water moves through a material and is usually given in gallons per day per square foot (gpd/ft<sup>2</sup>) or feet per day (ft/day).

<sup>22</sup> Transmissivity (T) is the product of K and aquifer thickness (b) and is a measure of how easily water moves through a thickness of aquifer. It is usually expressed in units of gallons per day per foot of aquifer (gpd/ft) or square feet per day (ft<sup>2</sup>/day).

<sup>23</sup> Storativity (S, also called storage coefficient) is defined as the volume of water that an aquifer releases from or takes into storage per unit surface area per unit change in groundwater elevation. High values of S are indicative of unconfined aquifers, while low values indicate confined (pressurized) aquifers. S does not have units.

<sup>24</sup> Pumping tests with water levels measured in the pumping well will experience more drawdown than elsewhere in the aquifer. The predicted drawdown divided by the actual drawdown is well efficiency.

<sup>25</sup> Theis is a mathematical solution for predicting drawdown in a well and is commonly used to estimate K, T, and S.

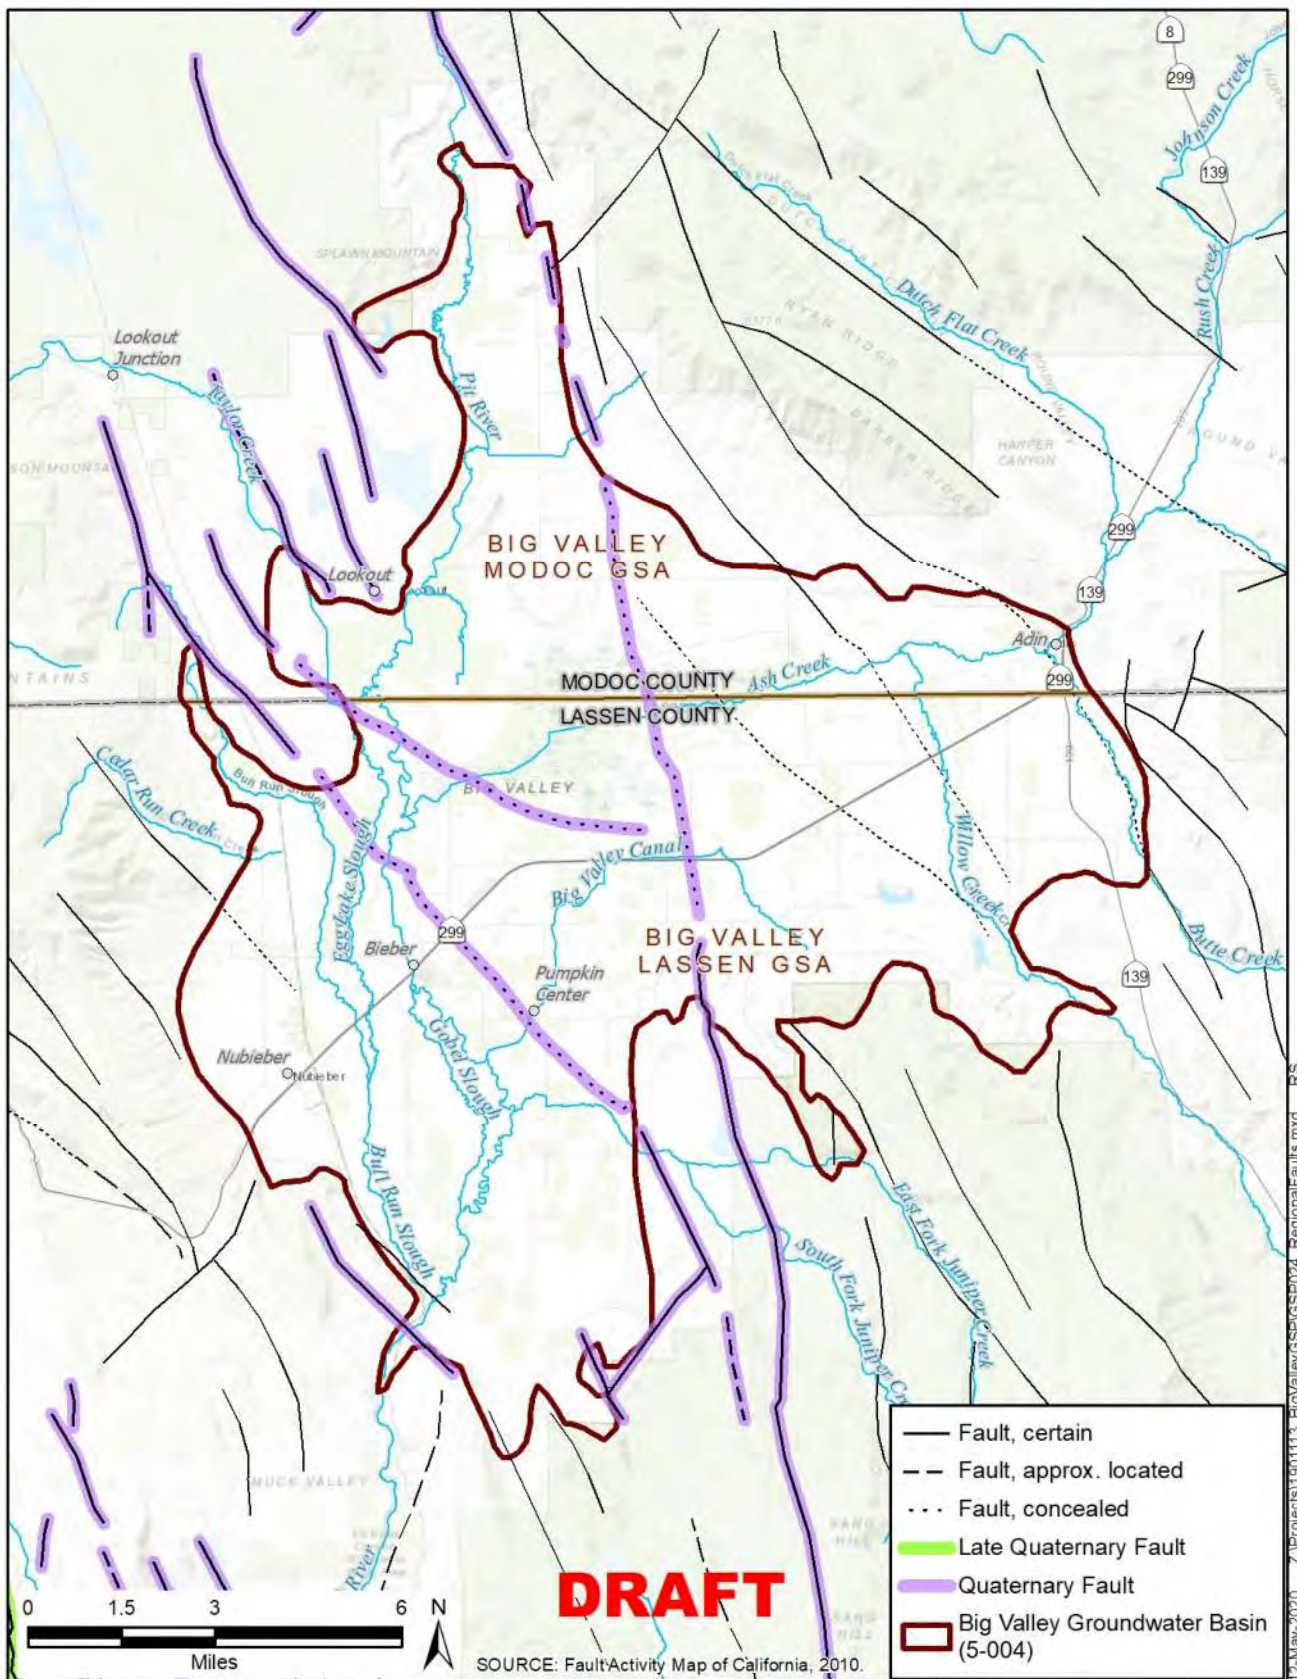



1176 **Table 4-2 Aquifer Test Results**

Parameter	Units	BVMW 1-1	BVMW 2-1	BVMW 3-1	BVMW 4-1	BVMW 5-1
Thickness (b)	ft	50	40	50	30	50
Flow (Q)	gpm	8	8	8	8	8
Drawdown after 1 hr	ft	4.3	16.0	27.5	2.0	3.0
Transmissivity (T)	gpd/ft	3000	750	700	4200	4500
Storativity (S)	unitless	1.5E-03	1.0E-03	3.0E-06	1.0E-01	2.0E-03
Hydraulic Conductivity (K)	ft/d	8	3	2	19	12
Source: GEI 2021						

1177 conductivity (K) ranged from 2 feet per day (ft/d) to 19 ft/d, although these K values likely range higher  
 1178 since pumping tests with larger pumps in larger wells for longer periods of time tend to give higher T  
 1179 and K. The results of these five pumping tests are documented further in **Appendix 4A**.

1180 The specific yield (SY) is another important aquifer characteristic, as it defines the fraction of the  
 1181 aquifer that contains recoverable water and therefore governs the volume of groundwater stored in the  
 1182 Basin. Reclamation (1979) discussed the SY in Big Valley and postulated that it varies with depth, at  
 1183 7 percent for the first 100 ft bgs, 6 percent for the 100 to 200 feet bgs and 5 percent from 200 to 1000 ft  
 1184 bgs. However, Reclamation doesn't give any supporting evidence for these percentages. SY in the  
 1185 Sacramento Valley has been estimated to vary between 5 to 10 percent (DWR 1978). Since Big Valley  
 1186 aquifer materials were primarily deposited in a lacustrine environment (as opposed to Sacramento  
 1187 Valley which has a higher percentage of riverine deposits), Big Valley's SY is likely on the lower end at  
 1188 5 percent. This conservative percentage will be used for all depth intervals in this GSP.


## 1189 **4.5 Soils**

1190 Information on soils within the BVGB were obtained from the Soil Survey Geographic Database  
 1191 (SSURGO) of the NRCS. The SSURGO data includes two categories of information relevant to the  
 1192 GSP: taxonomic soil orders and hydrologic soil groups. Taxonomic data include general characteristics  
 1193 of a soil and the processes of formation while hydrologic data relate to the soil's ability to transmit water  
 1194 under saturated conditions and is an important consideration for hydrology, runoff and groundwater  
 1195 recharge. The following section describes the soils of BVGB.

### 1196 **4.5.1 Taxonomic Soil Orders**

1197 Of the 12 established taxonomic soil orders, three were found within the BVGB, as listed below, and  
 1198 their distributions are presented in **Figure 4-9**. Descriptions below were taken from the Illustrated Guide  
 1199 to Soil Taxonomy (NRCS, 2015):

- 1200 • Alfisol – Naturally fertile soils with high base saturation and a clay-enriched subsoil horizon.  
 1201 Alfisols develop from a wide range of parent materials and occur under broad environmental  
 1202 conditions, ranging from tropical to boreal. The movement of clay and other weathering products  
 1203 from the upper layers of the soil and their subsequent accumulation in the subsoil are important  
 1204 processes. The soil-forming processes are in relative balance. As a result, nutrient bases (such as

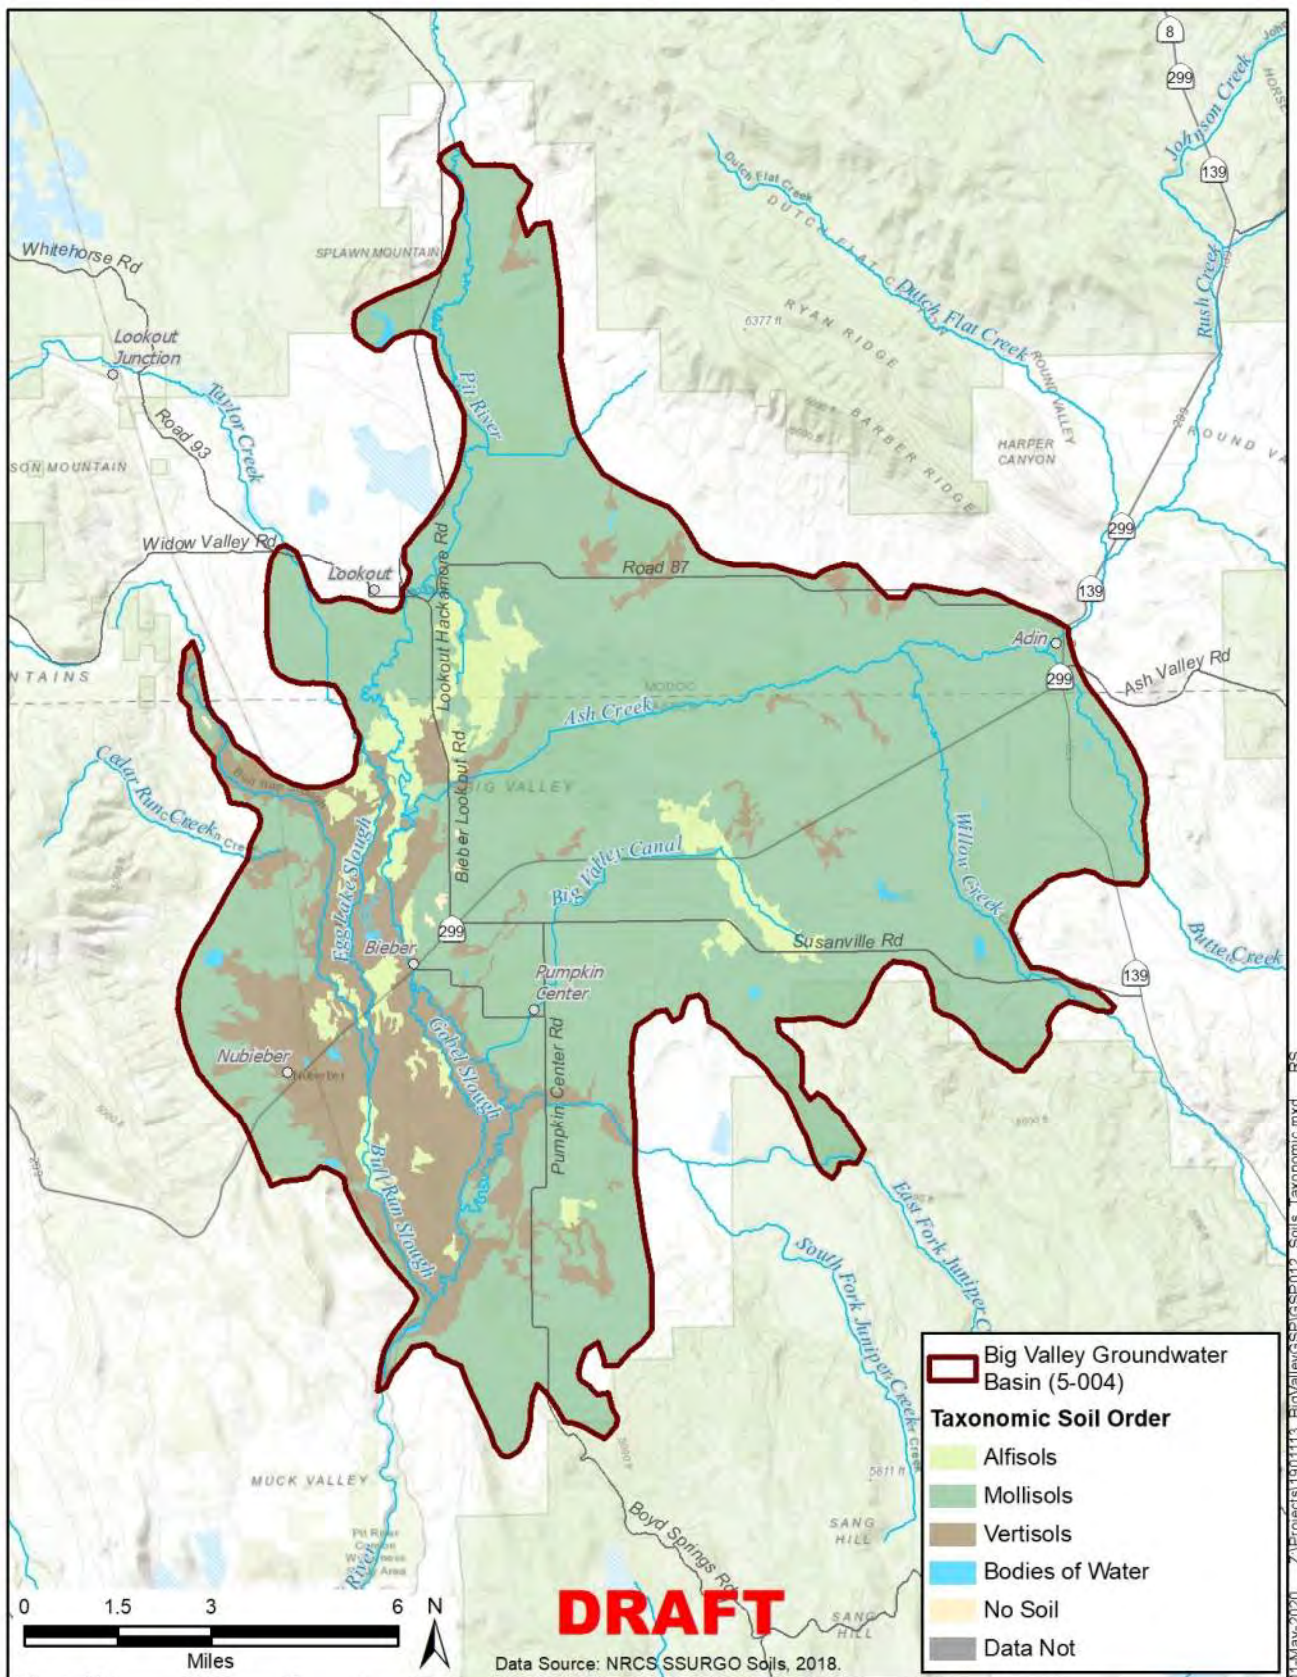

**Figure 4-9 Taxonomic Soils Classifications**

- calcium, magnesium and potassium) are supplied to the soil through weathering and the leaching process is not sufficiently intense to remove them from the soil before plants can use and recycle them.
- Mollisol – Very dark-colored, naturally very fertile soils of grasslands. Mollisols develop from predominantly grasslands in temperate regions at midlatitudes and result from deep inputs of organic matter and nutrients from decaying roots, especially the short, mid and tall grasses common to prairie and steppe areas. Mollisols have high contents of base nutrients throughout their profile due to mostly non-acid parent materials in environments (subhumid to semiarid) where the soil was not subject to intense leaching of nutrients.
- Vertisol – Very clayey soils that shrink and crack when dry and expand when wet. Vertisols are dominated by clay minerals (smectites) and tend to be very sticky and plastic when wet and very firm and hard when dry. Vertisols are commonly very dark in color and distinct soil horizons are often difficult to discern due to the deep mixing (churning) that results from the shrink-swell cycles. Vertisols form over a variety of parent materials, most of which are neutral or calcareous, over a wide range of climatic environments, but all Vertisols require seasonal drying.

Mollisols are the most prominent soil order within the BVGB occupying nearly 78 percent of the total area. Vertisols occupy over 16 percent and are found mostly on the southwestern side of BVGB within the floodplain of the Pit River. Small patches of Vertisols are scattered in the remainder of the Basin. Alfisols occupy over 5 percent of the Basin and are found mostly on the west side of the Basin and along Hot Spring Slough in the south-central portion of the Basin.


## 4.5.2 Hydrologic Soil Groups

The NRCS Hydrologic Soils Group (HSG) classifications provide an indication of soil infiltration potential and ability to transmit water under saturated conditions, based on hydraulic conductivities of shallow, surficial soils. **Figure 4-10** shows the distribution of the hydrologic soil groups, where higher conductivities (greater infiltration) are labeled as Group A and lowest conductivities (lower infiltration) as Group D. As defined by the NRCS (2012), the four HSGs are:

- Hydrologic Group A – “Soils in this group have low runoff potential when thoroughly wet. Water is transmitted freely through the soil. Group A soils typically have less than 10% clay and more than 90% sand or gravel and have gravel or sand textures.” Group A soils have the highest conductivity values (greater than 5.67 inches per hour [in/hr]) and therefore a high infiltration rate<sup>26</sup> and the greatest recharge potential.
- Hydrologic Group B – “Soils in this group have moderately low runoff potential when thoroughly wet. Water transmission is unimpeded. Group B soils typically have between 10 and 20% clay and 50 to 90% sand and have loamy sand or sandy loam textures. Group B soils have a wide range of conductivity values (1.42 in/hr to 5.67 in/hr), a moderate infiltration rate<sup>32</sup> and a moderate potential for recharge.

<sup>26</sup> Soil Survey Staff, NRCS, United States Department of Agriculture. Web Soil Survey



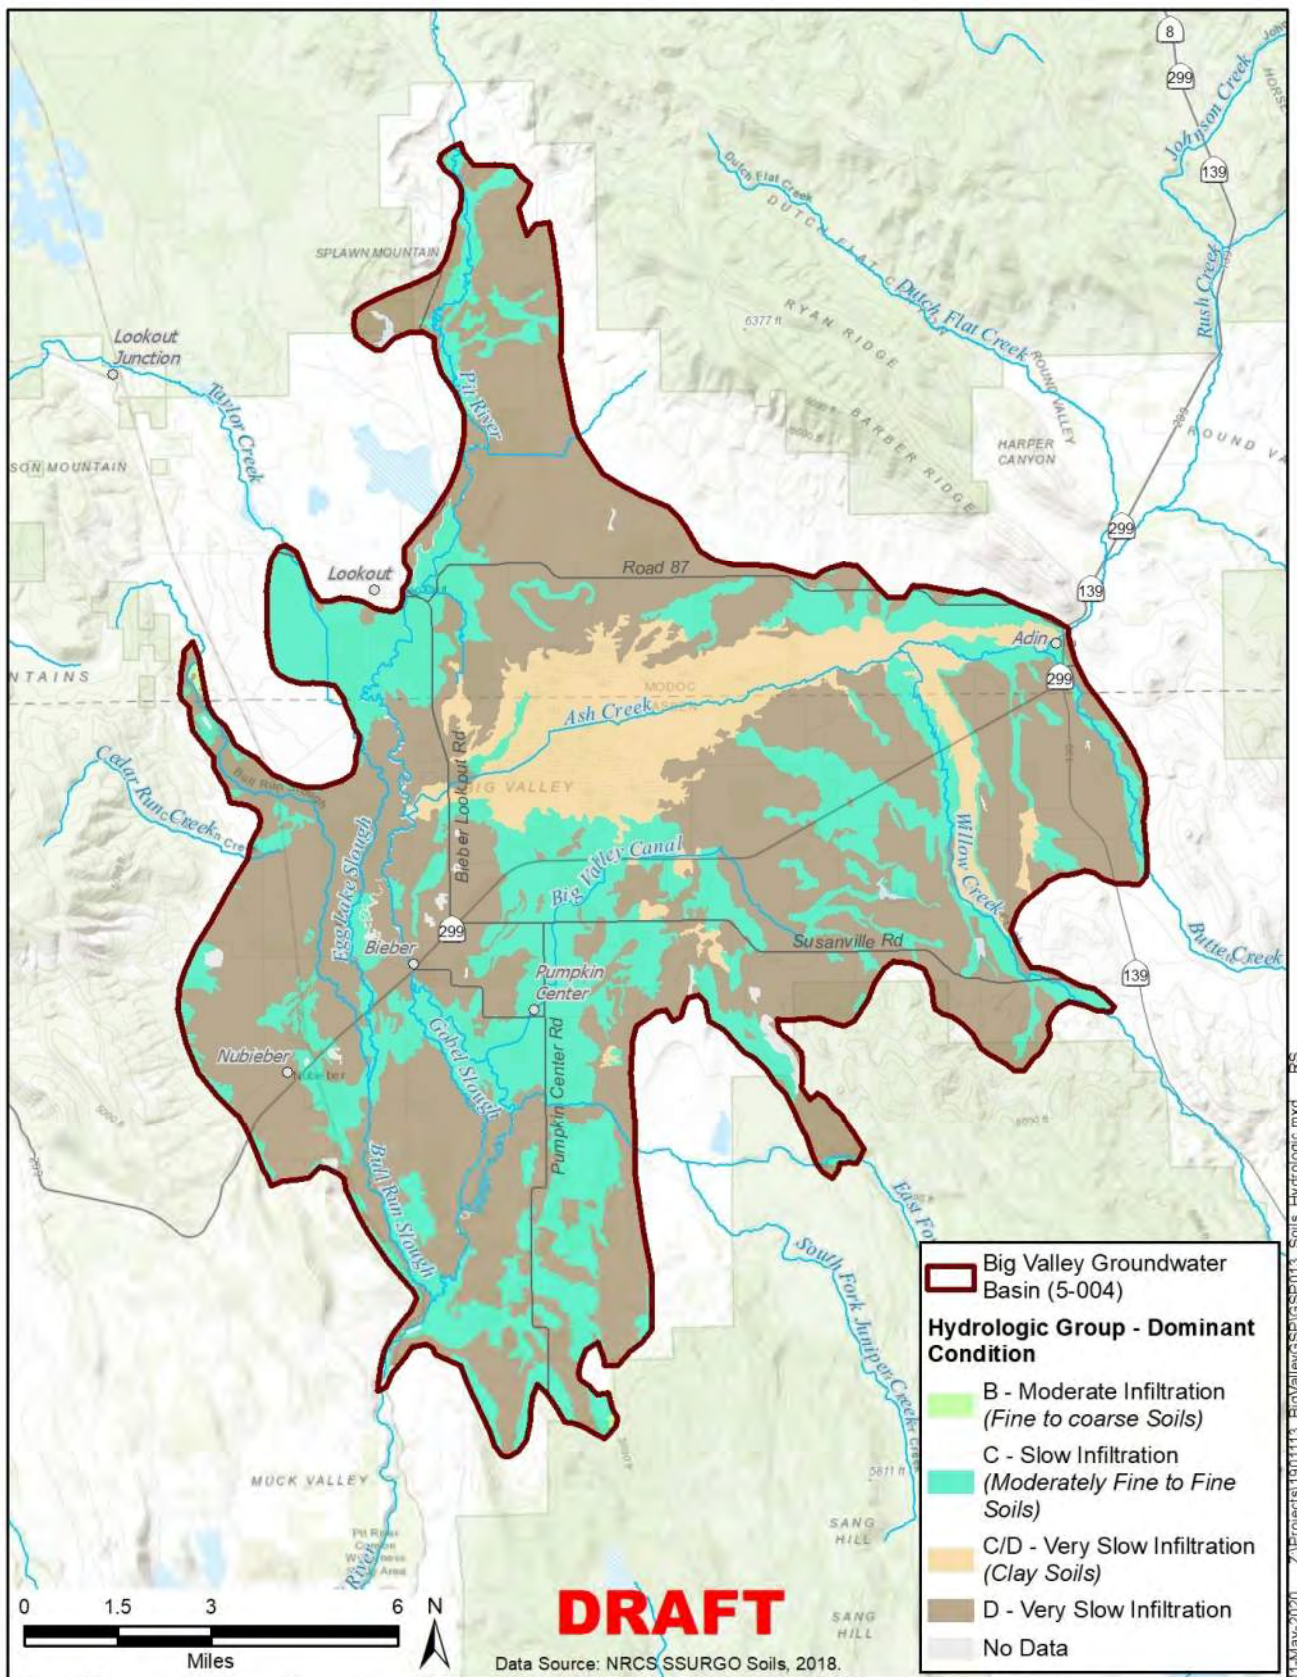

**Figure 4-10 Hydrologic Soils Group Classifications**



- Hydrologic Group C – “Soils in this group have moderately high runoff potential when thoroughly wet. Water transmission through the soil is somewhat restricted. Group C soils typically have between 20 and 40% clay and less than 50% sand and have loam, silt loam, sandy clay loam, clay loam and silty clay loam textures.” Group C soils have a relatively low range of conductivity values (0.14 to 1.42 in/hr), a slow infiltration rate<sup>27</sup> and limited potential for groundwater recharge due to their fine textures.
- Hydrologic Group D – “Soils in this group have high runoff potential when thoroughly wet. Water movement through the soil is restricted or very restricted. Group D soils typically have greater than 40% clay, less than 50% sand and have clayey textures. In some areas, [Group D soils] also have high shrink-swell potential.” Group D soils have conductivity values less than 0.14 in/hr, a very slow infiltration rate<sup>33</sup> and a very limited capacity to contribute to groundwater recharge.

A dual hydrologic group (C/D) is assigned to an area to characterize runoff potential under drained and undrained conditions, where the first letter represents drained conditions, and the second letter applies to undrained conditions.

According to this HSG dataset, no areas BVGB show high infiltration rates (Group A) and only a tiny area (<0.1%) of Group B soil (moderate infiltration) located on the western edge of the Basin at the top of Bull Run Slough near Kramer Reservoir. The remainder of the Basin is shown with hydrologic soils Groups C and D, slow to very slow infiltration rates (Group C at 30% and Group D at 58% of Basin area). Most of the ACWA is underlain by the dual hydrologic group C/D (11% of Basin area) and due to the wetland nature of this area contains primarily undrained soils corresponding to the very slow infiltration rates.


It should be noted that the NRCS develops these maps using a variety of information including remote sensing and some limited field data collection and does not always capture variations that may occur on a small scale. Historical experience from landowners and additional field data could identify areas of better infiltration. These soils groups do not necessarily preclude vertical movement of water and while recharge may be slower than desired, recharge may still be possible. Additionally, Group C and D soils may have slow infiltration rates due to shallow hardpan, and groundwater recharge could potentially be enhanced if this hardpan can be disrupted. More research on soil permeability is being conducted through grant funding.

### 4.5.3 Soil Agricultural Groundwater Banking Index

The University of California at Davis has established the Soil Agricultural Groundwater Banking Index (SAGBI) using data within the SSURGO database, which gives a rating of suitability of the soils for groundwater recharge. This index expands on the HSG to include topography, chemical limitations and soil surface condition. This effort has resulted in a mapping tool that illustrates six SAGBI classes (excellent-very poor) and has been completed for much of the state. This mapping tool is only available for the Modoc County portion of BVGB as shown on **Figure 4-11**, and the indices vary mostly between moderately poor to very poor. Small areas of moderately good are present along the Pit River as it enters

<sup>27</sup> Soil Survey Staff, NRCS, United States Department of Agriculture. Web Soil Survey

1283 BVGB and to the west of Adin. It should be noted that the SAGBI is a large-scale, planning level tool  
1284 and does not preclude local site conditions that are good for groundwater recharge.

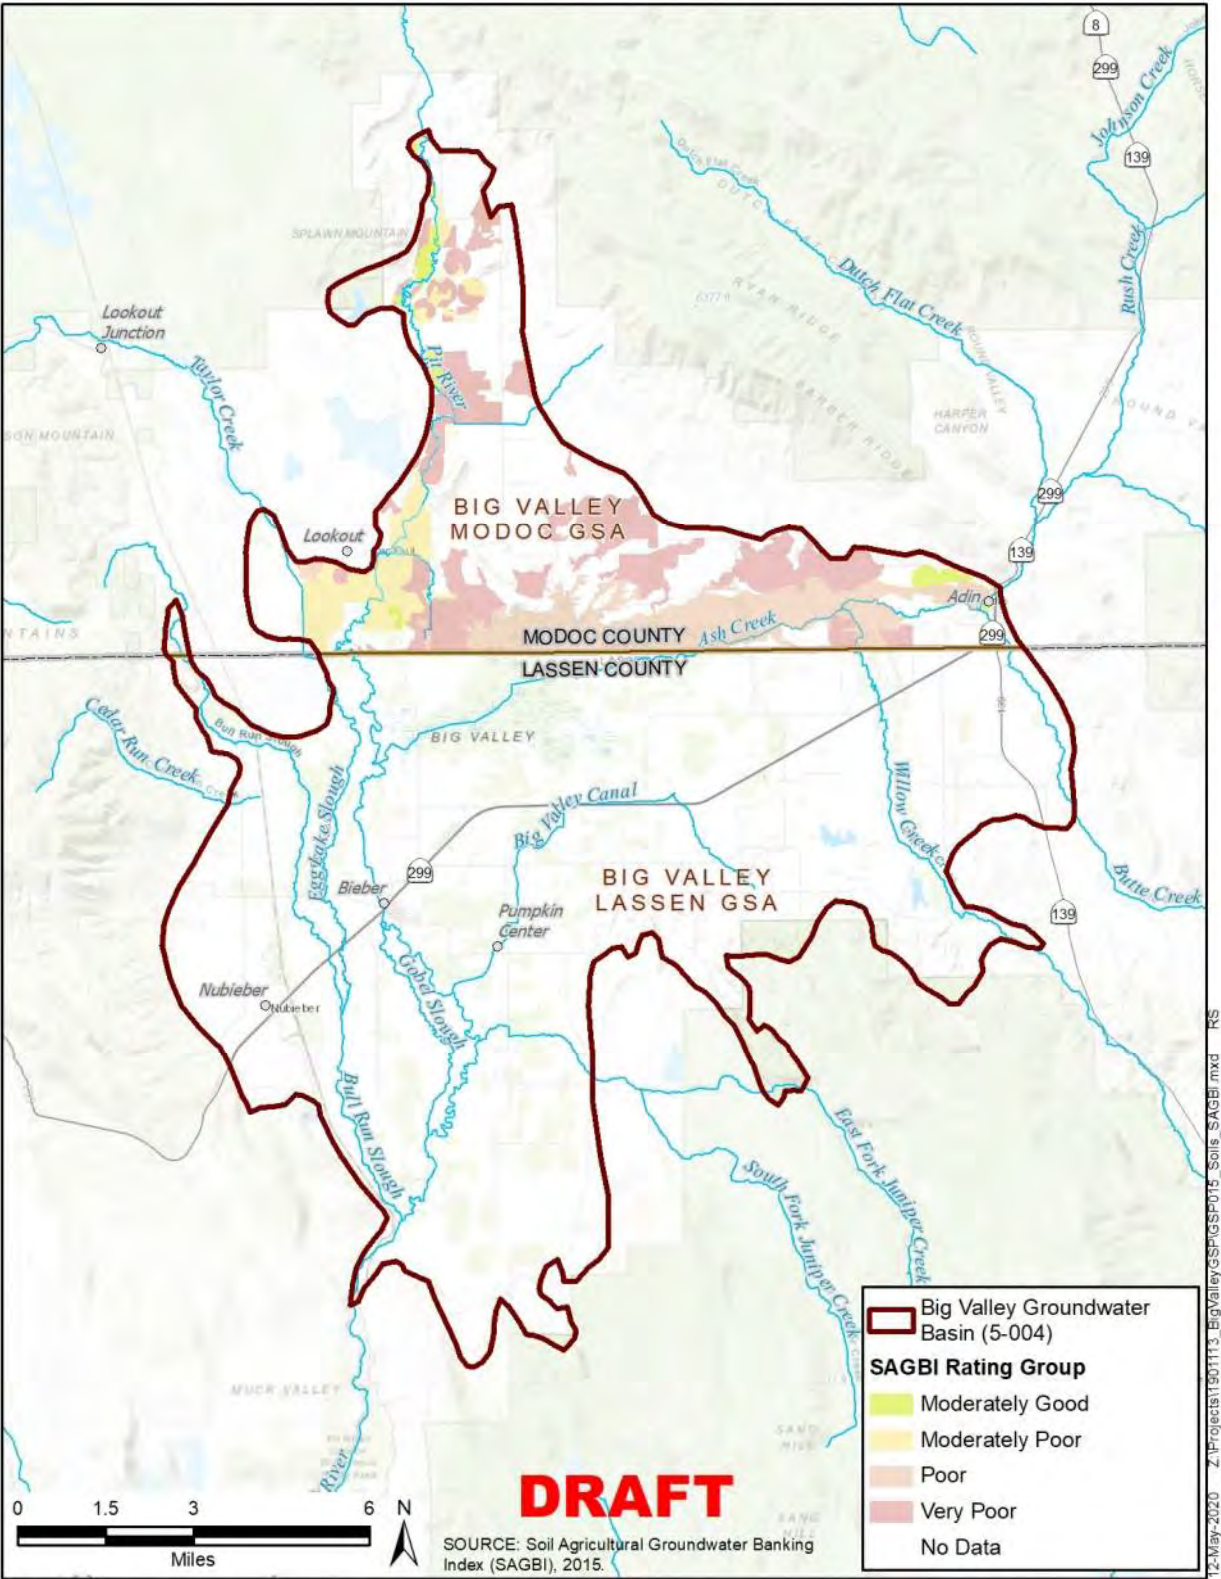

1285  
1286 **Figure 4-11 SAGBI Classifications**

## 1287 **4.6 Beneficial Uses of Principal Aquifer**

1288 Primary beneficial uses of groundwater in the BVGB include agricultural, environmental, municipal and  
1289 domestic uses. A description of each is provided below.

### 1290 **Agricultural**

1291 Agricultural users get their supply from surface water diversions, groundwater, or a combination of the  
1292 two. **Figure 3-5** from the previous chapter illustrates DWR's estimate of the primary source being used  
1293 around the Basin. The primary crops are grain and hay crops (primarily alfalfa) with some wild rice.

### 1294 **Industrial**

1295 Industrial groundwater use is limited in the BVGB. According to DWR well logs, six industrial wells  
1296 have been drilled, all of them near Bieber at Big Valley Lumber, which is not currently in operation.  
1297 **Figure 3-4** shows some areas of industrial use, but more use is likely present throughout the Basin as  
1298 agricultural users have some associated industrial needs.

### 1299 **Environmental**

1300 Environmental uses for wetland and riparian botanical and wildlife habitat occur primarily within the  
1301 ACWA in the center of the Basin, near the overflow channels adjacent to the Pit River in the southern  
1302 portion of the Basin and along the riparian corridors of some of the minor streams that flow into Big  
1303 Valley. **Add CRP/WRP discussion.**

### 1304 **Municipal**

1305 The State Water Board recognizes three public water systems that use groundwater under the purview of  
1306 the DDW: Lassen County Waterworks District #1 (LCWWD#1) which serves the community of Bieber,  
1307 the Forest Service Station in Adin which provides groundwater to a non-community, non-transient  
1308 population and the CAL FIRE conservation camp west of the Basin whose well is located within the  
1309 Basin boundary.


### 1310 **Domestic**

1311 Domestic users include residents that use their own well for household purposes. The BVGB has a  
1312 population of about 1,046. With the 312 Bieber residents receiving water from municipal supply, the  
1313 majority of the remaining 734 residents are domestic users.

1314 **4.7 General Water Quality**

1315 Previous reports have characterized the water quality as excellent. (DWR 1963, Reclamation 1979) The  
1316 central area of the Basin, where naturally occurring hot springs influence the chemistry, has elevated  
1317 levels of sulfate, fluoride, boron and arsenic. (Reclamation 1979) These localized areas with higher  
1318 mineral content occur near the major faults that traverse the valley.

1319 **Figure 4-12** shows a Piper Diagram for water samples that were collected in late 2019 and early 2020  
1320 and characterizes the relative concentrations of the major cations (Ca, Mg, Na, K) and anions (SO<sub>4</sub>, Cl,  
1321 HCO<sub>3</sub>). The dominant cations range from sodium rich to mixed with higher amounts of calcium and  
1322 magnesium which increases the water hardness. The major anion is strongly bicarbonate which indicates  
1323 that the water is generally young in geologic terms.

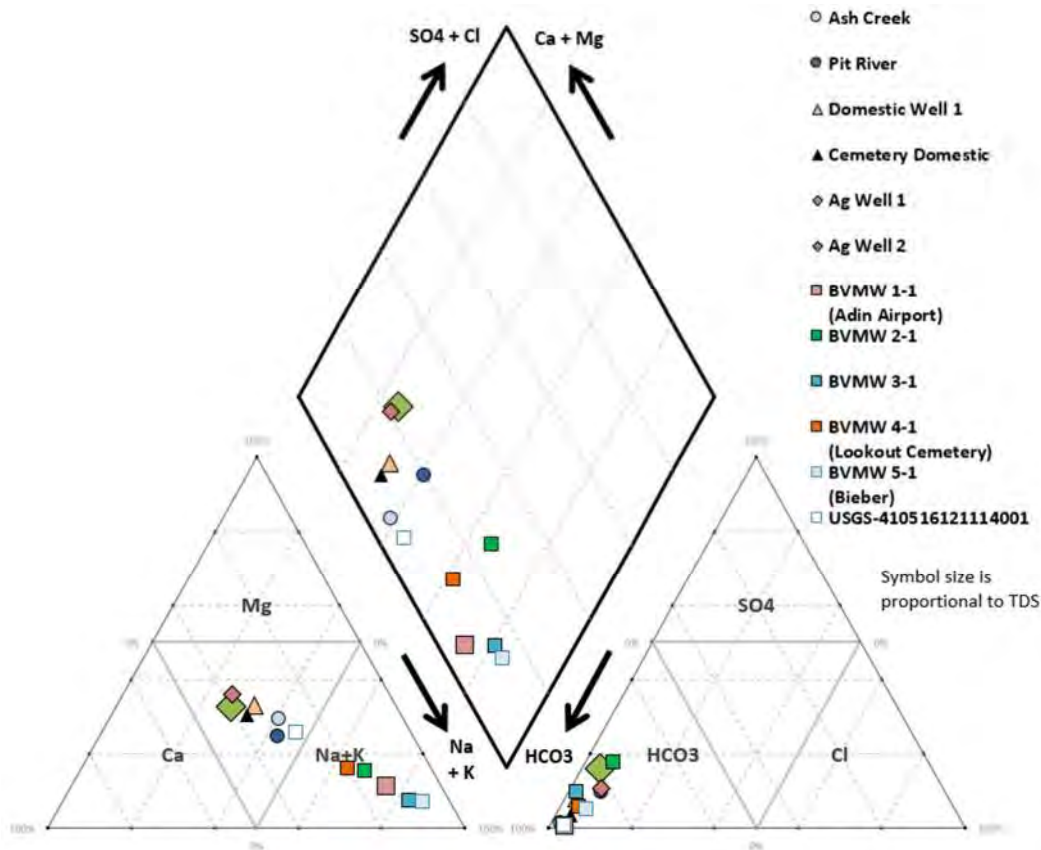

1324 **Figure 4-12 Piper Diagram showing major cations and anions**  
1325  
1326

1327 Some areas in the Basin have elevated levels of iron, manganese and/or arsenic, all of which are  
1328 naturally occurring in volcanic terrains such as Big Valley. The nature and distribution of these  
1329 constituents will be discussed further in Chapter 5 – Groundwater Conditions.



## 1330 **4.8 Groundwater Recharge and Discharge Areas**

### 1331 **4.8.1 Recharge**

1332 Groundwater recharge in BVGB likely occurs *via* several mechanisms discussed below.

#### 1333 **Underflow from adjacent upland areas and other areas outside the Basin**

1334 The upland areas consist of fractured basalt flows where the precipitation infiltrates vertically through  
1335 joints and fractures until it reaches underlying aquifer material and then travels horizontally into the  
1336 Basin. DWR has postulated that the areas shown in pink on **Figure 4-13** provide recharge in such a way.  
1337 However, other areas adjacent to the Basin could provide some recharge in a similar fashion. In  
1338 addition, underflow could enter the Basin where the Pit River and Ash Creek enter the Basin. A Basin  
1339 boundary modification is needed to encompass other important recharge areas outside the currently  
1340 defined Basin boundary.

#### 1341 **Infiltration of precipitation on the valley floor**


1342 Some direct infiltration of rain and snow on the valley floor likely occurs. However, because the aquifer  
1343 materials in the Basin are largely lacustrine and much of the soils have slow infiltration rates, a high  
1344 proportion of the precipitation likely runs off or is consumed through evapotranspiration. **Figure 4-13**  
1345 shows the areas from the NRCS datasets that may have a slightly higher infiltration rate (HSG B and  
1346 HSG C) than the other areas and therefore potentially more recharge.

#### 1347 **Rivers and streams that flow through the Basin**

1348 Streams that flow through the Basin lose water to the aquifer, particularly where they enter the Basin.  
1349 Aquifer materials are typically coarser on the fringes of the Basin where the stream gradient begins to  
1350 flatten. In general, recharge likely occurs in the eastern portions of the Basin along Ash Creek, Butte  
1351 Creek and Willow Creek and then flows westerly through the subsurface. As Ash Creek flows to the  
1352 center of the Basin and Big Swamp, the water slows and spreads out into a large marsh. The CDFW has  
1353 recently enhanced this slowing and spreading of water through “pond and plug” projects which bring the  
1354 water up out of the previously incised channel. Other pond and plug projects have been successfully  
1355 implemented in the region. Even though the soils and aquifer materials in this portion of the Basin have  
1356 slow infiltration rates, recharge still is likely to occur from Big Swamp because of the long period of  
1357 time that the shallow soils remain wet and saturated. Support from the public has been received at  
1358 outreach meetings to conduct more pond and plug projects within and near the Basin.

#### 1359 **Deep percolation of irrigation water**

1360 Depending on the irrigation method, particularly flood irrigation, deep percolation of irrigation water  
1361 into the aquifer occurs. Flood irrigation is an active practice in the Basin and provides valuable recharge.

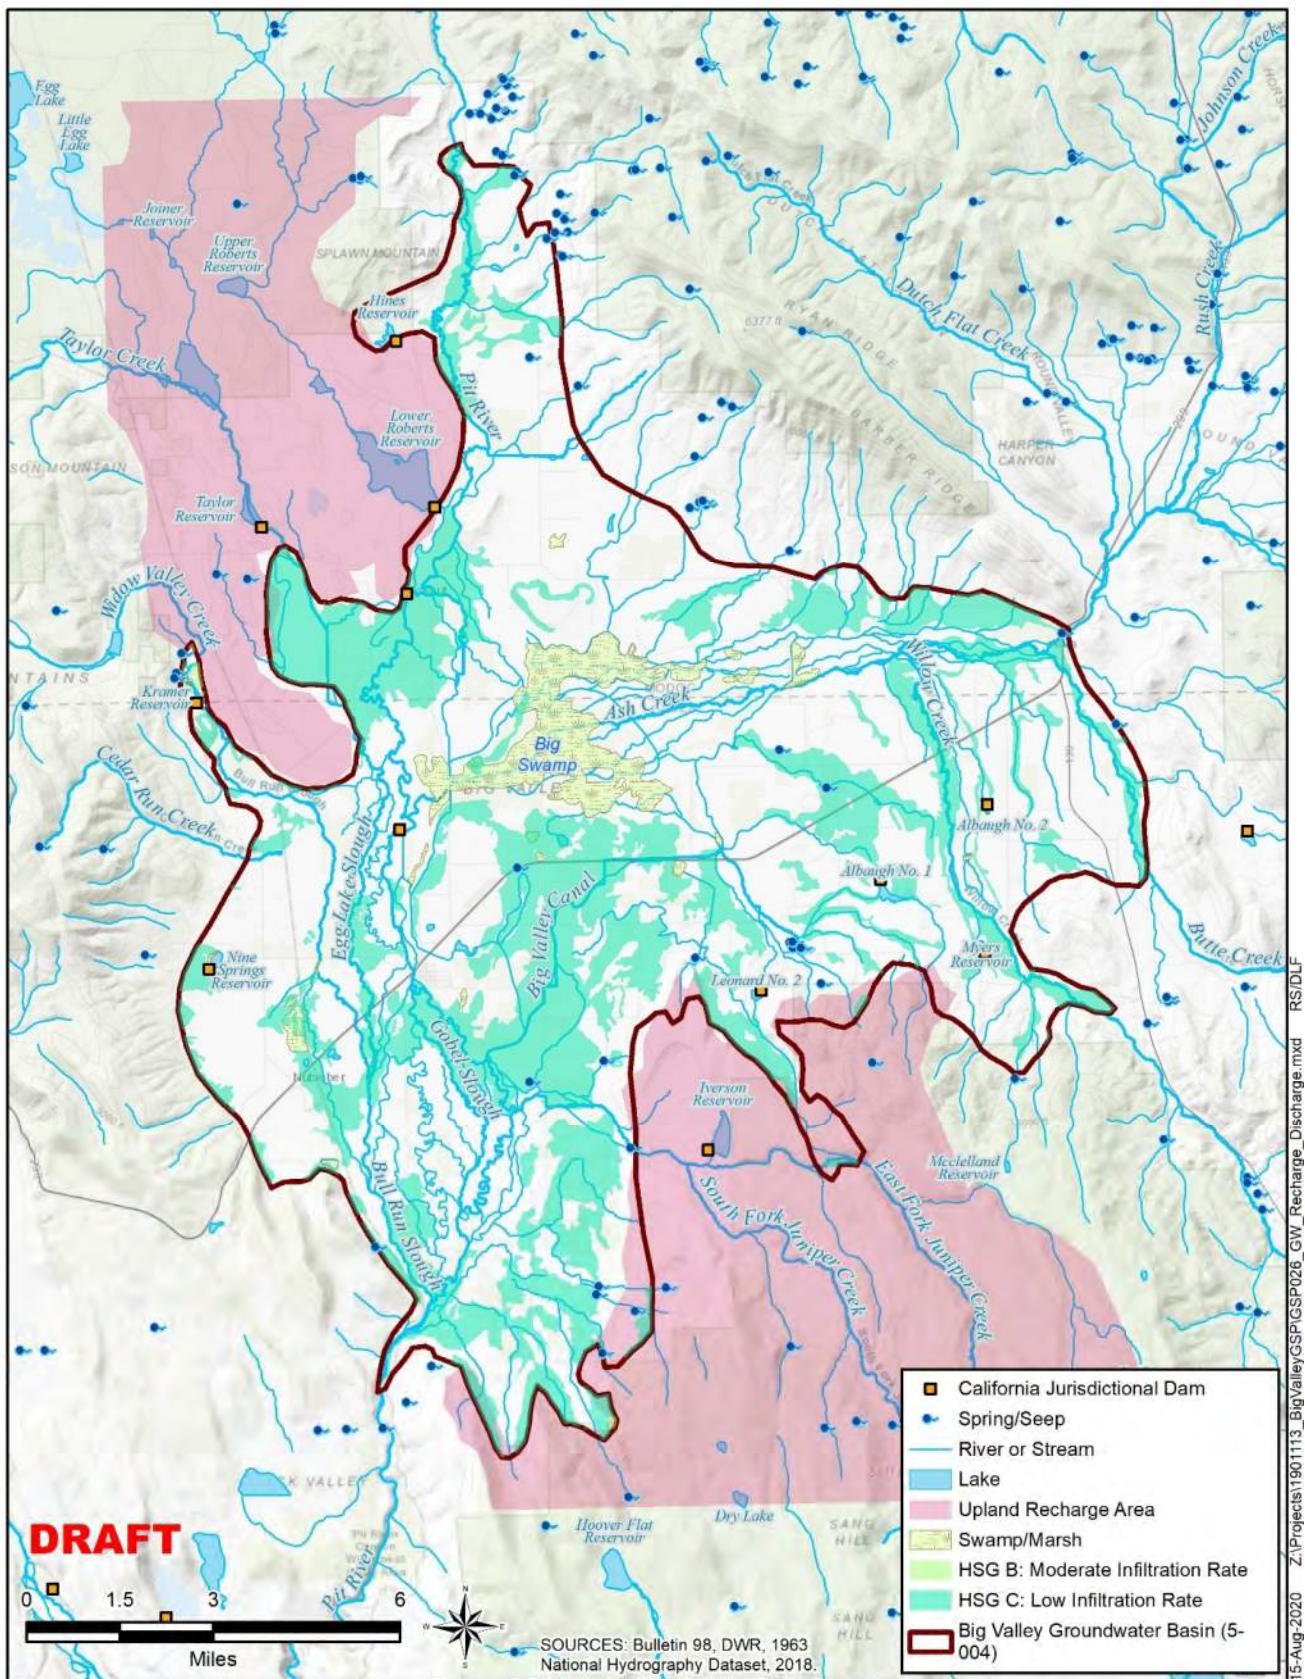

**Figure 4-13 Recharge, Discharge and Major Surface Water Bodies**



## 4.8.2 Discharge

Historically, flow out of the groundwater aquifer (and out of the Basin) most likely occurred at the southern portion of the Basin where the aquifer discharged to the Pit River. DWR (1963) indicates that artesian<sup>28</sup> conditions occurred in this southwestern area. The gaining river<sup>29</sup> then transported the water out of the Basin. However, based on currently documented water levels, this area is no longer artesian and likely hasn't been a gaining stream for decades. There are numerous springs throughout the Basin shown on **Figure 4-13** where groundwater is discharged, including several hot springs in the center of the Basin. Evapotranspiration may also be a significant discharge mechanism.

## 4.9 Surface Water Bodies

**Figure 4-14** shows the numerous small streams that enter the Basin and flow towards the center where they connect with the two major streams: Pit River and Ash Creek. The figure also shows the many small ponds and several reservoirs that are in and around the Basin. The dams that are within the jurisdiction of DWR's Division of Safety of Dams are shown. While many of these impoundments are located outside of Basin boundaries, they represent supplies that hydrologically flow to/through the Basin. The reservoirs provide options for the timing of release of those waters, rather than importing supplies from sources external to the Basin.

## 4.10 Imported Water Supplies

BVGB users do not import surface water into the Basin, where the water originates in a watershed other than the one in which BVGB is located

## 4.11 Data Gaps in the Hydrogeologic Conceptual Model

As discussed in the introduction, hydrogeology has inherent uncertainties due to sparse data and in the case of Big Valley, a limited number of detailed studies on the groundwater resources in the Basin. Identified below are some of the uncertainties associated with the hydrogeology in the Basin. In some instances, this uncertainty can be reduced while other uncertainties will remain. The filling of the data gaps below is contingent on the needs that arise as the GSP is developed and implemented and the level of available outside funding.

### Basin Boundary

The current, inaccurate Basin boundary was drawn by DWR with a regional scale map (CGS 1958) and was not drawn with as much precision as subsequent geologic maps. Additionally, the "uplands" areas outside the Basin boundary are postulated to be recharge areas interconnected to the Basin, which is contrary to DWR's definition of a lateral Basin boundary as being, "...features that significantly impede groundwater flow." (DWR 2016c) Further refinement of the Basin boundary is desired and necessary, particularly in the areas of, "upland recharge" mapped by DWR, the fingers in the southeastern portion of the Basin and in the northeastern portion of the Basin below Barber Ridge and Fox Mountain.

<sup>28</sup> Artesian aquifers are under pressure and wells screened in them flow from the surface.

<sup>29</sup> Gaining rivers are where groundwater flows toward the river and contributes to surface water flow.

1398 **Confining Conditions**

1399 Confining conditions exist throughout the Basin. Often the confinement is simply a result of depth and  
1400 the fact that horizontal hydraulic conductivities are about 10 times greater than vertical. However, in the  
1401 southwest portion of the Basin, DWR (1963) has documented an area of confining conditions. It is  
1402 unknown whether the confinement is due to a single, coherent aquitard or is just a result of depth. It is  
1403 also unknown whether the confinement is significant enough to warrant separate principal aquifers,  
1404 which could have implications for the GSP.

1405 **Definable Bottom**

1406 This HCM has used the “practical” depth of 1,200 feet as the definable bottom. If stakeholders seek to  
1407 develop groundwater deeper than this depth, newly constructed wells will demonstrate that the “physical  
1408 bottom” and/or the base of fresh water (“effective bottom”) extend deeper.

1409 **Faults as Barriers to Flow**

1410 It is unknown if the faults which traverse the Basin are barriers to flow. On the Lassen County side of  
1411 the Basin, this has bearing on understanding whether the eastern portions of the Basin near Willow  
1412 Creek are interconnected with the southwestern portions of the Basin near Pumpkin Center. This  
1413 uncertainty could be reduced by conducting a pumping test with observation well(s) on the other side of  
1414 the fault.

1415 **Soil Permeability**

1416 The NRCS mapping of soils indicates primarily low to very low permeability soils throughout the Basin.  
1417 However, there is some variation of permeabilities indicated by the maps, which are drawn at a large  
1418 scale with limited field verification. Further field investigation of soils and permeability tests could help  
1419 identify more permeable areas where groundwater recharge could be enhanced.

1420 **Recharge**

1421 The recharge sources below have been identified, but the rate and amount of recharge is unknown. In the  
1422 water budget (*see* Chapter 6 – Water Budget), the amount of recharge is roughly estimated. Below are  
1423 the data gaps related to recharge.

- 1424 • Effect of Ash Creek on recharge (including Big Swamp)
- 1425 • Effect of Pit River on recharge (including overflow channels)
- 1426 • Effect of smaller streams on recharge (including Willow Creek)
- 1427 • Amount of recharge from direct precipitation
- 1428 • Amount of recharge from deep percolation of applied water
- 1429 • Amount of recharge from upland recharge areas
- 1430 • Amount of recharge from seepage of ditches, canals and reservoirs



1431

## 5. Groundwater Conditions §354.16

---


1432 This chapter presents available information on groundwater conditions for the BVGB developed by GEI  
1433 for the Lassen County and Modoc County GSAs. This chapter provides some of the information needed  
1434 for the development of the monitoring network and the sustainable management criteria of this GSP.  
1435 The content of this chapter is defined by the regulations of SGMA (Chapter 1.5, Article 5, Subarticle 2:  
1436 354.16). GEI Certified Hydrogeologists provided the content of this chapter and will affix their  
1437 professional stamps (as required by the regulations) certifying that it was developed under their  
1438 supervision once the chapter is finalized into the GSP.

### 1439 5.1 Groundwater Elevations

1440 Historic groundwater elevations are available from a total of 22 wells in Big Valley, six located in  
1441 Modoc County and 16 in Lassen County as shown on **Figure 5-1** and listed in **Table 5-1**. Twenty of the  
1442 wells are part of Lassen and Modoc counties' monitoring network, which was approved by the counties  
1443 in 2011, in compliance with the CASGEM program. DWR staff measure water levels in these wells  
1444 twice annually (spring and fall) on behalf of the counties. Some measurements from wells are missing,  
1445 which is typically a result of access issues to the wells sites or occasionally a well owner who has  
1446 removed their well from the monitoring program. These wells may or may not be used as part of the  
1447 GSP monitoring network, which will be addressed in Chapter 8 – Monitoring Networks.

1448 The first water level measurements in the BVGB began in the late 1950s at two wells near Bieber  
1449 (17K1) and Nubieber (32A2). Regular monitoring of these two wells began in the mid-1960s and  
1450 monitoring began in most of the other wells during the late 1970s or early 1980s. Three wells located on  
1451 the ACWA were added to the CASGEM networks in 2016. Of the 22 historically monitored wells, one  
1452 well (12G1) has not been monitored since 1992 and one well (06C1) has no measurements since 2015.  
1453 Construction details are not available for one well (32R1). Well 32R1 could benefit from 'downhole'  
1454 video inspection of the well casing to determine the depth interval associated with the water levels.

1455 In addition to these 22 wells, five well clusters were constructed in late 2019 and early 2020 to support  
1456 the GSP. Their locations are shown on **Figure 5-1**. Each cluster consists of a deep well (200-500 feet)  
1457 and three shallow wells (60-100 feet). These wells were drilled to explore the geology, with the deep  
1458 well giving water level information for the main portion of the aquifer at that location. The three shallow  
1459 wells are screened shallow to determine the direction and magnitude of flow in the shallow subsurface  
1460 and potentially to give an indication if groundwater interacts with surface water and possibly the  
1461 location of groundwater recharge. Limited water level information is available from these five clusters.

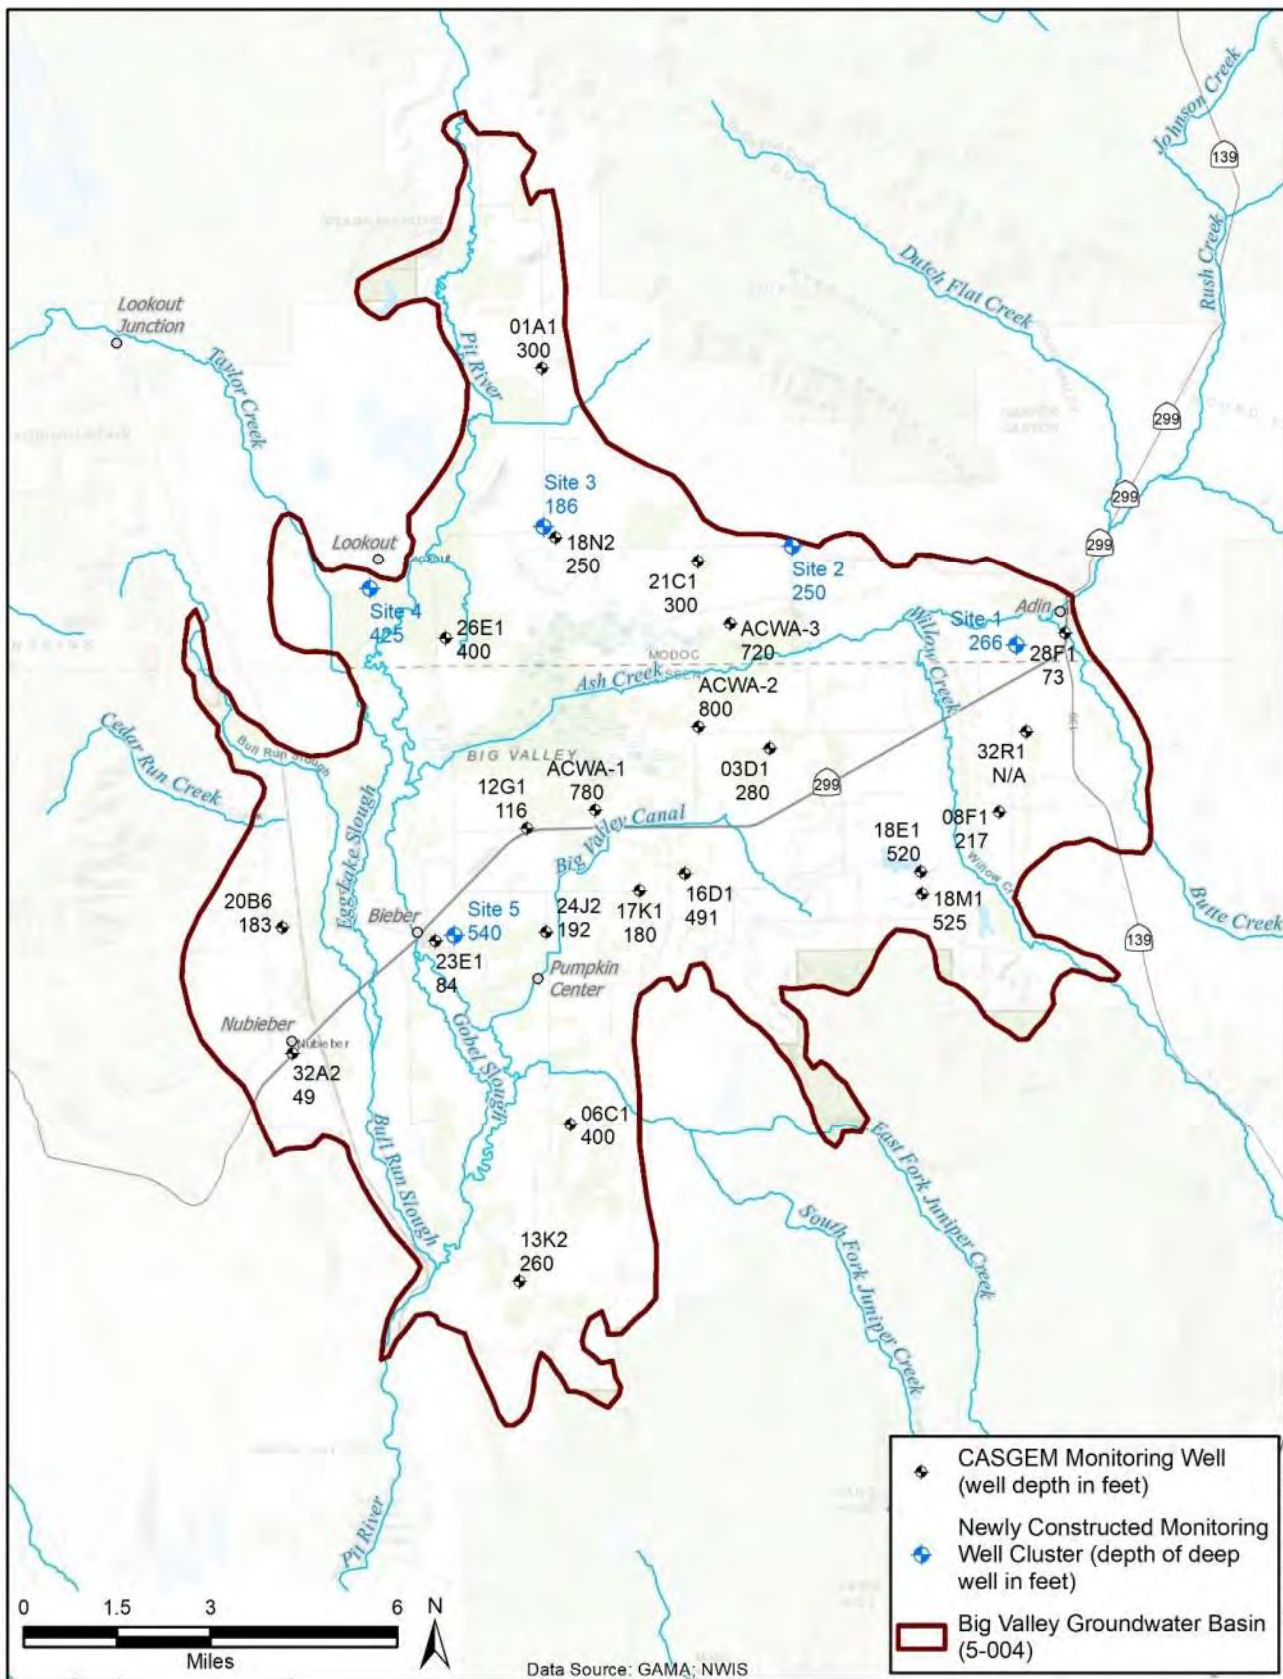

08-Jun-2020 Z:\Projects\1901113\_BigValleyGSP\GSP029\_WL\_Monitoring.mxd DLF

**Figure 5-1 Water Level Monitoring**

**Table 5-1 Historic Water Level Monitoring Wells**

Well Name	State Well Number	CASGEM ID	County	Well Use	Well Depth (feet bgs)	Ground Elevation (feet msl)	Reference Point Elevation (feet msl)	Period of Record Start Year	Period of Record End Year	Number of Measurements	Minimum Groundwater Elevation (feet msl)	Maximum Groundwater Elevation (feet msl)
18E1	38N09E18E001M	411356N1209900W001	Lassen	Irrigation	520	4248.40	4249.50	1981	2019	73	4198.20	4234.10
23E1	38N07E23E001M	411207N1211395W001	Lassen	Residential	84	4123.40	4123.40	1979	2020	81	4070.40	4109.10
260	39N07E26E001M	411911N1211354W001	Modoc	Irrigation	400	4133.40	4135.00	1979	2020	79	4088.90	4131.30
01A1	39N07E01A001M	412539N1211050W001	Modoc	Stockwatering	300	4183.40	4184.40	1979	2020	81	4035.40	4163.90
03D1	38N08E03D001M	411647N1210358W001	Lassen	Irrigation	280	4163.40	4163.40	1982	2020	71	4076.60	4148.60
06C1	37N08E06C001M	410777N1210986W001	Lassen	Irrigation	400	4133.40	4133.90	1982	2016	69	4066.20	4126.80
08F1	38N09E08F001M	411493N1209656W001	Lassen	Other	217	4253.40	4255.40	1979	2020	83	4167.90	4229.50
12G1	38N07E12G001M	411467N1211110W001	Lassen	Residential	116	4143.38	4144.38	1979	1993	28	4130.98	4138.68
13K2	37N07E13K002M	410413N1211147W001	Lassen	Irrigation	260	4127.40	4127.90	1982	2018	70	4061.90	4109.70
16D1	38N08E16D001M	411359N1210625W001	Lassen	Irrigation	491	4171.40	4171.60	1982	2020	74	4078.73	4162.40
17K1	38N08E17K001M	411320N1210766W001	Lassen	Residential	180	4153.30	4154.30	1957	2020	146	4115.08	4150.00
18M1	38N09E18M001M	411305N1209896W001	Lassen	Irrigation	525	4288.40	4288.90	1981	2020	74	4192.30	4232.70
18N2	39N08E18N002M	412144N1211013W001	Modoc	Residential	250	4163.40	4164.40	1979	2020	80	4136.60	4160.20
20B6	38N07E20B006M	411242N1211866W001	Lassen	Residential	183	4126.30	4127.30	1979	2019	80	4076.94	4116.60
21C1	39N08E21C001M	412086N1210574W001	Modoc	Irrigation	300	4161.40	4161.70	1979	2020	79	4082.10	4148.50
24J2	38N07E24J002M	411228N1211054W001	Lassen	Irrigation	192	4138.40	4139.40	1979	2019	77	4056.70	4137.70
28F1	39N09E28F001M	411907N1209447W001	Modoc	Residential	73	4206.60	4207.10	1982	2020	76	4194.57	4202.10
32A2	38N07E32A002M	410950N1211839W001	Lassen	Other	49	4118.80	4119.50	1959	2020	133	4106.70	4118.80
32R1	39N09E32R001M	411649N1209569W001	Lassen	Irrigation	unknown	4243.40	4243.60	1981	2020	64	4161.20	4205.50
ACWA-1	38N08E07A001M	411508N1210900W001	Lassen	Irrigation	780	4142.00	4142.75	2016	2020	8	4039.15	4126.35
ACWA-2	39N08E33P002M	411699N1210579W001	Lassen	Irrigation	800	4153.00	4153.20	2016	2020	8	4126.40	4139.35
ACWA-3	39N08E28A001M	411938N1210478W001	Modoc	Irrigation	720	4159.00	4159.83	2016	2020	7	4136.23	4150.58
Notes: bgs = below ground surface msl = above mean sea level source: <a href="https://sgma.water.ca.gov/webgis/?appid=SGMADataViewer">https://sgma.water.ca.gov/webgis/?appid=SGMADataViewer</a>												

1466


1467  
1468

[This page is intentionally blank.]




1469 **5.1.1 Groundwater Level Trends**

1470 **Figure 5-2** and **Figure 5-3** show hydrographs for the two wells with the longest monitoring records  
1471 along with background colors representing the Water Year (WY) type: wet, below normal, above  
1472 normal, dry and critical dry. These WY types are developed from the Sacramento River Index (SRI),  
1473 which is calculated from annual runoff of the Sacramento River Watershed, of which the Pit River is a  
1474 tributary. The SRI (no units) varies between 3.1 and 15.3 (average: 8.1) and are divided into the five  
1475 WY categories.

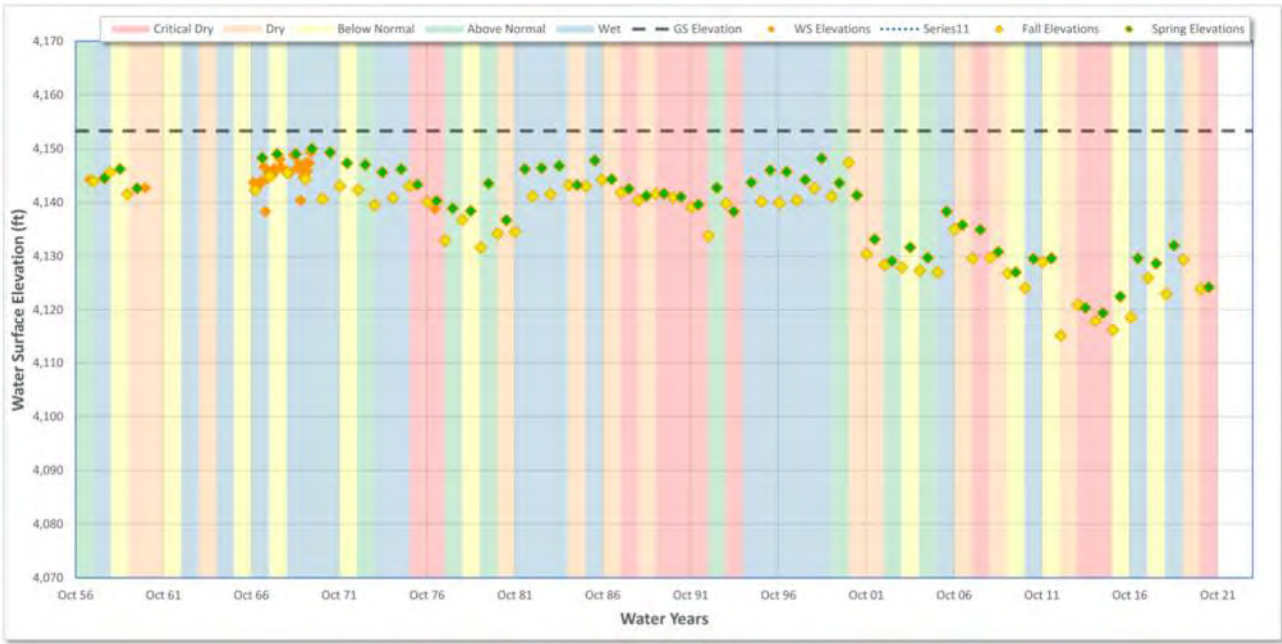

1476 **Figure 5-2 Hydrograph of Well 17K1**

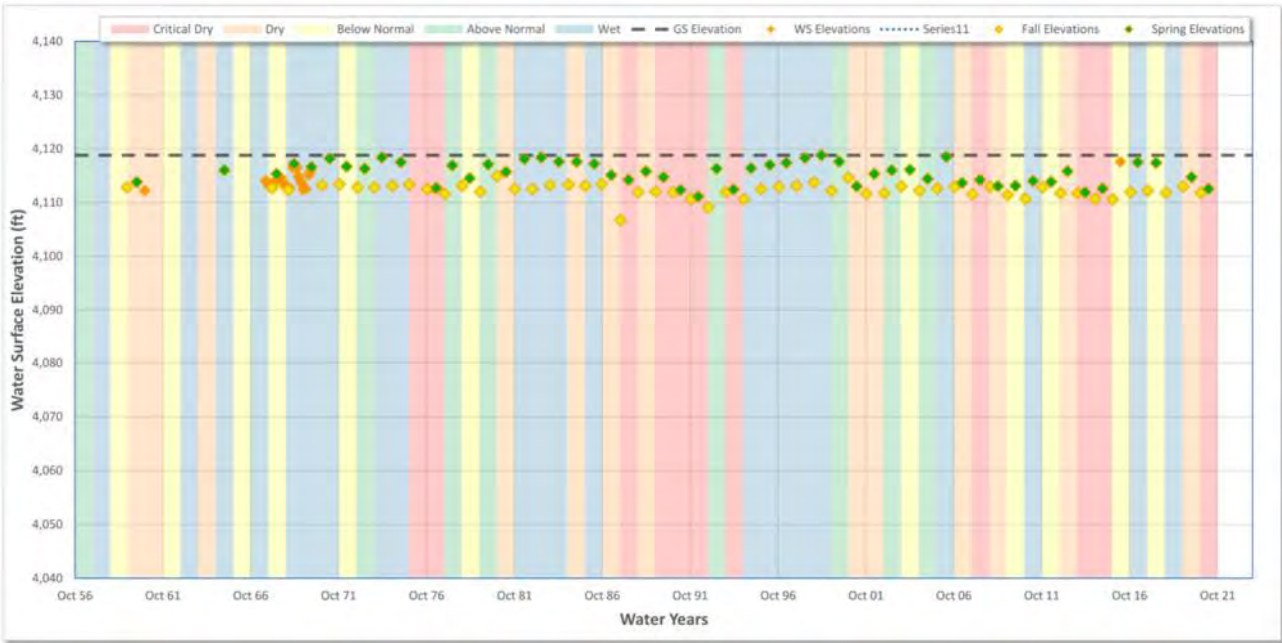

1479 **Figure 5-3 Hydrograph of Well 32A2**


1481 The water level record for these two wells illustrates that some areas of the Basin have experienced little  
1482 to no change in water levels, while other areas have fluctuated. Declines during the drought period of the  
1483 late 1980s and early 1990s were offset by recovery during the wet period of the late 1990s. Water levels  
1484 in some wells have declined during the sustained dry period that has occurred since 2000. Hydrographs  
1485 for all 22 wells are presented in **Appendix 5A**. On each hydrograph in the appendix an orange trend line  
1486 is shown, which is determined from a linear regression of the spring water level measurements between  
1487 WY 1979 and 2021. The average water level change during that period, in feet per year, is also shown.  
1488 Sixteen wells show relatively stable (less than -1.0 foot per year [ft/yr] of decline) or rising water levels  
1489 and six wells show declining water from -1 to -3.1 ft/yr. These water level changes are shown  
1490 graphically on **Figure 5-4** with the stable or rising water levels shown in green and areas with declines  
1491 in excess of -1 ft/yr in orange.

## 1492 **5.1.2 Vertical Groundwater Gradients**

1493 Vertical hydraulic gradients are apparent when groundwater levels in wells screened deep in the aquifer  
1494 differ from water levels measured shallow in the aquifer at the same general location. Vertical gradients  
1495 indicate that the deep portion of the aquifer is separate from the shallow (e.g., by a very low  
1496 permeability clay layer) and/or that pumping in one of the aquifers has occurred and the vertical flow  
1497 between the aquifers is in progress of stabilizing. Chapter 4 – Hydrogeologic Conceptual Model defines  
1498 a single principal aquifer in the BVGB; therefore, there is no vertical gradient that needs to be described  
1499 between principal aquifers. However, vertical gradients likely exist, and the five recently constructed  
1500 well clusters will have data to describe these gradients once sufficient water level data is available from  
1501 those wells. The locations of the clusters are shown on **Figure 5-1**.

## 1502 **5.1.3 Groundwater Contours**


1503 Spring and fall 2018 water level measurements from the 21 active CASGEM wells were used to  
1504 illustrate current groundwater conditions. 2018 was used to illustrate current conditions because there  
1505 were several wells without data for 2019 or 2020. **Figure 5-5** and **Figure 5-6** show the 2018 seasonal  
1506 high and seasonal low groundwater elevation contours, respectively. Each contour line shows equal  
1507 groundwater elevation. Groundwater flows from higher elevations to lower elevations, perpendicular to  
1508 the contour lines. The direction of flow is emphasized on the figures in certain areas with arrows. In  
1509 general, groundwater is highest in the east, where Ash, Willow and Butte creeks enter the Basin. The  
1510 general flow of water is to the west and south. The contours do indicate, however, northerly flow from  
1511 the lower reaches of Ash Creek. In the southern portions of the BVGB, groundwater flows toward the  
1512 east.

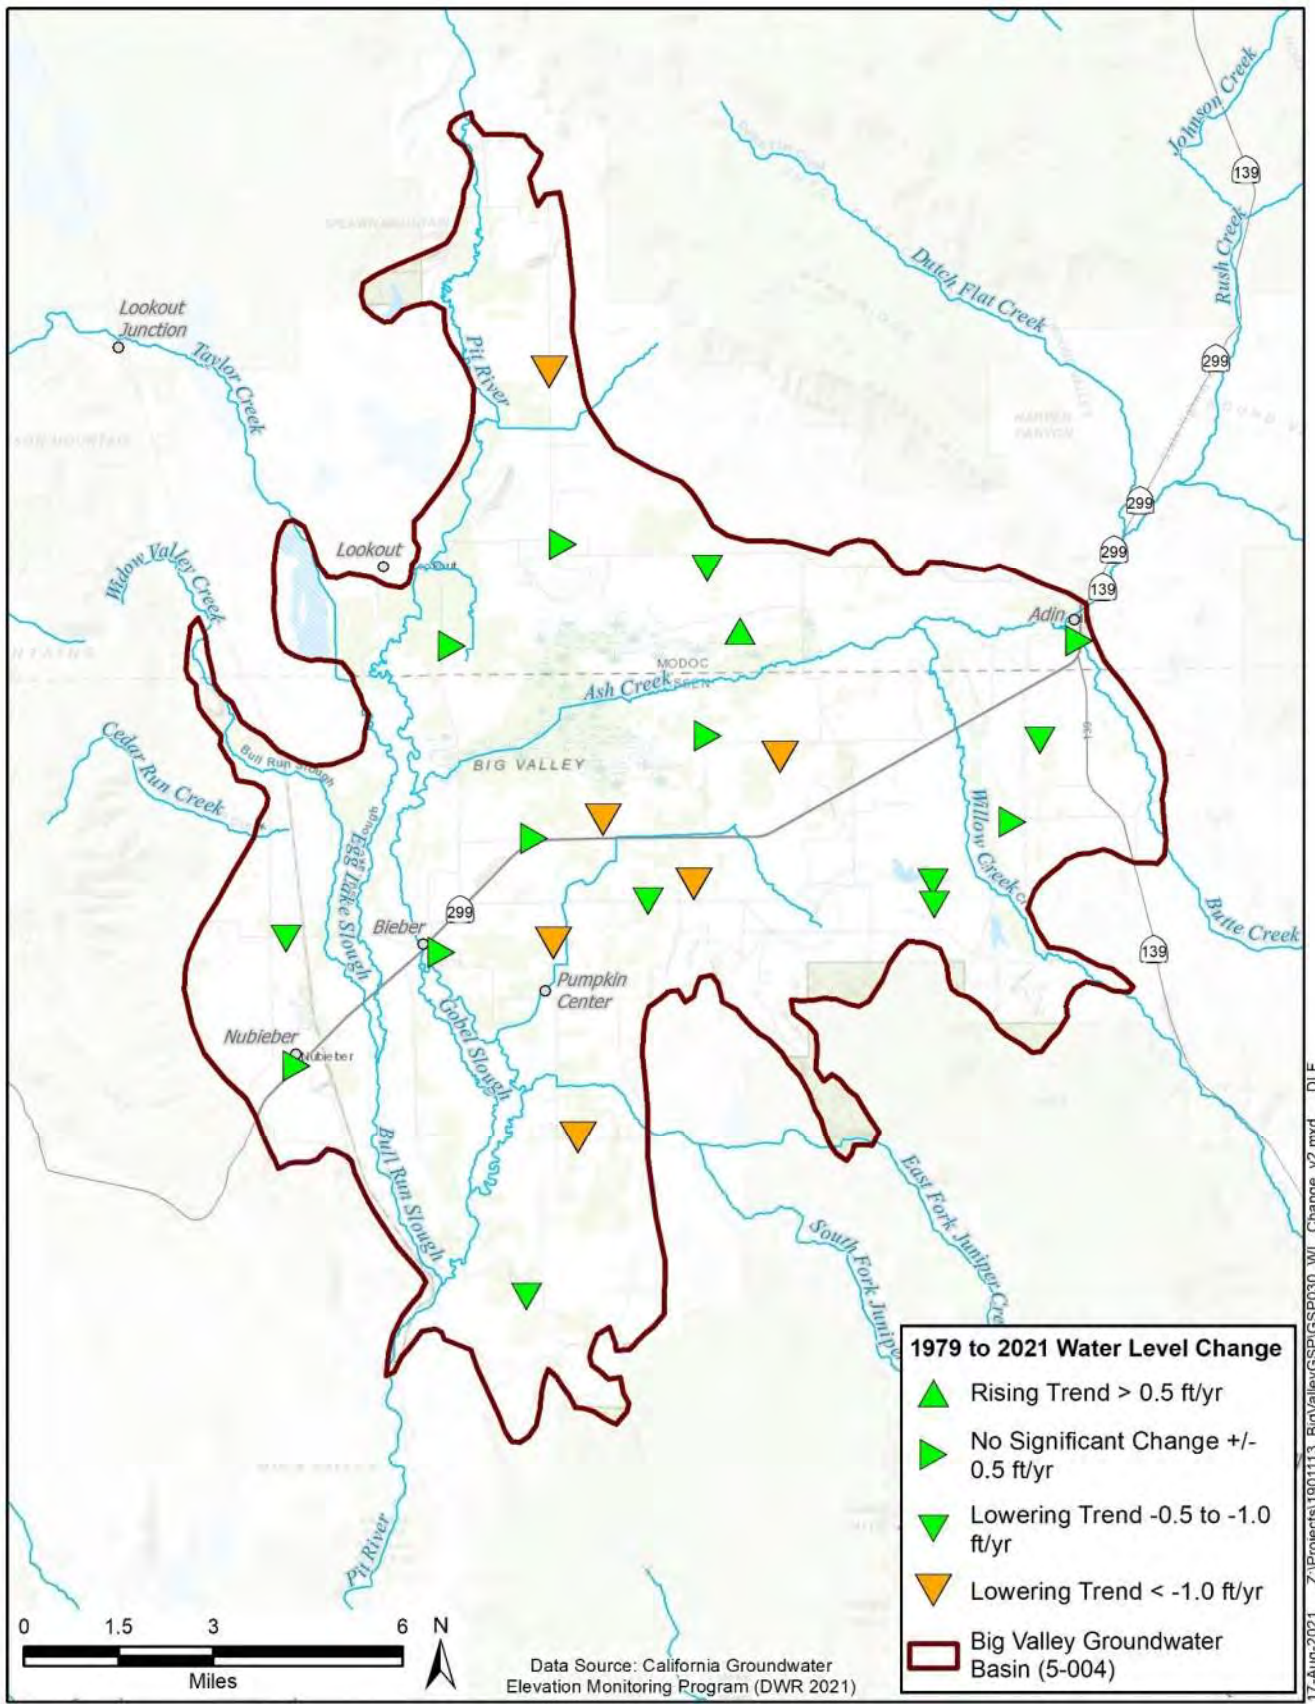

17-Aug-2021 Z:\Projects\1901113\_BigValleyGSP\GSP030\_WL\_Change\_v2.mxd DLF

**Figure 5-4 Average Water Level Change Since 2000 Using Spring Measurements**




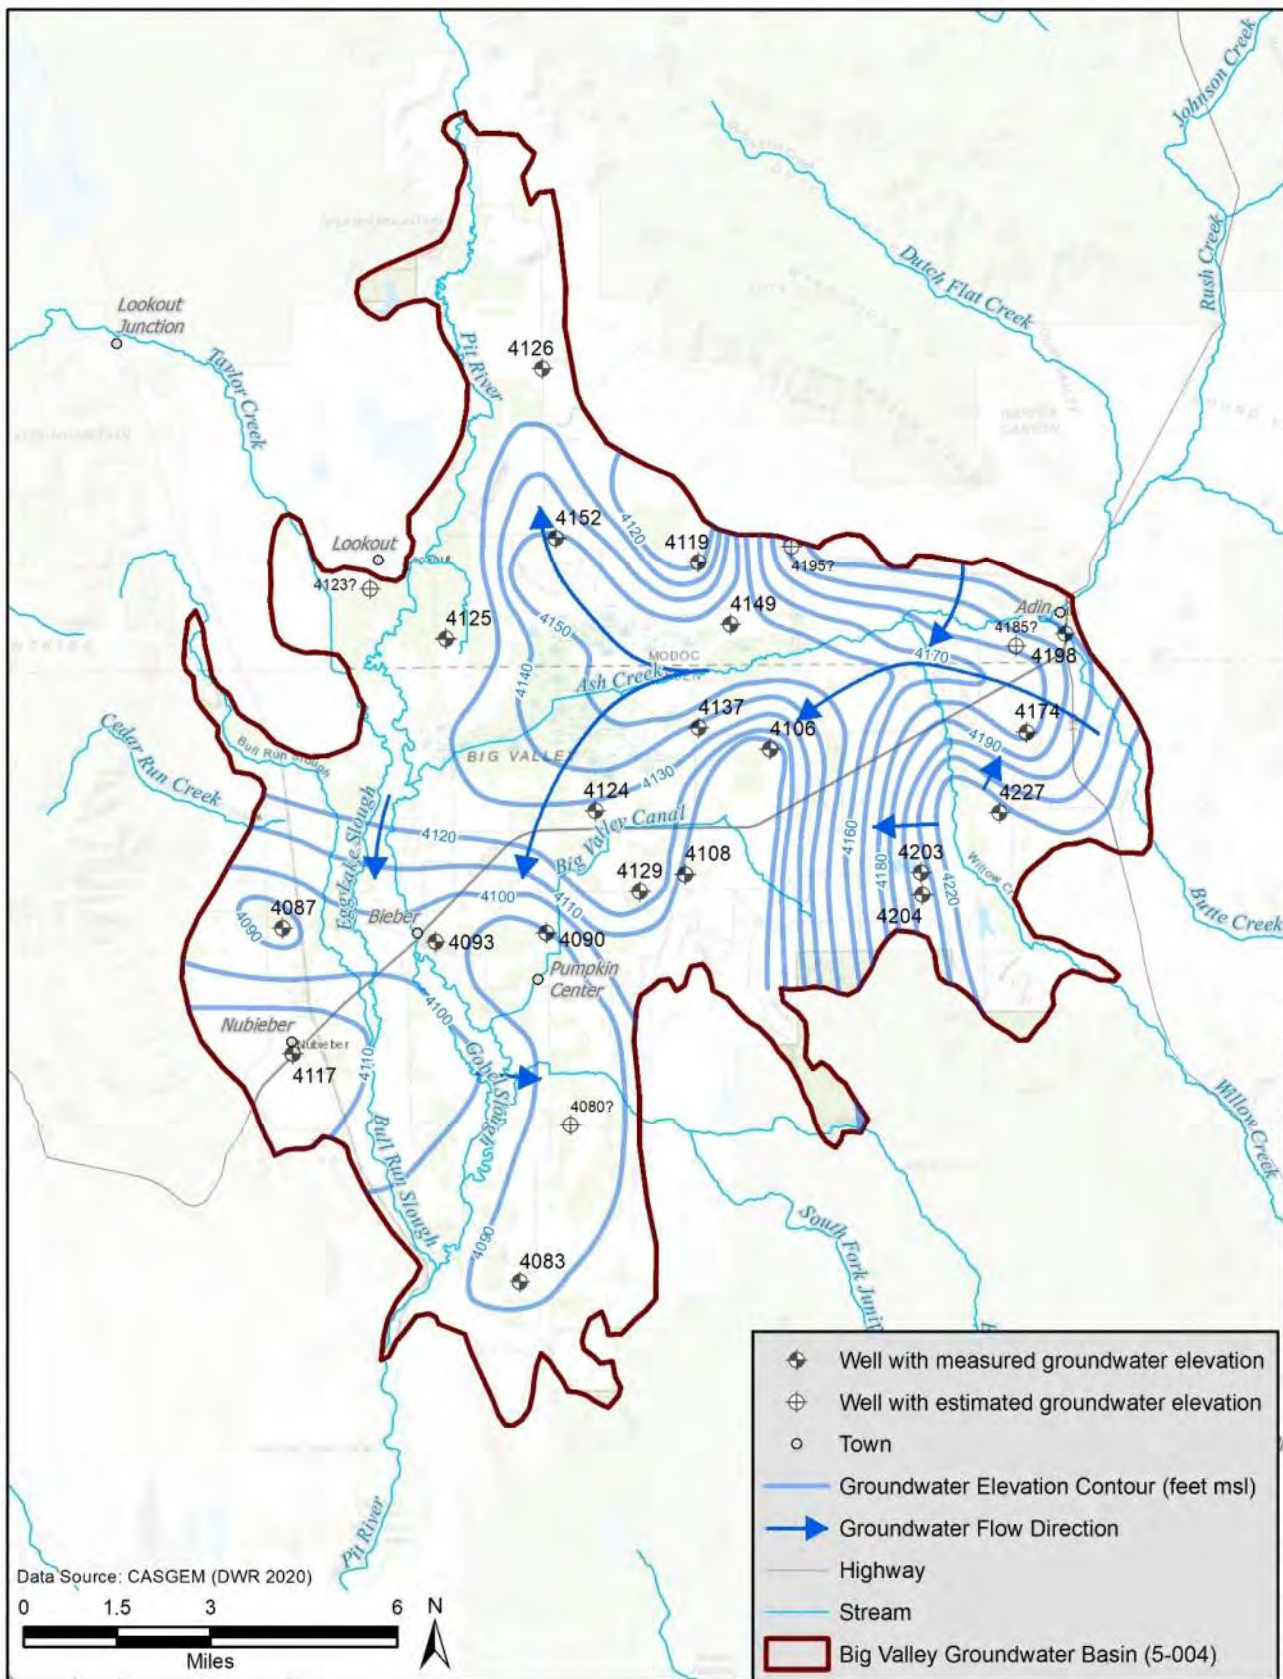

13-Sep-2020 Z:\Projects\1901113\_BigValleyGSP\GSP031\_ContoursSpring2018\_updated20200908.mxd DLF

**Figure 5-5 Groundwater Elevation Contours and Flow Direction Spring 2018**



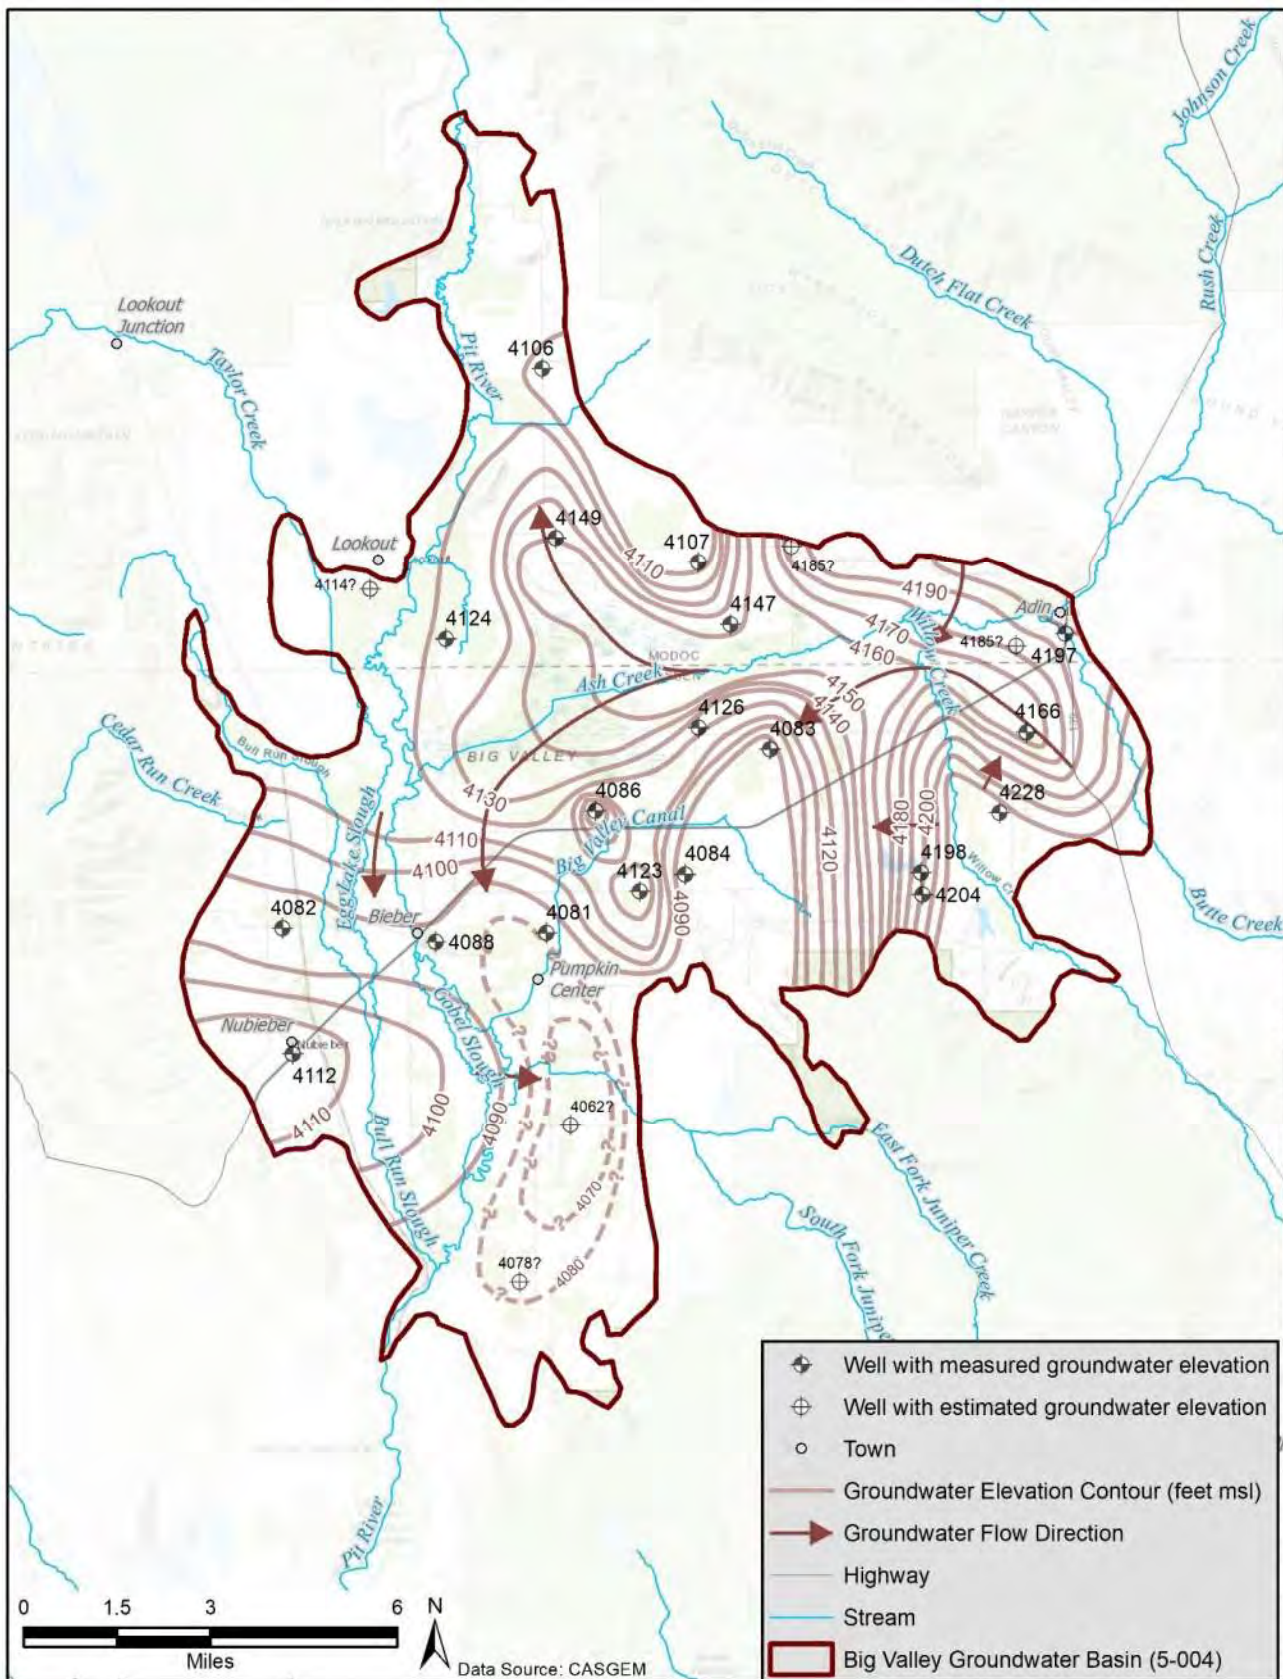

DLF

**Figure 5-6 Groundwater Elevation Contours and Flow Direction Fall 2018**

## 5.2 Change in Storage

To determine the annual and seasonal change in groundwater storage, groundwater elevation surfaces<sup>31</sup> were developed for spring and fall for each year between 1983 and 2018. These surfaces are included in **Appendix 5B**. The amount of groundwater in storage for each set of contours was calculated. This calculation was performed using software which can subtract the groundwater elevation surface from the ground elevation surface (using a digital elevation model) at each raster cell (pixel) and calculate the average depth to water (DTW) throughout the Basin. This average DTW was then subtracted from the definable bottom of the Basin (1,200 feet), multiplied by the area of the Basin and multiplied by 5 percent, which is used as the specific yield<sup>32</sup>.

**Table 5-2** shows, from 1983 to 2018, the total water in storage, the change in storage from the previous year and the cumulative change in storage. **Figure 5-7** shows this information graphically, along with the annual precipitation from the McArthur station. This graph shows that groundwater storage generally declines during dry years and stays stable or increases during normal or wet years. During the period from 1983 to 2000, groundwater levels dipped, then recovered to 1983 conditions by 1999 due to six consecutive years of above average precipitation. Since 2000, groundwater storage has generally declined by about 96,000 acre-feet (AF) (using spring measurements) which is a slight increase from the historic low of about 116,000 AF in spring 2015. During this same period (2000-2015), precipitation has gone through an average cycle of wet and dry years.

Annual groundwater use is not shown on **Figure 5-7** as required by SGMA regulations. Groundwater use will be addressed in Chapter 6 – Water Budget.

## 5.3 Seawater Intrusion

The BVGB is not located near the ocean, and therefore seawater intrusion is not applicable to this GSP.

## 5.4 Groundwater Quality Conditions

As noted in Chapter 4, previous, reports have characterized the water quality in the BVGB as excellent (DWR 1963, Reclamation 1979). Groundwater is generally suitable for all beneficial uses and only localized contamination plumes have been identified in the BVGB. This section presents an analysis of recent groundwater quality conditions and the distribution of known groundwater contamination sites in compliance with GSP Regulation §354.16(d).

---

<sup>31</sup> Groundwater elevation surfaces are developed using the known groundwater elevations at wells throughout the Basin and using kriging. Kriging is a mathematical method that predicts (interpolates) what groundwater levels are between known points. The kriging surface consists of a grid (pixels) covering the entire basin that has interpolated groundwater elevation values for each grid cell.

<sup>32</sup> The fraction of the aquifer material that contains recoverable water. This is described in more detail in Chapter 4 – Hydrologic Conceptual Model.

**Table 5-2 Change in Storage 1983-2018**

Year	Average Spring Depth to Water <sup>1</sup> (feet)	Spring Storage <sup>2</sup> (Acre-feet)	Spring Cumulative Change in Storage <sup>3</sup> (Acre-feet)
1983	29.3	5,390,192	-
1984	29.4	5,389,508	(684)
1985	31.4	5,380,526	(9,666)
1986	31.0	5,382,539	(7,653)
1987	32.6	5,375,135	(15,057)
1988	34.9	5,364,459	(25,733)
1989	35.2	5,363,150	(27,042)
1990	35.6	5,360,976	(29,216)
1991	36.8	5,355,677	(34,515)
1992	38.0	5,350,297	(39,895)
1993	36.9	5,355,293	(34,899)
1994	37.5	5,352,221	(37,971)
1995	35.3	5,362,737	(27,456)
1996	32.4	5,375,861	(14,332)
1997	31.8	5,378,600	(11,592)
1998	31.1	5,382,014	(8,179)
1999	29.5	5,389,070	(1,122)
2000	32.3	5,376,287	(13,905)
2001	38.0	5,350,015	(40,177)
2002	39.3	5,344,357	(45,835)
2003	39.4	5,343,881	(46,311)
2004	39.2	5,344,515	(45,677)
2005	41.5	5,334,164	(56,028)
2006	36.7	5,356,175	(34,017)
2007	38.8	5,346,641	(43,551)
2008	41.6	5,333,712	(56,480)
2009	42.5	5,329,337	(60,856)
2010	46.4	5,311,440	(78,752)
2011	45.9	5,313,710	(76,482)
2012	44.9	5,318,299	(71,893)
2013	49.3	5,298,013	(92,179)
2014	51.7	5,287,059	(103,133)
2015	54.4	5,274,644	(115,548)
2016	51.3	5,288,702	(101,490)
2017	49.7	5,296,127	(94,066)
2018	50.1	5,294,464	(95,728)


Note: Parentheses indicate negative numbers

<sup>1</sup> From water surface elevation contours - Appendix 5A

<sup>2</sup> Calculated from average depth to water, area of basin, 1,200 foot aquifer bottom, and specific yield of 5%

<sup>3</sup> This is the total change in storage since the baseline, defined as Spring 1983.



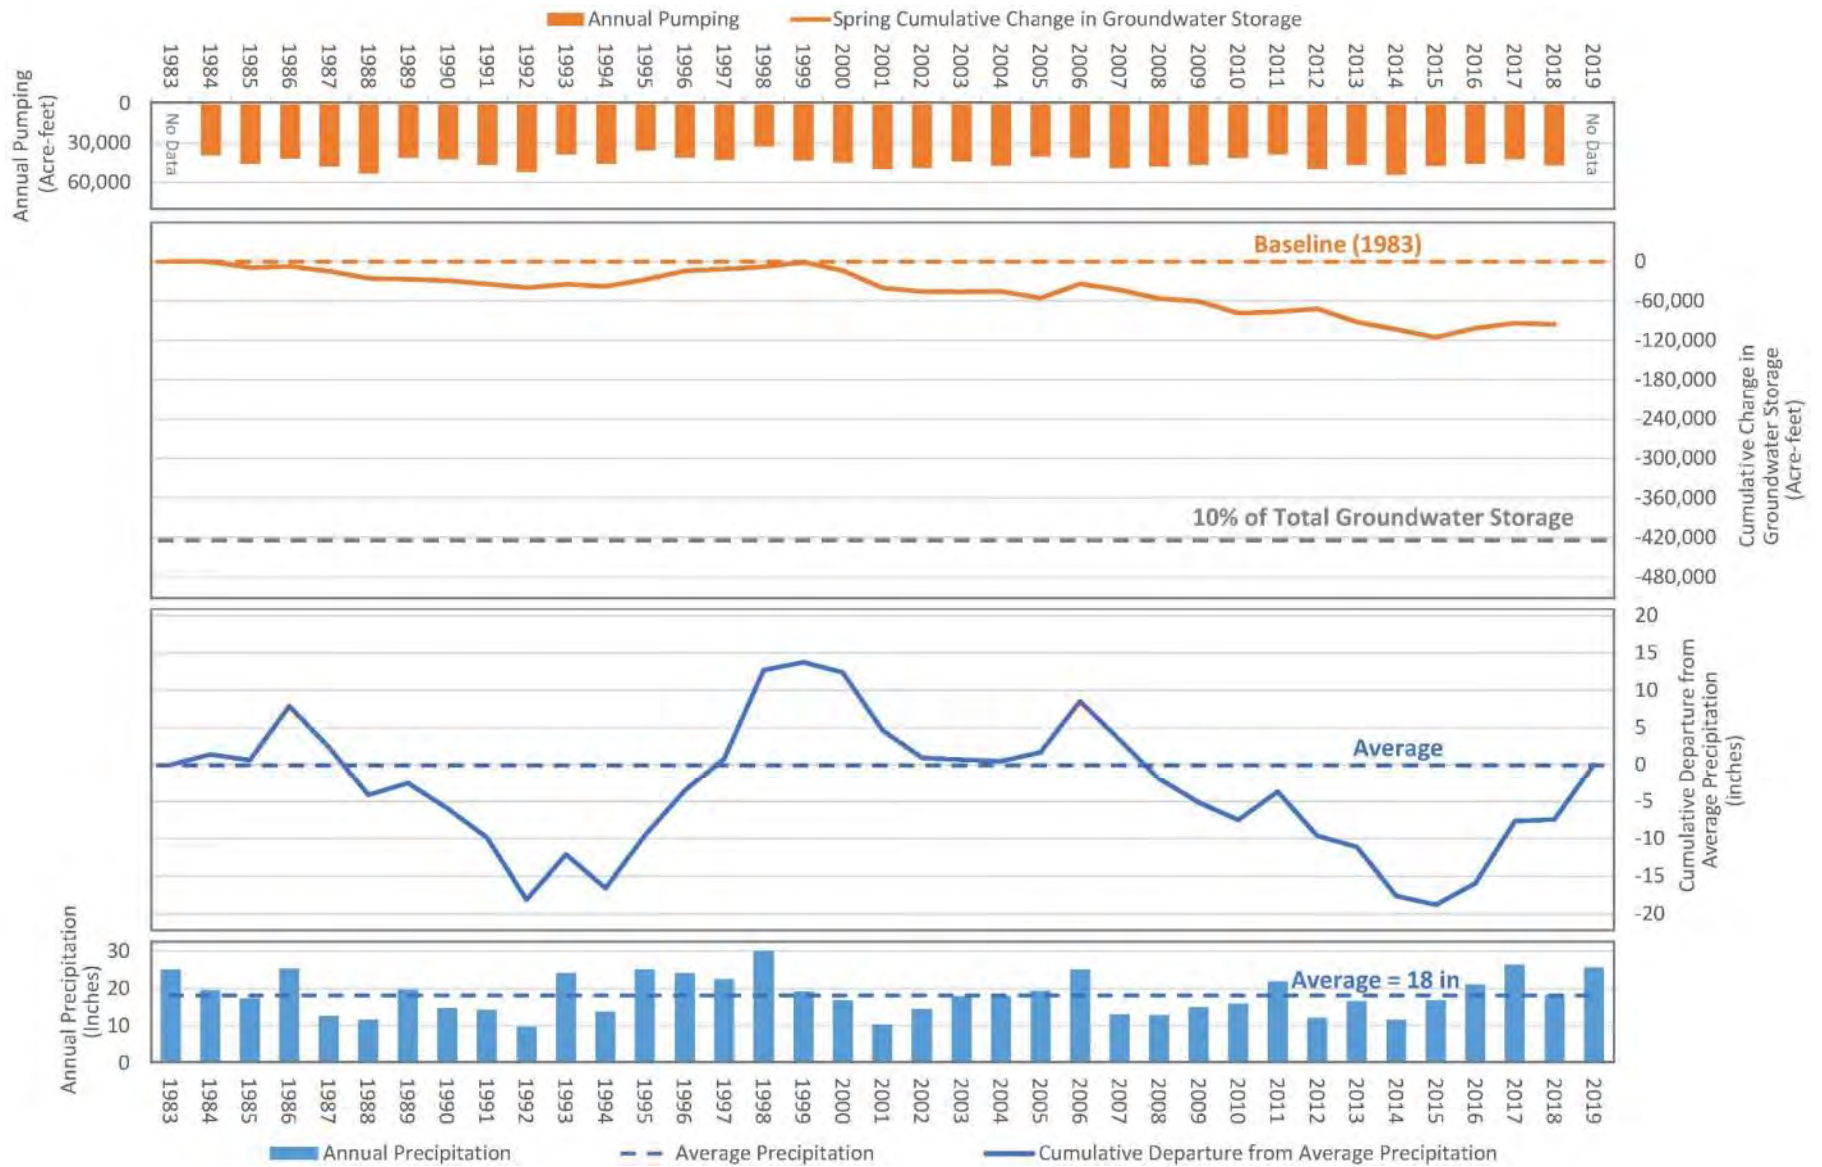

**Figure 5-7 Precipitation, Pumping and Change in Groundwater Storage**



1552

1553  
1554

[This page is intentionally blank.]

## 5.4.1 Naturally Occurring Constituents

The concentration of naturally occurring constituents varies throughout the BVGB. Previous reports have noted the potential elevated concentrations of arsenic, boron, fluoride, iron, manganese and sulfate. (DWR 1963, Reclamation 1979) All of these constituents are naturally occurring and in these historic reports, they indicate that most of these constituents are associated with localized thermal waters found near hot springs in the center of the Basin.

More recent conditions were analyzed using a statistical approach using data available from the state's GAMA Groundwater Information System [GAMA GIS] (State Water Board 2020a). The GAMA GIS data provides the most comprehensive, readily available water quality dataset and contains results from numerous programs including:

- Division of Drinking Water (public supply systems)
- Department of Pesticide Regulation
- Department of Water Resources (historic ambient monitoring)
- Environmental Monitoring Wells (regulated facilities and cleanup sites)
- U.S. Geological Survey (USGS) GAMA program
- USGS National Water Information System data

Water quality results in these datasets go back to the 1950s. Because conditions can change as groundwater is used over time, data prior to the WY 1983 were eliminated from the statistical analysis of the data. WY 1983 was chosen because the bulk of the historic water level wells (**Figure 5-1**) came online by 1983. In addition, data from the Environmental Monitoring Wells programs were eliminated since water quality issues associated with these regulated sites are typically highly localized, often are associated with isolated, perched groundwater and are already regulated. The nature and location of groundwater contamination sites are discussed in Section 5.4.2. – Groundwater Contamination Sites and Plumes.

**Table 5-3** shows the statistical evaluation of the filtered GAMA water quality data along with the water quality results obtained from the five well clusters constructed to support the GSP. The constituents selected to assess the suitability in the Basin are based on thresholds for different beneficial uses. For domestic and municipal uses, the inorganic constituents that are regulated under state drinking water standards are shown. Boron and sodium are also shown because elevated concentrations can affect the suitability of the water for agricultural uses. The suitability threshold concentration for each constituent is shown, using either the MCL or agricultural threshold, whichever was lower. Iron and manganese were evaluated for both drinking water and agricultural thresholds. It is assumed that water suitable for domestic, municipal and agricultural purposes would also be suitable for environmental and industrial beneficial uses.

**Table 5-3      Water Quality Statistics**

Constituent Name	Suitability Threshold Concentration	Suitability Threshold Type	Total # of Meas	min	max	# Meas Above Threshold	% of Meas Above Threshold	# Wells With Meas	# Wells with Average Above Threshold	% of Wells with Average Above Threshold	# Wells with Most Recent Meas Above Threshold	% of Wells with Most Recent Meas Above Threshold	Comment
Aluminum	200	DW1	41	0	552	2	5%	18	1	6%	0	0%	Low concern due to only two threshold exceedances and zero recent measurements above MCL
Antimony	6	DW1	45	0	36	1	2%	20	1	5%	0	0%	Low concern due to only one threshold exceedance and zero recent measurements above MCL
Arsenic	10	DW1	53	0	12	4	8%	23	3	13%	3	13%	
Barium	1000	DW1	49	0	600	0	0%	23	0	0%	0	0%	
Beryllium	4	DW1	48	0	1	0	0%	23	0	0%	0	0%	
Cadmium	5	DW1	49	0	1	0	0%	23	0	0%	0	0%	
Chromium (Total)	50	DW1	36	0	20	0	0%	13	0	0%	0	0%	
Chromium (Hexavalent)	10	DW1*	13	0.05	3.29	0	0%	13	0	0%	0	0%	
Copper	1300	DW1	34	0	190	0	0%	21	0	0%	0	0%	
Fluoride	2000	DW1	42	0	500	0	0%	16	0	0%	0	0%	
Lead	15	DW1	28	0	6.2	0	0%	16	0	0%	0	0%	
Mercury	2	DW1	44	0	1	0	0%	19	0	0%	0	0%	
Nickel	100	DW1	46	0	10	0	0%	20	0	0%	0	0%	
Nitrate (as N)	10000	DW1	151	0	4610	0	0%	24	0	0%	0	0%	
Nitrite	1000	DW1	62	0	930	0	0%	20	0	0%	0	0%	
Nitrate + Nitrite (as N)	10000	DW1	2	40	2250	0	0%	2	0	0%	0	0%	
Selenium	50	DW1	49	0	5	0	0%	23	0	0%	0	0%	
Thallium	2	DW1	46	0	1	0	0%	20	0	0%	0	0%	
Chloride	250000	DW2	66	1400	79000	0	0%	43	0	0%	0	0%	
Iron	300	DW2	50	0	11900	26	52%	21	8	38%	9	43%	Low human health concern due to being a secondary MCL for aesthetics
Iron	5000	AG	50	0	11900	2	4%	21	2	10%	2	10%	
Manganese	50	DW2	45	0	807	28	62%	21	12	57%	11	52%	Low human health concern due to being a secondary MCL for aesthetics
Manganese	200	AG	45	0	807	22	49%	21	7	33%	7	33%	
Silver	100	DW2	36	0	20	0	0%	19	0	0%	0	0%	
Specific Conductance	900	DW2	66	125	1220	3	5%	42	1	2%	1	2%	
Sulfate	250000	DW2	60	500	1143000	1	2%	40	0	0%	0	0%	Low concern due to only one threshold exceedance and zero recent measurements above MCL
Total Dissolved Solids (TDS)	500000	DW2	57	131000	492000	0	0%	39	0	0%	0	0%	
Zinc	5000	DW2	34	0	500	0	0%	20	0	0%	0	0%	
Boron	700	AG	40	0	100	0	0%	34	0	0%	0	0%	
Sodium	69000	AG	33	11600	69000	0	0%	21	0	0%	0	0%	

**Sources:**  
GAMA Groundwater Information System, accessed June 5, 2020 (SWRCB 2020)  
University of California Cooperative Extension Farm Advisor (UCCE 2020)

**Notes:**  
GAMA data was filtered to remove all measurements before Oct 1, 1982 and all GeoTracker cleanup sites  
Constituents listed are all inorganic naturally occurring elements and compounds that have a SWRCB drinking water maximum contaminant limit (MCL), plus Boron, which has a threshold for agricultural use.  
All measurements in micrograms per liter, except specific conductance which is measured in microsiemens per centimeter.  
Green indicates less than 1%  
Yellow indicates between 1% and 10%  
Red indicates greater than 10%

**Threshold Types:**  
DW1: Primary drinking water MCL  
DW2: Secondary drinking water MCL (for aesthetics such as taste, color, and odor)  
AG: Agricultural threshold based on guidelines by the Food and Agricultural Organization of the United Nations (Ayers and Westcot 1985)  
\* Hexavalent chromium was regulated under a primary drinking water MCL until the MCL was invalidated in 2017. The SWRCB is working to re-establish the MCL.

The subset of water quality data was analyzed to determine which constituents to investigate further. **Table 5-3** shows that most constituents have not had concentrations measured above their corresponding threshold since 1983 and were not investigated further. Sulfate, aluminum and antimony only had one or two detections above their threshold, and none of these were recent so these constituents were not investigated further. Arsenic (As), iron (Fe), manganese (Mn), specific conductance (SC) and total dissolved solids (TDS) were investigated further. All of these constituents are naturally occurring.

#### **Arsenic, Iron and Manganese**

As, Fe and Mn show elevated concentrations in over 10 percent of the wells. Although iron and manganese are regulated under secondary drinking water standards (for aesthetics such as color taste and odor) and are not of concern for human health as drinking water, these constituents were still chosen for further investigation because they also have multiple detections above the agricultural suitability threshold. (Ayers and Westcot 1985) **Figure 5-8** through **Figure 5-10** show the trends over time. Wells with single measurements are shown as dots, where wells that had multiple measurements shown as lines. These figures indicate that the number of wells with highly elevated concentrations of arsenic and manganese concentrations may have decreased over the last 40 years of groundwater use. Iron concentrations are generally below the agricultural suitability threshold (Ayers and Westcot, 1985), with two recent elevated measurements from the monitoring wells constructed in support of the GSP.

#### **Specific Conductance and Total Dissolved Solids**


SC is a measure of the water's ability to conduct electricity. TDS is a measure of the total amount of dissolved materials (i.e., salts) in water. SC and TDS are related to one another (higher TDS results in higher SC) and SC is often used as a proxy for TDS. Although there was only one recent measurement over the MCL for SC, both SC and TDS were investigated further because they are important indicators of general water quality conditions.

**Figure 5-11** and **Figure 5-12** show the distribution of elevated levels of SC and TDS around the Basin. **Figure 5-13** and **Figure 5-14** show the trends over time. Wells with single measurements are shown as dots, where wells that had multiple measurements shown as lines. These figures indicate that the number of wells with highly elevated concentrations of SC and TDS may have decreased over the last 40 years.


### **5.4.2 Groundwater Contamination Sites and Plumes**

To determine the location of potential groundwater contamination sites and plumes, the State Water Board's GeoTracker website was consulted. GeoTracker catalogs known groundwater contamination sites and waste disposal sites. (State Water Board 2020b) A search of GeoTracker identified ten sites where groundwater could potentially be contaminated. These sites are in the vicinity of Bieber and Nubieber as listed in **Table 5-4** and shown on **Figure 5-15**. The sites include leaking underground storage tanks (LUSTs), cleanup program sites and land disposal sites. Half of the sites are open and subject to on-going regulatory requirements. The contaminants are listed in **Table 5-4**, which also gives a summary of the case history.




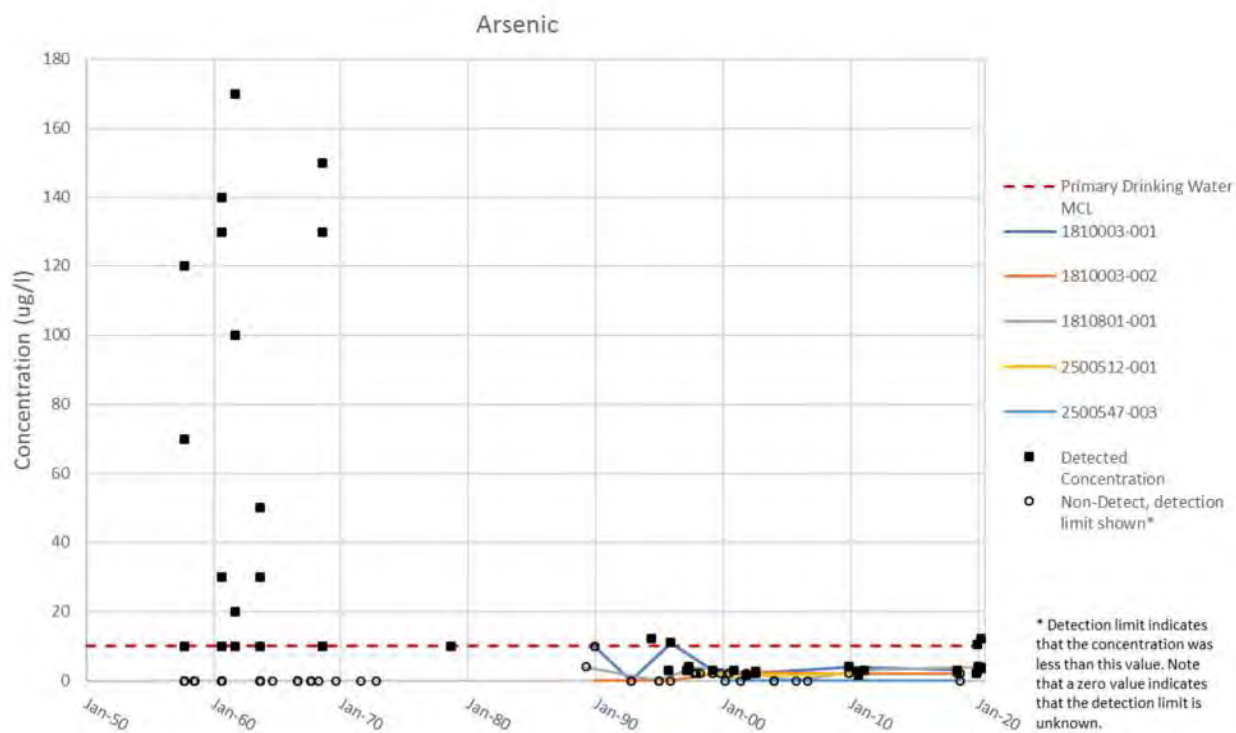


**Figure 5-8 Arsenic Trends**

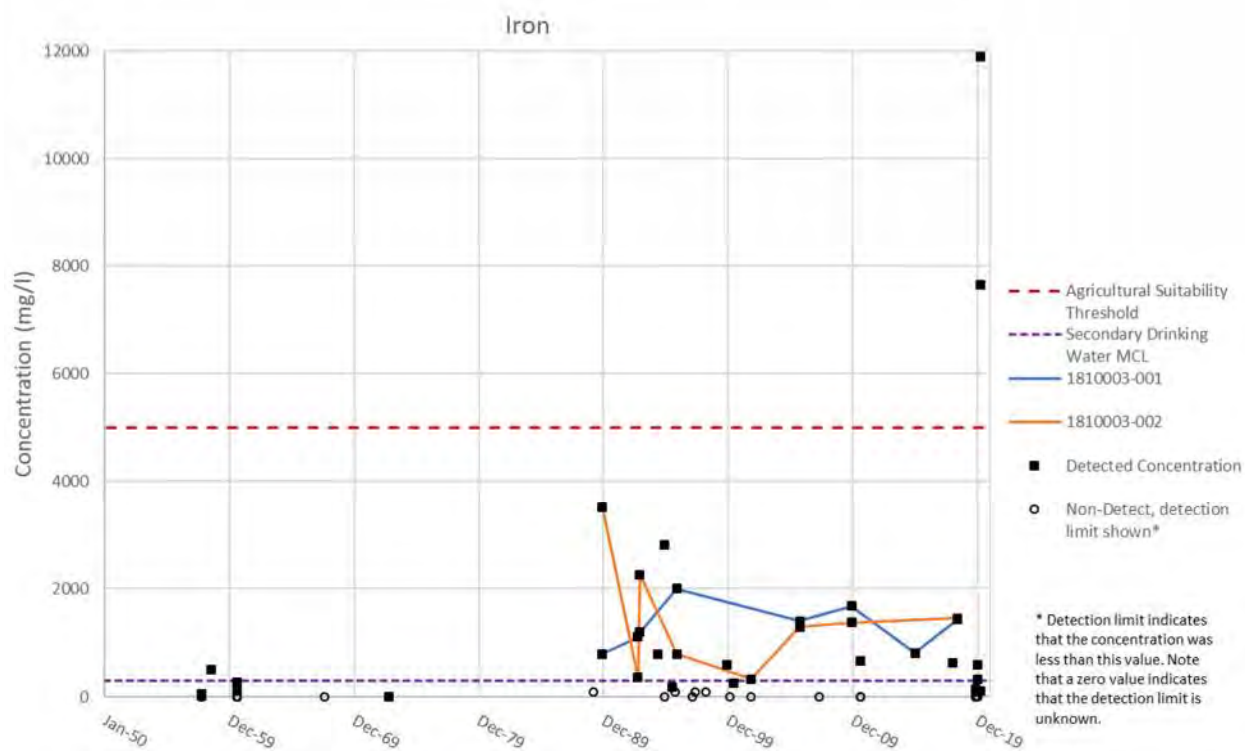

**Figure 5-9 Iron Trends**

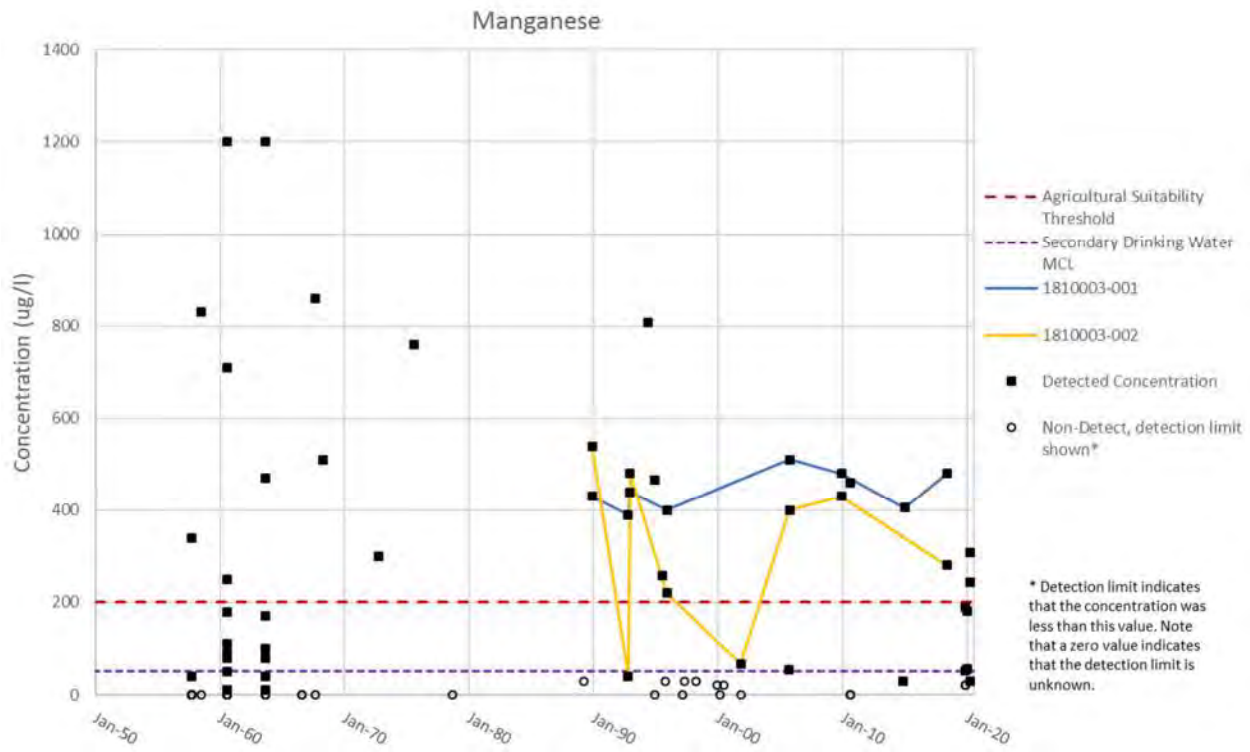


**Figure 5-10 Manganese Trends**

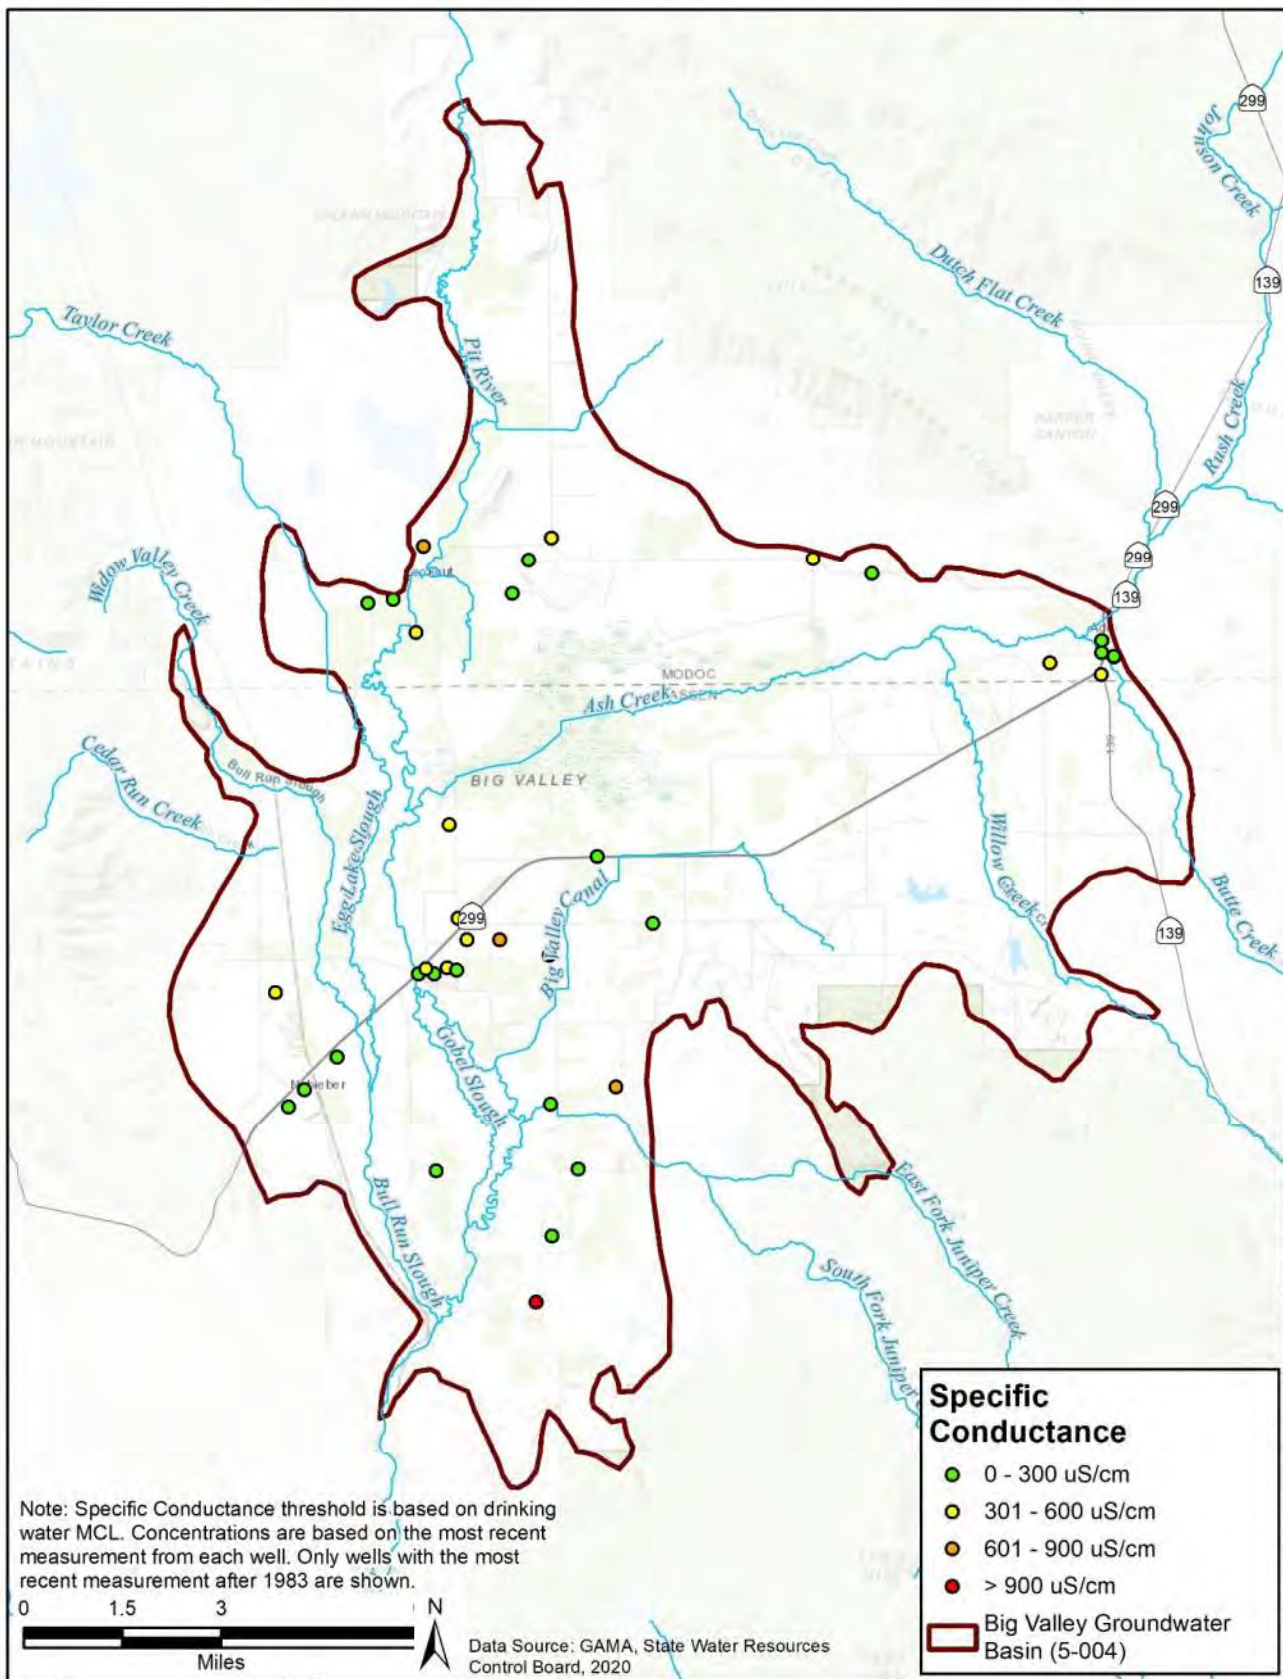

**Figure 5-11 Distribution of Elevated Specific Conductance**




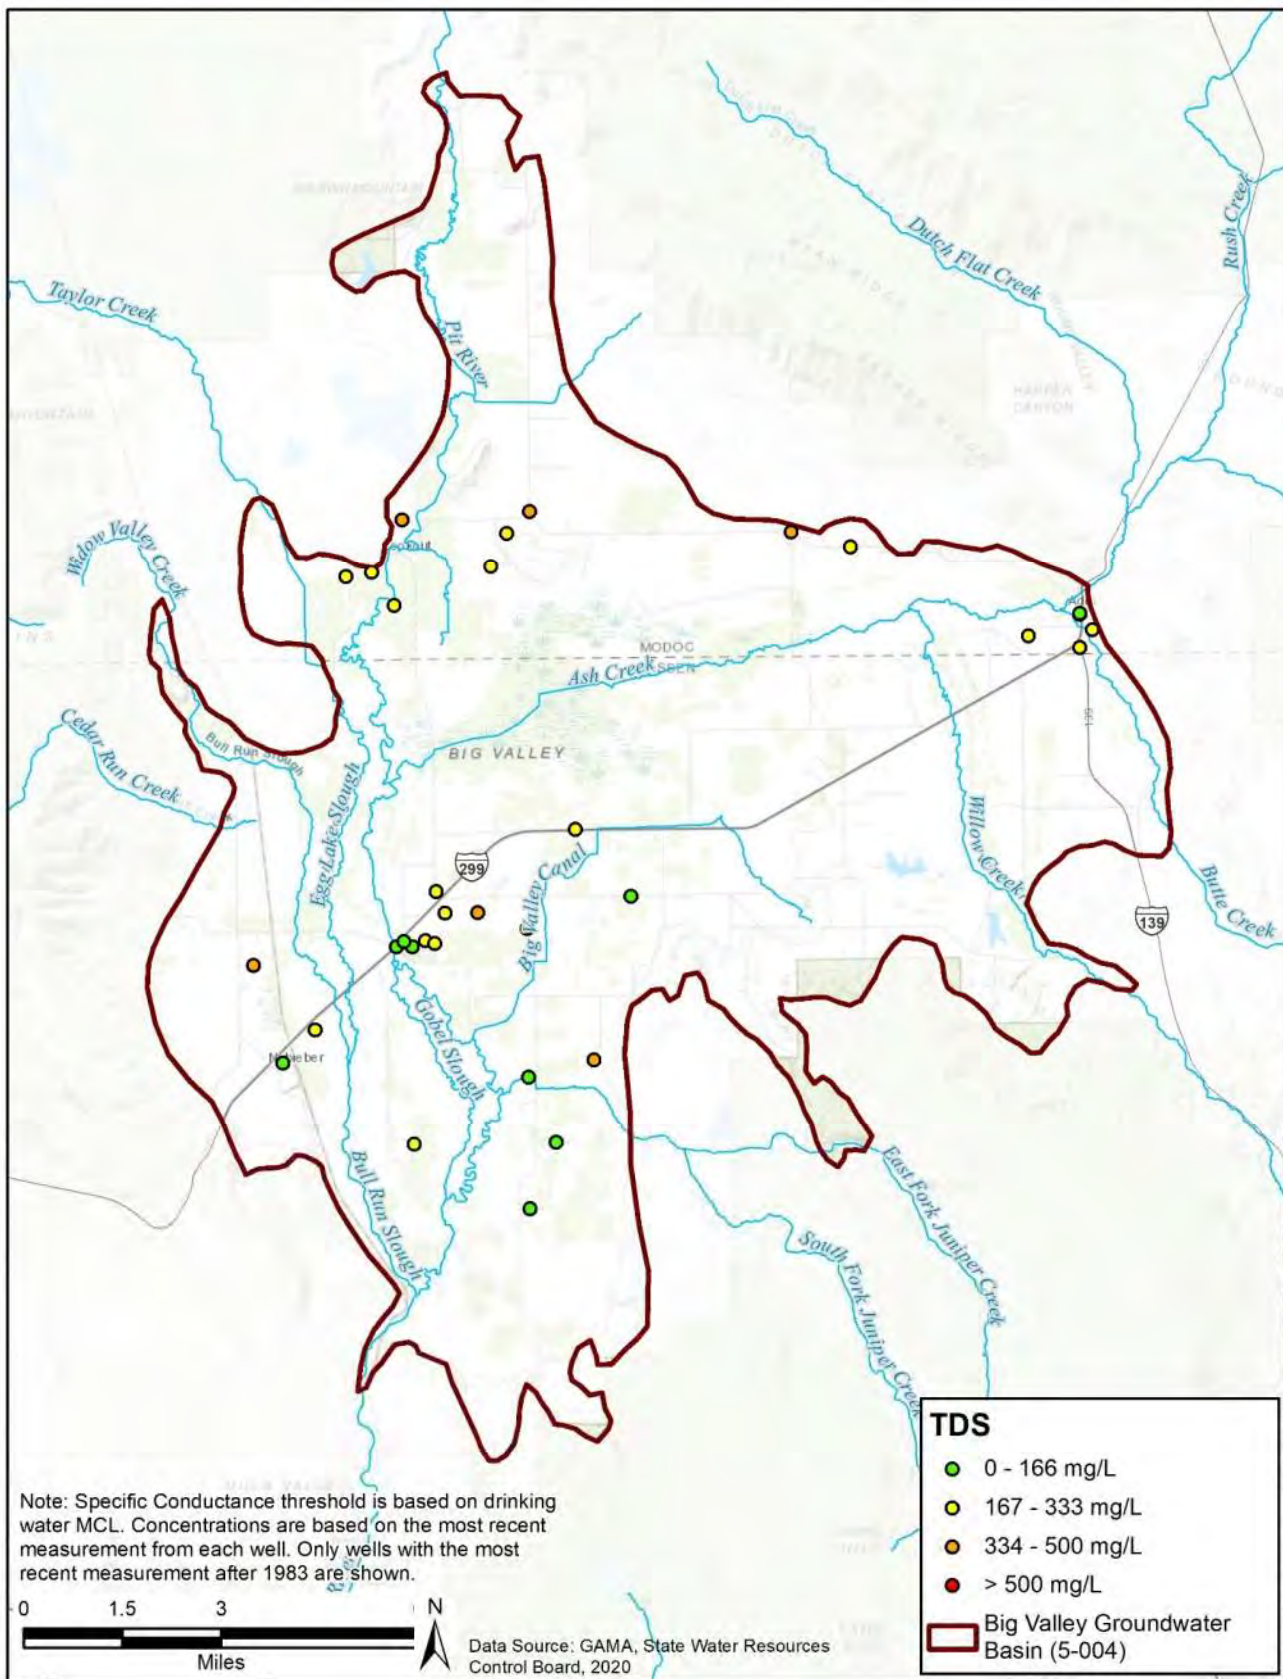


31-Jul-2020 Z:\Projects\1901113\_BigValleyGSP\GSP039\_WQ\_TDS\_post1983.mxd PAE

**Figure 5-12 Distribution of Elevated TDS Concentrations**



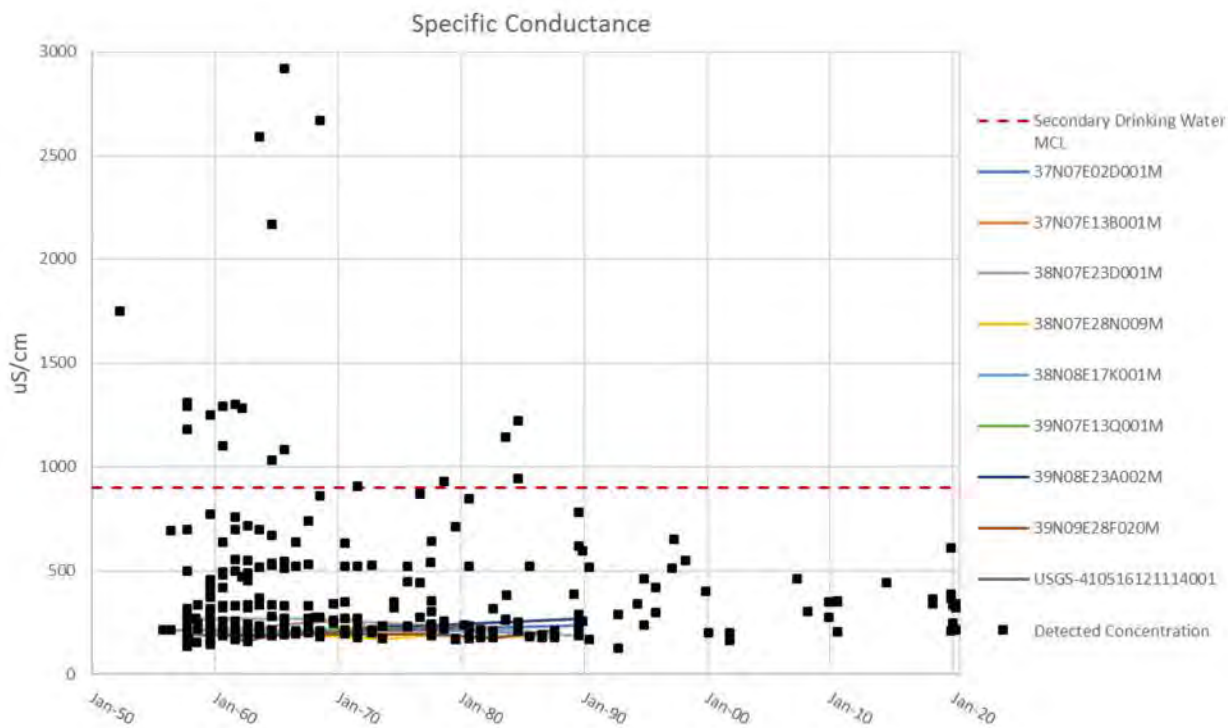

**Figure 5-13 Specific Conductance Trends**

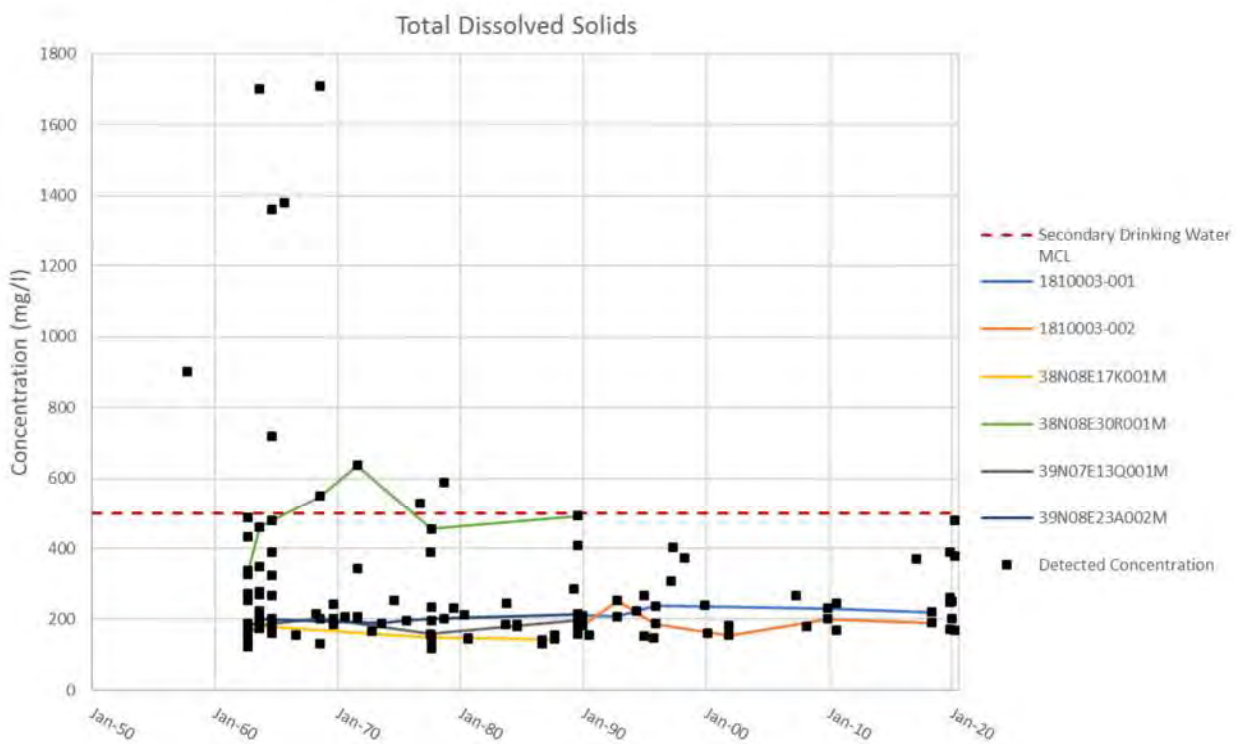

**Figure 5-14 TDS Trends**


**Table 5-4 Known Potential Groundwater Contamination Sites in the BVGB**

GeoTracker ID	Latitude	Longitude	Case Type	Status	Last Regulatory Activity	Case Begin Date	Potential Contaminants of Concern	Site Summary
T10000003882	41.12050	-121.14605	LUST Cleanup Site	Open - Assessment & Interim Remedial Action	04/16/20	10/17/11	Benzene, Diesel, Ethylbenzene, Total Petroleum Hydrocarbons (TPH), Xylene	The case was opened following an unauthorized release from an UST(s). Tank removal and further site assessment, including installation of 8 monitoring wells, led to remedial actions. Periodic groundwater monitoring started in October 2013 and has been ongoing through March 2020.
T0603593601	41.13230	-121.13070	LUST Cleanup Site	Open - Remediation	07/29/20	03/22/00	Gasoline	Active gas station with groundwater impacts. Full-scale remediation via groundwater extraction and treatment began in September 2013 and was shut down in April 2017 because it was determined that it was no longer an effective remedy to treat soil and groundwater. At the time of system shutdown, the influent MTBE concentration was 5,650 micrograms per liter which exceeds the Low-Threat Closure Policy criteria. Additionally, high levels of TPHg and sheen/free product are present. A soil vapor extraction system operated for a limited time in 2016/2017 but was not effective. In April 2018, it was determined that active remediation is not a cost-effective path to closure given low permeability of site soils. Staff suggested incorporating institutional controls (IC) and risk-based cleanup objectives instead of active remediation of soil and groundwater. The IC approach was dependent on the submittal of several documents related to soil management, deed restriction and risk modeling plus annual groundwater sampling. This information has not been provided and the RWQCB sent an Order for this information.
T0603500006	41.12241	-121.14128	LUST Cleanup Site	Completed - Case Closed	01/04/00	06/28/99	Diesel	A 2000-gallon UST was removed, and limited contaminated soil was present in the excavation. Petroleum hydrocarbons were not found in the uppermost groundwater. These findings led to the closure of the case.
L10005078943	41.12941	-121.14169	Land Disposal Site	Open - Closed facility with Monitoring*	06/26/20	06/30/08	Higher levels of Inorganic constituents, organic chemicals (synthetic), per/polyfluoroalkyl substances	Disposal activities at Bieber Landfill occurred from the early 1950s until 1994. The landfill was closed during the early 2000s. While active, the site received residential, commercial and industrial non-hazardous solid waste. Formerly an unlined burn dump, the site was converted to cut-and-cover landfill operation in 1974. Landfill refuse is estimated to occupy less than 13 acres of the 20-acre site. Wastes are estimated to be approximately 10-15 feet thick. The Class III landfill was closed in accordance with Title 27 of the California Code of Regulations. A transfer station was established at the site for the transportation of waste to another landfill. Groundwater levels and quality are monitored twice per year at 4 wells.
T0603500003	41.12124	-121.14061	LUST Cleanup Site	Completed - Case Closed	09/13/94	07/31/91	Heating Oil / Fuel Oil	A 1000-gallon UST was removed, and contaminated soil was present beneath the tank, which led to installation of nine soils borings and 3 monitoring wells. Contaminated soil was removed but an adjacent building limited the extent of the excavation so contaminated soil remains under the building. Hydrocarbons were initially found in 1 well but not in subsequent sampling. The RWQCB concurred with a request to close the investigation.
T10000003101	41.13151	-121.13658	Cleanup Program Site	Open - Assessment & Interim Remedial Action	07/22/20	04/03/07	Benzene, Toluene, Xylene, MTBE / TBA / Other Fuel Oxygenates, Gasoline, Other Petroleum	A diesel leak was found in association with an industrial chipper. Corrective action included excavation of diesel-impacted soil, removing contaminated water and groundwater monitoring. Results of soil and groundwater sampling indicate low concentrations of TPHg and BTEX and that there is no offsite migration. Staff have determined that the case is ready for closure, pending decommissioning of the site monitoring wells.
SL0603581829	41.09251	-121.17904	Cleanup Program Site	Completed - Case Closed	09/01/05	01/08/05	Petroleum - Diesel fuels, Petroleum - Other	Contaminated soil excavated and transported to Forward Landfill for disposal. Contaminated groundwater (7,000 gallons) extracted with vacuum truck for disposal.
T0603500002	41.12188	-121.13546	LUST Cleanup Site	Completed - Case Closed	07/17/06	10/20/86	Gasoline / diesel	Three USTs were removed, and contaminated soil was present beneath the tank, which led to installation of nine monitoring wells and three remediation wells. Natural attenuation of the hydrocarbon impact was acceptable to the RWQCB due to the limited, well-defined extent of the impact and the limited and declining impact to groundwater. The RWQCB concurred with a request to close the site.
T0603500004	41.12134	-121.13547	LUST Cleanup Site	Completed - Case Closed	03/12/99	06/12/97	Diesel	A 5000-gallon UST was removed and very low levels of petroleum hydrocarbons were detected in the soil, which was allowed to be spread onsite and the case was closed.
T10000002713	41.11993	-121.14271	Cleanup Program Site	Open - Site Assessment	12/30/16	03/10/10	Other Petroleum	The site is an old bulk plant which was built in the 1930's and handled gasoline and diesel. During a routine inspection in March 2010, evidence of petroleum spills were identified at the loading dock area. A follow-up inspection was conducted in April 2010. The ASTs and loading dock were removed but additional contamination was noted under the removed structures. Furthermore, a shallow excavation contained standing water with a sheen. Due to the potential impacts to shallow groundwater, the Regional Water Board became the lead agency in December 2010. Additional information was requested in December 2016. A response is not evident.

\*This terminology indicates that the landfill is closed (no new material being disposed), but the site is open with regard to ongoing groundwater monitoring.

Source: GeoTracker (State Water Board 2020b)

MTBE = Methyl tert-butyl ether; TBA = tert-Butyl alcohol

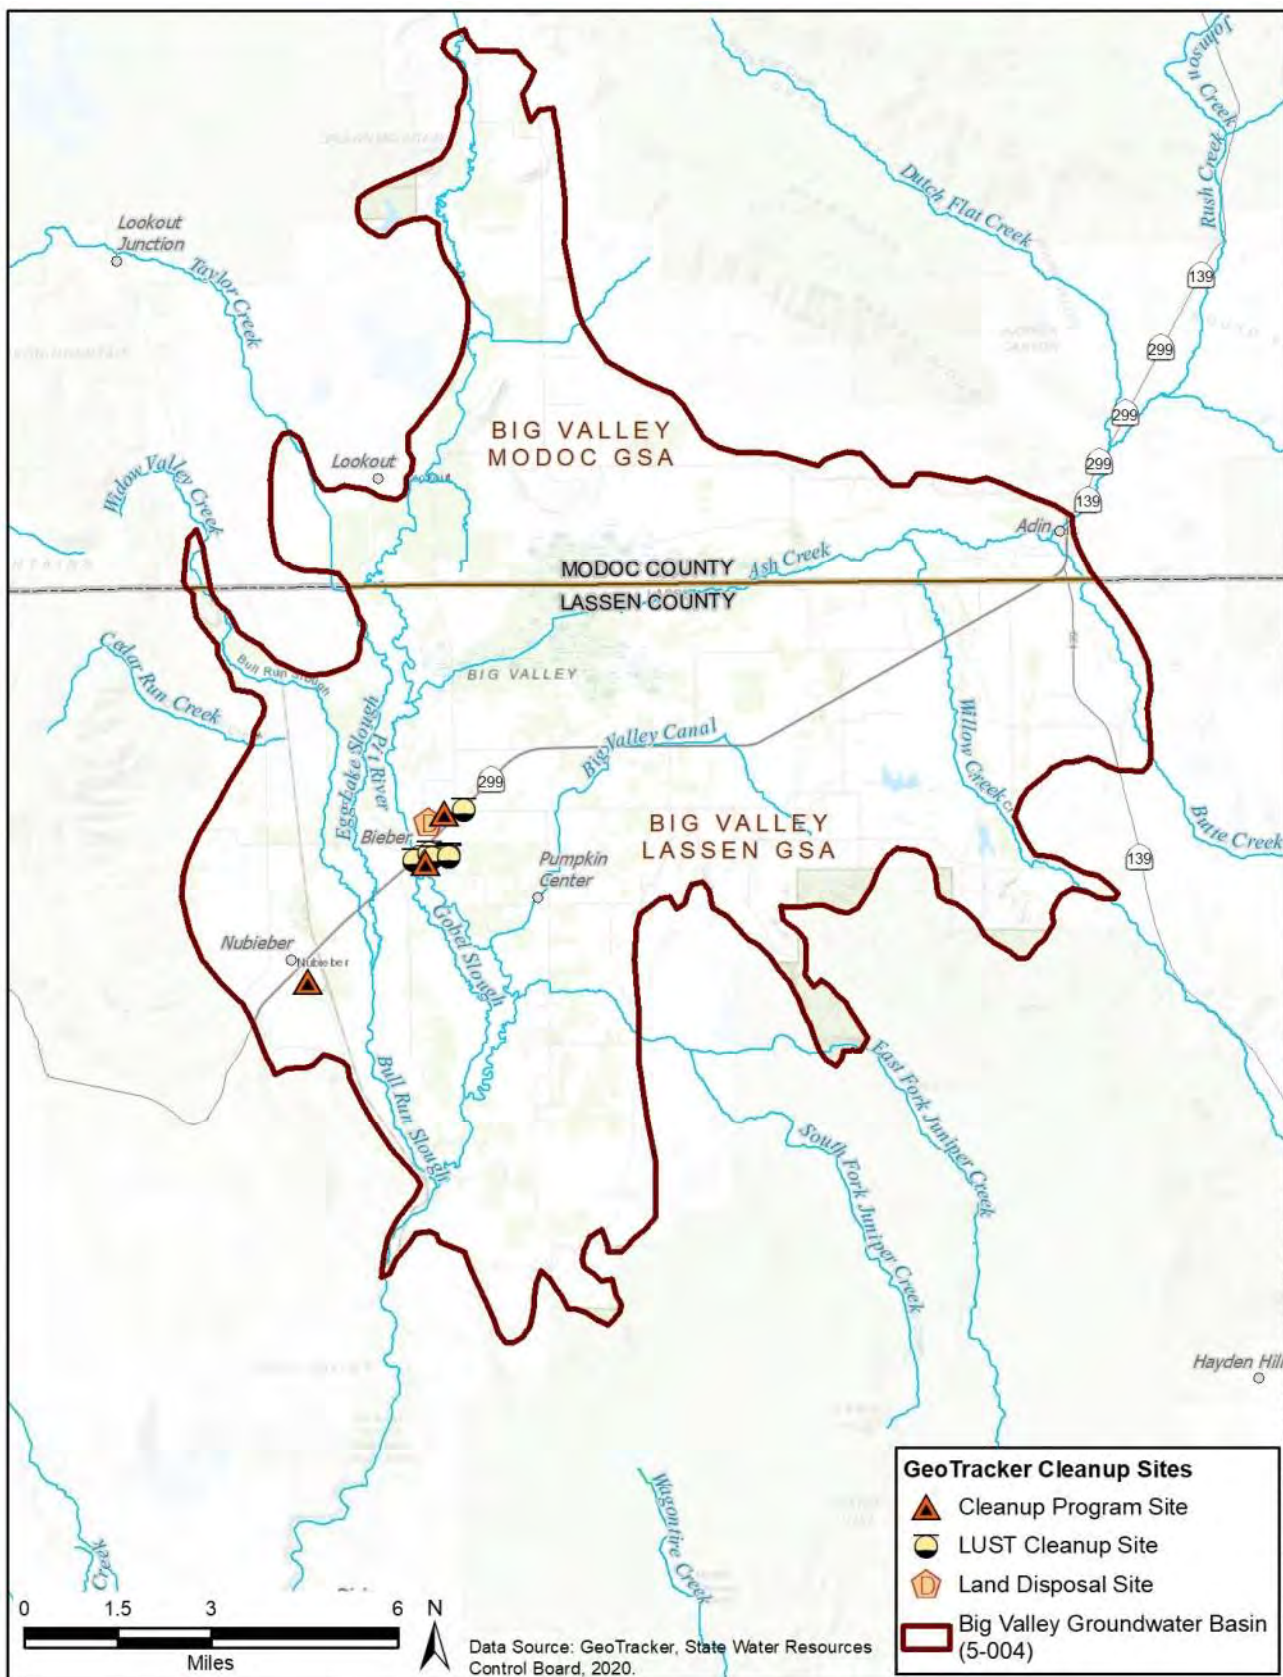

Z:\Projects\1901113\_BigValleyGSP\GSP021\_GeoTracker\_CleanupSites.mxd 5/12/2020

**Figure 5-15 Location of Known Potential Groundwater Contamination Sites**

Most of the contaminants originated at LUST sites leaking petroleum hydrocarbons which are light non-aqueous phase liquids (LNAPLs). LNAPLs are less dense than water and their solubility is quite low, meaning that if they reach groundwater, they float on top and generally do not migrate into the deeper portions of the aquifer. Moreover, many of the constituents can be degraded by naturally occurring bacteria in soil and groundwater so the hydrocarbons do not migrate far from the LUST sites. However, MTBE<sup>33</sup>, TBA<sup>34</sup> and fuel oxygenates are more soluble in water. Two LUST sites and the landfill site are subject to long-term monitoring while a fourth site is ready for case closure.

The Bieber Landfill is subject to on-going semi-annual monitoring of groundwater levels and groundwater quality at four shallow wells. This monitoring is required by the RWQCB (Order No. R5-2007-0175), after the formal closure of the landfill in the early 2000s. Trace concentrations of several organic constituents<sup>35</sup> have been detected at MW-1, the closest downgradient well to the site, but rarely at the other three wells. Higher concentrations of inorganic constituents (e.g., TDS, SC, others) are also present at MW-1. During 2019, the landfill was also required to analyze groundwater samples from MW-1, MW-2 and MW-4 for per/polyfluoroalkyl substances (PFAS), which are an emerging group of contaminants that are being studied for their effect on human health and may be subject to very low regulatory criteria (parts per trillion). Fifteen of 28 PFASs were detected at MW-1 and nine of 28 PFASs were detected at MW-4 (none at MW-2). The State Water Board/RWQCB evaluation of these data is still pending.

## 5.5 Subsidence

Vertical displacement of the land surface (subsidence) is comprised of two components: 1) elastic displacement which fluctuates according to various cycles (daily, seasonally and annually) due to temporary changes in hydrostatic pressure (e.g., atmospheric pressure and changes in groundwater levels) and 2) inelastic displacement or permanent subsidence which can occur from a variety of natural and human-caused phenomena. Lowering of groundwater levels can cause prolonged and/or extreme decrease in hydrostatic pressure of the aquifer. This decrease in pressure can allow the aquifer to compress, primarily within fine-grained beds (clays). Inelastic subsidence cannot be restored after the hydrostatic pressure increases. Other causes of inelastic subsidence include natural geologic processes (e.g., faulting) and the oxidation of organic rich (peat) soils as well as human-caused processes such as mining and grading of land surfaces.

---

<sup>33</sup> Methyl tert-butyl ether (MTBE) is a fuel additive that was used starting in 1979 and was banned in California after 2002. MTBE is sparingly soluble in water and has a primary MCL of 13 ug/l for human health and a secondary MCL of 5 ug/l for aesthetics.

<sup>34</sup> tert-Butyl alcohol (TBA) is also a fuel additive and is used to produce MTBE. TBA does not have a drinking water MCL in California.

<sup>35</sup> 1,1-dichloroethane, 1,4-dichlorobenzene, cis-1,2-dichloroethylene, benzene, chlorobenzene, MTBE, 2,4,5-trichlorophenoxyacetic acid




- 1680 Subsidence can be measured by a variety of methods, including:
- 1681 • Regular measurements of any vertical space between the ground surface and the concrete pad  
1682 surrounding a well. If space is present and increasing over time, subsidence may be occurring at  
1683 that location. If a space is not present, subsidence may not be occurring, or the well is not deep  
1684 enough to show that subsidence is occurring because the well and groundwater are subsiding  
1685 together.
  - 1686 • Terrestrial (ground-based) surveys of paved roads and benchmarks.
  - 1687 • Global Positioning Survey (GPS) of benchmarks. GPS uses a constellation of satellites to  
1688 measure the 3-dimensional position of a benchmark. The longer the time that the GPS is left to  
1689 collect measurements, the higher the precision. Big Valley has one continuously operating GPS  
1690 (CGPS) station near Adin.
  - 1691 • Monitoring of specially constructed “extensometer” wells. There are no extensometers in the  
1692 BVGB.
  - 1693 • Use of InSAR, which is microwave-based satellite technology that has been used to evaluate  
1694 ground surface elevation and deformation since the early 1990s. InSAR can document changes in  
1695 ground elevation between successive passes of the satellite. Between 2015 and 2019, InSAR was  
1696 used to evaluate subsidence throughout California, including Big Valley.

1697 Subsidence was recognized as an important consideration in the 2007 LCGMP (Brown and Caldwell  
1698 2007) but was not identified as an issue for Big Valley specifically. The analysis in the LCGMP was  
1699 based on indirect observations (groundwater levels) and anecdotal information. This section presents  
1700 additional data that has become available since the development of the LCGMP.

### 1701 **5.5.1 Continuous GPS Station P347**

1702 A CGPS station (P347) was installed at the CalTrans yard near Adin in September 2007. The station is  
1703 part of the Plate Boundary Observatory which is measuring 3-dimensional changes in the Earth surface  
1704 due to the movement of tectonic plates (e.g., Pacific and North American plates).

1705 **Figure 5-16** is a plot of the vertical displacement at P347 and shows a slight decline (0.6 inch) over the  
1706 first 11 years of operation, based on the annual mean values (large black open circles). Daily values  
1707 (blue dots) show substantial variation, as much as an inch, but more typically only 0.1 inch on average.  
1708 This scattering of daily values around the annual mean provides an indication of the elastic nature of the  
1709 displacement. The overall decline of 0.6 inch is an indication of inelastic displacement has occurred over  
1710 an 11-year period, which equates to a rate of -0.05 inch per year at this location near Adin.

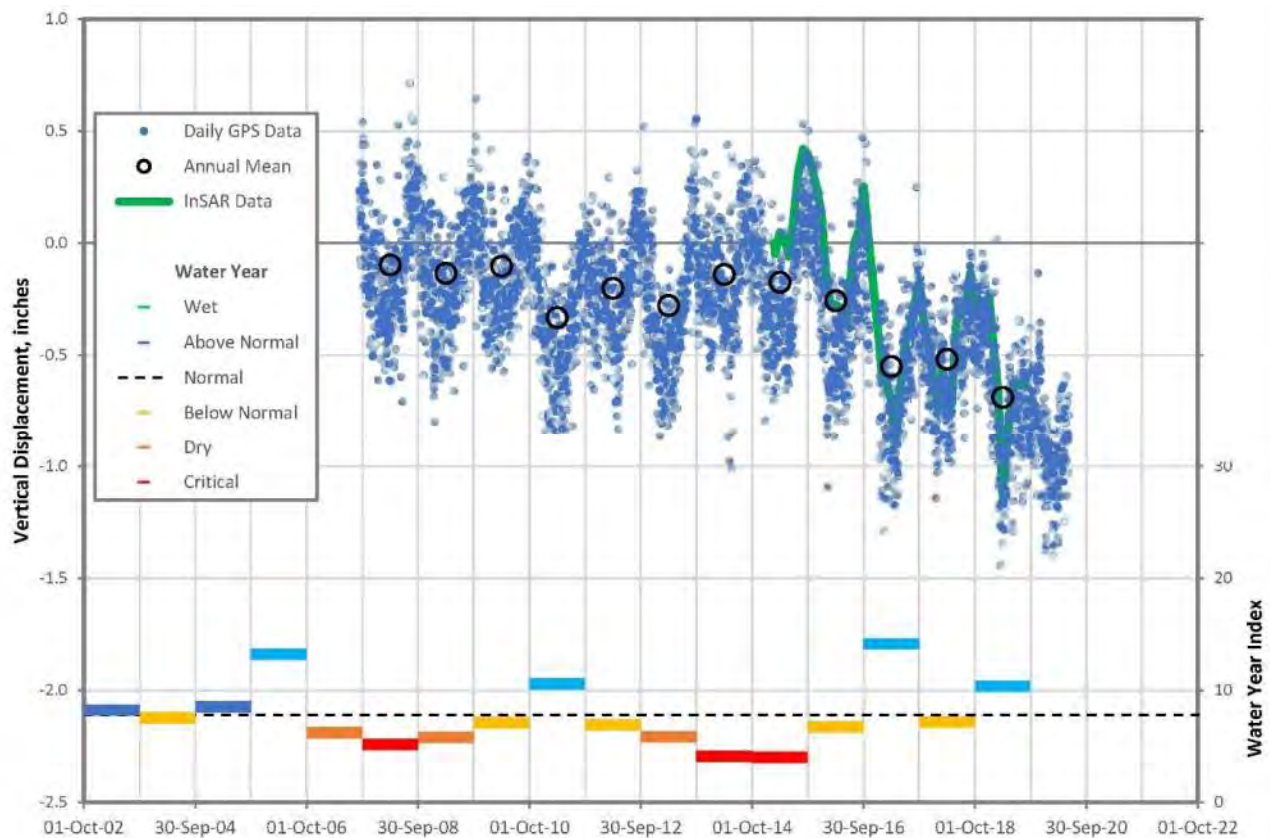


**Figure 5-16 Vertical Displacement at CGPS P347**

## 5.5.2 Interferometric Synthetic Aperture Radar

**Figure 5-17** is a map of InSAR data made available by DWR for the 4.3-year period between June 2015 and September 2019. The majority of Big Valley was addressed by this InSAR survey although the survey excludes some areas (shown in white on **Figure 5-17**) including much of the Big Swamp (ACWA), areas along the Pit River near Lookout and south of Bieber. The accuracy of this type of InSAR data in California has been calculated at 18mm (0.7 inches) at a 95% confidence level. (Towill 2021) Most of the survey shows downward displacement between 0 and -1 inch throughout Big Valley. This small displacement is close to the level of accuracy of the data, but if true is likely due to natural geologic activities due to its widespread nature.

Two localized areas of subsidence exceeding -1.5 inches are apparent from this data, one in the east-central portion of the Basin north of Highway 299 and one in the southern portion of the Basin between the Pit River and Bull Run Slough. Maximum downward displacement in the Basin is -3.3 inches, over the 4.3-year period. Some of the downward displacement in the Basin may be due to re-grading of fields, particularly for production of wild rice.

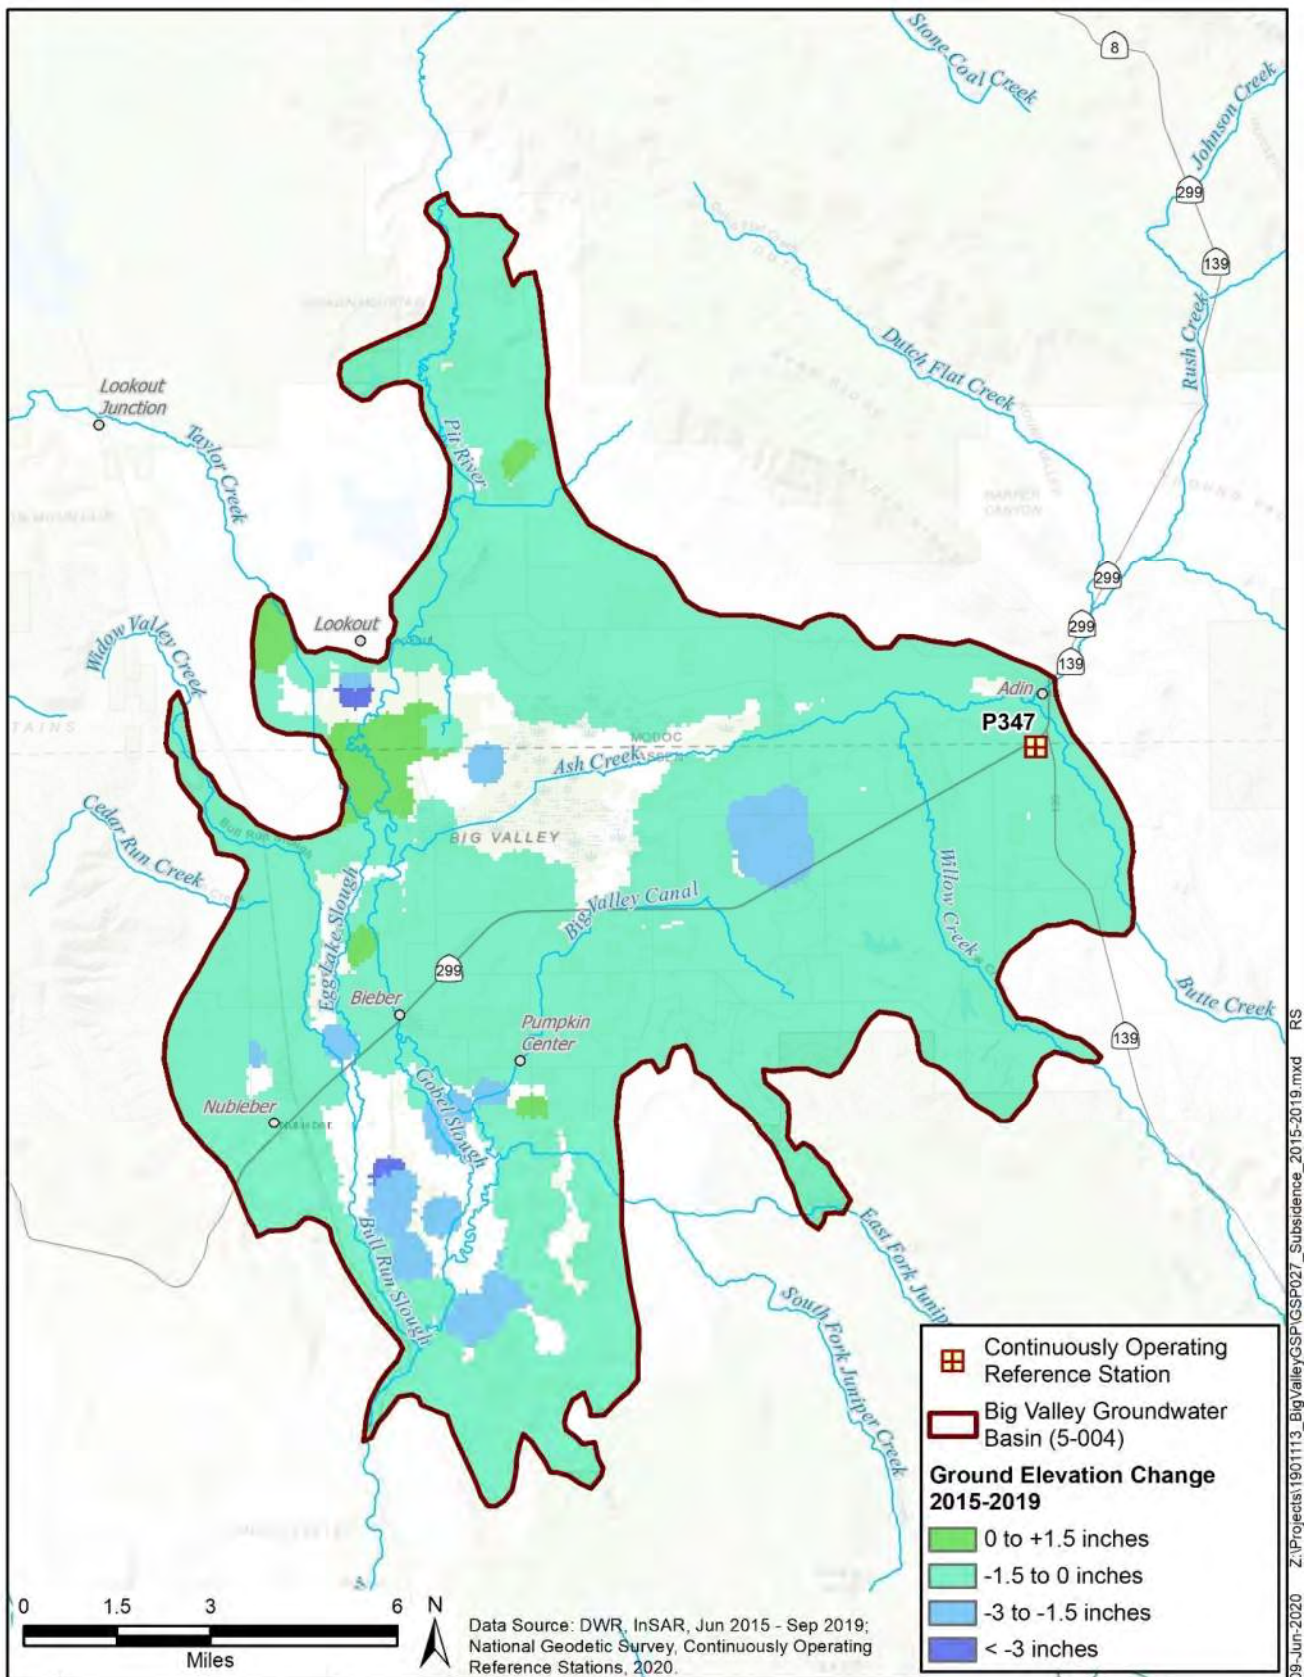

09-Jun-2020 Z:\Projects\1901113\_BigValleyGSP\GSP027\_Subsideance\_2015-2019.mxd RS

**Figure 5-17 InSAR Change in Ground Elevation 2015 to 2019**

## 5.6 Interconnected Surface Water

Interconnected surface water refers to surface water that is “hydraulically connected at any point by a continuous saturated zone to the underlying aquifer and the overlying surface water is not completely depleted” (DWR 2016c). For the principal aquifer to be interconnected to surface water streams, groundwater levels need to be near ground surface. As a first determination of where surface water *may* be interconnected, **Figure 5-18** shows the major<sup>36</sup>, perennial<sup>37</sup> streams in the Basin which have groundwater levels near ground surface, depth to water less than 20 feet based on spring 2015 groundwater contours. These are designated as areas with *potentially* interconnected surface water.

Interconnected streams can be gaining (groundwater flowing toward the stream) or losing (groundwater flowing away from the stream). The flow directions from the groundwater contours can indicate whether the stream might be gaining or losing, as shown on **Figure 5-18**. In addition, shallow monitoring well clusters<sup>38</sup> give the direction of shallow groundwater flow as shown by the black arrows on **Figure 5-18**.

§354.16(f) of the regulations require an estimate of the “quantity and timing of depletions of [interconnected surface water] systems, utilizing...best available information”. The quantity cannot be determined with any reasonable level of accuracy using empirical data, so the best available information is presented in Chapter 6 – Water Budget. The timing of depletions also cannot be determined with existing data.

## 5.7 Groundwater-Dependent Ecosystems

SGMA requires GSPs to identify Groundwater Dependent Ecosystems but does not explicitly state the requirements that warrant a GDE designation. SGMA defines a GDE as “ecological communities or species that depend on groundwater emerging from aquifers or on groundwater occurring near the ground surface”. (DWR 2016c) GDEs are considered a beneficial use of groundwater.

The most comprehensive and readily accessible data to identify GDEs is referred to as the NCCAG dataset. Upon inspection of the data there are many inaccuracies in the data. The abstract of the dataset documentation reads:


The Natural Communities dataset is a compilation of 48 publicly available State and federal agency datasets that map vegetation, wetlands, springs, and seeps in California. A working group comprised of DWR, the California Department of Fish and Wildlife (CDFW), and The Nature Conservancy (TNC) reviewed the compiled dataset and conducted a screening process to exclude vegetation and wetland types less likely to be associated with

<sup>36</sup> Named streams from the National Hydrography Dataset [NHD] (USGS 2020a)

<sup>37</sup> With year-round or nearly year-round flow, indicating it is not completely depleted.

<sup>38</sup> The clusters are sets of 3 wells drilled in close proximity to each other for the purpose of determining shallow groundwater flow direction and gradient. At the time of writing this draft chapter, 2 clusters have enough data to determine flow direction, 1 cluster near Adin and 1 near Lookout. **Appendix 5C** contains data collected at the 2 clusters and their flow directions



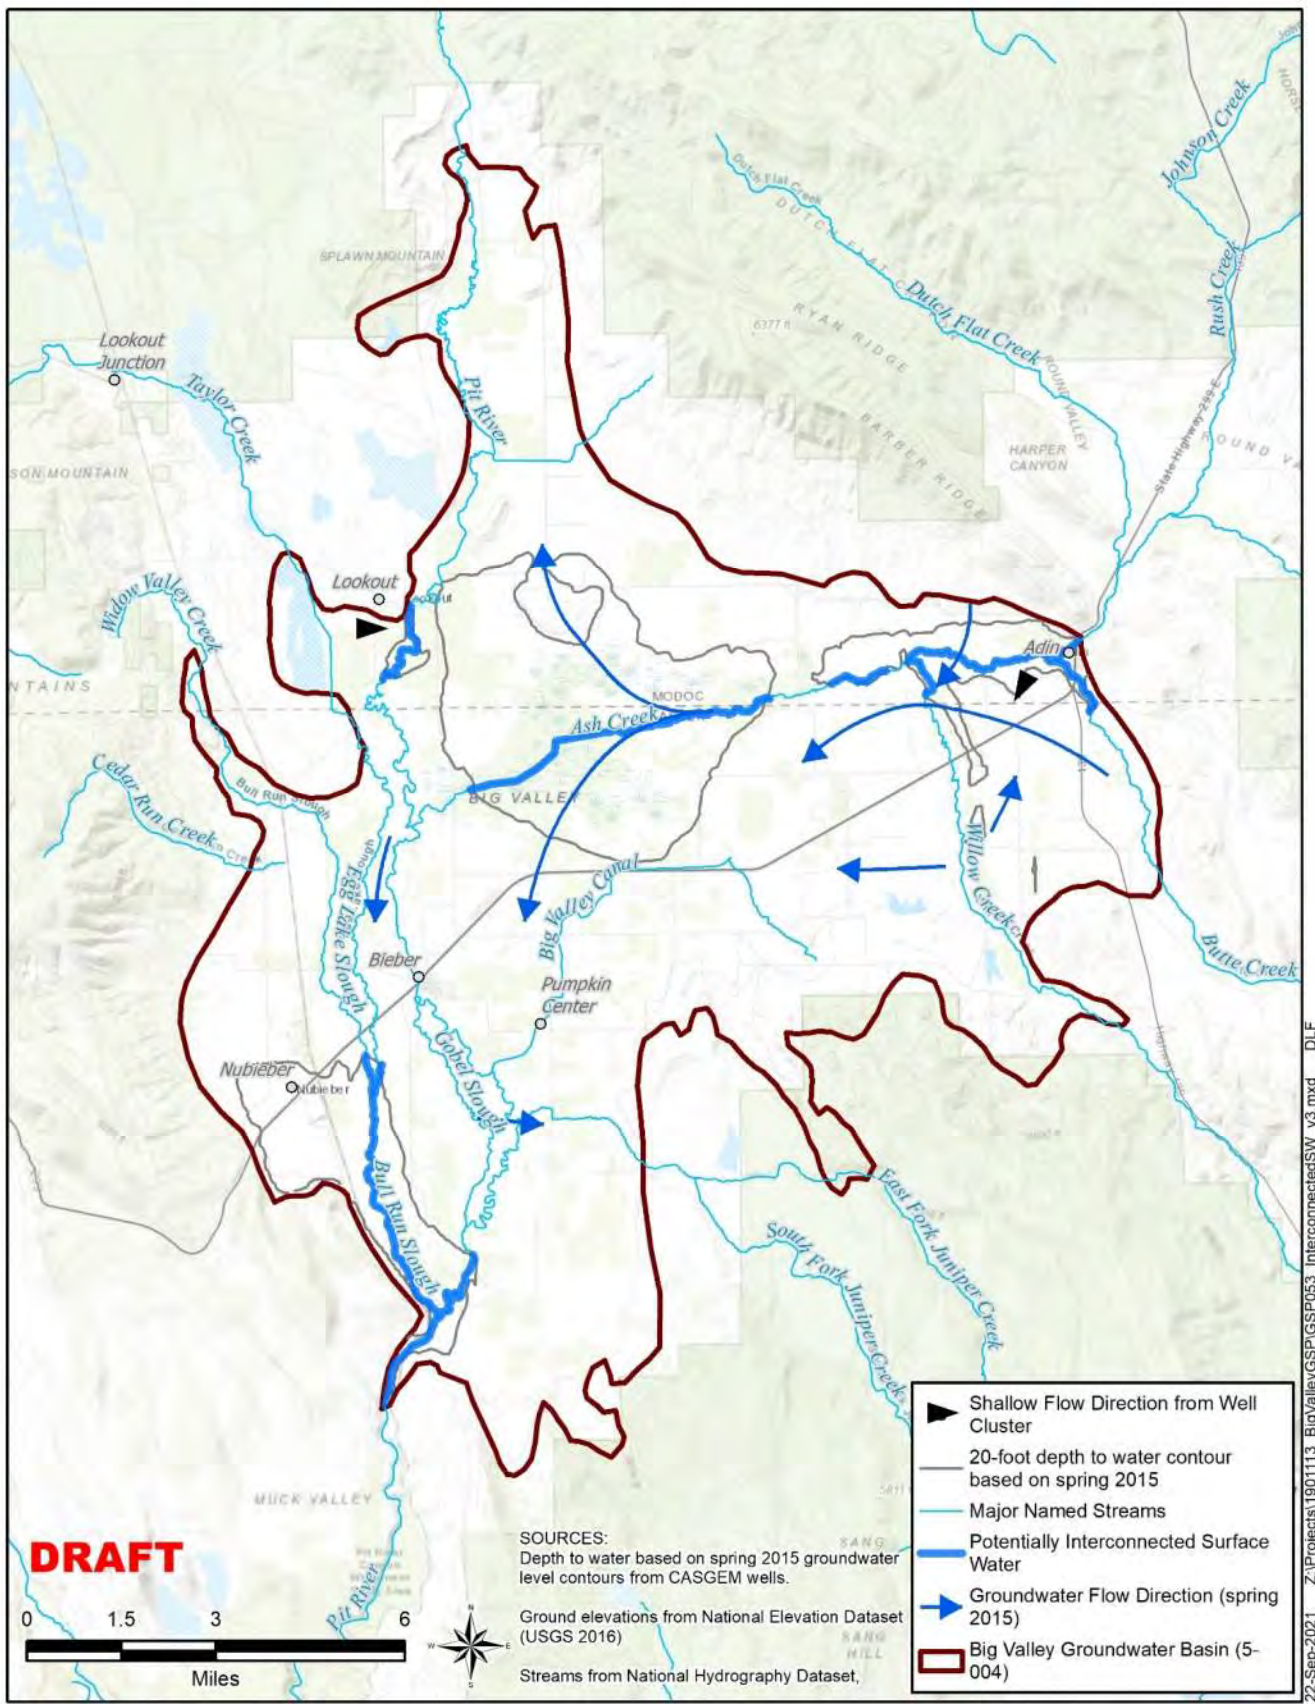

**Figure 5-18 Potentially Interconnected Surface Water**

1763 groundwater and retain types commonly associated with groundwater,  
 1764 based on criteria described in Klausmeyer et al. (2018).

1765 Two habitat classes are included in the Natural Communities dataset:  
 1766 (1) wetland features commonly associated with the surface expression of  
 1767 groundwater under natural, unmodified conditions; and (2) vegetation types  
 1768 commonly associated with the sub-surface presence of groundwater  
 1769 (phreatophytes).

1770 The data included in the Natural Communities dataset do not represent  
 1771 DWRs determination of a GDE. However, the Natural Communities dataset  
 1772 can be used by GSAs as a starting point when approaching the task of  
 1773 identifying GDEs within a groundwater basin. (DWR 2018a)

1774 The NCCAG geospatial data (DWR 2018a) is separated into two categories: wetlands and vegetation,  
 1775 respectively.

1776 The Wetlands area (12,800 total acres) is subdivided into two primary habitats present in Big Valley:  
 1777 palustrine<sup>39</sup> and riverine<sup>40</sup>. Palustrine is the dominant habitat at 96 percent of the total wetland area  
 1778 while riverine is present at 4 percent and can be seen along river courses. Sixteen springs account for a  
 1779 very small areal component. Most of the springs are in Lassen County (13) although numerous springs  
 1780 are located outside the BVGB boundary.

1781 The Vegetation area (11,500 total acres) is subdivided further into two primary habitats, based on the  
 1782 plant species. Wet Meadows was the largest primary habitat at 59 percent of the vegetation area but did  
 1783 not include a dominant species. Willow was the second largest habitat at 41 percent of the vegetation  
 1784 area.<sup>5195-20</sup>

1785 For the NCCAG areas to be designated as actual GDEs, the groundwater level needs to be close enough  
 1786 to the ground surface that it would support the vegetation. The depth to water that could potentially be  
 1787 accessed by GDEs depends on the rooting depth of the vegetation. Plant roots can extend up to 30 feet or  
 1788 more (TNC 2020), and 30 has been used by other GSPs as the threshold for GDEs. An assessment of  
 1789 native plants present in the BVGB found that maximum rooting depths of species present is 10 feet as  
 1790 shown in **Table 5-5**. Access to groundwater by plant roots extends above the water table as groundwater  
 1791 seeps upward to fill soil pores. This is known as the capillary fringe and can extend at least a few feet or  
 1792 potentially much more depending on the soil type. As a conservative estimate, a capillary fringe of 10  
 1793 feet is used. Therefore, for the purposes of delineating GDEs, only those areas in the NCCAG datasets  
 1794 that are in areas with groundwater less than 20 feet are classified as potential GDEs. **Figure 5-18** shows  
 1795 the spring 2015 20-foot depth to water contours.

1796

---

<sup>39</sup> Palustrine are freshwater wetlands not associated with flowing water such as marshes, swamps and bogs. (Cowardin et al. 2013)

<sup>40</sup> Riverine are freshwater wetlands located in or near a flowing stream. (Cowardin et al. 2013)

1797 **Table 5-5 Big Valley Common Plant Species Rooting Depths**

Species	Rooting Depth
Carex spp.	Up to 5 feet
Alfalfa	9 feet
Aspen	10 feet and less
Willow	2-10 feet
Elderberry	10 feet and less
Saltgrass	2 feet
Sources: CNPS 2020, TNC 2020, Snell 2020	

1798

1799 **Figure 5-19** shows the potential GDEs. This map is a preliminary assessment and the data is inaccurate  
1800 in many places. These potential GDEs need to be ground-truthed. Since a large portion of the potential  
1801 GDE areas are in the ACWA, the GSAs will seek assistance from CDFW to perform such an  
1802 assessment.








1805 **6. Water Budget § 354.18**


1806 The hydrologic cycle describes how water is moved on the earth among the oceans, atmosphere, land,  
1807 surface water bodies and groundwater bodies. **Figure 6-1** shows a depiction of the hydrologic cycle.

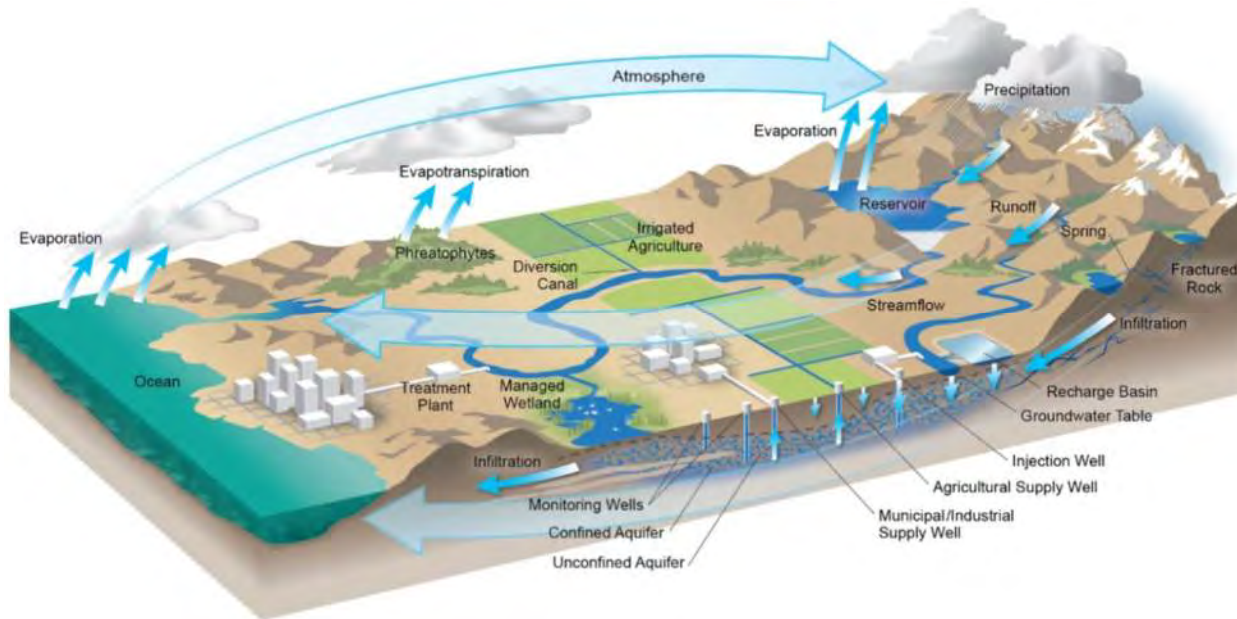

1808  
1809 **Figure 6-1 Hydrologic Cycle**

1810 A water budget accounts for the movement of water among the four major systems in Big Valley:  
1811 atmospheric, land surface, surface water and groundwater. The BVGB consists of the latter three (land  
1812 surface, surface water and groundwater) as shown by the black outline on **Figure 6-2**. This figure  
1813 demonstrates the specific components of the water budget and exchange between the systems. The  
1814 systems and the flow arrows are color coded. Inflows to the BVGB are shown with blue arrows and  
1815 outflows from the BVGB are shown with orange arrows. Flows between the systems are shown with  
1816 green arrows and flows within a system are shown in purple. The land system, surface water system and  
1817 groundwater system are green, blue and brown respectively.

1818 Like a checking account, a water budget helps the GSA and stakeholders better understand the deposits  
1819 and withdrawals and identify what conditions result in positive and negative balances. It should be noted  
1820 that, while the development of a water budget is required by the GSP regulations, the regulations don't  
1821 require actions based directly on the water budget. Actions are only required based on outcomes related  
1822 to the six sustainability indicators: groundwater levels, groundwater storage, water quality, subsidence,  
1823 seawater intrusion and surface water depletions. Therefore, a water budget should be viewed as a tool to  
1824 develop a common understanding of the Basin and a basis for making decisions to achieve sustainability  
1825 and avoid undesirable results with the sustainability indicators.

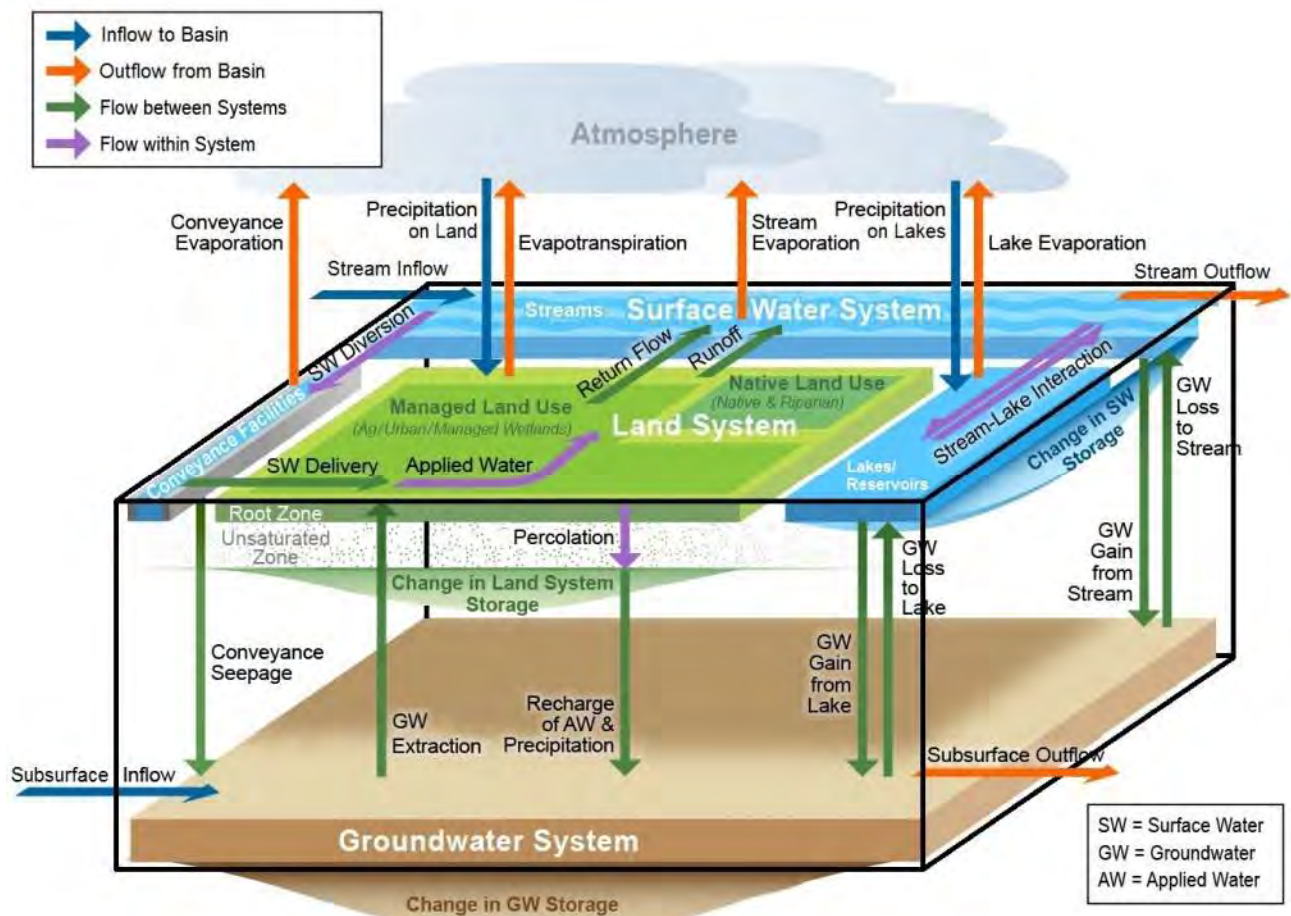

**Figure 6-2 Water Budget Components and Systems**

## 6.1 Water Budget Data Sources

Each component shown in **Figure 6-2** was estimated using readily available data and assembled into a budget spreadsheet. Many groundwater basins in California utilize a numerical groundwater model, such as MODFLOW<sup>41</sup> or IWFM<sup>42</sup> to calculate the water budget. These models require a specialized hydrogeologist to run them and the methodology by which the water budget is calculated is not readily apparent to the lay person. For the BVGB, a non-modeling (spreadsheet) approach was used so that future iterations of the water budget could be performed by a wider range of hydrology professionals (potentially reducing future GSP implementation costs) and so that the calculations of the specific components could be understood by a broader range of people.

In concept, each component could be quantified precisely and accurately, and the budget could come out balanced. In practice, most of the components can only be roughly estimated and in many cases not at all. Therefore, much of the work to balance the water budget is adjusting some of the unknown or

<sup>41</sup> Modular Finite-Difference Groundwater Flow model, developed by USGS.

<sup>42</sup> Integrated Water Flow Model, developed by DWR.

roughly estimated parameters within acceptable ranges until the budget is balanced and all components of the budget are deemed reasonable.

As such, the water budget calculations presented here are not unique and the precision of the components estimated through the use of the water budget are within an order of magnitude. Estimation of nearly all components involves assumptions and with more Basin-specific data, the accuracy and precision of many of the components are improved. Additional and improved data that is obtained results in a budget that more closely reflects the Basin conditions and allows the GSAs to make more informed decisions to sustainably maintain groundwater resources. **Appendix 6A** show the components of the water budget, their data source(s), assumptions and relative level of precision.

Major data sources include the PRISM<sup>43</sup> model (NACSE 2020) for precipitation, CIMIS (DWR 2020c) for evapotranspiration data, the National Water Information System (USGS 2020b) for surface water flows and DWR land use surveys (DWR 2020d).

## 6.2 Historical Water Budget

The historic water budget presented in this section covers 1984 to 2018. This period was chosen because it represents an average set of climatic conditions. **Figure 6-3** shows the annual precipitation and year type for the period. The criteria for year types were critical dry below 70 percent of average precipitation, dry between 70 and 85 percent of average precipitation, normal between 85 and 115 percent of average precipitation and wet years greater than 115 percent of average precipitation.


The budget was developed using this precipitation and other climate data (evapotranspiration) along with stream flow to estimate the inflows (credits) and outflows (debits) to the total BVGB. The budget was balanced by assuming that the land and surface water systems remain nearly in balance from year to year and allowing the groundwater system to vary. **Figure 6-4** shows the average annual values for the overall water budget. The detailed water budget for each year is included in **Appendix 6B**. **Appendix 6C** shows graphically how the water budget varies over time.

---

<sup>43</sup> PRISM stands for Parameter-elevation Regression on Independent Slopes Model and is provided by the Northwest Alliance for Computational Science and Engineering from Oregon State University. This model provides location-specific, historical precipitation values on monthly and annual time scales. Precipitation was evaluated at Bieber.


1866  
1867  
1868

1869

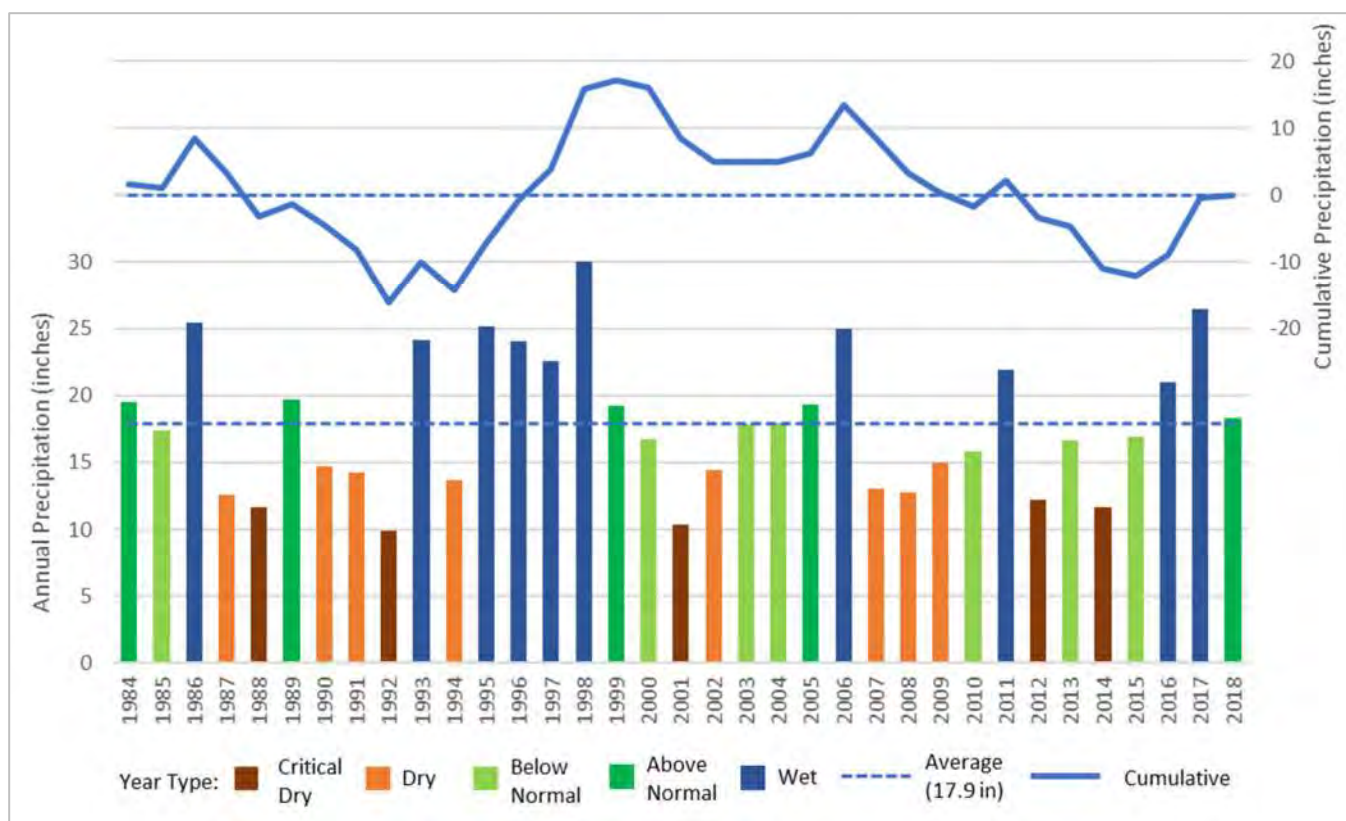

**Figure 6-3 Annual and Cumulative Precipitation and Water Year Types 1984 to 2018**

1870  
1871  
1872

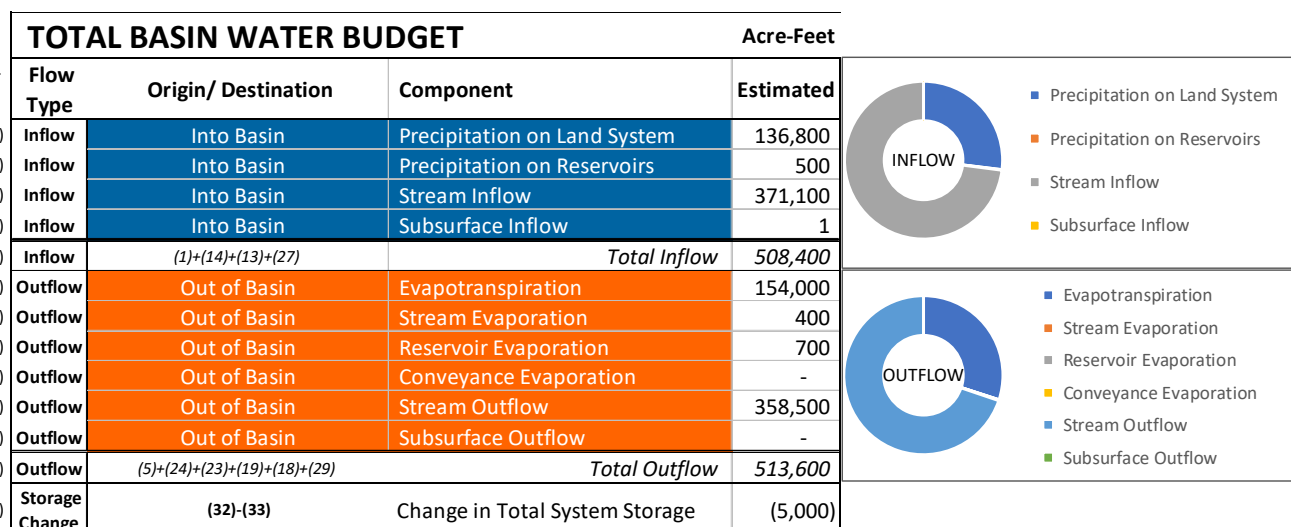

**Figure 6-4 Average Total Basin Water Budget 1984-2018 (Historic)<sup>44</sup>**

<sup>44</sup> To re-emphasize, these are rough estimates and better and more accurate data is needed.



1873 The evapotranspiration value was calculated using land use data (crop and wetland acreages) from DWR  
1874 for 2014 and land use was assumed to be constant throughout the water budget period.

1875 Using the evapotranspiration for irrigated lands, the amount of irrigation from surface water and  
1876 groundwater was determined using 85 percent irrigation efficiency (NRCS 2020) and a respective 35 to  
1877 65 percent split between surface water and groundwater. This surface water – groundwater split was  
1878 determined from input received from local landowners, an assessment of surface water rights (areas  
1879 without surface water rights were assumed to use 100% groundwater), well drilling records (areas  
1880 without wells drilled were assumed to use 100% surface water) and an assessment of aerial imagery to  
1881 see if water source could be determined. For the evapotranspiration associated with the ACWA, the  
1882 habitat largely relies on surface water and very shallow subsurface<sup>45</sup> water that may be interconnected  
1883 with Ash Creek. This surface water delivery<sup>46</sup> was enhanced by implementation of a “pond and plug”  
1884 project in 2012 to keep the water table higher and broader throughout ACWA. The ACWA also has  
1885 three wells that extract groundwater from the deeper aquifers and is applied in portions of the habitat  
1886 during dry months (fall). These groundwater-enhanced habitat areas are indicated by the light blue areas  
1887 within ACWA. Based on the limited area and time groundwater is used to support the habitat, 98 percent  
1888 of the evapotranspiration for ACWA is estimated to come from surface water and 2 percent from  
1889 groundwater. **Figure 6-5** shows the lands with applied water and their water source based on this  
1890 assessment.

1891 Stakeholders have noted that despite the efforts to improve estimates of water source and some input  
1892 from local residents, **Figure 6-5** still contains significant inaccuracies and further refinement of this  
1893 dataset is needed.

1894 The water budget for the three systems (land, surface water and groundwater) are shown on **Figure 6-6**,  
1895 **Figure 6-7** and **Figure 6-8**. The detailed water budget for each year is included in **Appendix 6B**.  
1896 **Appendix 6C** shows graphically how the system water budgets vary over time.

1897 With the land system and surface water system assumed to be in balance, the groundwater system varies  
1898 and reflects the change in water stored in the Basin. This change in storage is shown in **Figure 6-9** and  
1899 is analogous to the change in storage presented in Chapter 5 – Groundwater Conditions which used  
1900 groundwater contours to calculate the change. These two approaches show similar trends, but the  
1901 magnitude of the changes differs slightly, with the groundwater contours showing a cumulative  
1902 overdraft of about 120,000 AF and the water budget indicating about 190,000 AF. This difference may  
1903 indicate that the water budget overdraft may be slightly over estimated or that the average specific yield  
1904 of the Basin is higher.

1905

---

<sup>45</sup> Within about the top 10 feet that plant roots can access.

<sup>46</sup> For the purposes of the water budget, water from Ash Creek is considered “delivered” to the wetland areas.

1906  
1907  
1908



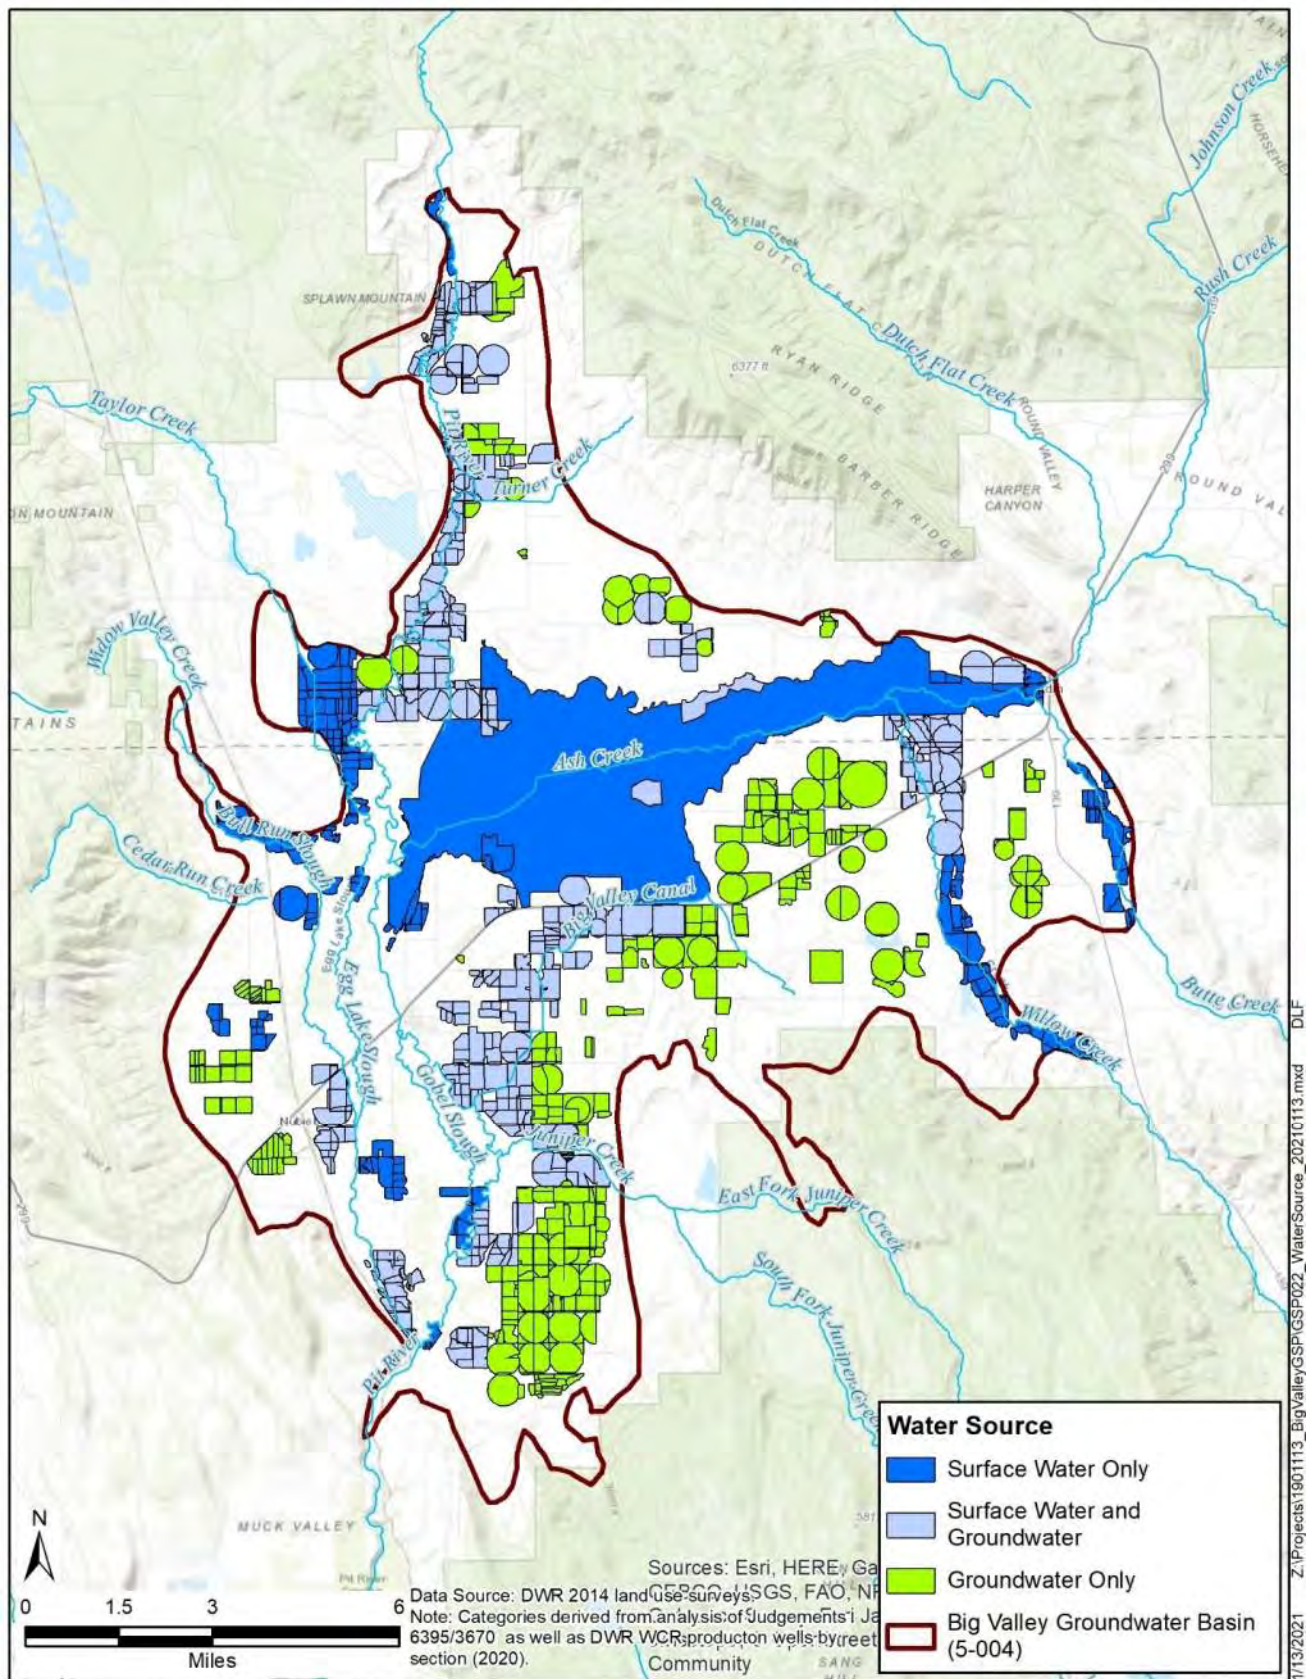


Figure 6-5 Primary Applied Water Sources

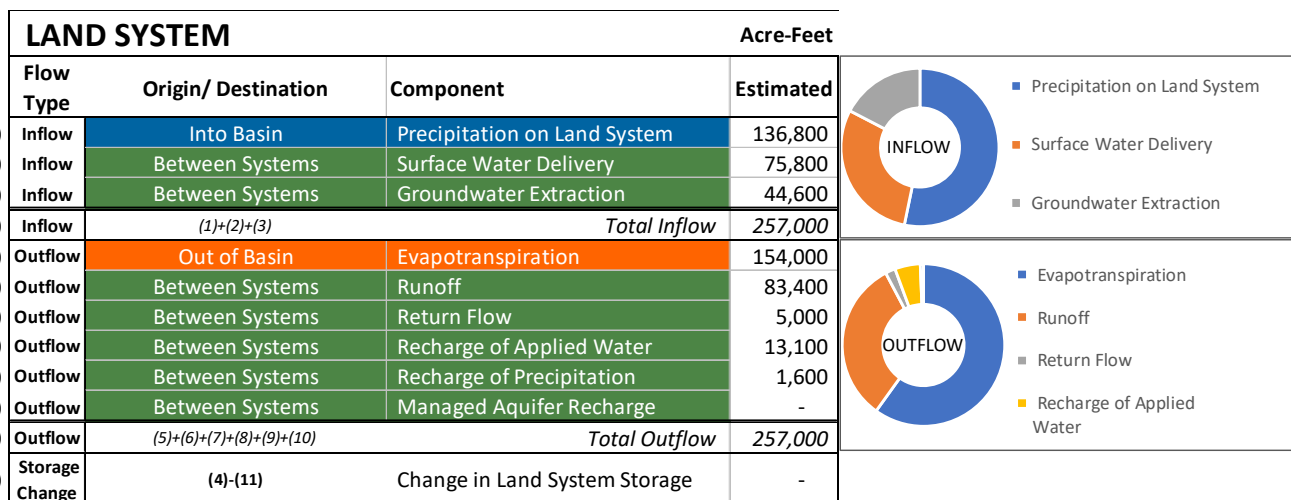


**Figure 6-6 Average Land System Water Budget 1984-2018 (Historic)**

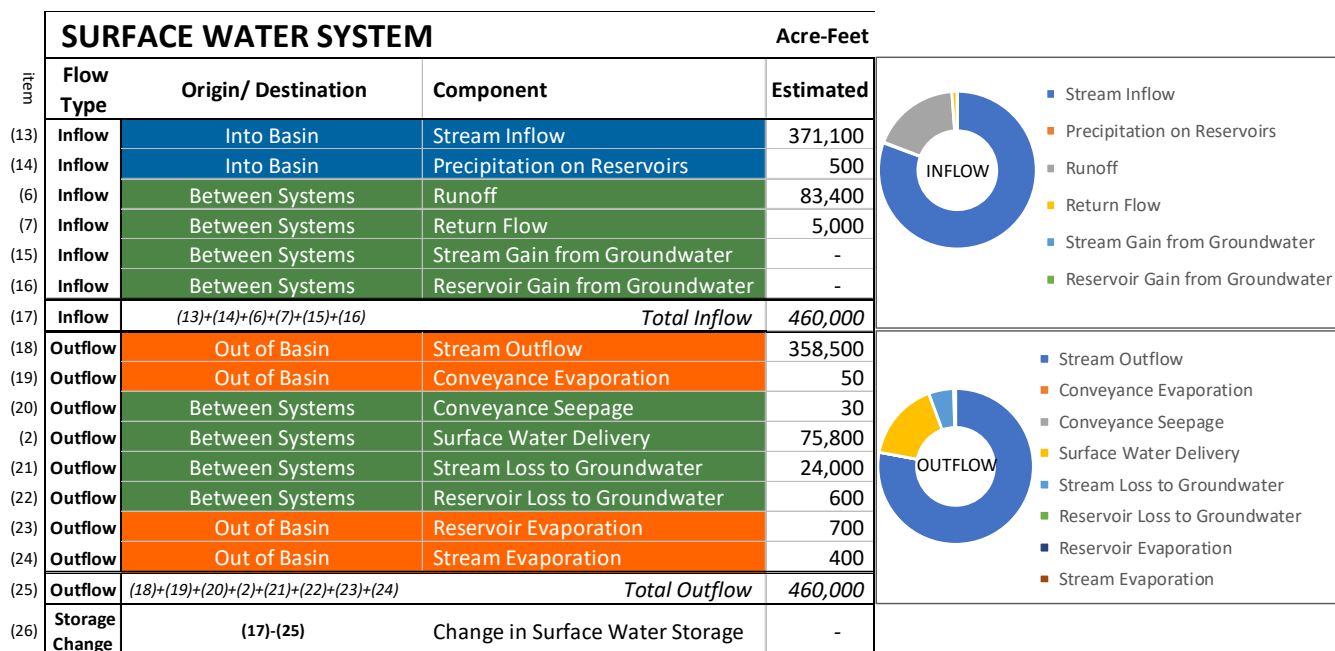


**Figure 6-7 Average Surface Water System Water Budget 1984-2018 (Historic)**



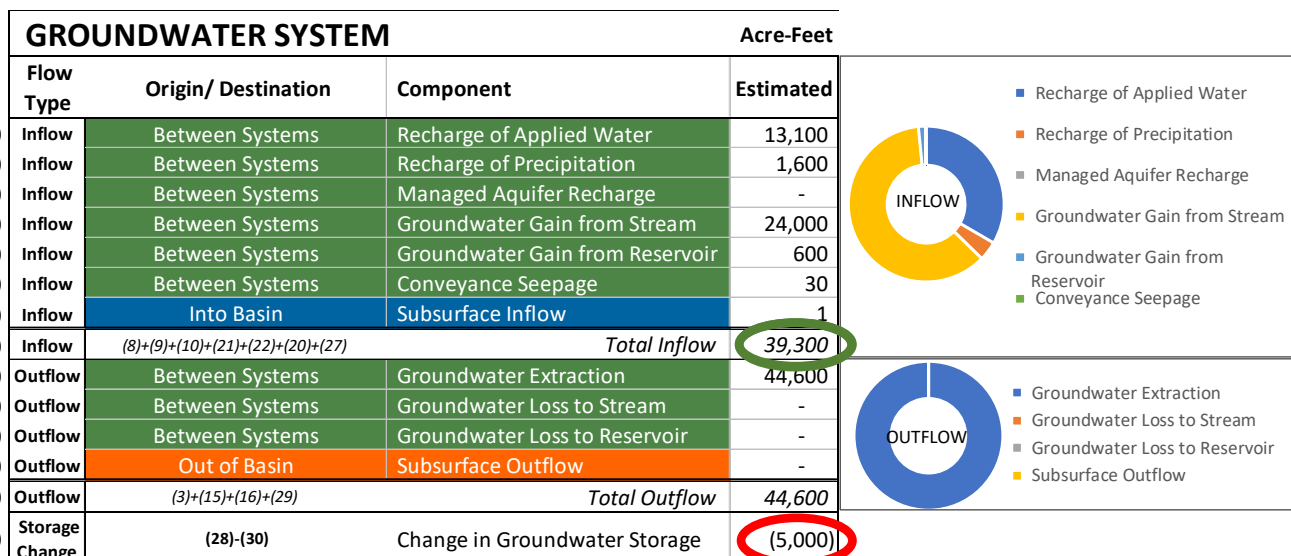

**Figure 6-8 Average Groundwater System Water Budget 1984 to 2018 (Historic)**

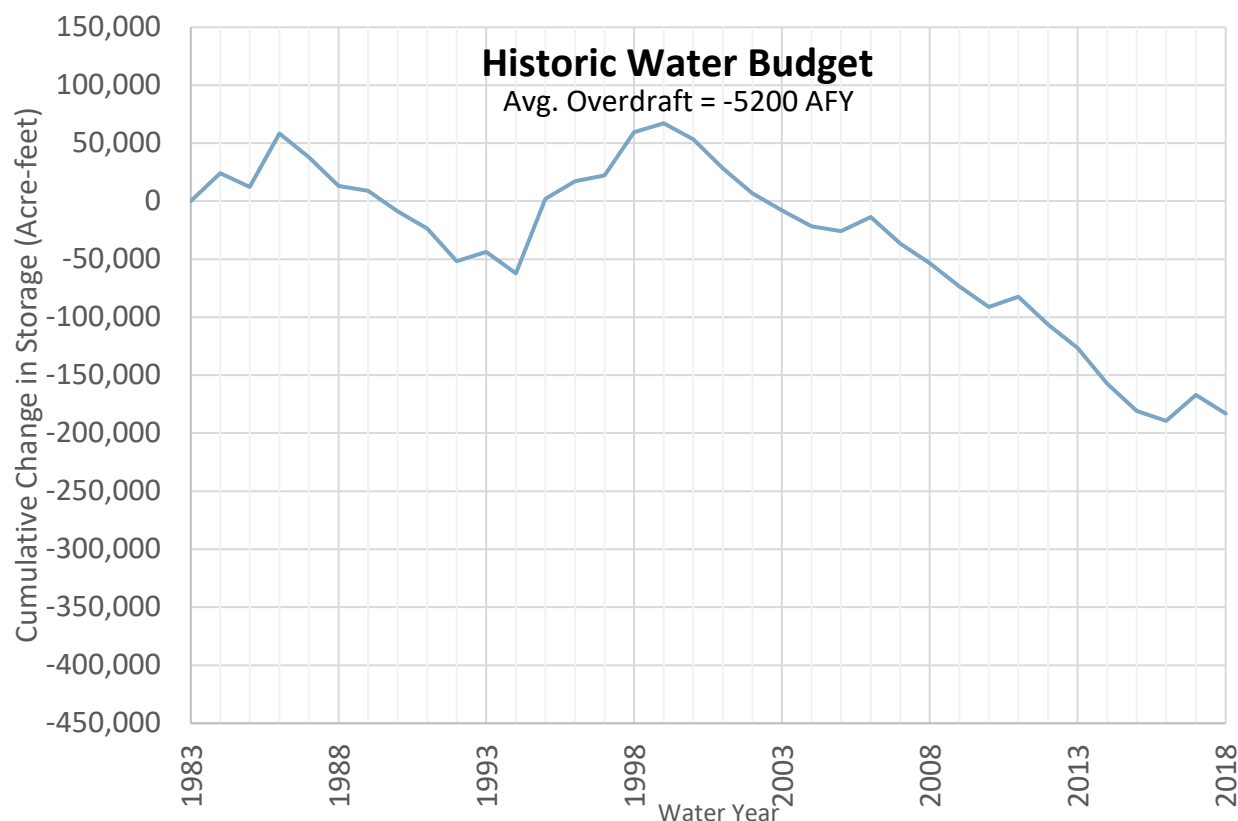

**Figure 6-9 Cumulative Groundwater Change in Storage 1984 to 2018 (Historic)**



1921 The GSP regulations require an estimate of the sustainable yield<sup>47</sup> for the Basin. (§354.18(b)(7)). This  
1922 requirement is interpreted as the average annual inflow to the groundwater system, which for the 34-year  
1923 period of the historic water budget is approximately 39,400 AF, as indicated on item 28 of **Figure 6-8**  
1924 (circled in green) for the groundwater system. The estimate of annual average groundwater use is  
1925 approximately 44,600 AFY.

1926 The regulations also require a quantification of overdraft<sup>48</sup>. (§354.18(b)(5)) For the water budget period  
1927 of 1984 to 2018, overdraft is estimated at approximately 5,200 AFY, shown as the average groundwater  
1928 system change in storage, circled in red on **Figure 6-8** (item 31).

## 1929 **6.3 Current Water Budget**

1930 The current water budget is demonstrated by looking at WY 2018, which is the most recent year of the  
1931 historic water budget.

## 1932 **6.4 Projected Water Budget**

1933 As required by the GSP Regulations, the projected water budget is developed using at least 50 years of  
1934 historic climate data (precipitation, evapotranspiration and streamflow) along with estimates of future  
1935 land and water use. The climate data from 1962 to 2011 was used as an estimate of future climate  
1936 baseline conditions.

### 1937 **6.4.1 Projection Baseline**

1938 The baseline projected water budget uses the most recent estimates of population and land use and keeps  
1939 them constant. **Figure 6-10** shows the average annual future water budget. Long-term overdraft is  
1940 projected to be about 2,100 AFY, which is less than the overdraft for the historic water budget because it  
1941 uses a longer, wetter time-period for its projections. **Figure 6-11** shows the projected cumulative change  
1942 in groundwater storage.

---

<sup>47</sup> The state defines sustainable yield as, “the maximum quantity of water, calculated over a base period representative of long-term conditions in the basin and including any temporary surplus, that can be withdrawn annually from a groundwater supply without causing an undesirable result.” (CWC §10721(w))

<sup>48</sup> DWR defines overdraft as “the condition of a groundwater basin or Subbasin in which the amount of water withdrawn by pumping exceeds the amount of water that recharges the basin over a period of years, during which the water supply conditions approximate average conditions.” (DWR 2016b)

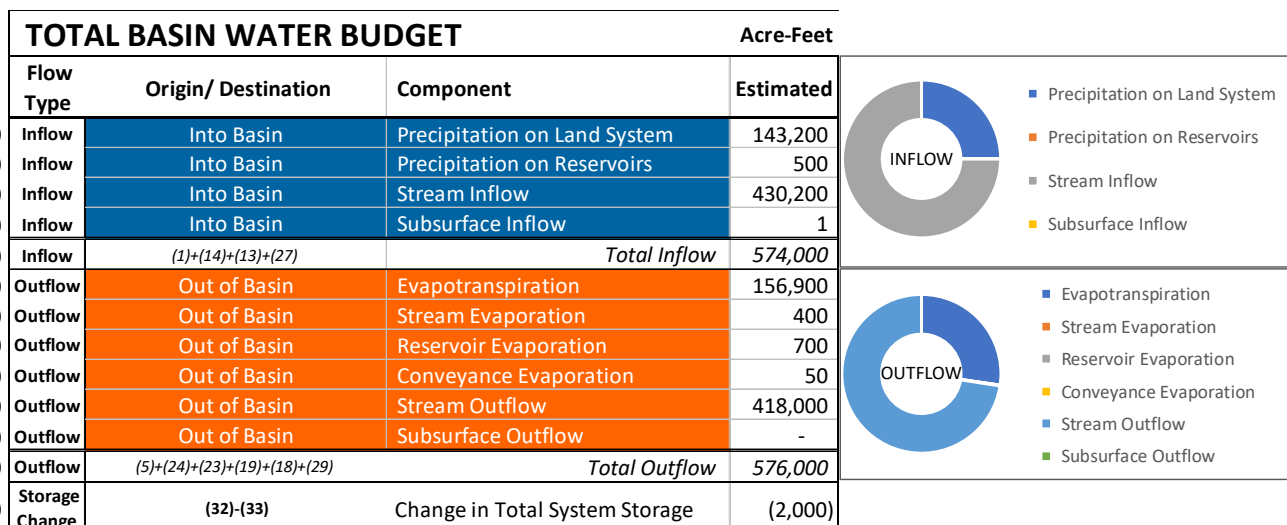


Figure 6-10 Projected Total Basin Water Budget 2019-2068 (Future Baseline)


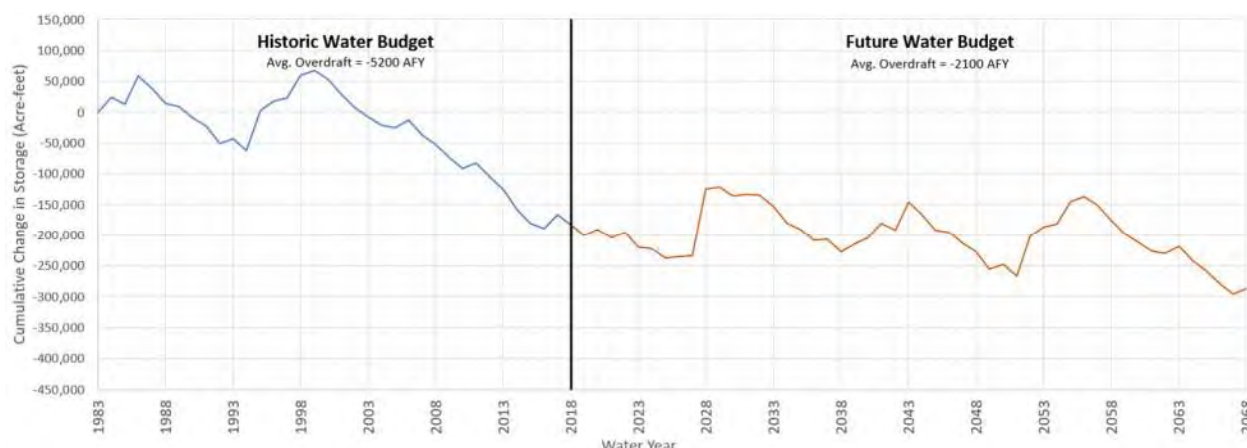


Figure 6-11 Cumulative Groundwater Change in Storage 1984 to 2068 (Future Baseline)


## 6.4.2 Projection with Climate Change

The SGMA regulations require an analysis of future conditions based on a potential change in climate. DWR provides location-specific change factors for precipitation, evapotranspiration and streamflow based on climate change models. While there is variability in the climate change models, if the models are correct, they indicate that the future climate in Big Valley will be wetter and warmer, resulting in more precipitation and more of that precipitation falling in the form of rain rather than snow. The change factors were applied to the baseline water budget and are shown in **Figure 6-12** and **Figure 6-13**. Land use was assumed to be constant, with conditions the same as DWR's 2014 land use survey. Future conditions with climate change projections indicate that the Basin may be nearly in balance, with overdraft of only about 600 AFY.

TOTAL BASIN WATER BUDGET				Acre-Feet
Flow Type	Origin/ Destination	Component	Estimated	
(1) Inflow	Into Basin	Precipitation on Land System	152,200	
(14) Inflow	Into Basin	Precipitation on Reservoirs	600	
(13) Inflow	Into Basin	Stream Inflow	450,400	
(27) Inflow	Into Basin	Subsurface Inflow	-	
(32) Inflow	(1)+(14)+(13)+(27)	Total Inflow	603,000	
(5) Outflow	Out of Basin	Evapotranspiration	165,800	
(24) Outflow	Out of Basin	Stream Evaporation	400	
(23) Outflow	Out of Basin	Reservoir Evaporation	800	
(19) Outflow	Out of Basin	Conveyance Evaporation	-	
(18) Outflow	Out of Basin	Stream Outflow	436,700	
(29) Outflow	Out of Basin	Subsurface Outflow	-	
(33) Outflow	(5)+(24)+(23)+(19)+(18)+(29)	Total Outflow	604,000	
(34) Storage Change	(32)-(33)	Change in Total System Storage	(1,000)	

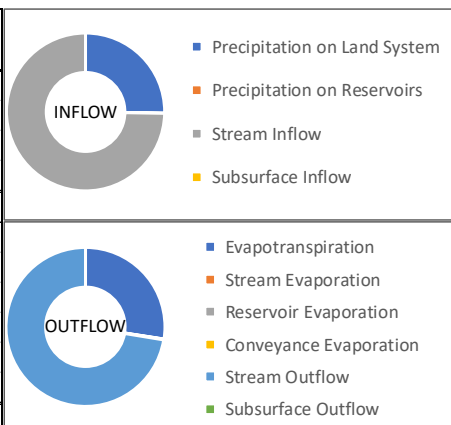

**Figure 6-12 Projected Total Basin Water Budget 2019-2068 (Future with Climate Change)**

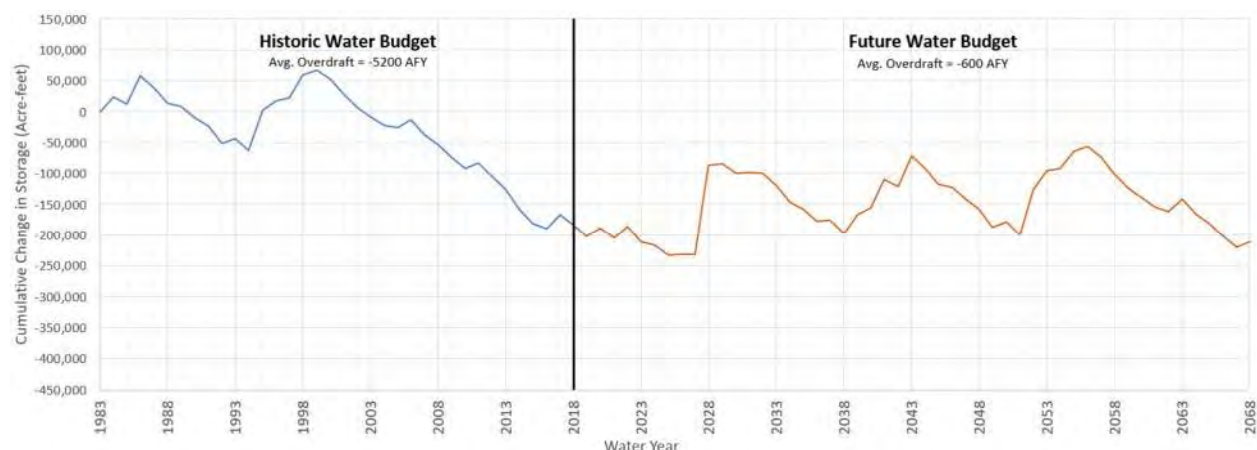

**Figure 6-13 Cumulative Groundwater Change in Storage 1984 to 2068 (Future with Climate Change)**

1967

## 7. Sustainable Management Criteria § 354.20

---

1968  
1969  
1970

This chapter describes criteria and conditions that constitute sustainable groundwater management for the BVGB, also known as Sustainable Management Criteria (or SMC). Below are descriptions of key terms used in the GSP Regulations and described in this chapter:

1971  
1972  
1973  
1974

- **Sustainability goal:** This is a qualitative, narrative description of the GSP’s objective and desired conditions for the BVGB and how these conditions will be achieved. The Regulations require that the goal should, “culminate in the absence of undesirable results within 20 years” (§ 354.22).

1975  
1976

- **Undesirable result:** This is a description of the condition(s) that constitute “significant and unreasonable” effects (results) for each of the 6 sustainability indicators:

1977

- Chronic lowering of *groundwater levels*

1978

- Reduction in *groundwater storage*

1979

- *Seawater intrusion* – Not applicable to BVGB

1980

- Degraded *water quality*

1981

- Land *subsidence*

1982

- Depletion of *interconnected surface water*

1983

- **Minimum threshold (MT):** Numeric values that define when conditions have become undesirable (“significant and unreasonable”). Minimum thresholds are established for representative monitoring sites. Undesirable results are defined by minimum threshold exceedance(s) and define when the Basin conditions are unsustainable (i.e., out of compliance with SGMA).

1984

1985

1986

1987

1988

- **Measurable objective (MO):** Numeric values that reflect the desired groundwater conditions at a particular monitoring site. MOs must be set for the same monitoring sites as the MTs and are not subject to enforcement.

1989

1990

1991

- **Interim milestones (IMs):** Numeric values for every 5 years between the GSP adoption and sustainability (20 years, 2042) that indicate how the Basin will reach the MO (if levels are below the MO). IMs are optional criteria and not subject to enforcement.

1992

1993

1994

**Figure 7-1** shows the relationship of the sustainability goal, undesirable results and minimum thresholds. **Figure 7-2** shows the relationship of the MT, MO and IMs. In addition to these regulatory requirements, some GSAs in other basins have developed “action levels”, applicable when levels are above the MT but below the MO, for each well to indicate where and when to focus projects and management actions. This GSP also has action levels that are described in this chapter.

1995

1996


1997

1998





**Figure 7-1** Illustration of the relationship among the sustainability indicators

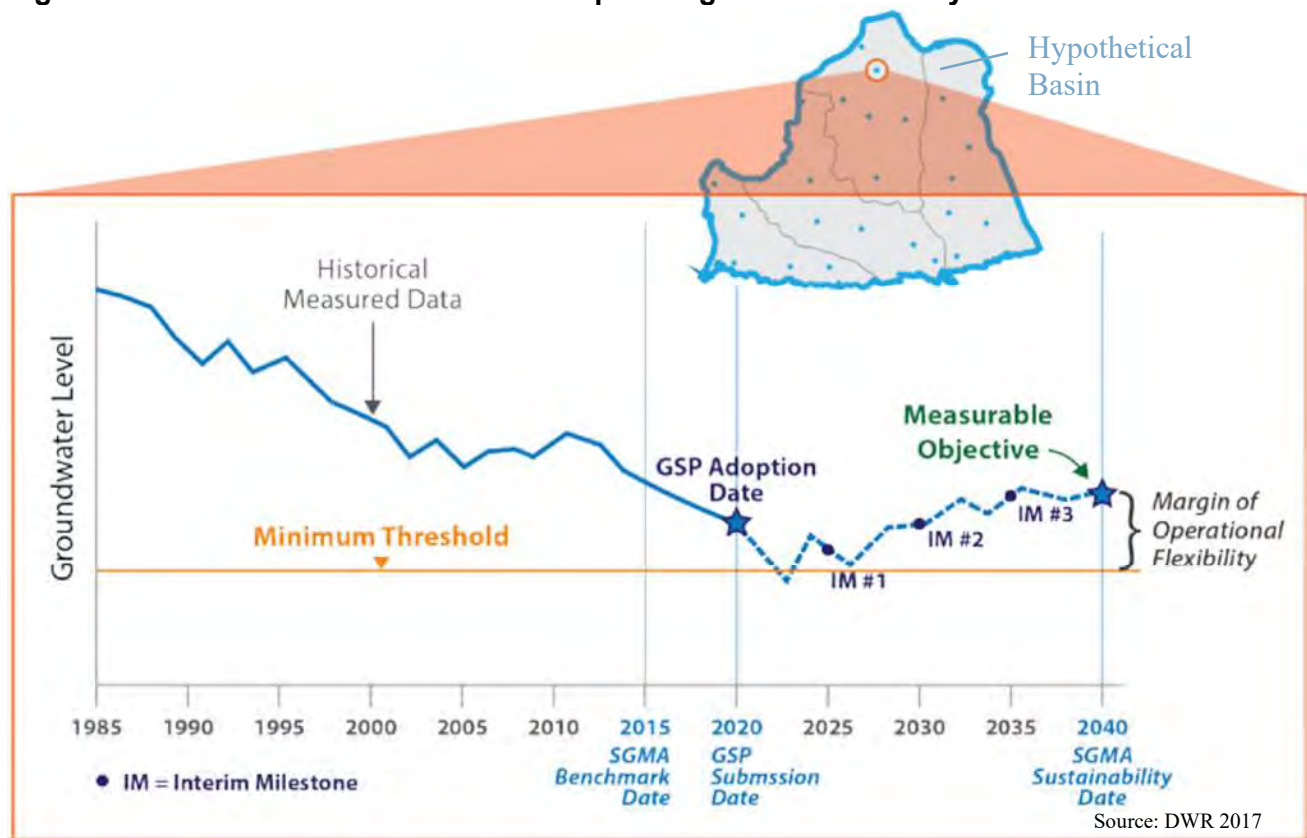

**Figure 7-2** Relationship among the MTs, MOs and IMs for a hypothetical basin

2004 **7.1 Process for Establishing SMCs**

2005 The SMCs detailed in this chapter were developed by the GSAs through consultation with the BVAC.  
2006 The sustainability goal was developed by an ad hoc committee and presented to the larger BVAC, GSA  
2007 staff and the public for review and comment. The BVAC also formed ad hoc committees for each  
2008 sustainability indicator and evaluated the data and information presented in Chapters 1-6. In consultation  
2009 with GSA staff, each committee determined whether significant and unreasonable effects for each  
2010 sustainability indicator have occurred historically and the likelihood of significant and unreasonable  
2011 effects occurring in the future. The sections below reflect the guidance given to the GSAs and  
2012 consultants by the ad hoc committees.

2013 **7.2 Sustainability Goal**

2014 The sustainability goal was presented in Chapter 1 and is reiterated here:

2015 The sustainability goal for the Big Valley Groundwater Basin is to maintain  
2016 a locally governed, economically feasible, sustainable groundwater basin  
2017 and surrounding watershed for existing and future legal beneficial uses with  
2018 a concentration on agriculture. Sustainable management will be conducted  
2019 in context with the unique culture of the basin, character of the community,  
2020 quality of life of the Big Valley residents and the vested right of agricultural  
2021 pursuits through the continued use of groundwater and surface water.

2022 **7.3 Undesirable Results**

2023 Undesirable results must be described for each sustainability indicator. To comply with §354.26 of the  
2024 Regulations, the narrative for each applicable indicator includes:

- 2025 • *Description* of the “significant and unreasonable” conditions that are undesirable
- 2026 • Potential *causes* of the undesirable results
- 2027 • *Criteria* used to define when and where the effects are undesirable
- 2028 • Potential *effects* on the beneficial uses and users of groundwater, on land uses and property
- 2029 interests

2030 Sustainability indicators that have not experienced undesirable results and are unlikely to do so in the  
2031 future describe the justification for non-applicability of that Sustainability Indicator.

2032 **7.3.1 Groundwater levels**

2033 For this section, it is necessary to understand that it is natural (and expected) that groundwater levels  
2034 will rise and fall during a particular year and over the course of many years. Chapters 4 through 6  
2035 describe the nature of groundwater levels throughout the Basin and how levels have changed over time.  
2036 These chapters conclude that many areas of the Basin have seen no significant change. Other areas saw a  
2037 lowering of levels in the late 1980’s and early 1990’s, recovery during the wet period of the late 1990’s  
2038 and lowering water levels since 2000. Groundwater usage has only seen minor increases since 2000,  
2039 therefore the declines are more related to climatic conditions than to a lack of stewardship of the  
2040 resource. As illustrated in **Figure 5-4**, water levels in 12 wells have shown stable (less than 1 foot of

2041 change) or rising water levels and 9 wells have shown declining trends with only three of those wells  
2042 declining by more than 2 feet per year.

2043 This context is given both to set the stage for discussion of undesirable results and to illustrate that water  
2044 levels overall have not declined significantly. This re-emphasizes the point raised in Section 1.3 that the  
2045 GSAs believe the Basin should be ranked as low priority. As mentioned previously, the GSAs also  
2046 believe its ranking of medium priority is due in large part to the DWR's scoring of all basins with water  
2047 level declines with a fixed number of points rather than considering the severity of declines. Big Valley  
2048 has seen only minor declines in comparison to the widespread decline of hundreds of feet experienced  
2049 elsewhere in the state. The Basin has demonstrated that it can recover during wet climatic cycles (e.g.,  
2050 late 1990's) as shown in **Figure 5-7**. There have not been widespread reports of issues or concerns  
2051 regarding groundwater levels from the residents of the Basin (whether agricultural producers or  
2052 domestic users or others). The GSAs contend that Big Valley's medium priority ranking is based on  
2053 concerns raised by DWR based on isolated wells that experienced limited decline during a below  
2054 average climatic cycle.

2055 Therefore, undesirable results have not occurred in the past and the measurable objective established in  
2056 this section is set at the fall 2015 groundwater level for each well in the monitoring network (*see*  
2057 Chapter 8 – Monitoring Networks). Fall 2015 is the most recent measurement prior to the adoption of  
2058 this GSP and is generally the lowest groundwater level throughout the period of record. Since these  
2059 levels are assumed to be economically feasible for agricultural uses, this level is a reasonable proxy for  
2060 the desired conditions.

## 2061 **Description**

2062 This section describes undesirable results for groundwater levels by defining significant and  
2063 unreasonable impacts on beneficial uses. As described in Section 1.1 and emphasized in the  
2064 Sustainability Goal, agricultural production is of paramount importance due to its economic, cultural and  
2065 environmental benefits. For agricultural pursuits to be viable, growers need a large margin of operational  
2066 flexibility (*refer to Figure 7-2*) so that crops can be irrigated even during dry years. Accordingly, and  
2067 consistent with the goal, 140 feet below the 2015 groundwater level was established as the minimum  
2068 threshold.

2069 Consistent with the Sustainability Goal, significant and unreasonable lowering of groundwater levels is  
2070 defined as the level where the energy cost to lift groundwater exceeds the economic value of the water  
2071 for agriculture. Through discussions in BVAC ad hoc committee meetings among committee members,  
2072 local well driller (Conner 2021) and the Lassen County Farm Advisor (Lile 2021) a depth of 140 feet  
2073 below fall 2015 levels was determined to be the depth at which groundwater pumping becomes  
2074 economically unfeasible for agricultural use.

2075 The increase in horsepower required to pump from a well approaching the MT would result in an  
2076 increased cost of \$15 per acre foot of water using Surprise Valley Electric (SVE) rates and \$30 per acre  
2077 foot using Pacific Gas and Electric (PG&E) rates (Conner 2021). Calculated on a per ton basis, the  
2078 increased cost of 140-foot water level decline translates to about \$6.50 per ton using SVE power and  
2079 \$13 per ton with PG&E. (*see Appendix 7A*).

2080 Total operating costs for a typical grass hay farm in the intermountain area are estimated to be \$119 per  
2081 ton. Total cash costs, not counting land and depreciation are estimated at \$138 per ton of hay produced  
2082 (Orloff et al 2016). Considering hay prices have been in the \$200 per ton range (U.S. Department of

2083 Agriculture [USDA], Agricultural Marketing Service), the potential increase in required pumping power  
2084 reduces return over cost by 10 to 20 percent.

2085 To produce grain hay pumping costs are less because less water is required. Because the relative value  
2086 of grain hay, approximately \$120 per ton, is also much less, the overall impact to economic returns is  
2087 equal if not greater. Thus, the agricultural production economic threshold for well levels is determined  
2088 to be 140 feet below the fall 2015 baseline.

2089 While the viability of agriculture is of paramount importance, it is acknowledged that if water levels  
2090 approach the MT, some wells in the Basin may go dry. **Figure 7-3** shows an assessment of the depths of  
2091 wells throughout the Basin based on DWR well logs<sup>49</sup>. While this dataset has inaccuracies, it gives a  
2092 sense of the impact of lowering water levels on the different well types and indicates that lowering of  
2093 water levels throughout the Basin to the MT could result in a significant percentage of wells going dry.  
2094 Many of the shallower wells are likely the oldest wells in the Basin and may be unused or abandoned.

2095 **Figure 7-4** shows that domestic well density is not evenly distributed throughout the Basin and that  
2096 representative wells are located near the areas of highest domestic well density

2097 It is also acknowledged that utilizing the margin of operational flexibility by agriculture could have  
2098 impacts on users of surface water if it is determined to be interconnected. This potentially includes  
2099 groundwater dependent ecosystems and surface water rights holders. Discussion of this effect is  
2100 discussed in Section 7.3.6 – Interconnected Surface Water, below.

## 2101 **Causes**

2102 Long term sustainability of groundwater is achieved when pumping and recharge are measured and  
2103 balanced over multiple wet and dry cycles. When the groundwater pumping exceeds recharge,  
2104 groundwater levels may decline. Similarly, when recharge exceeds pumping, groundwater levels may  
2105 rise. Lower than average precipitation and snowpack over the last 20 years has resulted in declining  
2106 groundwater levels in some parts of the Basin. A similar period of declining water levels occurred in the  
2107 late 1980's through the middle of the 1990's. In the late 1990's, several years in a row of above average  
2108 precipitation caused groundwater levels to fully recover. Future wet periods, enhanced recharge,  
2109 increased storage and addressing data gaps will likely cause groundwater levels to experience a similar  
2110 recovery and maintain balance within the Basin.

## 2111 **Criteria**


2112 The undesirable result criterion for the groundwater level sustainability indicator occurs when the  
2113 groundwater level in one-third of the representative monitoring wells drop below their minimum  
2114 threshold for 5 consecutive years.

2115 In addition to the above definition of undesirable result it is recognized that, although groundwater  
2116 levels naturally fluctuate, some actions may be justified even before levels fall below the minimum  
2117 threshold at a particular representative well. Thus, the GSAs are defining an “action level” to identify  
2118 areas within the Basin where management actions and projects are needed (*see* Chapter 9 – Projects and  
2119 Management Actions). The definition of the term “Action Level” is also at the discretion of the GSAs.  
2120 “Action Levels” and the associated protocol are defined as follows:


---

<sup>49</sup> This is an inaccurate dataset, but the best well data available to the GSAs.



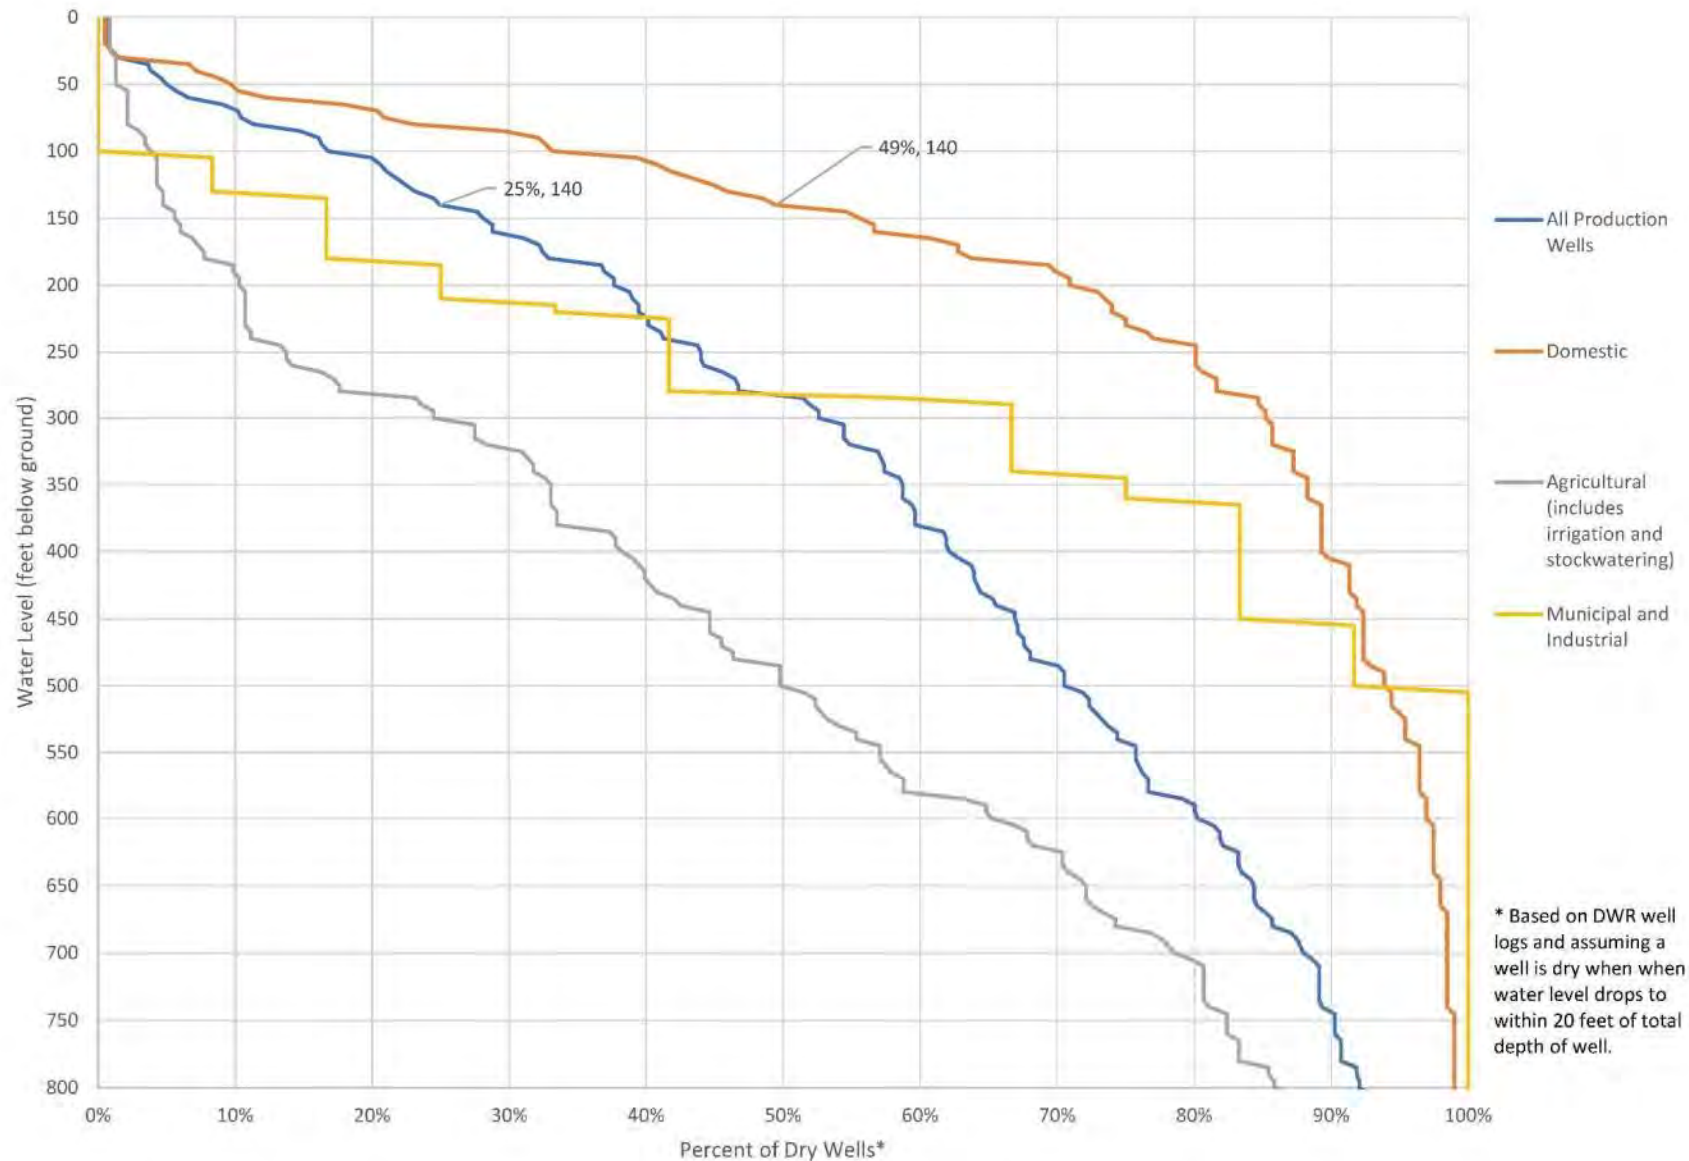

**Figure 7-3 Analysis of Wells That Could Potentially Go Dry at Different Depths**

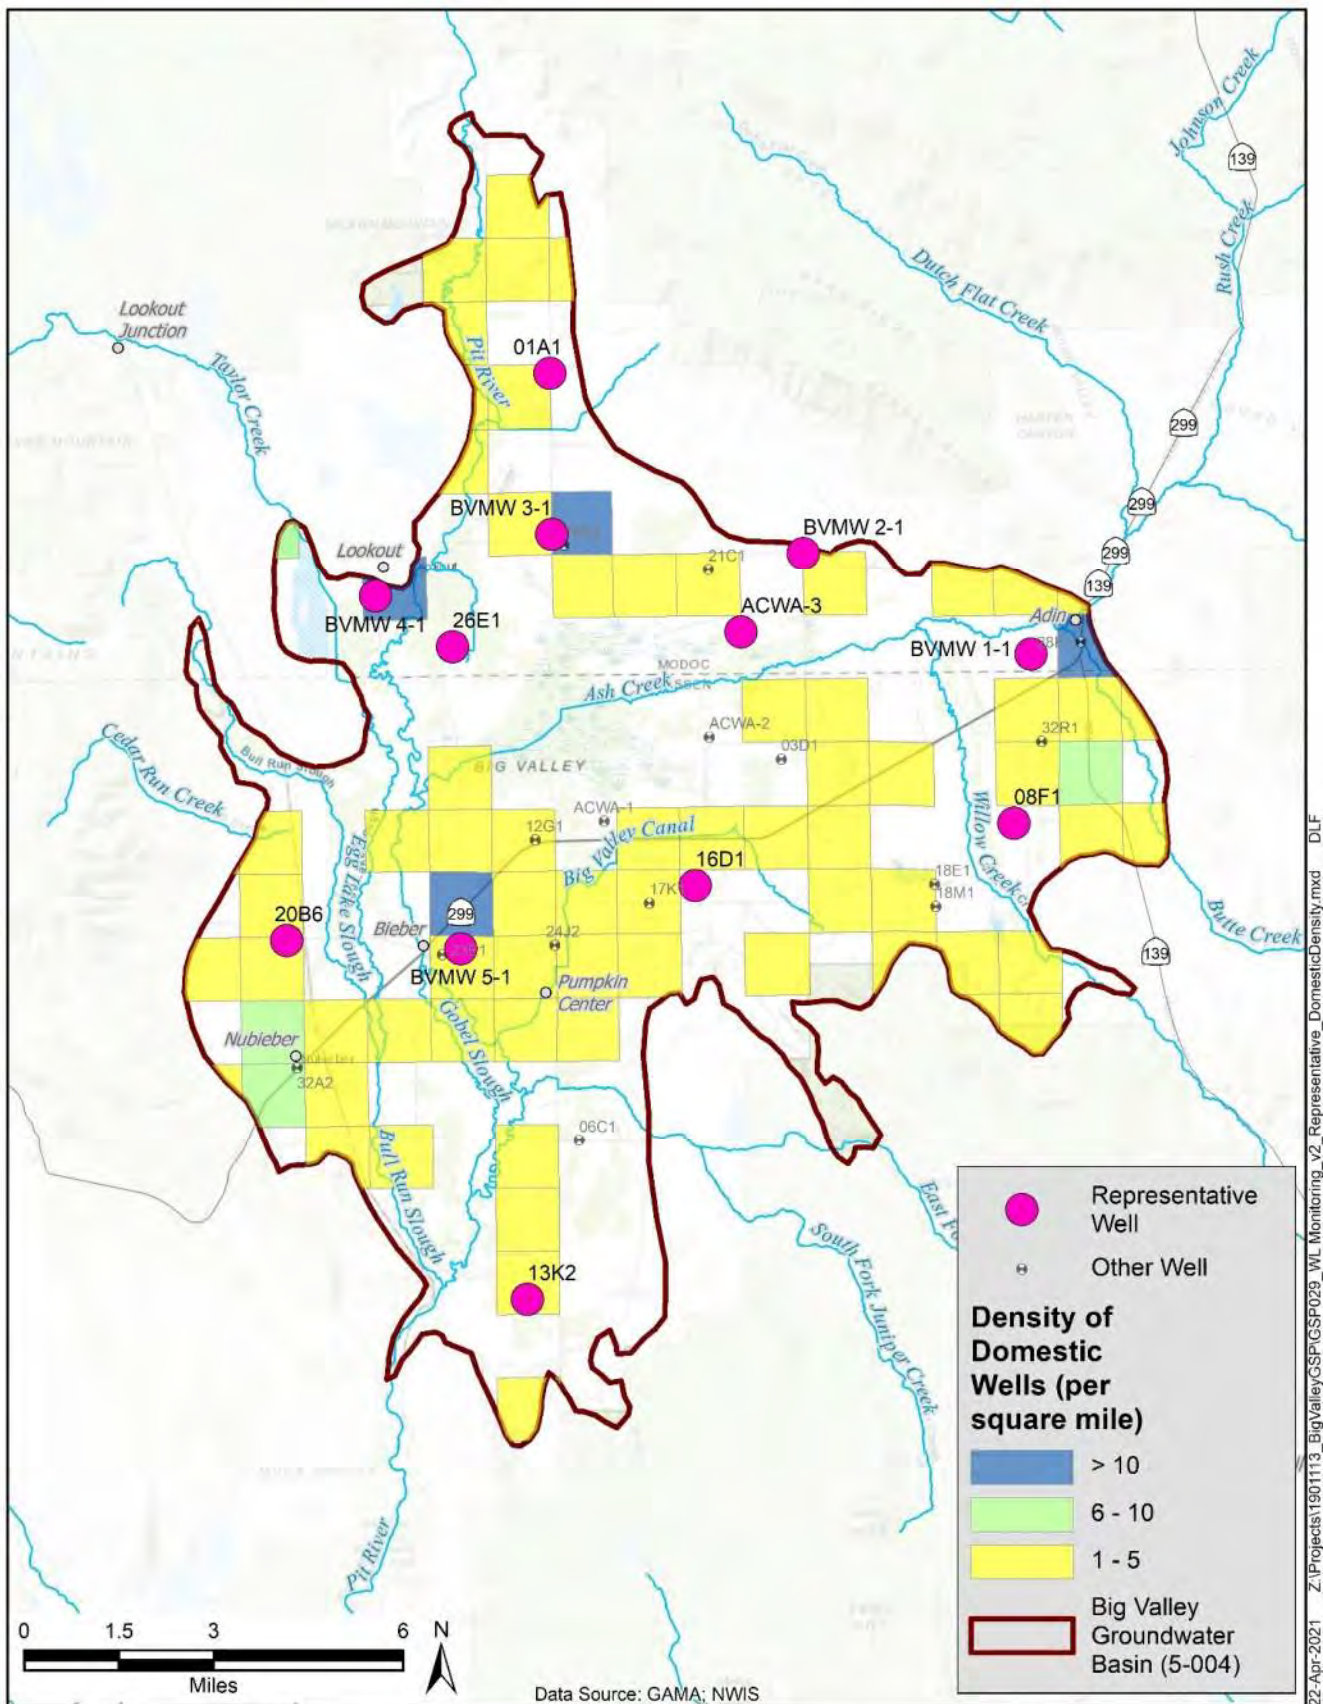

**Figure 7-4 Domestic Well Density and Representative Groundwater Level Wells**

2126 “Action Level”: When monitoring within the established monitoring network identifies the following  
2127 ground water level trends, targeted projects or management actions may be considered, at the discretion  
2128 of the GSAs when any of the following occur:

- 2129 • 1/3 of the representative monitoring wells in the Basin decline below the measurable objective  
2130 (e.g., the fall 2015 baseline levels) for 5 consecutive years.
- 2131 • Water levels at a 1/3 of the representative wells decline 3 times the average historic decline that  
2132 well experienced between 2000 and 2018 as shown in **Appendix 5A**.
- 2133 • Water levels at 1/3 of the representative wells decline more than 5 feet in 1 year.

## 2134 **Effects**

2135 As discussed above, if groundwater levels were to fall below the minimum threshold, pumping costs  
2136 would render agricultural pursuits in the affected areas unviable. Without agriculture, the unique culture,  
2137 character of the community and quality of life for Big Valley residents would be drastically changed.  
2138 Reductions in agriculture would also affect wildlife who use irrigated lands as habitat, breeding grounds  
2139 and feeding grounds.

2140 Low water levels could cause wells to go dry, requiring deepening, redrilling, or developing a new water  
2141 source. However, the long-term costs of agriculture becoming unviable causing reduced property values  
2142 and tax revenue outweigh the short-term costs of investing in deeper wells or alternative water supplies.  
2143 The potential effect would be offset by a shallow well mitigation program, which would apply to wells  
2144 that have gone dry because water levels have fallen below the measurable objective. Substandard (e.g.,  
2145 hand-dug wells) would not qualify for mitigation. Mitigation would rely on a “good neighbor” practice  
2146 already demonstrated in the Basin and would leverage any state or federal funding that may be secured.  
2147 For example, the USDA Rural Development has offered low interest loans to drill new or replace  
2148 existing wells. Additionally, prior to the first 5-year update, a program will be developed (*see* Chapter 9  
2149 – Projects and Management Actions) to cover a portion of the cost if new residential wells must be  
2150 drilled because groundwater levels drop below the measurable objective. Any such program would  
2151 apply to legally established wells and would be dependent on state and federal funding. Criteria will  
2152 likely include well depth, screen interval, age of the well, distribution of declining wells (e.g., is it  
2153 isolated) and other factors.

## 2154 **7.3.2 Groundwater Storage**

2155 The discussion and analysis regarding groundwater levels is directly related to groundwater storage. The  
2156 groundwater levels for the fall 2015 measurement for each of the wells in the monitoring network (*see*  
2157 Chapter 8 – Monitoring Network) is established as the measurable objective for groundwater storage  
2158 (identical to the groundwater level measurable objective). The measurable objective is established at this  
2159 level for storage for the same reasons discussed in the groundwater levels section. In summary, through  
2160 public outreach, coordination with the BVAC and analysis of available data, the GSAs have determined  
2161 that groundwater storage has not reached significant and unreasonable levels historically. Like the  
2162 groundwater levels minimum threshold, the minimum threshold for groundwater storage is the same as  
2163 for groundwater levels. The minimum threshold is set at this level for the same reasons discussed in the  
2164 groundwater levels section.

2165 Chapter 5 contains estimates of groundwater storage from 1983 to 2018 using groundwater contours  
2166 from each year and an assumption that the definable bottom of the groundwater basin is 1,200 feet bgs.

2167 During this period, storage has fluctuated between a high of about 5,390,000 AF in fall 1983 (and 1999)  
2168 to a low of 5,214,000 AF in fall 2015.

2169 **Description**

2170 Like groundwater levels, significant and unreasonable reduction in groundwater storage is defined as a  
2171 level that results in the energy cost to lift the groundwater exceeding the economic value of the water for  
2172 agriculture or a significant number of domestic wells are affected.

2173 **Justification of Groundwater Elevations as a Proxy**

2174 Again, the use of groundwater elevations as a substitute metric for groundwater storage is appropriate  
2175 because change in storage is directly correlated to changes in groundwater elevation.

2176 **Causes**

2177 Long-term sustainability of groundwater is achieved when pumping and recharge are measured and  
2178 balanced over multiple wet and dry cycles. When the groundwater pumping exceeds recharge,  
2179 groundwater levels may decline. Similarly, when recharge exceeds pumping, groundwater levels may  
2180 rise. Lower than average precipitation and snowpack over the last 20 years has resulted in declining  
2181 groundwater levels in some parts of the Basin. A similar period of declining water levels occurred in the  
2182 late 1980’s through the middle of the 1990’s. In the late 1990’s, several years in a row of above average  
2183 precipitation caused groundwater levels to fully recover. Future wet periods, enhanced recharge,  
2184 increased storage and addressing data gaps will likely cause groundwater storage to experience a similar  
2185 recovery and maintain balance within the Basin.

2186 **Criteria**

2187 As said, the measurable objective and the minimum threshold for groundwater levels and groundwater  
2188 storage is the same. The monitoring network described in Chapter 8 – Monitoring Networks is also the  
2189 same for both groundwater levels and storage. As such, the GSAs will use the voluntary and  
2190 discretionary “Action Level” protocol described in the groundwater level section as a technique to  
2191 improve management of groundwater when groundwater storage is below the measurable objective but  
2192 above the minimum threshold.

2193 **Effects**

2194 Please *refer to* the “Effects” discussion in the groundwater levels section of this chapter, as the content  
2195 in both sections is the same.

2196 **7.3.3 Seawater Intrusion**

2197 §354.26(d) of the GSP Regulations states that “An agency that is able to demonstrate that Undesirable  
2198 Results related to one or more sustainability indicators are not present and are not likely to occur in a  
2199 basin shall not be required to establish criteria for undesirable results related to those sustainability  
2200 indicators.”



2201 The BVGB is not located near an ocean and ground surface elevations are over 4000 feet above msl.  
2202 Seawater intrusion is not present and is not likely to occur. Therefore, SMCs are not required for  
2203 seawater intrusion as per §354.26(d) cited above.

### 2204 **7.3.4 Water Quality**

2205 As described in Chapter 5 – Groundwater Conditions, the groundwater quality conditions in the Basin  
2206 are over all excellent (DWR 1963, Reclamation 1979). After a review of the best available data on water  
2207 quality in the Basin, it was concluded that all the constituents which were elevated above suitable  
2208 thresholds are naturally occurring. There has been no identifiable increase in the level of concentrations  
2209 over time, and several constituents have indications of improvement in recent decades compared to  
2210 concentrations in the 1950's and 1960's (e.g., Arsenic and Manganese **Figures 5-8 and 5-10**).

2211 While the water quality is considered excellent in the Basin, water quality is an important issue to both  
2212 agricultural and domestic users within the Basin and they are working in coordination to retain the  
2213 existence of excellent water quality. The multitude of programs which regulate water quality is listed in  
2214 Section 3.5.

2215 In addition, Big Valley residents are voluntarily participating and coordinating in activities that will  
2216 ensure continued excellent quality water in the Basin. Over the last 15 years, landowners have drilled  
2217 stock watering wells as part of the EQIP program to protect water quality in streams. In 2018, the Upper  
2218 Pit River Watershed IRWMP 2017 Update was completed. This document conducted a thorough  
2219 analysis of the entire Pit River Watershed and found no water quality issues within the BVGB.  
2220 Agricultural users are also proactively managing water quality *via* partnerships with agencies such as the  
2221 NRCS to implement on site programs which are designed to improve water quality as detailed in  
2222 Chapter 9 – Projects and Management Actions. As described in Section 1.1 – Introduction, agricultural  
2223 users primarily grow low impact crops with no till methods and little application of fertilizer or  
2224 pesticides. Domestic water users are also assisting in maintaining good water quality within the Basin  
2225 through community action. Through the civic process, Big Valley residents were engaged in the  
2226 development of the Modoc and Lassen County ordinances to deter unlicensed outdoor marijuana  
2227 growers and the unpermitted use of pesticides and rodenticides which may make their way into the  
2228 groundwater and surface water. The domestic water users are also actively seeking to assist in code  
2229 enforcement and reduce the amount of harmful debris within the Big Valley communities that may  
2230 cause water quality issues. Public outreach through the offices of Public Health, Environmental Health  
2231 and the Regional Recycling Group Recycle Used Oil and Filter Campaign will assist in maintaining  
2232 excellent water quality. These outreach efforts are further discussed in Chapter 9 – Projects and  
2233 Management Actions.

2234 Due to the existence of excellent water quality in the Basin, significant amount of existing water quality  
2235 monitoring, generally low impact land uses and a robust effort to conduct conservation efforts by  
2236 agricultural and domestic users, per §354.26(d), SMCs were not established for water quality because  
2237 Undesirable Results are not present and not likely to occur. At the 5-year updates of this GSP, data from  
2238 various existing programs, including the RWQCB sites, public supply wells (regulated by the Division  
2239 of Drinking Water) and electrical conductivity transducers installed by the GSAs at three wells (BVMW  
2240 1-2, 4-1 and 5-1) will be assessed to determine if degradation trends are occurring in the principal

2241 aquifer. In addition, water quality impacts resulting from projects and management actions will be  
2242 evaluated during their planning and implementation. At the 5-year update, SMCs will be considered  
2243 only if the trends indicate that undesirable results are likely to occur in the subsequent 5 years.

### 2244 **7.3.5 Land Subsidence**

2245 As detailed in Section 5.5, little to no measurable subsidence is occurring in the Basin. Furthermore,  
2246 causes of micro-subsidence identified by the InSAR data presented in Section 5.5 are likely due to either  
2247 agricultural land leveling operations or natural geologic activity. The specific identified areas of  
2248 subsidence are considered acceptable and necessary agricultural operations to promote efficient  
2249 irrigation. Similar situations may occur throughout the Basin and if identified through InSAR will be  
2250 investigated. As detailed in Chapter 5, very minor areas of land subsidence have been observed in the  
2251 Basin by the Continuous Global Positioning System site near Adin (CGPS P347, -0.6 inch over  
2252 11 years) and by the InSAR data provided by DWR (maximum of -3.3 inches over 4 years). The cause  
2253 of these downward displacements has not been determined conclusively, but due to the widespread  
2254 nature is likely natural and unavoidable due to the movement of Tectonic plates.

2255 Given the lack of significant subsidence and the fact that some subsidence is acceptable to stakeholders  
2256 in the absence of impacts on infrastructure (roadways, railroads, conveyance canals and wells among  
2257 others), no undesirable results have occurred and none are likely to occur. Therefore, per §354.26(d),  
2258 SMCs were not established for subsidence. At the 5-year updates of this GSP, data from GPS P347 and  
2259 InSAR data provided by DWR will be assessed for notable subsidence trends that can be correlated with  
2260 groundwater pumping. SMCs and undesirable results for subsidence will be established at the 5-year  
2261 update only if trends indicate significant and unreasonable subsidence is likely to occur in the  
2262 subsequent 5 years.

### 2263 **7.3.6 Interconnected Surface Water**

2264 The rivers and streams of the Basin are an important and vital resource for all interested parties. The  
2265 agricultural industry has an extensive history of surface water use in the Basin and has operated for over  
2266 a century. Many of the surface water rights on farms and ranches are pre-1914 water rights. All surface  
2267 water flowing in the Basin during irrigation season is fully allocated. For all interested parties, there is  
2268 need for better tracking of surface water allocations.

2269 Section 5.6 – Interconnected Surface Water presents the available information related to interconnected  
2270 surface water. It is nearly impossible to quantify surface water depletion impact based on flow alone,  
2271 even in an area where there is good data, such as pumping quantity, deep aquifer groundwater elevation,  
2272 precipitation and surface flow. Many of these criteria are current data gaps in the Basin, particularly the  
2273 variation in precipitation and flow across the Basin. Uncertainty in the amount of surface water entering  
2274 the Basin and the unpredictability of weather patterns has already been established and will continue to  
2275 be a barrier. Pumping data in the Basin is also a data gap as there is no current monitoring system which  
2276 annually measures the amount of water pumped. The connection between upland recharge areas and the  
2277 unique volcanic geologic features surrounding the Basin are mostly unknown and make understanding  
2278 the connectivity of surface and groundwater very difficult if not impossible.

2279 Furthermore, the number of wells located next to streams and the river in the Basin are not quantified.  
2280 While Chapter 5 – Groundwater Conditions details the streams in Big Valley which *may* be  
2281 interconnected by a “...continuous saturated zone to the underlying aquifer and the overlying surface  
2282 water...” (DWR 2016c), however, there is currently no evidence to support interconnected surface  
2283 water. Therefore, there is a lack of evidence for interconnection of streams. **Figure 5-18** overlays the  
2284 general direction(s) of groundwater flow around the Basin in relation to the major perennial streams.  
2285 Also shown is the general direction of flow determined from the newly constructed well clusters near  
2286 Adin and Lookout. The remaining clusters were constructed later and do not yet have a sufficient period  
2287 of data to determine flow directions with certainty. The newly constructed monitoring wells will  
2288 continue to gather data on whether there is any evidence of interconnected surface water.

2289 Chapter 4 – Hydrogeological Conceptual Model, identified data gaps related to the effect of Ash Creek,  
2290 Pit River and smaller streams on recharge. These data gaps may partially be filled once adequate data  
2291 from the five monitoring well clusters are collected. Scientific research related to groundwater and  
2292 surface water will improve over time. As this science is made available, the GSAs will work to locate  
2293 funding for improved data depending on available staffing and financial resources.

2294 SMCs were not established for interconnected surface water because there is insufficient evidence to  
2295 determine if Undesirable Results are present or likely to occur. At the 5-year updates of this GSP, data  
2296 from newly established well clusters, new and historic stream gages and the monitoring network detailed  
2297 in Chapter 9 – Projects and Management Actions, will be assessed to determine if undesirable trends are  
2298 occurring in the principal aquifer. At the 5-year update, SMCs will be considered only if the trends  
2299 indicate that undesirable results are likely to occur in the subsequent 5 years.

## 2300 **7.4 Management Areas**

2301 Management areas are not being established for this GSP.

## 2302 8. Monitoring Networks § 354.34

---

### 2303 8.1 Monitoring Objectives

2304 This chapter describes the monitoring networks necessary to implement the BVGB GSP. The  
2305 monitoring objectives under this GSP are twofold:

- 2306 • to characterize groundwater and related conditions to evaluate the Basin’s short-term, seasonal  
2307 and long-term trends related to the six sustainability indicators
- 2308 • to provide the information necessary for annual reports, including water levels and updates to the  
2309 water budget<sup>50</sup>

2310 The sections below describe the different types of monitoring required to meet the above objectives,  
2311 including groundwater levels, groundwater quality, subsidence, streamflow, climate and land use. Each  
2312 type of monitoring relies on existing programs not governed by the GSAs and therefore the monitoring  
2313 networks described in this chapter are subject to change if the outside agencies modify or discontinue  
2314 their monitoring. The monitoring networks will generally be adjusted to the availability of data collected  
2315 and provided by the outside agencies.

### 2316 8.2 Monitoring Network

#### 2317 8.2.1 Groundwater Levels

2318 Monitoring of groundwater levels is necessary to meet several needs based on the above stated  
2319 objectives of the monitoring networks, including:

- 2320 • Representative monitoring for groundwater levels
- 2321 • The groundwater contours required for annual reports
- 2322 • Shallow groundwater monitoring to help define potential interconnection of groundwater  
2323 aquifers with surface water bodies

2324 **Table 8-1** lists existing wells that have been used for groundwater monitoring along with the newly  
2325 constructed dedicated monitoring wells. The table indicates which wells are used for each

2326

---

<sup>50</sup> Water levels are needed to generate hydrographs, contours and an estimate of change in storage as required for the annual report. Also required for the annual reports are estimates of groundwater pumping, surface water use, and total water use which can be estimated from the water budget.



**Table 8-1 Big Valley Groundwater Basin Water Level Monitoring Network**

Well Name	Well Use	Well Depth (feet bgs)	Screen <sup>1</sup> Interval (feet bgs)	Representative Well <sup>2</sup>	Depth to Water (feet bgs)		Groundwater Elevation (feet msl)		Contour Well	Shallow Well	Monitoring Frequency
					Measurable Objective <sup>3</sup>	Minimum Threshold <sup>4</sup>	Measurable Objective <sup>3</sup>	Minimum Threshold <sup>4</sup>			
01A1	Stockwatering	300	40 - 300	X	148	288	4035	3895	X		biannual
03D1	Irrigation	280	50 - 280						X		biannual
06C1	Irrigation	400	20 - 400						X		biannual
08F1	Other	217	26 - 217	X	32	172	4222	4082	X		biannual
12G1	Residential	116	--								biannual
13K2	Irrigation	260	20 - 260	X	66	206	4062	3922	X		biannual
16D1	Irrigation	491	100 - 491	X	93	233	4079	3939	X		biannual
17K1	Residential	180	30 - 180						X		biannual
18E1	Irrigation	520	21 - 520						X		biannual
18M1	Irrigation	525	40 - 525								biannual
18N2	Residential	250	40 - 250								biannual
20B6	Residential	183	41 - 183	X	41	181	4085	3945	X		biannual
21C1	Irrigation	300	30 - 300						X		biannual
22G1	Residential	260	115 - 260								biannual
23E1	Residential	84	28 - 84								biannual
24J2	Irrigation	192	1 - 192						X		biannual
26E1	Irrigation	400	20 - 400	X	20	160	4114	3974	X	X	biannual
28F1	Residential	73	--								biannual
32A2	Other	49	--						X		biannual
32R1	Irrigation	--	--						X		biannual
ACWA-1	Irrigation	780	60 - 780						X		biannual
ACWA-2	Irrigation	800	50 - 800						X		biannual
ACWA-3	Irrigation	720	60 - 720	X	23	163	4136	3996	X	X	biannual
BVMW 1-1	Observation	265	175 - 265	X	53	193	4162	4022	X		continuous <sup>5</sup>
BVMW 1-2	Observation	52	32 - 52							X	continuous <sup>5</sup>
BVMW 1-3	Observation	50	30 - 50							X	continuous <sup>5</sup>
BVMW 1-4	Observation	49	29 - 49							X	continuous <sup>5</sup>
BVMW 2-1	Observation	250	210 - 250	X	22	162	4194	4054	X		continuous <sup>5</sup>
BVMW 2-2	Observation	70	50 - 70							X	continuous <sup>5</sup>
BVMW 2-3	Observation	70	50 - 70							X	continuous <sup>5</sup>
BVMW 2-4	Observation	60	40 - 60							X	continuous <sup>5</sup>
BVMW 3-1	Observation	185	135 - 185	X	18	158	4146	4006	X		continuous <sup>5</sup>
BVMW 3-2	Observation	40	25 - 40							X	continuous <sup>5</sup>
BVMW 3-3	Observation	50	25 - 50							X	continuous <sup>5</sup>
BVMW 3-4	Observation	50	25 - 50							X	continuous <sup>5</sup>
BVMW 4-1	Observation	425	385 - 415	X	65	205	4088	3948	X		continuous <sup>5</sup>
BVMW 4-2	Observation	74	54 - 74							X	continuous <sup>5</sup>
BVMW 4-3	Observation	80	60 - 80							X	continuous <sup>5</sup>
BVMW 4-4	Observation	93	73 - 93							X	continuous <sup>5</sup>
BVMW 5-1	Observation	540	485 - 535	X	47	187	4082	3942	X		continuous <sup>5</sup>
BVMW 5-2	Observation	115	65 - 115							X	continuous <sup>5</sup>
BVMW 5-3	Observation	85	65 - 85							X	continuous <sup>5</sup>
BVMW 5-4	Observation	90	70 - 90							X	continuous <sup>5</sup>

Notes:


-- = information not available

feet bgs = feet below ground surface (depth to water)

feet msl = feet above mean sea level (groundwater elevation NAVD88)

water year = October 1 to September 30

<sup>1</sup> For the purposes of this GSP, the terms "screen" or "perforation" encompasses any interval that allows water to enter the well from the aquifer, including casing perforations, well screens, or open hole.<sup>2</sup> Representative wells for Water Levels and Groundwater Storage<sup>3</sup> Measurable objective is set at the Fall 2015 water level or at the lowest water level measured for wells that don't have a Fall 2015 measurement<sup>4</sup> Minimum threshold is set at 140 feet below the measurable objective<sup>5</sup> Continuous measurements are currently available due to the water level transducers installed in the wells. Less frequent monitoring may be appropriate in the future once the period of record of these wells is longer and interconnection of surface and groundwater is better understood.

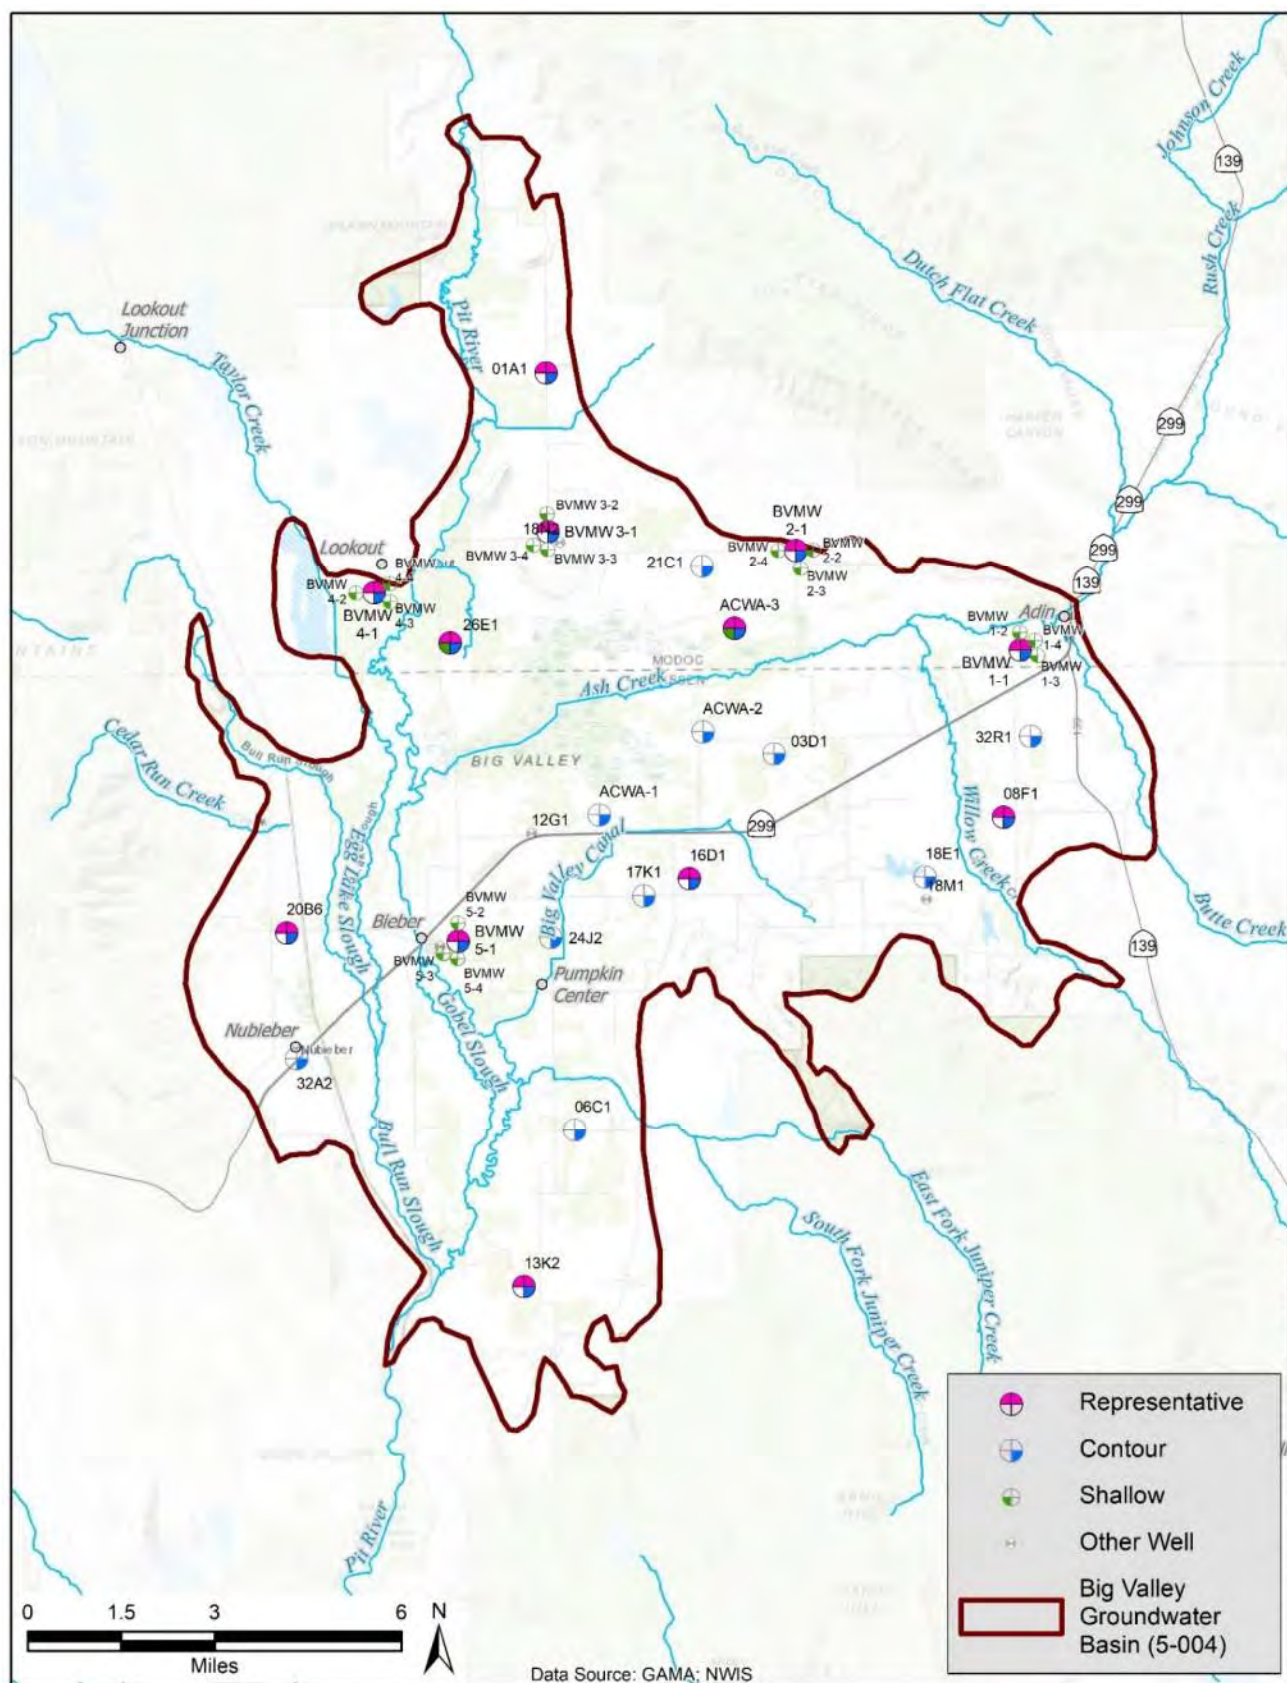

12-Apr-2021 Z:\Projects\1901113\_BigValleyGSP\GSP029\_WL Monitoring\_v2.mxd DLF

**Figure 8-1 Water Level Monitoring Networks**

2333 of the three groundwater level monitoring networks. A more detailed table with elements required under  
2334 §352.4(c) is included in **Appendix 8A**. Further details for each well and water level hydrographs are  
2335 included in **Appendix 5A**. **Appendix 8B** contains the As-Built Drawings for the dedicated monitoring  
2336 wells, also required by §352.4(c). The locations of the wells are shown on **Figure 8-1**.

2337 GSP Regulation §352.4 states that monitoring sites that do not conform to DWR BMPs, “...shall be  
2338 identified and the nature of the divergence from [BMPs] described.” DWR’s BMP (DWR 2016e) states  
2339 that wells should be dedicated to groundwater monitoring. In addition, §354.34 indicates that wells in  
2340 the monitoring network should have “depth-discrete<sup>51</sup> perforated intervals.” Many of the historic wells  
2341 listed in **Table 8-1** diverge from these standards and the explanation of their suitability for monitoring is  
2342 described below.

2343 Previous groundwater level monitoring in the Basin has relied on existing domestic and irrigation wells  
2344 that often have pumps in them used for irrigation, stockwatering, or domestic uses. The intent of  
2345 groundwater level monitoring is to capture static (non-pumping) water levels. However, historic  
2346 monitoring is performed before and after the irrigation season, March or April for spring measurements  
2347 and October for fall measurements<sup>52</sup>. Since these measurements are taken at a time when large-scale  
2348 groundwater use is typically not active, using production wells is acceptable in the absence of dedicated  
2349 monitoring wells. DWR staff who monitor the wells will indicate if the well (or a nearby well) is  
2350 pumping in order to be considered when assessing water level measurements.

2351 In addition to the well use considerations, most of the historic wells do not have depth-discrete screen  
2352 intervals<sup>53</sup>, as the typical well construction practice in the Basin has been to use long (100 feet up to  
2353 800 feet) screens, perforations, or open hole below about 30 to 40 feet of blank well casing. This  
2354 construction practice is designed to maximize well yield. The use of such long-screen wells is acceptable  
2355 for monitoring in Big Valley because multiple principal aquifers have not been defined in the Basin and  
2356 therefore these long intervals do not cross defined principal aquifers. Since most wells are constructed  
2357 with this practice, water levels in these long-screen wells should be indicative of the aquifer as a whole  
2358 and less likely to be affected by perched water or isolated portions of the aquifer that may not be  
2359 interconnected over large areas.

### 2360 **8.2.1.1 Representative Groundwater Levels and Storage Monitoring** 2361 **Network**

2362 The representative monitoring network includes all wells that have been assigned sustainable  
2363 management criteria (minimum thresholds and measurable objectives). DWR does not give strict  
2364 guidance on the number or density of wells appropriate for representative monitoring. Their BMP  
2365 document cites sources that recommend well densities ranging from 0.2 to 10 wells per 100 square miles

---

<sup>51</sup> “Depth-discrete” means that the screens, perforations, or open hole is relatively short (typically less than about 20 feet).

<sup>52</sup> Local stakeholders have advocated for future measurements to occur in mid-March and late-October to ensure they are taken before and after the irrigation season.

<sup>53</sup> Screens in this context includes perforated casing, well screens, or open hole, all of which allow water to flow into the well.

2366 (DWR 2016e). Through consultation with the BVAC, 12 wells were selected for representative  
2367 monitoring of the 144 square mile Basin, a density of 8.3 wells per 100 square miles.

2368 Extensive discussion and consideration were performed by the GSAs and local stakeholders to  
2369 determine an appropriate water level monitoring network. Based on the comprehensive review of the  
2370 wells, the network was selected based on:

- 2371 • Spatial distribution throughout the Basin to represent agricultural pumping areas
- 2372 • Areas with a high density of domestic wells
- 2373 • An existing monitoring record (where available) to track long-term trends
- 2374 • Access for long-term future monitoring
- 2375 • Well depth (greater than the MT)
- 2376 • Wells dedicated to monitoring where available

2377 **Table 8-1** shows the MOs and MTs for the 12 representative wells. As stated in Chapter 7 – Sustainable  
2378 Management Criteria, MOs are set at the fall 2015 water level. MTs are shown in **Table 8-1** to protect  
2379 agricultural beneficial use

#### 2380 **8.2.1.2 Groundwater Contour Monitoring Network.**

2381 The GSP Regulations (§356.2) require that annual reports include groundwater contours for the previous  
2382 year (spring and fall) as well as an estimate of change in groundwater storage. Historic groundwater  
2383 storage changes were estimated in Chapter 5 – Groundwater Conditions, using groundwater contours  
2384 contained in **Appendix 5B**. Therefore, for annual reports to be comparable to historic conditions, the  
2385 wells used for groundwater contouring should be the same, or nearly the same as those used for the  
2386 historic contours. Five wells that were used in the historic contours are not included in the groundwater  
2387 contour monitoring network (18M1, 18N2, 22G1, 23E1 and 28F1), because they were either replaced by  
2388 a new dedicated monitoring well or there was another well close by that makes the measurement  
2389 unnecessary. **Table 8-1** lists the groundwater contour monitoring network and **Figure 8-1** shows their  
2390 locations.

#### 2391 **8.2.1.3 Shallow Groundwater Monitoring Network**

2392 Chapter 5 – Groundwater Conditions, discusses interconnected surface water and describes the perennial  
2393 streams in the BVGB. As described in Chapter 7 – Sustainable Management Criteria, there is currently  
2394 no conclusive evidence for interconnection of streams with the groundwater aquifer and all summer  
2395 flows are 100 percent allocated based on existing surface water rights. Therefore, measurable objectives,  
2396 minimum thresholds and a representative monitoring network for interconnected surface water have not  
2397 been established. Monitoring will be assessed at the 5-year update. Through consultation with the  
2398 BVAC, a shallow monitoring network has been established that includes the shallow wells from each of  
2399 the five monitoring well clusters. These clusters were designed to measure the magnitude and direction  
2400 of shallow groundwater flow and are equipped with water level transducers that collect continuous  
2401 (15-minute interval) water level measurements so that potential correlations with streamflow gages can  
2402 be assessed. Well 26E1 was also added to the shallow network due to its position between the two major



streams (Pit River and Ash Creek), its shallow screen depth (20 feet bgs) and its lack of a pump. Well number ACWA-3 was also selected for the shallow network due to its location on the ACWA within the northern portion of the Ash Creek wetlands associated with Big Swamp and the possible groundwater dependent ecosystems shown in **Figure 5-19**. **Table 8-1** lists the shallow groundwater monitoring network and **Figure 8-1** shows the well locations.

#### 2408 **8.2.1.4 Monitoring Protocols and Data Reporting Standards**

2409 Currently, DWR measures groundwater levels at 21 wells in Big Valley. The expectation of the GSAs is  
2410 that DWR will also monitor levels at the dedicated monitoring wells and download the transducer data  
2411 from these wells. Transducer data will be corrected for barometric fluctuations using data from two  
2412 barometric probes installed at two of the clusters. Water level data will be made available on the state's  
2413 SGMA Data Viewer website for use by the GSAs in their annual reports and GSP updates. DWR's  
2414 water level monitoring protocols are documented in their Monitoring Protocols, Standards and Sites  
2415 BMP. (DWR 2016b). Portions of the BMP relevant to water levels are included in **Appendix 8C**.

#### 2416 **8.2.1.5 Data Gaps in the Water Level Monitoring Network**

2417 Data gaps are identified in this section using guidelines in SGMA Regulations and BMP published by  
2418 DWR on monitoring networks (DWR, 2016e). **Table 8-2** summarizes the suggested attributes of a  
2419 groundwater level monitoring network from the BMP in comparison to the current network and  
2420 identifies data gaps. No data gaps exist except the area near well 06C1, shown on **Figure 8-1**.

### 2421 **8.2.2 Groundwater Quality**

2422 Chapter 5 describes water quality conditions as overall excellent, and the few constituents that are  
2423 infrequently elevated in Big Valley are all naturally occurring. Therefore, measurable objectives,  
2424 minimum thresholds and a representative monitoring network have not been established. Monitoring  
2425 will be assessed at the 5-year update. To make such an assessment, the GSAs will rely on existing  
2426 programs, described in Chapter 7. Focus will be on the water quality reported for wells regulated by the  
2427 State Water Board's DDW. DDW wells are shown on **Figure 8-2** and are in Bieber and Adin, with one  
2428 well in the western portion of the Basin. In addition to data from DDW, the GSAs have installed three  
2429 transducers to measure electrical conductivity (EC) at wells BVMW 1-1, 4-1 and 5-1, shown on  
2430 **Figure 8-2**. These transducers increase the distribution of the monitoring network around the Basin and  
2431 with increased frequency of measurement will allow the GSAs to better understand temporal trends that  
2432 may not be apparent from infrequent DDW measurements. The EC transducers may be able to put  
2433 anomalous<sup>54</sup> measurements from DDW into better context. **Table 8-3** lists the groundwater quality  
2434 monitoring sites and their details.

---

<sup>54</sup> Anomalous measurements are those that are out of the norm or deviate from what would be expected. The source of the deviation from the norm should be noted and if errors are identified, the measurement(s) removed from the dataset based on professional judgment. At a minimum, anomalous measurements are marked as questionable, and the potential source(s) of the deviation documented.


**Table 8-2 Summary of Best Management Practices, Groundwater Level Monitoring Well Network and Data Gaps**

Best Management Practice (DWR, 2016d)	Current Monitoring Network	Data Gap
Groundwater level data will be collected from each principal aquifer in the Basin.	12 representative wells	None. There is a single principal aquifer and therefore all wells monitor the aquifer.
Groundwater level data must be sufficient to produce seasonal maps of groundwater elevations throughout the Basin that clearly identify changes in groundwater flow direction and gradient (Spatial Density).	22 contour wells	21 of the 22 proposed contour wells are currently monitored. Well 06C1 was monitored up until WY 2016. This well fills an important spatial area in the southern part of the Basin. To fill the data gap, the well could be re-activated, a new willing well owner found, or a dedicated monitoring well constructed in the area.
Groundwater levels will be collected during the middle of October and March for comparative reporting purposes, although more frequent monitoring may be required (Frequency).	All proposed monitoring network wells, except 06C1 are measured biannually, with the dedicated monitoring wells collecting continuous (15-minute) measurements	None. Current DWR monitoring occurs in March or April and in October for seasonal high (spring) and low (fall) respectively.
Data must be sufficient for mapping groundwater depressions, recharge areas and along margins of basins where groundwater flow is known to enter or leave a basin.	Groundwater depressions are present in the east-central part of the Basin near 03D1 and in the southern portion of the Basin near Well 06D1 and Well 13K2	03D1 defines the east-central depression. To ensure adequate definition of the southern depression, well 06C1 could be re-activated, a new, willing well owner found, or a dedicated monitoring well constructed in the area.
Well density must be adequate to determine changes in storage.	22 contour wells	Filling of data gap near 06C1.
Data must be able to demonstrate the interconnectivity between shallow groundwater and surface water bodies, where appropriate.	17 shallow wells, including 5 clusters of 3 shallow wells each	None.
Data must be able to map the effects of management actions, i.e., managed aquifer recharge.	22 contour wells and 17 shallow wells	None. Once projects and management actions are defined, monitoring specific to those projects and management actions will be identified.
Data must be able to demonstrate conditions near Basin boundaries; agencies may consider coordinating monitoring efforts with adjacent basins to provide consistent data across Basin boundaries. Agencies may consider characterization and continued impacts of internal hydraulic boundary conditions, such as faults, disconformities, or other internal boundary types.	22 contour wells and 17 shallow wells	None. There are no direct boundaries with adjacent Basins. Inflow/outflow from Basin addressed above.
Data must be able to characterize conditions and monitor adverse impacts to beneficial uses and users identified within the Basin.	12 representative wells	None

2436

2437  
2438

[This page is intentionally blank.]

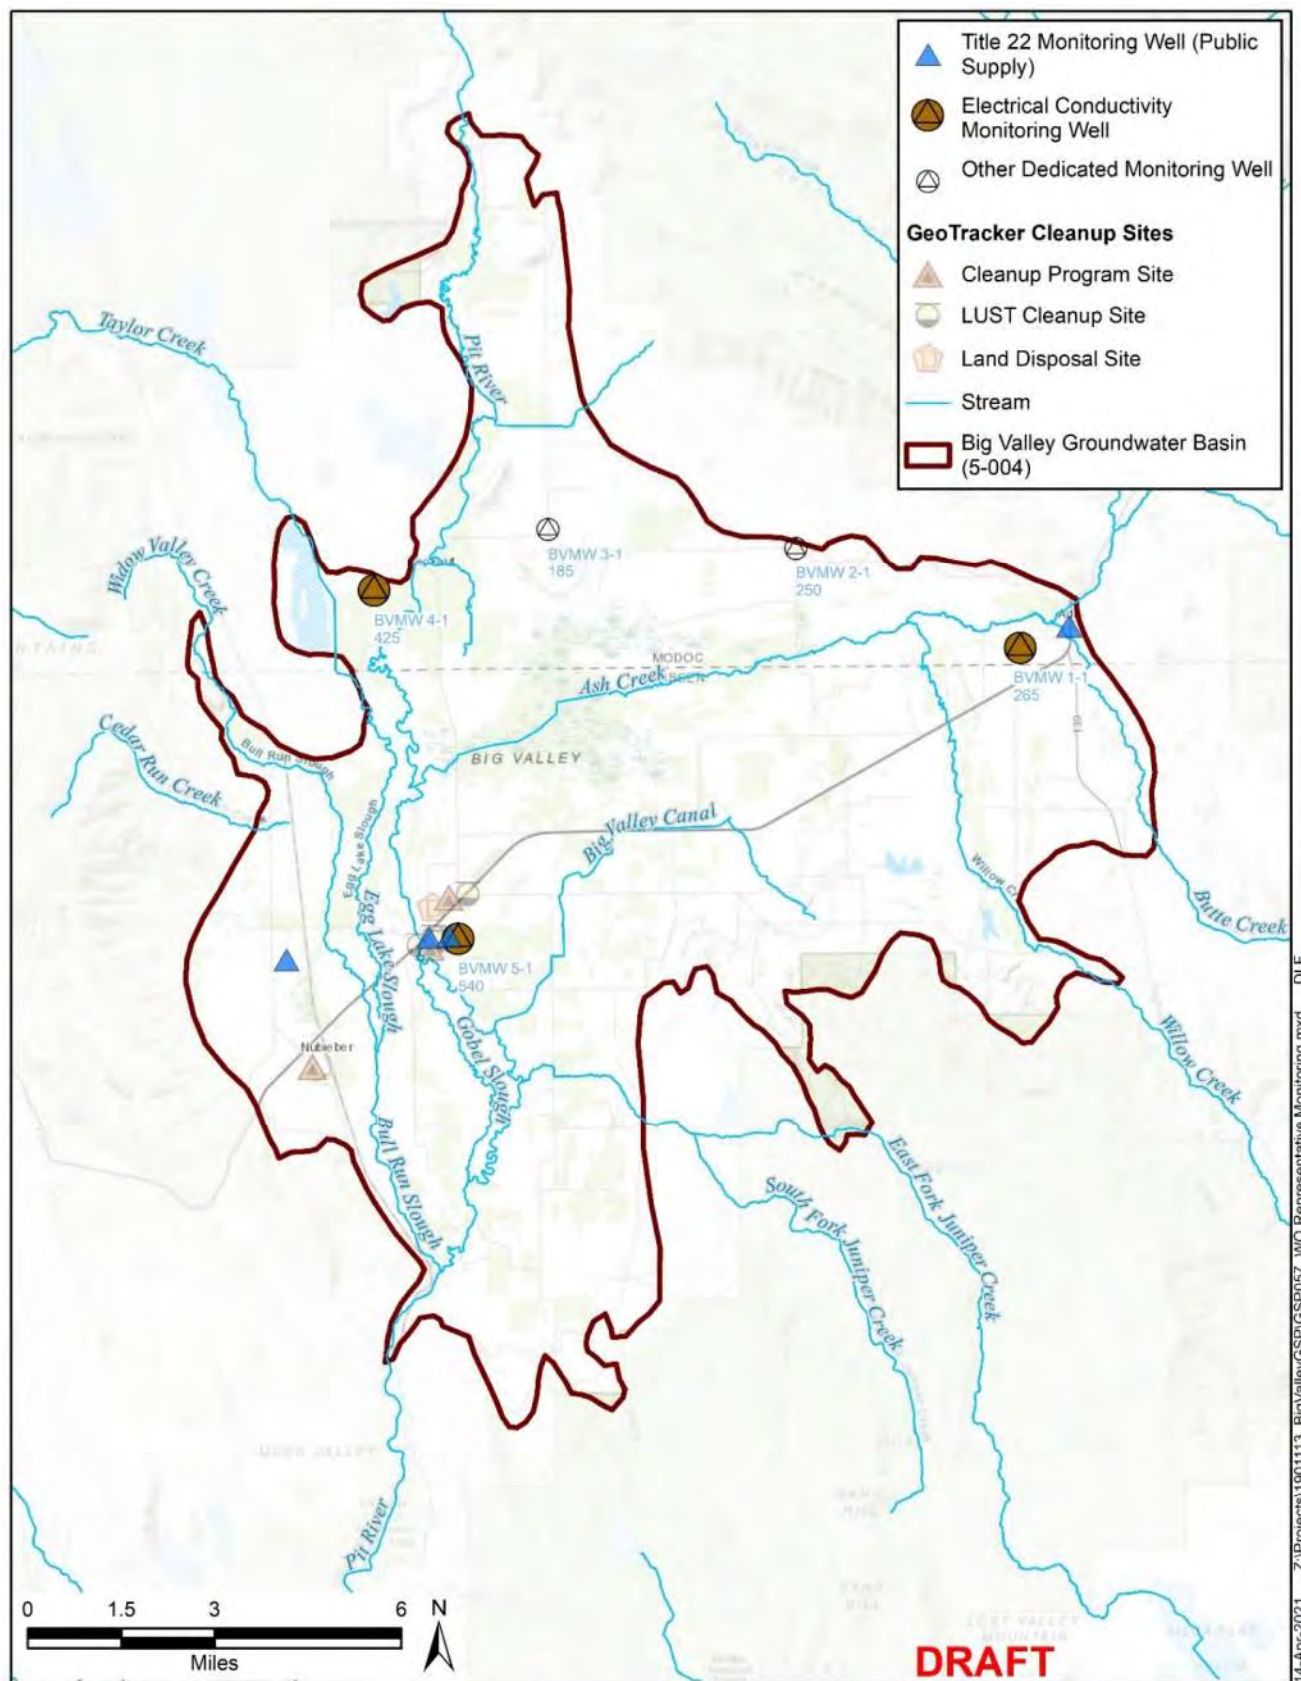



2441 **Table 8-3 Big Valley Groundwater Basin Water Quality Monitoring Network**

Well Name	SWRCB Public Source Code	DWR Site Code	Well Use	Well Depth (feet bgs)	Open Hole	Screen <sup>1</sup> Interval (feet bgs)	Constituents
Bieber Town Well 1	1810003-001		Public Supply	200	yes	62 - 200	Title 22
Bieber Town Well 2	1810003-002		Public Supply	240	no	60 - 240	Title 22
Adin Ranger Station Well 3	2500547-003		Public Supply	--	--	--	Title 22
Intermountain Conservation Camp Well 1	1810801-001		Public Supply	--	--	--	Title 22
BVMW 1-1		411880N1209599W001	Observation	265	no	175 - 265	Electrical conductivity
BVMW 3-1		412029N1211587W001	Observation	185	no	135 - 185	Electrical conductivity
BVMW 5-1		411219N1211339W001	Observation	540	no	485 - 535	Electrical conductivity

Notes:

-- = information not available

feet bgs = feet below ground surface (depth to water)

<sup>1</sup> For the purposes of this GSP, the terms "screen" or "perforation" encompasses any interval that allows water to enter the well from the aquifer, including casing perforations, well screens, or open hole.

### 2442 8.2.2.1 Monitoring Protocols and Data Reporting Standards

2444 While DWR provides guidance on protocols and standards for water quality in their BMP (DWR 2016f),  
 2445 these don't generally apply to the Big Valley water quality monitoring network. For the DDW wells,  
 2446 monitoring protocols used by the parties responsible for collecting and analyzing samples will be relied  
 2447 upon. DDW and other data regulated by the State Water Board is made available on their GAMA GIS  
 2448 website. At the 5-year update, the GSAs will obtain and analyze the available data. The measurements  
 2449 for EC transducers are made in situ with no samples collected or analyzed in a laboratory.

### 2450 8.2.2.2 Data Gaps in the Water Quality Monitoring Network

2451 **Table 8-4** summarizes the recommendations for groundwater quality monitoring from DWR's BMPs,  
 2452 the current network and data gaps. There are no data gaps in the water quality monitoring network.

### 2453 8.2.3 Land Subsidence

2454 As described in Chapter 5 - Groundwater Conditions and Chapter 7 – Sustainable Management Criteria,  
 2455 no significant land subsidence has occurred in the BVGB and no significant subsidence is likely to  
 2456 occur. Therefore, MOs, MTs and a representative monitoring network have not been established. This  
 2457 assessment was made based on a CGPS station near Adin (P347) and InSAR data provided by DWR.  
 2458 Future assessment of subsidence at the 5-year GSP update will rely on data provided by NOAA who  
 2459 operates Well P347 and updated InSAR data provided by DWR. The data will be assessed to determine  
 2460 if significant subsidence is occurring and the source of that subsidence.

**Table 8-4 Summary of Groundwater Quality Monitoring, Best Management Practices and Data Gaps**

<b>Best Management Practices (DWR, 2016a)</b>	<b>Current Network</b>	<b>Data Gap</b>
<p>Monitor groundwater quality data from each principal aquifer in the Basin that is currently, or may be in the future, impacted by degraded water quality.</p> <p>The spatial distribution must be adequate to map or supplement mapping of known contaminants.</p> <p>Monitoring should occur based upon professional opinion, but generally correlate to the seasonal high and low groundwater level, or more frequent as appropriate.</p>	4 public supply wells and 3 monitoring wells with EC transducers	None. Most known contaminants are located in Bieber and Nubieber. Monitoring at wells in Bieber and in BVMW 5-1 have not shown contaminants but monitoring there would indicate if they become present.
<p>Collect groundwater quality data from each principal aquifer in the Basin that is currently, or may be in the future, impacted by degraded water quality.</p> <p>Agencies should use existing water quality monitoring data to the greatest degree possible. For example, these could include ILRP, GAMA, existing RWQCB monitoring and remediation programs and drinking water source assessment programs.</p>	4 public supply wells and 3 monitoring wells with EC transducers	None.
Define the three-dimensional extent of any existing degraded water quality impact.	No degraded water quality impacts are present	None.
Data should be sufficient for mapping movement of degraded water quality.	No degraded water quality impacts are present	None.
Data should be sufficient to assess groundwater quality impacts to beneficial uses and users.	No degraded water quality impacts are present	None.
Data should be adequate to evaluate whether management activities are contributing to water quality degradation.	None. Projects and management activities that are implemented will assess potential water quality impacts.	None.

2463

2464  
2465

[This page is intentionally blank.]

2466 **8.2.3.1 Monitoring Protocols and Data Reporting Standards**

2467 Since the monitoring network relies on NOAA and DWR-provided data, the monitoring protocols and  
2468 reporting standards for those organizations apply.

2469 **8.2.3.2 Data Gaps in the Subsidence Monitoring Network**

2470 Since InSAR data is contiguous across the Basin, there are no spatial data gaps. If subsidence is  
2471 indicated by future InSAR datasets, there may be a need to field verify those areas to determine if field  
2472 leveling has occurred or there is another reason or cause for the subsidence. Additional field validation  
2473 could potentially be made by re-surveying monuments in the Basin, including those installed at the new  
2474 monitoring wells.

2475 **8.2.4 Monitoring to Support Water Budget**

2476 **8.2.4.1 Streamflow and Climate**

2477 Streamflow and climate data are needed to update the water budget. Current monitoring sites are shown  
2478 on **Figure 8-3**. Modoc County has been working to improve water budget estimates and is proposing to  
2479 add a stream gage on the Pit River just north of the BVGB, shown on **Figure 8-3**, which will be  
2480 maintained by the state. Data gaps for smaller streams, such as inflow from Roberts Reservoir, Taylor  
2481 Creek and Juniper Creek are proposed to be filled by investigating SB-88 stream diversion records  
2482 submitted to the State Water Board.

2483 **8.2.4.2 Land Use**

2484 Land use data is needed for updates to the water budget. Since 2014, DWR has provided land use  
2485 mapping using remote sensing processed by DWR's LandIQ mapping resource. DWR has provided  
2486 these datasets for 2014, 2016 and 2018. The GSAs will rely on DWR continuing to provide this land use  
2487 data to generate annual updates to the water budget. The most recent land use data available will be used  
2488 to generate the evapotranspiration estimates. Current research is being performed to develop the  
2489 relationship between evapotranspiration (ET) and applied water. This research indicates that crops in  
2490 this area are typically irrigated less than indicated by the assumptions made by multiplying ETo by crop  
2491 coefficients.





2494

## 9. Projects and Management Actions §354.44

---

2495 Through an extensive planning and public outreach process, the GSAs have identified an array of  
2496 projects and management measures that may be implemented to meet sustainability objectives in the  
2497 BVGB. Additionally, numerous state and federal programs are available in the Basin to help meet the  
2498 sustainability goals. Some of the projects can be implemented immediately while others will take  
2499 significantly more time for necessary planning and environmental review, navigation of regulatory  
2500 processes and implementation. The Big Valley Basin is relatively small, and while recharge does occur  
2501 within the Basin itself, significant recharge comes from the extensive uplands surrounding the Basin.  
2502 Projects will be located within the greater Big Valley watershed boundary shown in **Figure 9-1**.


2503 Although the Big Valley area is extremely rural and economically disadvantaged, and resource capacity  
2504 is limited, there are several local, state and federal agencies that can assist in project development.

2505 Project implementation will also be impacted by funding acquisition. **Table 9-1** lists current state and  
2506 local funding sources that can be targeted to support project planning and implementation.

2507 With a proactive approach to identify projects for increased recharge and conservation in the Big Valley  
2508 Basin and surrounding watershed, it is envisioned that the GSAs will be successful in remaining a  
2509 sustainable groundwater basin. With the possible exception of a large surface water storage project such  
2510 as Allen Camp Dam, the projects and management measures describe in this chapter are expected to  
2511 work in combination and should be considered as a whole rather than dependent on any single strategy.  
2512 Should sustainability not be realized, additional projects and management actions will be considered and  
2513 developed as appropriate. A timeline for projects can be found in **Table 9-2** and additional details  
2514 fulfilling state requirements can be found in **Table 9-3**.

2515



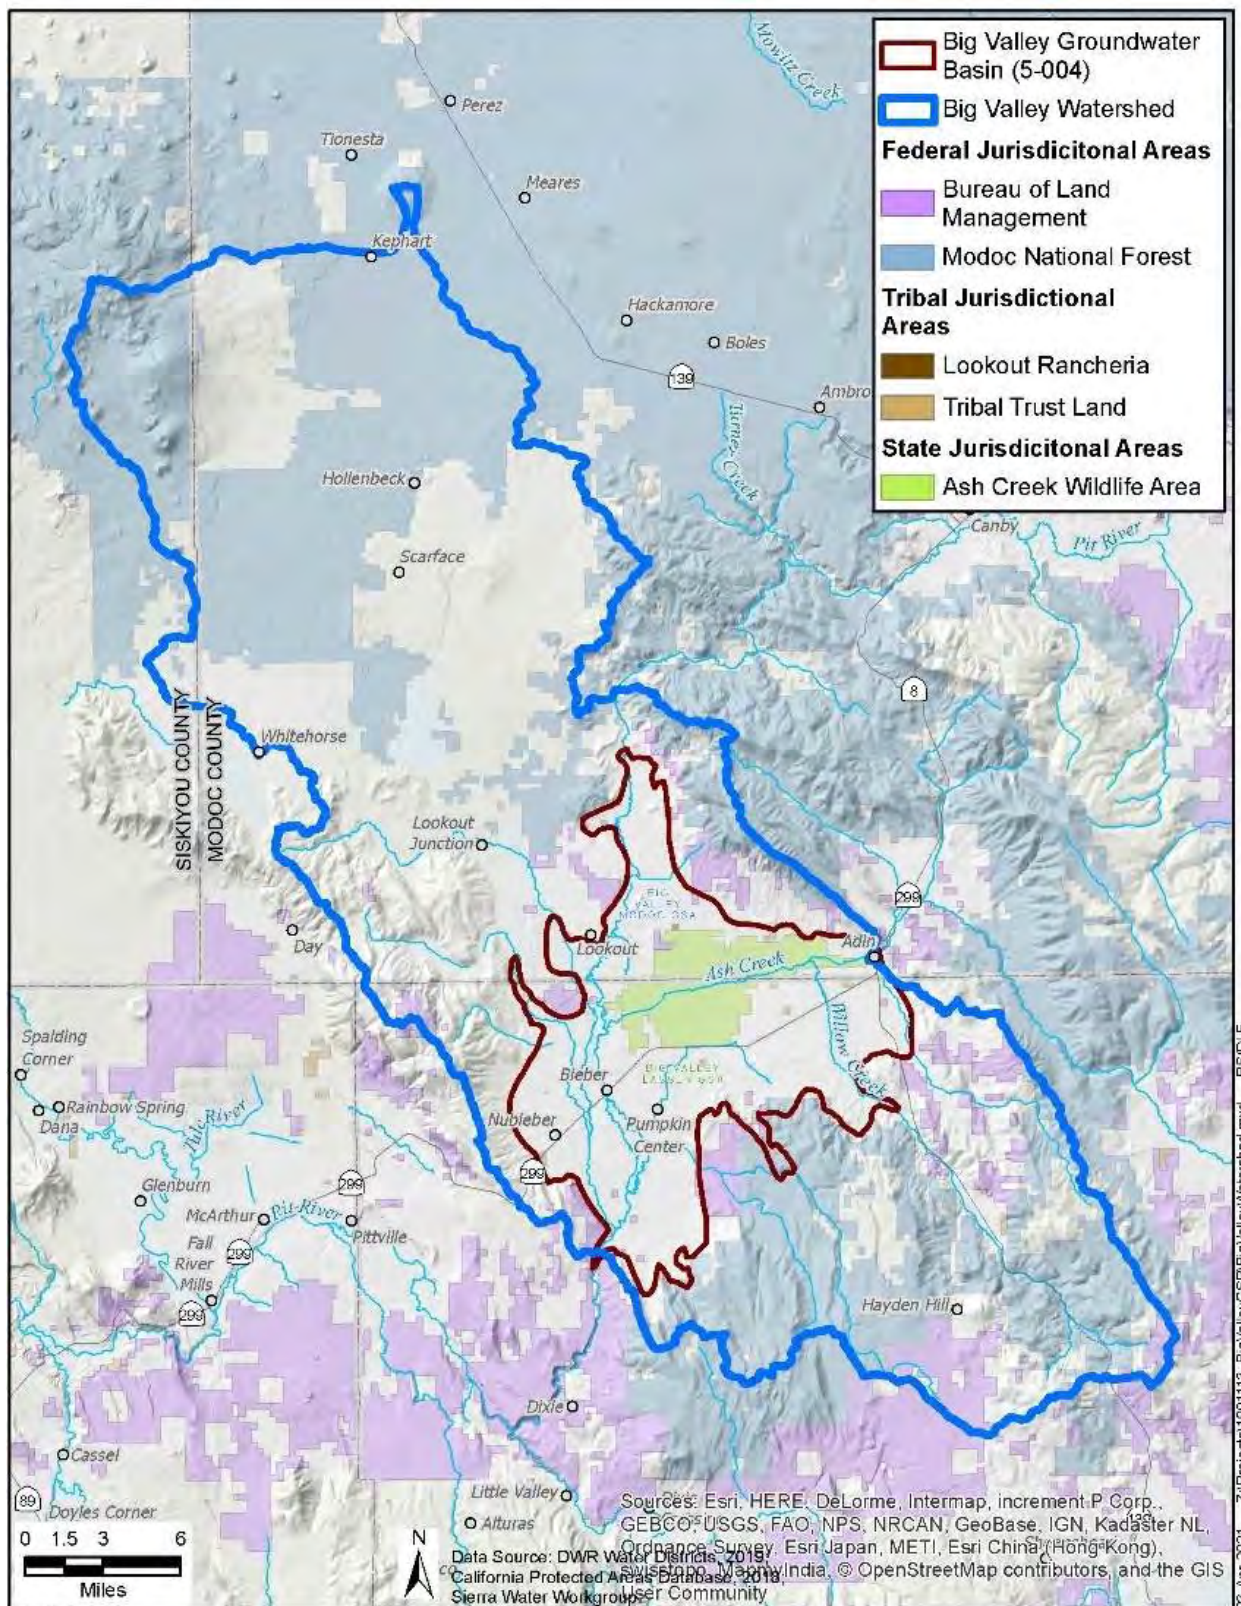

**Figure 9-1 Big Valley Watershed Boundary**

2518 **Table 9-1 Available Funding Supporting Water Conservation**

Funding Program Title	Managing Agency	Description of Funding
Wetlands Reserve Program, Crop Reserve Program, Environmental Quality Improvement Program	NRCS ( <a href="#">website</a> )	Cost share funding for wide array of soil, water and wildlife conservation practices. Funding priorities developed locally.
Conservation Innovation Grants	NRCS ( <a href="#">website</a> )	Supports development of new tools, approaches, practices and technologies to further conservation on private lands.
Partners for Fish and Wildlife Program	US Fish and Wildlife Service ( <a href="#">website</a> )	Private land meadow, forest, or rangeland restoration, conservation easement.
State Water Efficiency and Enhancement Program (SWEET)	California Dept of Food and Agriculture (CDFA) ( <a href="#">website</a> )	Supports implementation of water saving irrigation systems.
Healthy Soils Program	CDFA ( <a href="#">website</a> )	Supporting management and conservation practices for enhancing soil health (which includes water holding capacity).
Farmer/Rancher and/or Professional + Producer grants	Western Sustainable Agriculture Research and Education ( <a href="#">website</a> )	Farmer-driven innovations in agricultural sustainability including profitability, stewardship and quality of life.
Alternative Manure Management Program (AMMP) ( <a href="#">link</a> )	CDFA ( <a href="#">website</a> )	Financial assistance for non-digester manure management.
Sustainable Groundwater Management	DWR ( <a href="#">website</a> )	Planning and implementation grants supporting sustainable groundwater management. Disadvantaged communities and economically distressed areas.
State Forest Health Program	CAL FIRE ( <a href="#">website</a> )	Improve forest health throughout California.
USDA for household well deepening	USDA Rural Development ( <a href="#">website</a> )	No interest loan up to \$11K to improve existing domestic wells.

2519  
2520



2521 **Table 9-2 Projects and Potential Implementation Timeline**

No.	Category	Description	Estimated Time for Potential Implementation (years)		
			0-2	2-8	>8
1	9.1 Recharge Projects	AgMAR	X	X	X
2		Drainage and Basin Recharge	X	X	X
3		Ag Injection Wells			X
4	9.2 Research and Data Development	Stream Gages	X		
5		Refined Water Budget	X	X	
6		Agro-Climate Station	X		
7		Voluntary Installation of Well Meters	X	X	
8		Adaptive Management	X	X	X
9		Mapping and Land Use	X	X	
10	9.3 Increased Storage Capacity	Expanding Existing Reservoirs		X	
11		Allan Camp Dam			X
12	9.4 Improved Hydrologic Function	Forest Thinning and Management	X	X	X
13		Juniper Removal	X	X	X
14		Stream and Meadow Restoration	X	X	X
15	9.5 Water Conservation	Irrigation Efficiency	X	X	
16		Landscaping and Domestic Water Conservation	X	X	
17		Conservation Projects	X	X	
18	9.6 Education and Outreach	Public Communication	X		
19		Information and Data Sharing	X	X	
20		Fostering Relationships	X		
21		Compiling Efforts	X	X	
22		Educational Workshops	X		

2522 Note: AgMAR = Agricultural Managed Aquifer Recharge

2523  
2524

**Table 9-3 Required Elements for Projects and Management Actions**

Project	Brief description	Circumstances under which the project will be implemented	Public notification process	Permitting and regulatory process	Benefits	Schedule	Estimated cost	Legal authority
9.1 Basin Recharge Projects	Agricultural Managed Aquifer Recharge is the practice of using excess surface water (when available) and applying it to agricultural fields to intentionally recharge groundwater aquifers	AgMAR will be performed during winter months during high surface flows. The nature, frequency and timing of these flows will be evaluated through a <a href="#">Water Availability Analysis</a> <b>FIX LINK</b> (WAA).	Notification of available water and success of this projects will be communicated at public GSA meetings. Agreements will be made between the GSAs and interested producers.	Following development of the WAA, an <a href="#">AgMAR permit</a> for surface water diversions can be solicited from the State Water Board. Currently this permitting process can take 6-18+ months and cause significant economic burden to the applicant. An organized application for Basin-wide winter diversions by the GSAs could lessen some of the regulatory burden since they qualify for a streamlined process but a waiver of fees for extremely disadvantaged communities working to improve groundwater recharge may also be needed.	Irrigating every 5-7 days for roughly 10 weeks in the winter/spring would benefit 2-5 AF of water per acre. Previous research has quantified that over 90% of water is recharged to deep aquifers or available in the soil profile with AgMAR. The limitation to this project is available winter for recharge but a project goal of 1,000 acres per year could provide roughly 10,000 AF of water per year benefit.	Water budget planning and permitting will take 6-18 months and possibly more depending on the case load at the department of water resources. After an off-season water budget is completed, permitting can be distributed to the GSAs for winter recharge location selection. AgMAR could start being used at productive scale by 2024 if all processes go smoothly.	The cost to develop the WAA is still being developed but may be covered under existing grants from DWR. The cost of submitting a streamlined permit will also be developed, including <a href="#">fees</a> .	<b>[Need support here, potentially from council on the authority of the GSAs to coordinate this permitting]</b>
9.2 Research and Data Development	Stream gages are scientific instruments used to collect streamflow and water quality data to decrease scientific uncertainty in order to inform water management decisions. Agri-climate/CIMIS stations are helpful in monitoring for climactic factors such as temperature, humidity, wind speed, etc. and overall help refine estimates of ET in the Basin. Refining the water budget for the Basin will improve the accuracy with which management decisions are made because many of the assumptions used to generate the water budget stem from data gaps that need to be addressed, or other efforts to collect and analyze data submitted through other regulatory programs.	In addition to the continued use of existing stream gages which monitor many of the seasonal streams that contribute inflow to the Big Valley Basin, stream gages may be installed if locations and need are determined. Presently, Modoc County is working to install an additional stream gage where the Pit River enters the Basin. Data from agri-Climate/CIMIS stations may be utilized in order to make water management decisions with regard for climactic factors such as wind, rain etc. Adaptive management will be employed throughout the implementation process to allow for management decisions to reflect the best available data as more information comes available. Employing adaptive management strategies will expand our capacity to conduct research and data development, also. Refining the water budget will be done as more data becomes available through the combination of the data development projects described previously.	All research and data development progress will be shared at public GSA meetings. Data collected from gaging stations will be publicly available.	We will continue to work with DWR to ensure compliance with any relevant laws and to obtain any necessary permits related to stream gage installation and maintenance, as well as for other projects that fall under adaptive management strategies and the water budget.	Decreasing data gaps would decrease reliance on assumptions to govern groundwater management decisions. As more data becomes available, more accurate estimates of evapotranspiration would allow for more precise water budgeting estimates.	Gaging stations being installed where necessary early in the planning process in order to decrease uncertainty related to streamflow. They will be monitored throughout. Adaptive management strategies are anticipated to be employed throughout the GSP development and implementation phases. Refining the water budget is important early on in order to create a GSP that best reflects existing conditions in the Basin and which may be referenced in the future to perform adaptive management.	Funding is available for the development of new gaging stations. Maintenance costs may vary, but 1 estimate projects the annual maintenance cost for a single gage to be around \$15,000.  Funding for projects related to adaptive management and refining the water budget will be acquired as necessary. Presently, there is funding to maintain or install flow meters on private wells. More funding is likely available for similar projects, such as refining mapping and land use designations within the Basin.	

2525

Project	Brief description	Circumstances under which the project will be implemented	Public notification process	Permitting and regulatory process	Benefits	Schedule	Estimated cost	Legal authority
9.3 Increased Surface Water Storage Capacity	Surface water storage may be used to reduce reliance on groundwater by providing an alternative water source. Presently, Robert's Reservoir and several others including the Inverson, Silva and BLM reservoirs mitigate potential overdraft. As water levels in streams and other water courses diminish during the dry months, existing diversions may not adequately meet the needs of users. Expanding the capacity of these reservoirs and possibly constructing new reservoirs such as the Allan Camp Project would allow additional water from snowmelt and storm events to be stored. This would help circumvent reliance on groundwater and would provide reliable supplies of surface water for users.	Projects intended to increase surface water storage will be implemented when it is economically advisable to do so and when they may help mitigate Basin overdraft.	Pursuant to environmental review, these projects will have opportunities for public comment and project documents will be made publicly available whenever appropriate. Both National Environmental Policy Act (NEPA) and California Environmental Quality Act (CEQA) compliance mandate opportunities for public comment.	Permitting for surface water storage projects will be subject to NEPA and CEQA depending on whether the project sites are located on federal or state land respectively.	Increasing the capacity to store surface water by capturing runoff could reduce reliance on groundwater during summer months. Further, increasing surface water storage would improve water security during dry years.	The timeframe for largescale infrastructure projects would likely be upwards of 8 years, as the regulatory and environmental review processes generally require extensive coordination between agencies and stakeholders for planning and compliance.	Large infrastructure projects can be quite expensive. \$1 in May 1981 had the same buying power as \$2.97 in April 2021. A ballpark estimate of the capital costs for the Allan Camp Project in its entirety would amount to approximately \$344,041,830, with the dam and reservoir component amounting to an additional \$174,487,500. These figures are Funding may be available from the federal government in the form of loans under the Small Reclamation Projects Act of 1956. The cost associated with expanding existing reservoirs depends on the method employed. Sediment removal typically costs between "\$8,000 and \$32,000 per acre foot," (Lund 2014) and would be done infrequently. Increasing dam height typically costs between "1,700 to \$2,700 per acre foot" (Lund 2014).	
9.4 Improved Hydrologic Function and Upland Recharge	Upland forest recharge enhancement occurs in conjunction with vegetation management and forest fuels reduction by increasing snow water content and reducing dense forest canopy and associated evapotranspiration	Upland forest recharge will take place will be enhanced by implementation of forest health and fuels reduction projects within the Big Valley watershed. Such projects are on-going and in varying stages of planning and implantation. Support from GSAs and local, state and federal partners will increase implementation rate and scope. Water availability and recharge enhancement will be realized along with fire/fuels and wildlife habitat benefits.	On federally-managed lands public notification of projects will be conducted under NEPA by the Modoc National Forest or Applegate BLM. State funded projects will follow CEQA public notification process. Opportunities on private land be communicated by GSAs, <a href="#">Pit Resource Conservation District</a> and other state and local entities.	Projects permitting will vary by land ownership. On federal lands: NEPA and applicable federal land policies. On private lands: state forestry rules are applicable and programs such as <a href="#">CAL FIRE's Forest Health Program</a> will help clarify and streamline permitting processes.	Snow water content has been shown to increase by 33 to 44% from a dense conifer canopy to an open area. Surface run-off has also been shown to respond to treatments. Recharge figures are difficult to quantify, but even a modest increase in recharge over 10% of the potential upland recharge area could result several thousand AF of water.	The initial upland forest recharge project "Wagontire Project" is scheduled for implementation in 2022 and is expected completion in a 2- to 4-year window.	Project costs vary by site, but an estimated average is from \$500 to \$650 per acre.	
9.5 Water Conservation Projects	Water conservation and water use efficiency projects would primarily be adopted by growers and homeowners on their private property. Infrastructure improvements, while requiring capital outlay are not subject to permitting or public environmental review.	Project implementation will be voluntary with cost-share incentives. Projects will be implemented on a site-by-site basis and designed for overall production and economic efficiency, along with water use savings.	Notification of opportunity to participate will be through local agricultural organizations, extension outreach meetings and by sponsoring agencies. Broad public notification of individual projects is not required.	Projects in this category such as upgrading irrigation infrastructure, irrigation management techniques, home landscaping, etc. are generally not subject to permitting requirements.	Some practices have been shown to result in efficiency increases in the range of 10% at the field scale. Multiplied over a number of farms, water use savings could be significant.	Irrigation infrastructure and water use efficiency incentives are on-going. UC Cooperative Extension has submitted a grant proposal to SWEEP to initiate an outreach education program in 2022.	Costs vary widely. New irrigation infrastructure on a field scale can exceed \$100,000. Soil moisture meters for irrigation scheduling can be in the \$100's to \$1,000's of dollars per farm. Landscaping and homeowner water efficiency projects in the \$100's to \$1000's per home.	Farmers and homeowners have legal authority to make upgrades to their own systems.
9.6 Education and Outreach	Education and outreach efforts can drive beneficial changes in patterns of use and protect water resources. Existing efforts employed by the GSAs include outreach about funding opportunities that support water conservation methods, coordinating information sharing efforts and facilitating informational meetings with stakeholder groups.	As an essential part of sustainability, outreach and education will be conducted throughout the development of the GSP, with many opportunities for public engagement.	Public information is available through the Big Valley GSP communication portal, accessible at <a href="#">bigvalleygsp.org</a> . Informational brochures will be distributed to interested parties to make information about the GSP more accessible.	Public engagement is important to the regulatory process of SGMA and other acts that the GSP may be subject to. However, education and outreach are an incredibly important part of meeting the sustainability goals of this GSP, especially as it relates to equity and inclusion.	Public involvement in the GSP development is crucial in attaining sustainability. <a href="#">Research</a> (OECD 2015) has shown that here are many social, economic and environmental benefits to education and outreach efforts in water management. These benefits can vary widely, but generally include increased levels of social cohesion, equity and conflict avoidance, improved water use efficiency and improved water quality.	Ongoing efforts to engage the public in outreach and education programs related to groundwater management are essential as part of the Groundwater Sustainability Plan. The anticipated timeline for outreach and education efforts is indefinite, but it is especially important throughout the planning and implementation process of the GSP.	Costs may vary depending on program type.	

## 9.1 Basin Recharge Projects

Enhancing recharge to get more of the available water into the aquifer is one of the key means to attaining sustainability. Priority is given to the immediate Big Valley watershed, but additional recharge projects will be considered for surrounding upland and upstream areas of the Pit River watershed. A more detailed watershed map is provided in Chapter 3 – Plan Area. For off-season diversion recharge projects to be widely available in the Big Valley Basin, an off-season water availability study must be completed for the Pit River watershed up-river of Big Valley. This would allow growers to be able to obtain a permit for winter flow diversion. This study would include a survey of potential water rights held for off-season use, storage and hydroelectric power. *See footnote link for a more detailed description of what is needed in this process.*<sup>55</sup>

Once this survey is completed and approved by a licensed engineer, permits to divert for available surface water can be solicited from DWR. Currently this permitting process can take 6 to 18+ months and cause significant economic burden to the applicant. An organized application for Basin-wide winter diversions by the GSAs could lessen some of the regulatory burden since they qualify for a streamlined process but a waiver of fees for extremely disadvantaged communities working to improve groundwater recharge is needed. *See footnote link for a more detailed description of what is needed in this process.*<sup>56</sup>

Along with permitting costs, there are also costs to the irrigator in electricity and labor costs to apply water.

### 9.1.1 Agriculture Managed Aquifer Recharge

One approach to Basin recharge currently being considered is the intentional recharge of groundwater aquifers by spreading water over agricultural fields at times when excess surface water is AgMAR (Kocis & Dahlke, 2017, Dahlke et al. 2018). With significant surface water irrigation and diversions already present in Big Valley, AgMAR is a viable option in the Basin. Much of the current research on AgMAR has been completed on relatively well-drained soils that are not present in Big Valley. Research on Big Valley soils with slow to very slow infiltration rates appears to be initially promising. While recharge of groundwater may be slower in the Basin, it could still be a feasible means for deep water recharge and filling the shallow aquifer and root zone. AgMAR can be utilized for both, increasing recharge and decreasing water application of groundwater during the growing season due to a saturated soil profile. A conservative estimate suggests that 25,000 acres in Big Valley of agricultural and native vegetation lands are accessible to surface water and available for AgMAR. Priority will be given to low infiltration over very low infiltration soils for recharge and areas addressing more critical groundwater levels.

Among the perennial crops, alfalfa is considered a promising candidate for AgMAR for several reasons and significant initial research has been completed throughout California on its feasibility (Dahlke et al. 2018). 80 to 85 percent of the alfalfa in California is irrigated by flood irrigation which in turn could

---

<sup>55</sup>[https://www.waterboards.ca.gov/waterrights/water\\_issues/programs/applications/groundwater\\_recharge/docs/streamlined\\_waa\\_guidance.pdf](https://www.waterboards.ca.gov/waterrights/water_issues/programs/applications/groundwater_recharge/docs/streamlined_waa_guidance.pdf)

<sup>56</sup>[https://www.waterboards.ca.gov/waterrights/water\\_issues/programs/applications/groundwater\\_recharge/streamlined\\_permits.html](https://www.waterboards.ca.gov/waterrights/water_issues/programs/applications/groundwater_recharge/streamlined_permits.html)



allow for areas where surface water can be utilized for groundwater recharge (Dahlke et. al. 2018). Alfalfa is widely grown in Big Valley and flood irrigation is common. Alfalfa is a nitrogen-fixing plant that seldom receives nitrogen fertilizer, which reduces the risk of leaching excess nitrate to groundwater, one of the main concerns of AgMAR (Putnam and Lin 2016; Walley et al. 1996). Dahlke, H.E., Et. al. 2018 found that winter recharge had no discernible effect on alfalfa yield (first and second cutting) and led to increased crop water availability in the deep soil profile offsetting potential irrigation deficits during the growing season.

Research currently being completed in Big Valley on the feasibility of AgMAR on perennial grass pasture and hay fields looks promising. Although soils in Big Valley have lower infiltration rates, winter recharge rates of 0.2 - 0.5 AF per acre per irrigation between March and April have shown no damage to crops. Soil infiltration rates show 2 to 3.5 inches of infiltration over a 24-hour period to be feasible. Irrigating every 7 to 10 days for six irrigations in the winter/spring would benefit 1 to 2 AF of water per acre into groundwater storage. This is the first AgMAR research completed on grass which is a dominant perennial crop in Big Valley. Given that some forms of applied nitrogen, particularly nitrate, have a propensity for leaching which has presented a challenge in other parts of the state, there has been some concern over nitrogen application and AgMAR. This can easily be addressed with BMPs of applying nitrogen outside of the winter recharge window. This work could also be easily applied to AgMAR feasibility on adjacent rangeland, conservation reserve project (CRP) or NRCS WRP land.

### 9.1.2 Drainage or Basin Recharge

Using the same principles as used in AgMAR, excess surface water can be diverted into irrigation drainages or canals and recharge basins to percolate into the groundwater table and replenish upper levels of the aquifer. This water is then available to be extracted at a later date for beneficial use. The volume of water recharged is limited by the availability and access to surface water, infiltration rates of the soils, losses to evaporation and available infrastructure.

The total number of feet or miles of irrigation canals or ditches needs to be determined along with the availability of current water storage basins (reservoirs) for recharge. Additional basins may need to be created for the sole purpose of groundwater recharge. Producers wanting to participate in this program would notify the GSA and report diverted water for the purpose of drainage or Basin recharge. The development of a water availability study and permitting as described on in **Table 9-3** also applies to this project. Unlined drainages, canals and basins could recharge up to 90 percent of diverted surface water to the aquifer.

### 9.1.3 Aquifer Storage and Recovery and Injection Wells

Aquifer storage and recovery (ASR) is the use of a new or existing well to inject and store water underground during wet periods and then extract by the same or other nearby wells to meet demand during dry periods. Increased aquifer storage provides some of the same benefits as new surface storage but can be phased in over time and can be less expensive. From an operations perspective, increased aquifer storage is a practical option since it involves the use of new or existing groundwater wells

2599 retrofitted for injection. ASR projects require a permit from the RWQCB and the permitting method is  
2600 usually the Statewide ASR General Order (General Order)<sup>57</sup> adopted by the State Water Board in 2012.

2601 The General Order requires that the water being injected into aquifer storage meet drinking water  
2602 standards, so in the case of Big Valley, this will require filtration and chlorination of surface water prior  
2603 to injection into aquifer storage.

2604 Because pre-treatment of the water source for injection and operation and maintenance of ASR wells is  
2605 relatively expensive, ASR is typically used when surface spreading *via* basins or flooded fields is not  
2606 feasible. ASR may be favored in areas of the Basin constrained by land area limitations, unfavorable  
2607 surface soils or shallow confining layers at or near the ground surface preventing deep percolation of  
2608 applied water.

2609 In Big Valley, the most likely scenarios in which ASR would be implemented are when under the  
2610 following conditions:

- 2611 • Flood MAR projects are not able to stabilize groundwater levels in some location due to the  
2612 presence of impermeable soils at or new the surface, or
- 2613 • As mitigation to reverse declining groundwater levels near public or domestic supply wells

2614 ASR would be implemented in phases if the conditions above warrant it. ASR would only be feasible  
2615 with outside funding assistance through either state or federal grant programs to both cover the capital  
2616 expenses and assist with the monitoring required for compliance with the ASR General Order. Under  
2617 these conditions, ASR will be developed in phases as summarized below:

- 2618 • Phase 1 – Assessment of wells and hydrogeology culminating in a technical report to accompany  
2619 a notice of intent to inject provided to the regional water quality control board. This phase will  
2620 identify locations and monitoring during ASR pilot testing.
- 2621 • Phase 2 – ASR pilot testing following receipt of a Notice of Applicability from the RWQCB.  
2622 Pilot testing may include a single well test or may involve multiple wells throughout the Basin  
2623 based on the finding and recommendations in the technical report developed in Phase 1.
- 2624 • Phase 3 – Implementation including retrofit of existing wells, construction of new wells and  
2625 operation of these facilities to stabilize or increase aquifer storage.

2626 More information about ASR is available from the U.S. Environmental Protection Agency.<sup>58</sup>

## 2627 **9.2 Research and Data Development**

2628 Data gaps are mentioned and detailed throughout the GSP chapters. Continuing to fill these gaps,  
2629 participate in research and collect data to support the GSP is necessary to support sustainability using the  
2630 best science available.

---

<sup>57</sup> [https://www.waterboards.ca.gov/water\\_issues/programs/asr/](https://www.waterboards.ca.gov/water_issues/programs/asr/)

<sup>58</sup> <https://www.epa.gov/uic/aquifer-recharge-and-aquifer-storage-and-recovery>

## 9.2.1 Additional Stream Gages and Flow Measurement


Several seasonal streams contribute inflow to the Big Valley Basin (**Figure 9-2**). Many of these streams had historical stream gages or have current gages monitored by the USGS and DWR. The Pit River which is a major inflow river and significant contributor of surface water irrigation and recharge in Big Valley has a gage 13 miles from where the Pit River enters Big Valley at the Canby bridge. There are many springs and small tributaries that flow into the Pit River after the Canby bridge as well as irrigated lands water use between Canby and the Big Valley Basin. Modoc County has been working to install an additional stream gage where the Pit River enters the Basin to fill this data gap and provide more current stream flow information for GSP development and water management. There is also funding for additional stream gages if locations of need can be determined. The current and proposed stream gages are in **Figure 9-2**.

## 9.2.2 Refined Water Budget

Many assumptions were taken to create the Big Valley water budget in Chapter 6 – Water Budget. Some of these assumptions stem from data gaps that need to be addressed and other areas are opportunities to collect and analyze data that is being submitted through other regulatory programs. This section describes a combination of projects that will help improve the accuracy of the water budget and in-turn better inform groundwater management in Big Valley.

There is currently no agri-climate or CIMIS station located in Big Valley. Nearby stations in other basins have helped to create models to determine averages but significant geologic features affecting elevation often make weather patterns unpredictable from nearby basins. These stations have more sensors than typical weather stations including solar radiation, soil temperature, air temperature, wind speed and direction, relative humidity, soil moisture and rain gauging. These measurements can determine accurate ET which is very helpful in creating a more refined water budget for the Basin and help maintain sustainable groundwater conditions. ET is used as a metric for applied water especially when meters on actual applied water are not available. These stations can also help farmers in determining irrigation need and promote water conversation especially early in the growing season.



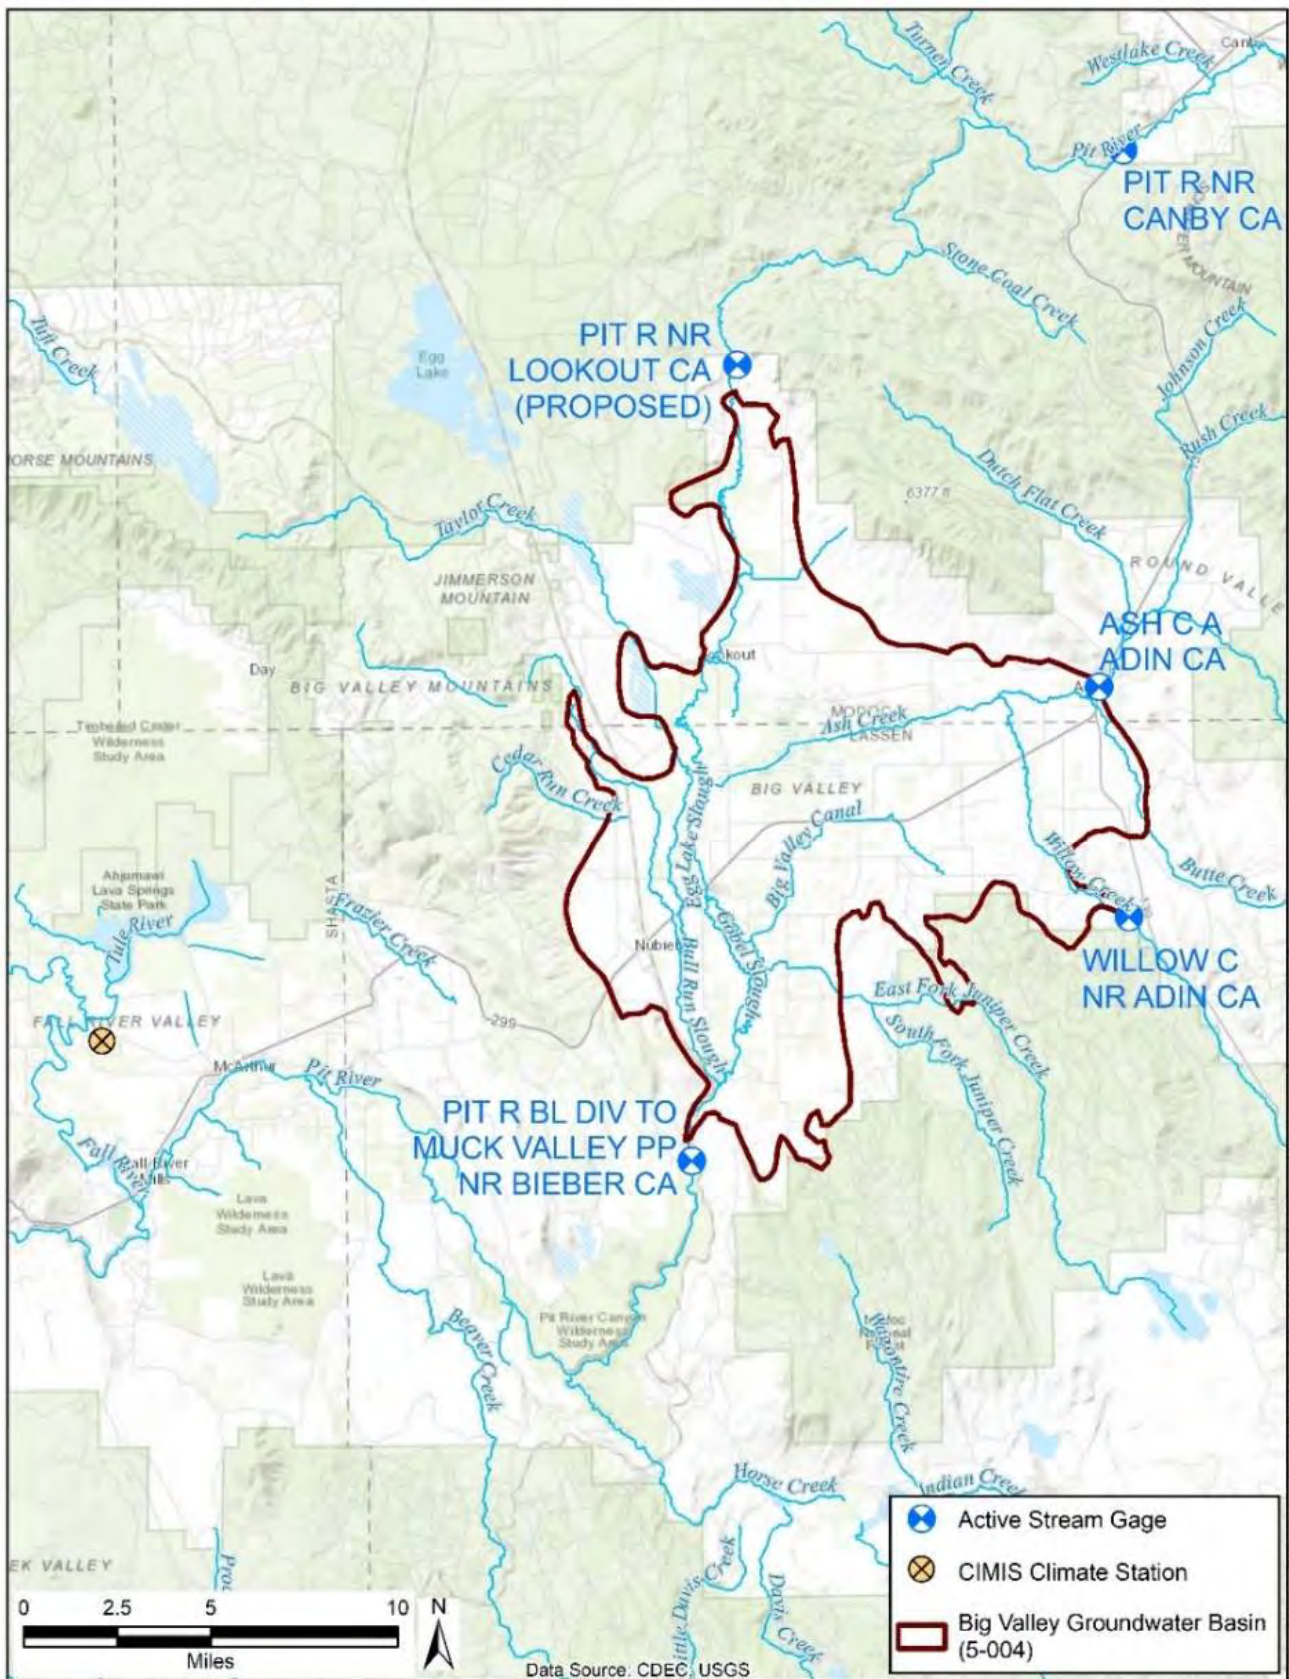

14-Apr-2021 Z:\Projects\1901113\_BigValleyGSP\GSP010\_SW\_Climate\_Monitoring\_v2.mxd RSDLF

**Figure 9-2 Current and Proposed Stream Gages**



2659 With an accurate estimate of ET, the next assumption is the relationship between ET and applied water  
2660 in Big Valley. Since most crops grown in Big Valley are hay crops, irrigation must be stopped when  
2661 cutting, drying and baling even though ET continues. Pinpointing the relationship between ET and  
2662 applied water could greatly refine the water budget and amount of irrigation water that is being applied.

2663 An effort to refine mapping and land use designations would further increase the accuracy of estimates  
2664 related to water use within Big Valley. The water budget's assumptions are primarily derived from  
2665 existing sources, many of which may need to be updated or expanded upon to reflect current conditions.  
2666 LandIQ has been a primary tool in estimating irrigated acres, although there is some inaccuracy related  
2667 to the land classifications which field studies could address.

2668 A voluntary well monitoring program has been available in Big Valley for upwards of 2 decades through  
2669 the Lassen-Modoc Flood Control and Water Conservation District<sup>59</sup>. Reinvigorating this program by  
2670 identifying meters that need to be replaced, conducting outreach to add new wells to the program and  
2671 organizing the historical data fills a data gap and provides critical data to refine the water budget and  
2672 pinpoint areas of concern. Meters are available for agricultural and domestic water users. Funding from  
2673 DWR in a grant to Modoc County is currently available to provide well meters to voluntary applicants.  
2674 Further, it would be beneficial to identify additional monitoring wells to provide unobstructed  
2675 measurements year-round. Several such wells have been installed at five sites within the Basin and  
2676 generate monthly data across 15-minute intervals. Expanding on this existing program would further  
2677 refine the water budget.

2678 Additionally, funding is available to install satellite transducers in key areas throughout the Basin, which  
2679 would allow for real time monitoring of domestic well levels. Coupled with an increased effort to both  
2680 verify well numbers and update lists to reflect active *versus* inactive wells, these real time monitoring  
2681 locations will provide more accurate estimates of domestic groundwater demand and supply within the  
2682 Basin. Thus, these combined actions will further inform water management strategies to ensure that  
2683 domestic users' groundwater needs are represented equitably in the water budget.

2684 Collectively, the continuation of applied research efforts will help to better quantify the impacts from  
2685 those actions and thus help refine the water budget. Such research efforts, which will be discussed in  
2686 depth in later sections of this chapter, include evaluating the effectiveness of off-season groundwater  
2687 recharge in hay crop fields and pastures, the impacts of forest thinning projects such as fuels reductions  
2688 and the removal of invasive junipers on water availability within the watershed, and the extent to which  
2689 surface water systems, including drainages, canals and reservoirs contribute to recharge within the  
2690 Basin. Additional research projects to support the water budget will be identified and undertaken as  
2691 needed, contingent on funding.

### 2692 **9.2.3 Adaptive Management**

2693 There are many unknowns and data gaps with respect to groundwater resources in the Big Valley Basin.  
2694 As a result, estimates and assumptions are currently used in the plan to determine several key variables.  
2695 To address the lack of necessary information, a significant commitment to the continued monitoring of

---

<sup>59</sup> Lassen-Modoc County Flood Control and Water Conservation District

2696 both ground and surface water is described in this plan. By further developing and enhancing monitoring  
2697 networks in Big Valley we can gather the data necessary to inform management and set criteria as more  
2698 information becomes available.

2699 This describes an adaptive management strategy. Adaptive management is an approach to improve  
2700 natural resource management which focuses on learning by doing. Learning occurs through monitoring,  
2701 data development, outreach and collaborative interpretation. Then, the adaptation of management  
2702 criteria and tools is applied to existing practices as critical information becomes available. This approach  
2703 is very applicable to the BVGB and will serve as a bridge towards sustainability by providing current  
2704 site-specific information to inform appropriate SMCs and thresholds as well as the ongoing assessment  
2705 of projects and management actions in the Basin.


2706 Although it is recognized and proven that the Big Valley Basin does not have the unsustainable  
2707 conditions seen in other basins around the state, monitoring and filling data gaps from SMCs that were  
2708 determined to not require thresholds helps us prepare for annual reports and 5-year revisions and make  
2709 management decisions. These SMCs without identified thresholds include interconnected surface water  
2710 and groundwater, water quality and subsidence. Additionally, monitoring could aid in the analysis of the  
2711 relationship between groundwater levels and GDEs.

## 2712 **9.3 Increased Surface Water Storage Capacity**

2713 Increasing the capacity to store surface water run-off during winter/spring high-flows could provide  
2714 significant amounts of water for summer irrigation. An increase in surface water available for irrigation  
2715 would lessen the reliance on groundwater and thus remain sustainable.

### 2716 **9.3.1 Expanding Existing Reservoirs**

2717 Expansion of several existing reservoirs serving Big Valley Basin would increase the capacity of surface  
2718 water for irrigation and recharge projects as well as help balance the water budget. An increase in water  
2719 storage would make the Basin more sustainable regarding climate variability and decreases in snowpack  
2720 while also relieving pressure on groundwater for irrigation in Big Valley. One larger reservoir, Robert's  
2721 Reservoir, is located northeast of Lookout and has a current capacity of 5,500 AF. Possible scenarios for  
2722 raising this reservoir's dam are shown in **Figure 9-3**. For example, raising Robert's Reservoir 3 feet  
2723 would increase capacity 1900 AF, an increase of 35 percent.

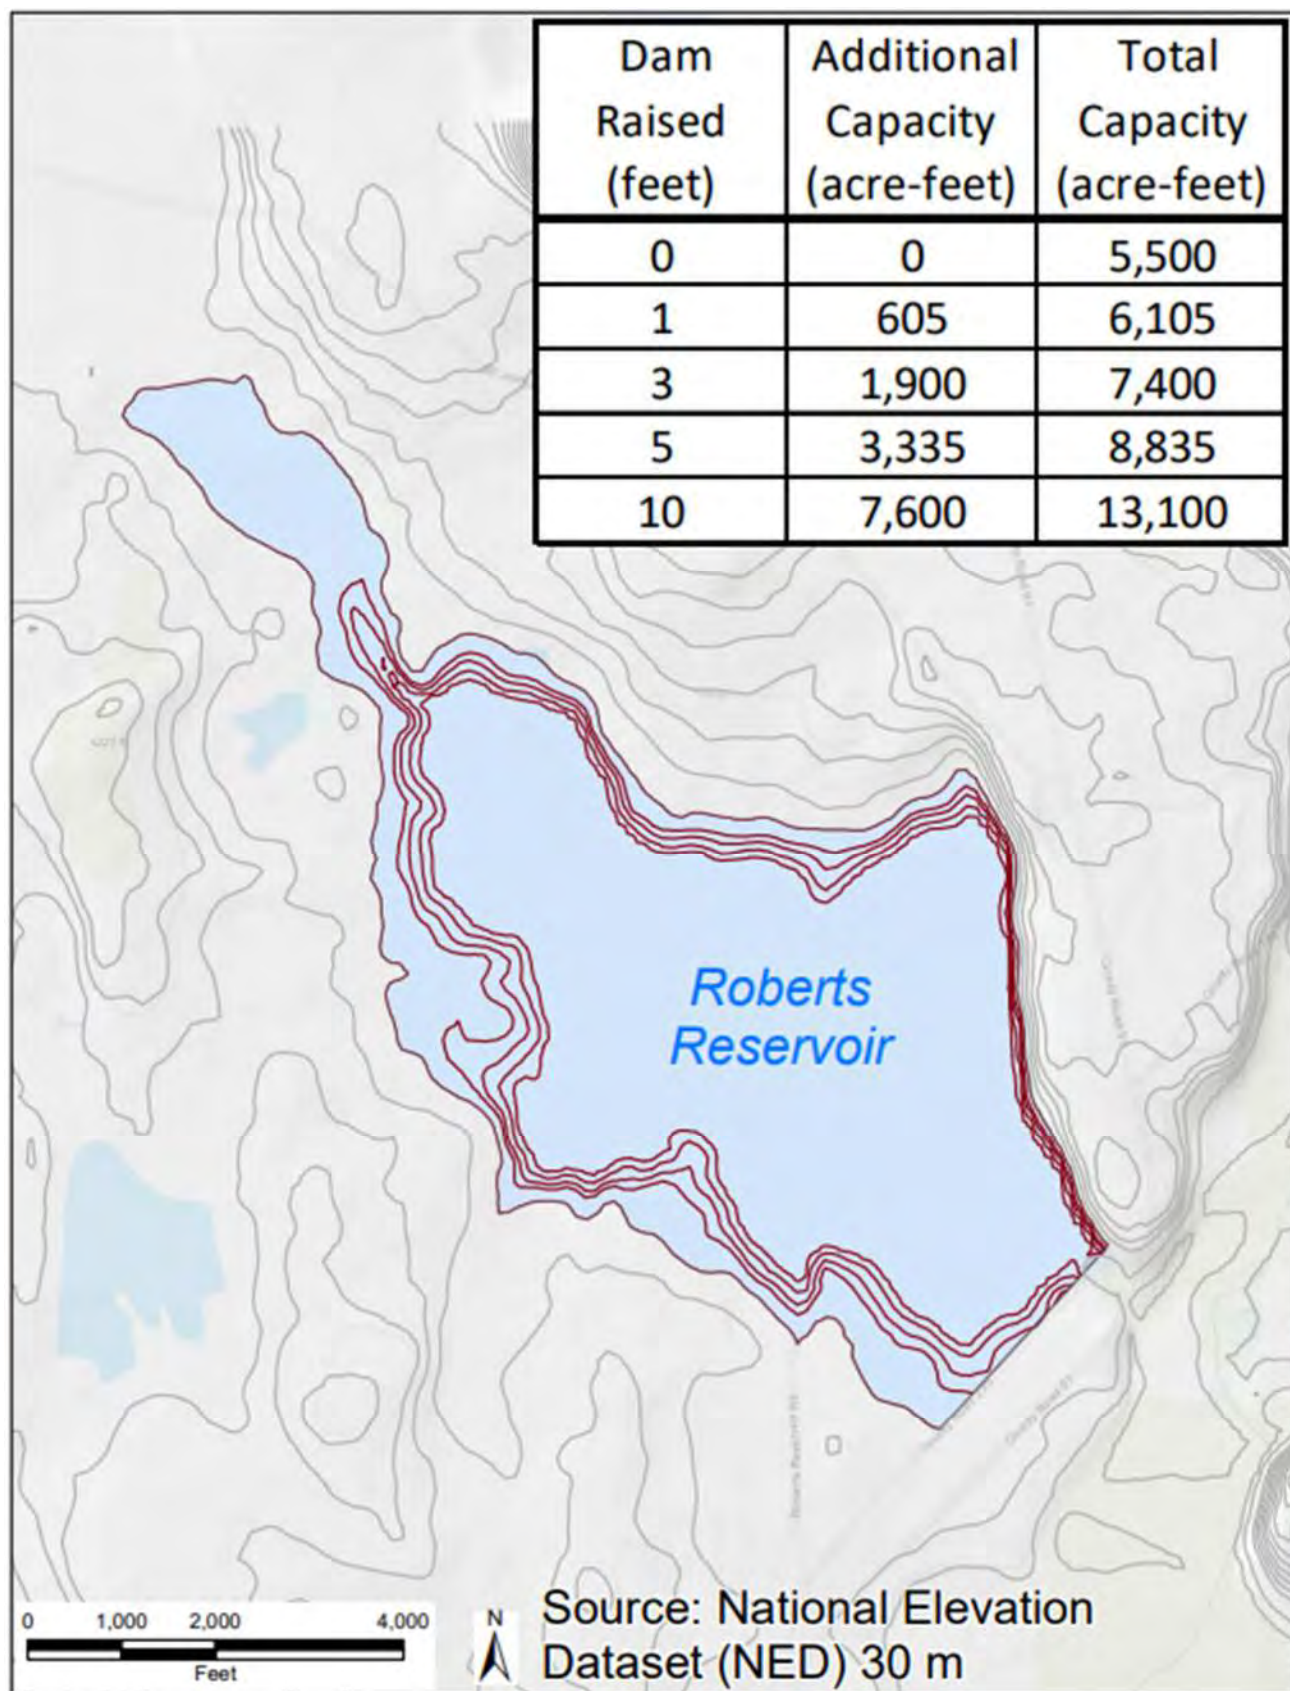

**Figure 9-3 Robert's Reservoir Scenarios**

2726 Other reservoirs include Iverson, Silva and BLM reservoirs. From an engineering perspective, the base  
2727 of the Iverson reservoir is much wider than it needed to be at the time it was built. This suggests that the  
2728 foundation would easily support construction to increase its height.

2729 Expanding current reservoirs may possibly be the most time and cost-effective alternative for expanding  
2730 surface water storage compared with building new reservoirs, for which navigating the environmental  
2731 review process and other regulations can be difficult.


2732 All reservoir expansion projects would undergo three phases. The Phase 1 examines the feasibility of the  
2733 proposed project and planning. Engineering, permitting and project design take place during Phase 2.  
2734 Phase 3 covers implementation and construction of the proposed project. Reservoir expansion is  
2735 typically done through either sediment removal or by physically raising the height of the dam. Typically,  
2736 expanding reservoirs through sediment removal is very costly, between “8,000 and 32,000 dollars per  
2737 acre foot” (Lund 2014) and would be done very infrequently. Raising dam heights or building new  
2738 reservoirs is also expensive; an acre foot of storage space generally costs between “1,700 and 2,700  
2739 dollars.” (Lund 2014). Depending on funding, sediment removal may be investigated and removed  
2740 sediment could potentially be repurposed to reinforce existing infrastructure such as the levees that  
2741 protect Bieber and Lookout from Pit River flood events.

### 2742 **9.3.2 Allen Camp Dam**

2743 The Allen Camp Dam and Reservoir (**Figure 9-4**) was authorized by the Department of the Interior  
2744 (DOI) as part of the Allen Camp Unit of the Central Valley project in 1976 to regulate flows of the Pit  
2745 River primarily for irrigation and fish and wildlife purposes, as well as flood control and recreation  
2746 services. The DOI published a report (DOI 1981) that concluded that based on the existing criteria the  
2747 proposed project was economically inadvisable, it may be appropriate to conduct a new investigation  
2748 into the feasibility of this project to reflect the changes to water needs of the community, environment  
2749 and state that have occurred over the last 40 years.

2750 According to the original feasibility study (DOI 1981) the dam would be located around 11 miles north  
2751 of the Modoc-Lassen county line, Allen Camp Reservoir would have a 90,000-AF storage capacity, a  
2752 18,000-AF surcharge, 2,350 acres of water surface area and a normal year yield of 22,400 AF. The dam  
2753 would be constructed from earth and rock fill and would measure 103 feet from the streambed. The  
2754 construction of the various proposed project components would require the acquisition of about 18,240  
2755 acres of private land through easements or through fee titles and the withdrawal of roughly 11,845 acres  
2756 of public land. Most of the land acquired would be allocated for the dam and reservoir project features, a  
2757 total of 18,015 acres. In the original document, another significant allocation, 11,562 acres, was for the  
2758 proposed Big Valley National Wildlife Refuge. This addition was intended to offset habitat loss for  
2759 species such as deer and migratory waterfowl. An updated feasibility study for this project should  
2760 consider the expansion of the Ash Creek Wildlife Refuge since 1970 as an alternative for this proposed  
2761 mitigation measure. The remaining land would be partitioned at 355 acres for the Hillside Canal, 148  
2762 acres for the lateral distribution system and 5 acres for the Nubieber protective dike.



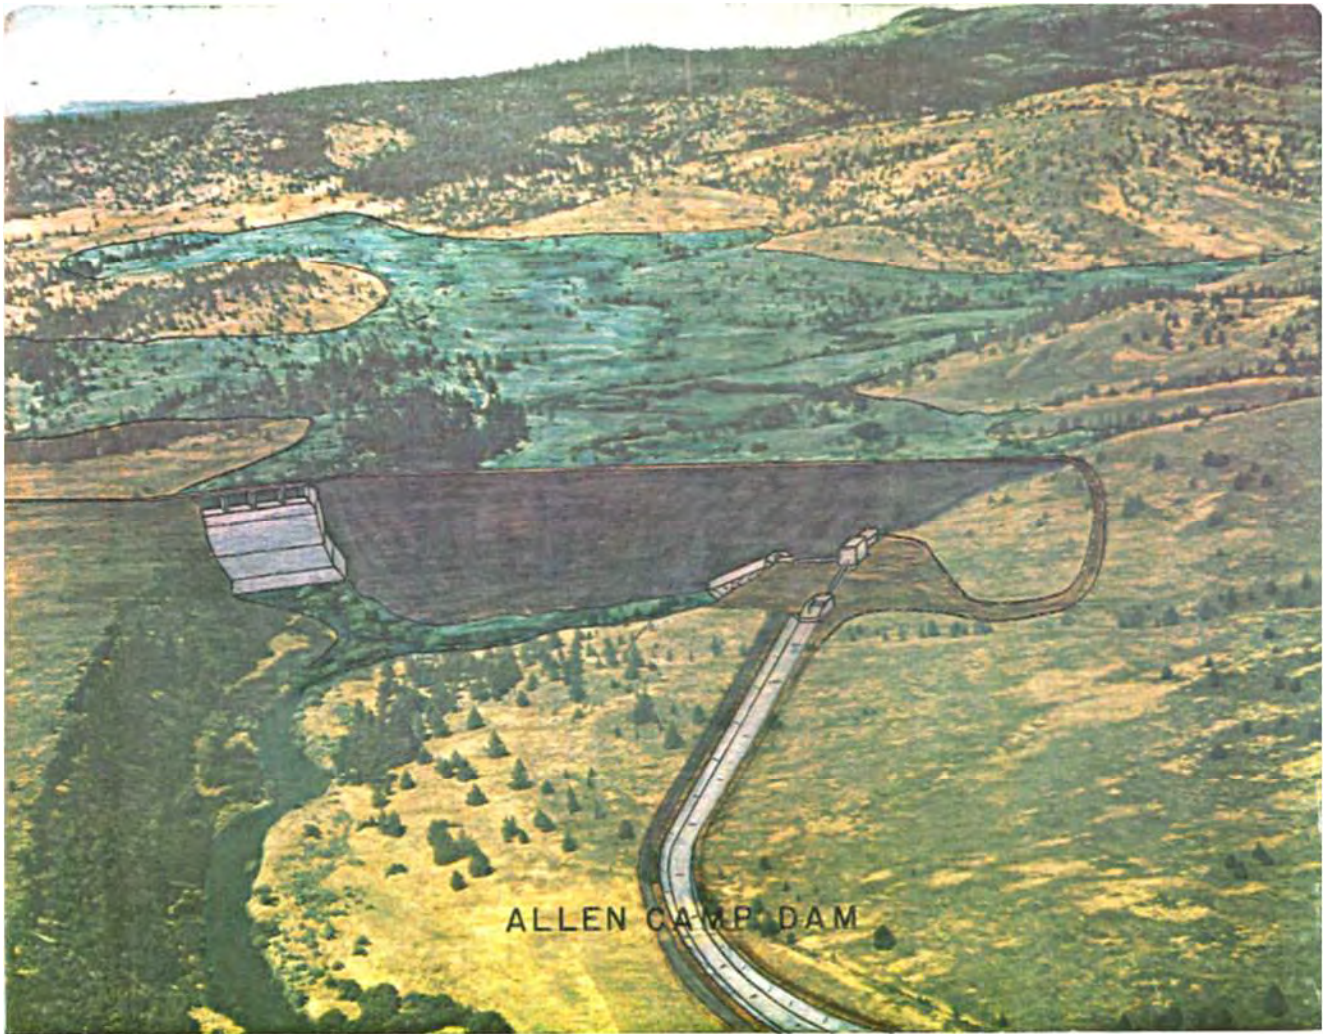

**Figure 9-4 Allen Camp Dam Drawing**


In 1981, there were 62 ownerships slotted to receive deliveries from this project, accounting for a total 11,700 irrigable acres all of which would benefit from full or supplemental water deliveries. The report stated that the groundwater basin area of the project has a storage capacity of roughly 532,000 AF with a safe yield of 7,000 AFY, with 5,000 AF of that developed. These numbers may have changed over the 40 years that have elapsed since the report was published and should be reviewed under an updated feasibility study. An increasingly variable climate casts uncertainty over water availability, with drier years driving an increased reliance on groundwater supplies. Further, an updated feasibility study might consider how this project could mitigate some of the effects of climate variability and watershed conditions on the BVGB by providing a reliable source of surface water, thereby reducing dependence on groundwater.

2776  
2777  
2778  
2779  
2780  
2781

## 9.4 Improved Hydrologic Function and Upland Recharge

### 9.4.1 Forest Health / Conifer and Juniper Thinning

The watershed surrounding the Big Valley Basin is comprised of approximately 800,000 acres of conifer forest and rangeland (**Figure 9-5**). Management policies have resulted in tree densities that are currently much higher than at the beginning of the 20<sup>th</sup> century. This includes western juniper and other mixed conifers (Stephens et. al. 2016) (Miller and Tausch 2001).

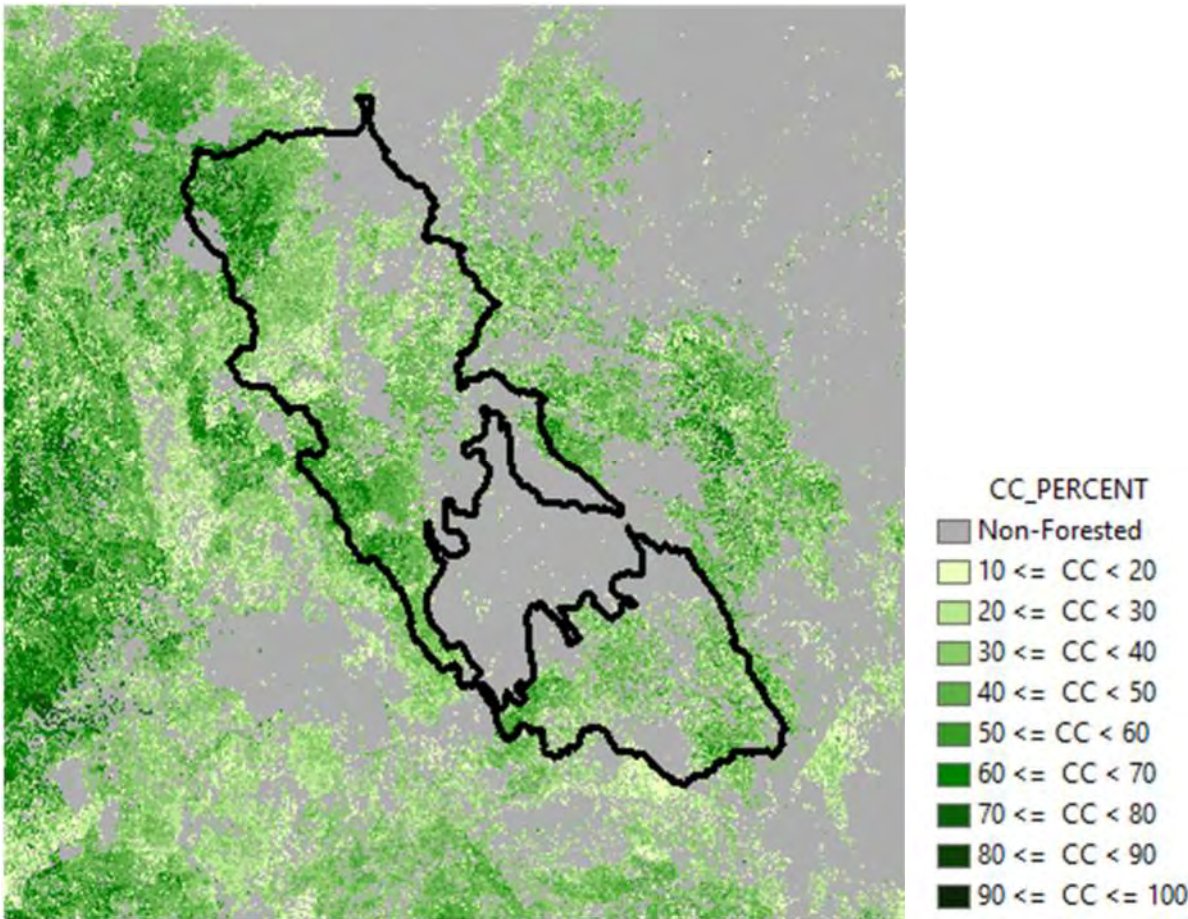

2782  
2783  
2784

**Figure 9-5 Canopy cover percentage of forested areas within the Big Valley watershed**

2785  
2786  
2787  
2788  
2789  
2790

There are two main mechanisms by which dense junipers and other conifers impact water availability in forested watersheds. First is the interception of snow (primarily) and rain that gets caught in branches and needles and evaporates before ever reaching soil surface and second is the high rate of transpiration due to dense layered canopy and vigorous network of roots (Ryel and Leffler 2011). An excellent summary paper by Smerdon et al (2009) describes linkages between forest health and tree density and groundwater recharge in a variety of landscapes.



Spring snow water content ranged from 33 to 44 percent higher in the aspen and an open meadow snowpack telemetry (SNOTEL<sup>60</sup>) site *versus* adjacent juniper and conifer forest where interception of snowfall was much higher (LaMalfa and Ryel 2008). Averaged over the entire catchment, strategically placed fuel treatments in the wetter central Sierra Nevada (American River) creating a relatively light vegetation decrease (8%), resulted in a 12 percent runoff increase, averaged over wet and dry years. Wildfire, with and without forest treatments, reduced vegetation by 38 and 50 percent and increased runoff by 55 and 67 percent, respectively. Forest fuel reduction in drier sites in the southern Sierra had less increase in run-off than wetter sites in the central Sierra Nevada Range. (Saska 2019).

A similar increase in water availability has been documented on juniper-invaded rangelands. During the period of maximum water uptake, mature trees used between 45 and 69 times more water than juniper saplings depending on precipitation and, consequently, soil water availability. In summary, 1) juniper water use varies greatly with precipitation and 2) because of the large difference between mature and sapling trees, juniper control results in considerable water savings, even after a 14-year period of juniper regrowth. (Mata-Gonzales et. al. 2021). Paired watershed studies in Oregon have demonstrated increased deep soil moisture, increased spring flow and increased surface water run-off after juniper harvest compared to untreated areas. They have also documented a hydrologic connection between shallow groundwater on juniper sites and a nearby riparian valley. (Ochoa et. al. 2016).

The opportunity to enhance upland watershed recharge is significant as projects are already in planning and implementation stages to reduce fire risk and improved wildlife habitat (Miller 2001) and programs such as CAL FIRE's Forest Health Program support project implementation funding. Forest health projects can be developed and meet multiple resource objectives including hydrologic values. Removal of conifers from meadow edges, drainages and spring areas as well as improving hydrologic function of road crossings, ditches and stream channels (where feasible) will enhance hydrologic and recharge benefits of forest health projects. Given the vast land area surrounding Big Valley, treatment of even a fraction of the land area would result in a significant amount of recharge. This could help mitigate any deficit. Recently, controlled burns and fuels reductions have gained considerable traction as forest management tools and could be utilized for the purposes discussed.

## 9.4.2 Stream Channel Enhancement and Meadow Restoration

Several meadow restoration techniques exist for the purpose of returning proper hydrologic function to montane and rangeland meadows. Two commonly used in the Big Valley Basin and surrounding uplands include pond and plug and beaver dam analogs. Both techniques result in reconnection of a stream channel with a functioning floodplain and restoration of a degraded meadow's water table up to its historic level. Restoration of the meadow water table results in re-watering of meadow soils and vegetation, with significant effects throughout the restored floodplain for meadow hydrology, wildlife and forage. Restored floodplain connectivity spreads flood flows so that a meadow's natural ability to settle the coarse or fine sediment delivered from steeper stream reaches is restored and natural percolation can occur. When floodplain function is restored, a portion of winter and spring runoff is

---

<sup>60</sup> SNOTEL is an automated system of snowpack and related climate sensors operated by the NRCS of the USDA in the Western U.S.

2828 stored in meadow soils rather than racing down the pre-project gully during the runoff season. Data  
2829 indicates that release of this stored runoff results in increased stream flow in late spring. (Hunt et. al.  
2830 2018)

2831 In mountains of the western U.S., channel incision has drawn down the water table in many meadow  
2832 floodplains. Increasing climate variability is resulting in earlier melt and reduced snowpack and water  
2833 resource managers are investing in meadow restoration which can increase springtime storage and  
2834 summer flows. Between 2012 and 2015, during a record setting drought, a pond and plug restoration in  
2835 Indian Valley in the Sierra Nevada Mountains was implemented and monitored. Despite sustained  
2836 drought conditions after restoration, summer base-flow from the meadow increased 5 to 12 times. Before  
2837 restoration, the total summer outflow from the meadow was 5 percent more than the total summer  
2838 inflow. After restoration, total summer outflow from the meadow was between 35 and 95 percent more  
2839 than total summer inflow. In the worst year of the drought (2015), when inflow to the meadow ceased  
2840 for at least one month, summer base-flow was at least five times greater than before restoration.  
2841 Groundwater levels also rose at four out of five sites near the stream channel. Filling the incised channel  
2842 and reconnecting the meadow floodplain increased water availability and streamflow, despite  
2843 unprecedented drought conditions. (Hunt et. al. 2018).

2844 Other studies have also shown that these techniques may increase surface and subsurface storage and  
2845 groundwater elevations that contribute to channel complexity and residence times. These factors could  
2846 lead to stronger flow permanence in channels subject to seasonal drying. Increased availability of water  
2847 and productivity of riparian vegetation can also support human uses in arid regions, such as irrigation  
2848 and livestock production. (Pilliod et. al. 2018).

## 2849 **9.5 Water Conservation**

### 2850 **9.5.1 Irrigation Efficiency**

2851 The fundamental objective of an irrigation system is to deliver an optimum amount of water for crop  
2852 growth during spring, summer and fall growing seasons while temperature and daylength are conducive  
2853 to plant growth but natural precipitation is lacking. Irrigation water and water application costs comprise  
2854 the single biggest operational cost associated with alfalfa or grass hay production in the intermountain  
2855 area accounting for approximately 30 percent of total operating costs (Wilson et. al. 2020) (Orloff et. al.  
2856 2016). Increasing the efficiency of crop water use is an economic as well as a conservation minded goal.  
2857 Farmers in the Big Valley area have been adopting water conservation measures as feasible  
2858 opportunities arise and will continue to do so. Support for infrastructure, new technology and education  
2859 outreach will help attain this goal.

2860 Flood, wheel-line and center pivot irrigation systems are all used on Big Valley farms. The best  
2861 irrigation system depends on water availability, crop, soil type and infrastructure. Commonly, center-  
2862 pivots are rated as the most efficient systems but there are appropriate uses for all three types. Many  
2863 advancements in irrigation efficiency have been made and will continue to be developed and  
2864 implemented. It is critical that implementation is done at a farm-by-farm basis in such a way as to fit  
2865 specific conditions and production systems. A one-size fits-all application will be neither effective nor  
2866 economically viable, such as SGMA.



2867 It is important that any irrigation system be well maintained to operate properly. Flood irrigated fields  
2868 should be appropriately leveled with appropriate width and length of irrigation check to provide for a  
2869 uniform application of water. Sprinkler systems should be regularly checked for function and be  
2870 designed with the right nozzle size for available flow and pressure. Systems that can utilize larger  
2871 diameter nozzles can reduce droplet size and evaporation loss. Length of irrigation set should make use  
2872 of soil water holding capacity without incurring excessive tailwater. Specialized systems such as Low  
2873 Energy Sprinkler Application can improve water use efficiency up to 15 percent. Length of irrigation set  
2874 should make full use of soil water holding capacity without incurring excessive run-off.

2875 To optimize efficiency of water use, the amount and timing of irrigation water applied should closely  
2876 match the amount of water needed by the crop thus maintaining adequate soil moisture for crop growth  
2877 while minimizing tail water run-off. Effective use of irrigation technology such as soil moisture sensors,  
2878 tracking of evapotranspiration, flow meters etc. are available to help farmers manage irrigation timing  
2879 and length of set to get the most of their irrigation system. While some of these have been applied in Big  
2880 Valley some are relatively novel.

2881 Genetic selection and the continued improvement of forage crop species has resulted in the increased  
2882 availability of drought tolerant, heat tolerant, or short-season forage grasses that may provide growers  
2883 and viable alternatives in certain situations where water availability is otherwise limited. Crop selection  
2884 is often based on the best fit for particular soil depth, soil texture and water availability in conjunction  
2885 with value and marketability. Although Big Valley cropping systems are heavily constrained by climate  
2886 and growing season, on-going forage crop improvement may provide growers with a wider range of  
2887 species and variety options.

2888 Overall good agronomic practices in terms of soil fertility, weed control, harvest etc. is critical and  
2889 promotes an efficient use of all resources including water. Finally, as mentioned in other places in this  
2890 plan, agricultural fields and farms provide important wildlife habitat in the valley. Irrigated lands are an  
2891 important part of the overall landscape. A good example is that flood irrigated pastures are highly valued  
2892 by migratory birds particularly in the spring. Emphasis on water efficiency is important but should not  
2893 become such a single-focused objective that other resource values or farm profitability are ignored.

2894 It should be clear that efficient use of water for irrigated forage crop production is multi-faceted, and  
2895 several small improvements, strategically together to fit on-farm conditions is the most effective  
2896 approach. To this end, education outreach *via* U.C. Cooperative Extension, technical support from  
2897 NRCS, and cost-share and grant programs are all critical to supporting water use efficiency measures.  
2898 Support and incentive programs that have been used and can be further expanded upon in Big Valley are  
2899 listed in **Table 9-1** (funding program table).

## 2900 **9.5.2 Landscaping and Domestic Water Conservation**

2901 While Big Valley is extremely rural and economically disadvantaged, there are opportunities to enhance  
2902 water conservation among domestic water users. Particularly regarding domestic landscaping, use of  
2903 native drought adapted plants, irrigation timers, effective mulch, and rainwater/snow water catchments  
2904 can reduce water requirements. Low water landscaping can also be integrated with homeowner firesafe

2905 planning. Landscaping guides for homeowners can be distributed at public centers and at regional  
2906 garden supply stores (Hartin et. al. 2014) (California Native Plant Society, 2021).

### 2907 **9.5.3 Illegal Diversions and Groundwater Uses**

2908 As detailed in Section 3.3 – Land and Water Use, water use for illegal activities (i.e., unlicensed  
2909 marijuana growers) occurs in the Basin and surrounding watershed. Lassen and Modoc county staff have  
2910 limited time and resources to address this issue, but they do utilize high-resolution aerial imagery from  
2911 an imaging contractor as part of their effort to identify, map and report to the appropriate federal and  
2912 state agencies responsible for taking enforcement action against the offenders. When county resources  
2913 are available, staff will continue to work with their imaging contractors to identify and report illegal  
2914 activities to the Bureau of Cannabis Control, CDFW, State Water Board and the BLM. The GSAs will  
2915 rely on these agencies to take an aggressive approach in Big Valley with the objective of eradicating the  
2916 Basin and watershed of illegal groundwater pumping and surface water diversions within the first 5 to  
2917 10 year of GSP implementation.

## 2918 **9.6 Public Education and Outreach**

2919 The GSAs believe that public education and outreach are an important component of this GSP.  
2920 Education can change use patterns that promote water conservation and protection of water resources.  
2921 The GSAs support continued education on preventing illegal dumping, illegal marijuana growers,  
2922 properly sealing abandoned wells and BMPs. Continued outreach to support the coordination of efforts  
2923 and information sharing, fostering relationships with relevant agencies and organizations and attending  
2924 meetings with local and region groups involved in water management is also important. This includes  
2925 increasing public outreach about funding opportunities and programs that support water conservation  
2926 methods, increased recharge and mediation opportunities for decreasing water levels. **Table 9-1** lists  
2927 current state and local funding sources that can be targeted to support project planning and  
2928 implementation. More information on public outreach and communication can be found in Chapter 11 –  
2929 Notice and Communications.

2930 Outreach methods that can be expanded include radio public service announcements, cooperator  
2931 workshops with University of California Cooperative Extension (UCCE) and social media posts  
2932 informing the public about upcoming meetings and deadlines, BMPs, plan updates, recharge  
2933 opportunities and updated water conditions. An organized effort to compile recharge and conservation  
2934 activities would aid GSAs in tracking impacts for future Plan revisions.

## 2935 10. Implementation Plan

---

2936 GSP implementation generally consists of five categories of activities:

- 2937 • GSA Administration and Public Outreach
- 2938 • Monitoring and Data Management
- 2939 • Annual Reporting
- 2940 • Plan Evaluation (5-year updates)
- 2941 • Projects and Management Actions

2942 This chapter contains discussion of the details for each of these activities, then sets forth a schedule for  
2943 implementation, estimates costs of implementation and discusses funding alternatives.

### 2944 10.1 GSA Administration and Public Outreach

2945 The nature of GSA administration is not addressed explicitly in the GSP Emergency Regulations. Much  
2946 of the work to implement portions of the GSP (e.g., monitoring and projects and management actions)  
2947 must be performed by outside entities such as DWR and hydrology professionals. However, this work  
2948 will need to be coordinated by the GSAs and some work will need to be performed by GSA staff.

2949 One category of work that rests on GSA shoulders is public outreach. The level of effort needed from  
2950 GSA staff depends greatly on the details of public outreach discussed in Chapter 11 – Notice and  
2951 Communications. In addition to the public outreach performed during GSP development, Regulations  
2952 (§354.10(d)) require GSAs to develop a communication section of the plan that includes the following:

- 2953 (1) An explanation of the Agency’s decision-making process
- 2954 (2) Identification of opportunities for public engagement and a discussion  
2955 of how public input and response will be used
- 2956 (3) A description of how the Agency encourages the active involvement of  
2957 diverse social, cultural and economic elements of the population within  
2958 the basin
- 2959 (4) The method the Agency shall follow to inform the public about progress  
2960 implementing the Plan, including the status of projects and actions

2961 Chapter 11 will contain the Communications and Engagement Plan, but the requirements of the  
2962 Regulations are presented here for awareness by GSA staff to refine this chapter and understand the  
2963 level of effort and expense that will be required for this component of GSP implementation. Decisions  
2964 will need to be made regarding whether the BVAC continues as a functioning body after completion of  
2965 the GSP and if the BVAC continues what role they take and how often they meet will determine the  
2966 level of GSA staff effort to facilitate BVAC meetings and activities.

## 10.2 GSP Annual Reporting

According to §356.2 of the Regulations, the Big Valley GSAs are required to provide an annual report to DWR by April 1 of each year following the adoption of the GSP. The first annual report will be provided to DWR by April 1, 2022 and will include data for the prior WY, which will be WY 2021 (October 1, 2020 – September 30, 2021). While the WY as defined by DWR isn't ideal for use in Big Valley, the GSAs will assemble data based on DWR's definition as per SGMA statute and regulations. The Annual Report will establish the historic conditions of groundwater within the BVGB, the status of the GSP implementation and the trend towards maintaining sustainability. Unfortunately, while conditions won't differ significantly from when the GSP was developed, the GSAs are still required to submit the annual report to comply with GSP regulations. A general outline is included below:

- General Information
  - Executive Summary
  - Introduction (1 map of Basin)
- Basin Conditions
  - Groundwater Elevations (2 contour maps, 12 hydrographs)
  - Estimated Groundwater Extractions (1 table from water budget)
  - Estimated Surface Water Supply (1 table from water budget)
  - Estimated Total Water Use (1 table from water budget)
  - Estimated Change in Groundwater Storage (2 maps, 1 graph and 1 table)
- GSP Implementation Progress
  - Progress Toward Measurable Objectives
  - Updates on Projects and Management Actions

Another way to organize this requirement and for GSA staff and stakeholders to understand the level of effort and expense involved in developing annual reports is to outline major technical tasks. Much of the effort to develop the annual reports is to take available data collected by outside agencies, generate figures based on that data and then re-submit to DWR. Below is a summary outline of tasks to be performed by GSA staff and/or consultants to develop the annual report:

- Download Water Level Data from state website and generate:
  - Hydrographs for 12 representative wells
  - Assumed Spring and Fall groundwater contours
  - Assumed Groundwater difference contours (e.g., fall 2020 to fall 2021)
- Download water budget data from state websites<sup>61</sup>

---

<sup>61</sup> This includes precipitation and reference evapotranspiration (ET<sub>o</sub>) from CIMIS and streamflow data from CDEC, BVWUA, Brookfield Energy, and other sources.



- 2999           ○ Run water budget for the WY and generate estimates of:
- 3000           ▪ Groundwater extractions.
- 3001           ▪ Surface water supply.
- 3002           ▪ Total water use.
- 3003       • Assemble and write annual report, of the estimates and assumptions.
- 3004       • Upload report and data to state website, of the estimates and assumptions.

## 3005   **10.2.1   General Information**

3006   In accordance with §356.2(a), each Annual Report will include, at the front of the report, an executive  
 3007   summary that will summarize the activities and the condition of groundwater levels within the BVGB  
 3008   for the prior year. The executive summary shall also include a map of the BVGB, its GSAs and the  
 3009   monitoring network.

3010   The annual report will include an introduction that will describe the following:

- 3011       • A description of the BVGB and the two GSAs
- 3012       • The general conditions of the BVGB for the prior WY (precipitation, surface water allocations,  
 3013       crop demands, municipal demands, etc.)
- 3014       • Any significant activities or events that would impact the water supply and/or groundwater  
 3015       conditions for the BVGB

## 3016   **10.2.2   Basin Conditions**

3017   Included in the annual report will be a discussion of specific local water supply conditions per  
 3018   §356.2(b). This section will provide a description of the water supply conditions for the WY being  
 3019   reported along with a graphical representation of the conditions. A WY shall be defined as the 12-month  
 3020   period starting October 1 through September 30 of the following year. Water supply conditions that will  
 3021   be discussed include:

- 3022       • Assumed Groundwater Elevations – elevation data from the monitoring network, including  
 3023       hydrographs for the representative wells and groundwater contours for spring and fall.
- 3024       • Assumed Groundwater Extractions – groundwater pumping estimates and measurements for  
 3025       agricultural, municipal, domestic and industrial<sup>62</sup> pumping generated from the water budget
- 3026       • Assumed Surface Water Supply – data from surface water supplies to irrigation demand<sup>63</sup>,  
 3027       conveyance losses and groundwater recharge, generated from the water budget
- 3028       • Assumed Total Water Use – total water uses by agricultural, municipal, domestic and industrial  
 3029       sectors, generated from the water budget

---

<sup>62</sup> This includes both in-basin industries as well as fire, wildlife, logging, and construction (which use both surface and groundwater).

<sup>63</sup> Summer flows in the BVGB are 100% allocated under existing water rights.

- Assumed Change in Groundwater Storage – a determination of the groundwater (volumetric) change, calculated from groundwater difference contours and/or the water budget.

### 10.2.3 Plan Progress

The annual report also needs to describe progress of the Plan since the previous report, including progress in maintaining measurable objectives and status of projects and management actions.

## 10.3 Data Management System

The Regulations require a data management system (DMS), but do not give strict guidance on format or how to develop and maintain the DMS. §352.6 of the Regulations states:

Each Agency shall develop and maintain a data management system that is capable of storing and reporting information relevant to the development or implementation of the Plan and monitoring of the basin.

The DMS proposed for Big Valley is separated into two categories: data for annual reports and data for GSP updates much of which is taking data already managed by the state and returning it to the state in a new format.

### 10.3.1 Annual Report DMS

Annual reports require water level data and other data to update the water budget. **Table 10-1** lists the data needed and the sources of those data. The DMS can be stored using common software (Microsoft Excel and ArcGIS) on GSA servers. Water level data will be downloaded from the state website<sup>64</sup> and stored in an Excel hydrograph spreadsheet tool. This tool will store the well information, water level data, WY types and sustainable management criteria (minimum thresholds and measurable objectives). The tool will allow users to generate hydrographs and provide the data needed to generate contours. **Figure 10-1** shows a screenshot of the Excel Water Level Tool for storing water well and water level data and generating hydrographs.

**Table 10-1 Annual Report DMS Data Types**

Data Type	Collecting Entity	Data Source	DMS Tool
Water Levels	DWR	<a href="#">SGMA Data Viewer</a>	Excel Water Level Tool
Precipitation	DWR	<a href="#">CIMIS</a>	Excel Water Budget Tool
Evapotranspiration	DWR	<a href="#">CIMIS</a>	Excel Water Budget Tool
Streamflow (gages)	USGS/DWR	<a href="#">CDEC</a>	Excel Water Budget Tool
Streamflow (water rights reporting)	State Water Board	<a href="#">eWRIMS</a>	Excel Water Budget Tool
GIS Base Data <sup>1</sup>	GSAs	various	GIS Database

Notes:  
<sup>1</sup>Base data includes GIS layers such as the county boundaries, streams, roads, well locations, etc., which generally don't change over time and don't need to be updated.  
CDEC = California Data Exchange Center

<sup>64</sup> Currently water level data for Big Valley is being managed and stored through [DWR's CASGEM system](#). Once the GSP is completed, the data will be brought into DWR's new [SGMA Portal](#) Monitoring Network Module (MNM). Data from either of these systems is available through the [SGMA Data Viewer](#).

3054 Water budget data will also be stored in an Excel spreadsheet tool as shown in **Figure 10-2**. Each of  
 3055 these spreadsheet tools has instructions, sheets to store raw data and sheets that perform calculations and  
 3056 generate the needed figures for annual reports or other purposes.

3057 Annual reports require maps, which are generated with widely used ArcGIS software. The geographic  
 3058 information system (GIS) data, including base data such as streams, roads and well locations will be  
 3059 organized into a folder structure as shown in **Figure 10-3**. Water level data will be imported into GIS to  
 3060 generate contours for annual reports.

### 3061 10.3.2 GSP Update DMS

3062 Additional types of data are needed to update the GSP, listed in **Table 10-2**. Much of this additional data  
 3063 is GIS-based and will be stored in the GIS database, shown in **Figure 10-3**. Water quality data will need  
 3064 to be downloaded from the State Water Board’s GAMA groundwater system in 2026 to support the  
 3065 5-year update.

3066 **Table 10-2 GSP Update DMS Data Types**

Data Type	Collecting Entity	Data Source	DMS Tool
Water Levels	DWR	<a href="#">SGMA Data Viewer</a>	Excel Water Level Tool
Precipitation	DWR	<a href="#">CIMIS</a>	Excel Water Budget Tool
Evapotranspiration	DWR	<a href="#">CIMIS</a>	Excel Water Budget Tool
Streamflow (gages)	USGS/DWR	<a href="#">CDEC</a>	Excel Water Budget Tool
Streamflow (water rights reporting)	State Water Board	<a href="#">eWRIMS</a>	Excel Water Budget Tool
Water Quality	State Water Board	<a href="#">GAMA</a>	Data to be downloaded for 5-year update.
Land Use	DWR	<a href="#">SGMA Data Viewer</a>	GIS Database
Subsidence (InSAR)	DWR	<a href="#">SGMA Data Viewer</a>	GIS Database
GIS Base Data <sup>1</sup>	GSAs	various	GIS Database

Note:

<sup>1</sup> Base data includes GIS layers such as the county boundaries, streams, roads, well locations, etc. which generally don't change over time and won't need to be updated.

3067

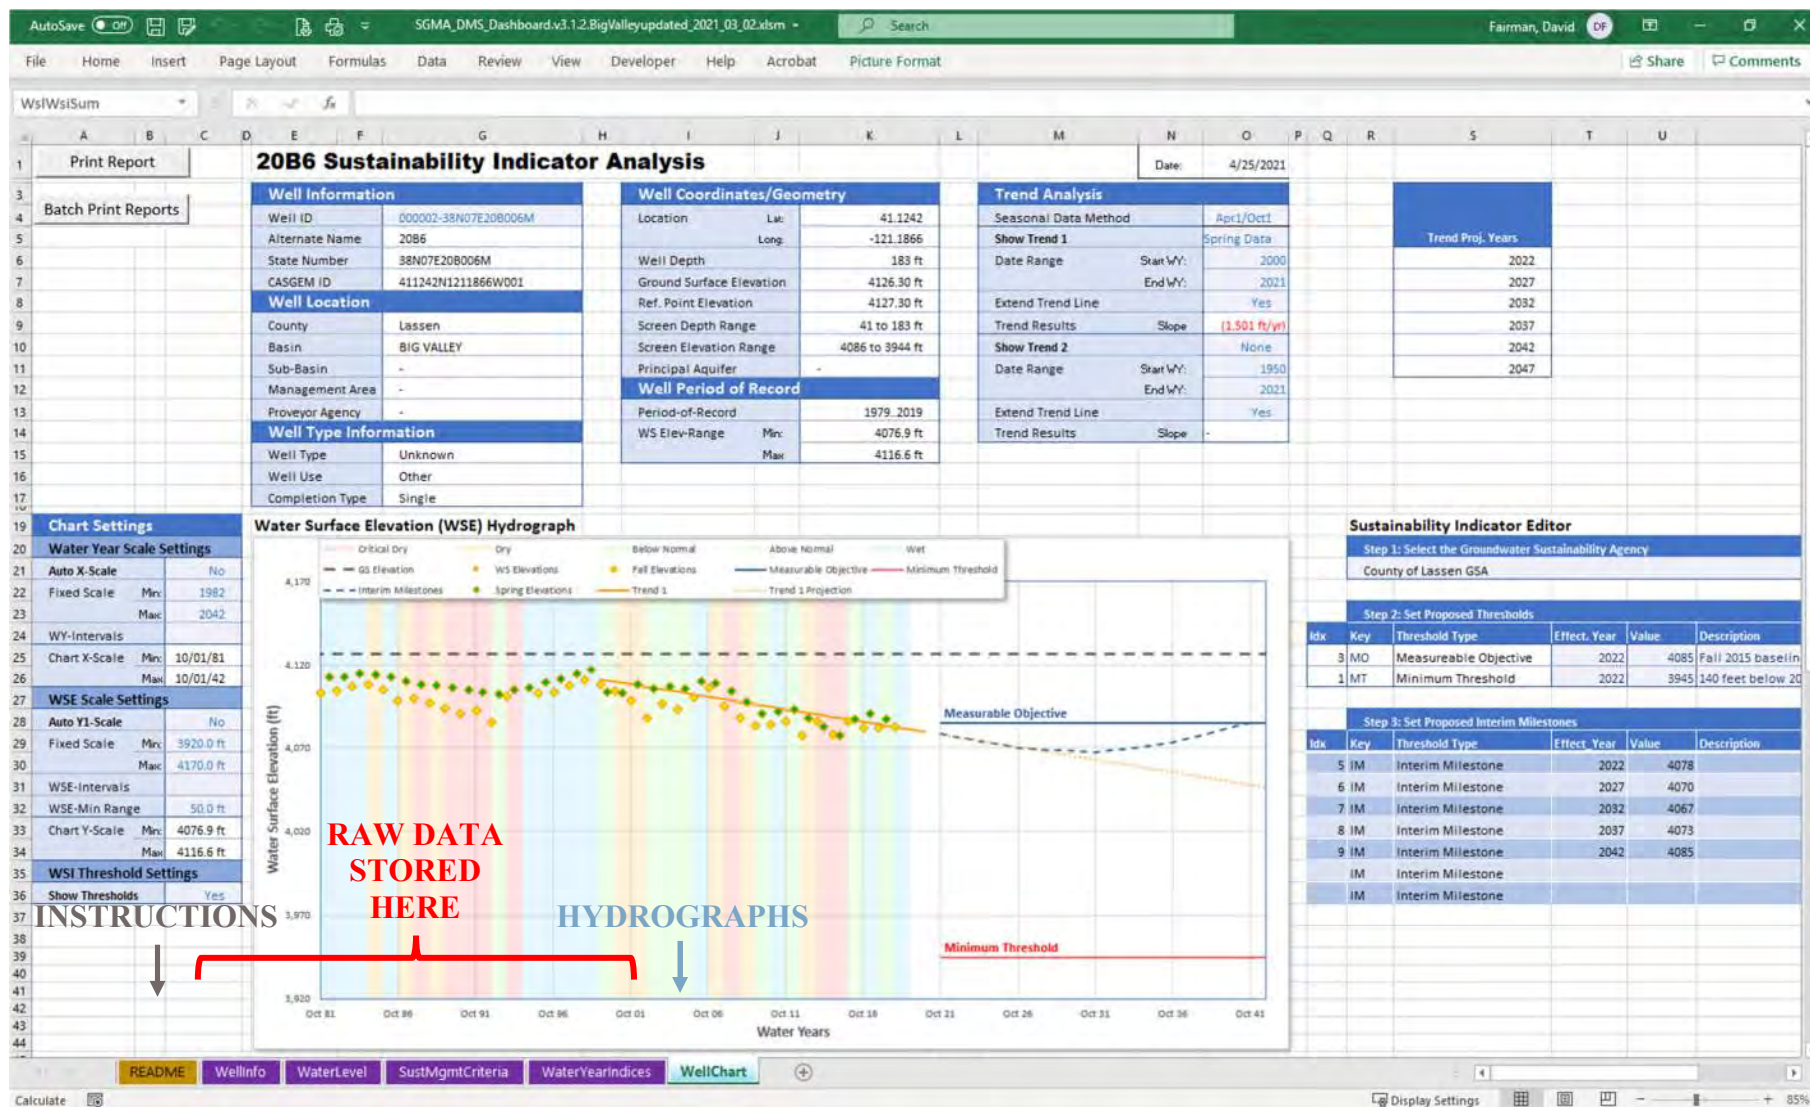


Figure 10-1 Excel Water Level Tool




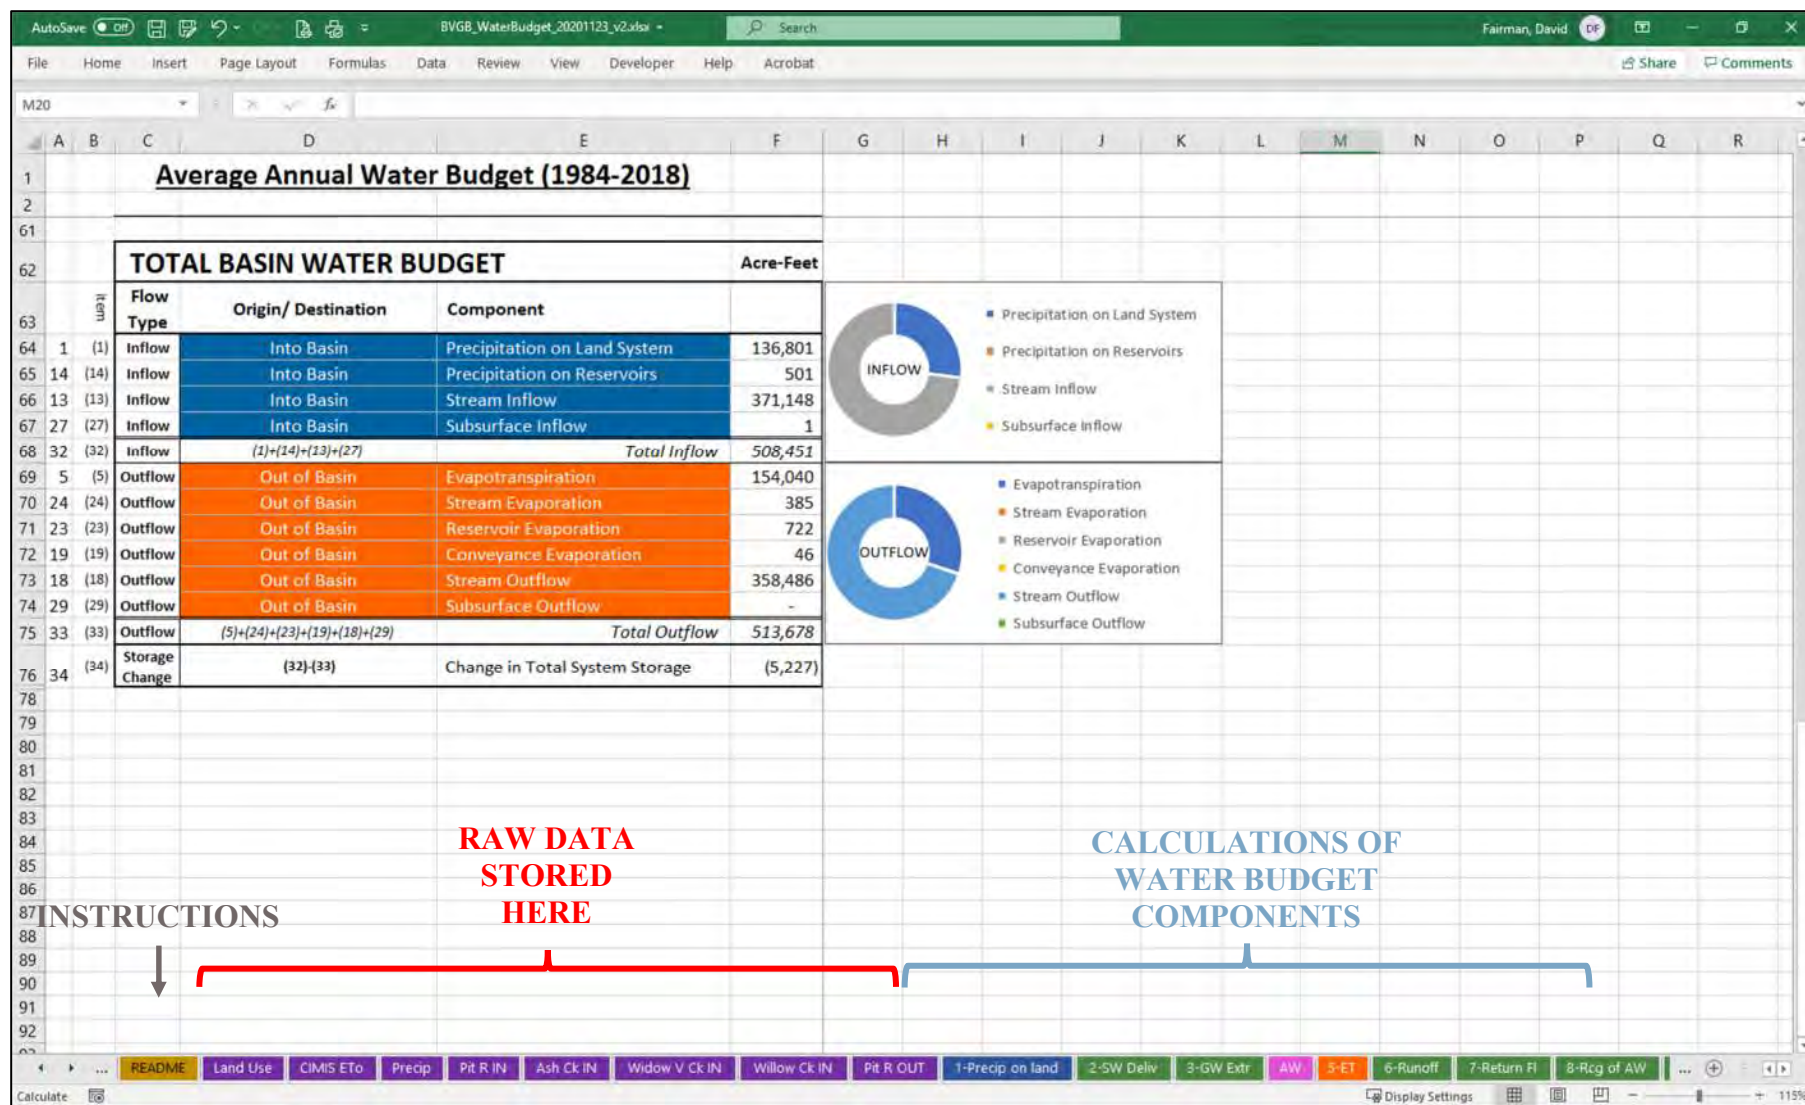


Figure 10-2 Excel Water Budget Tool

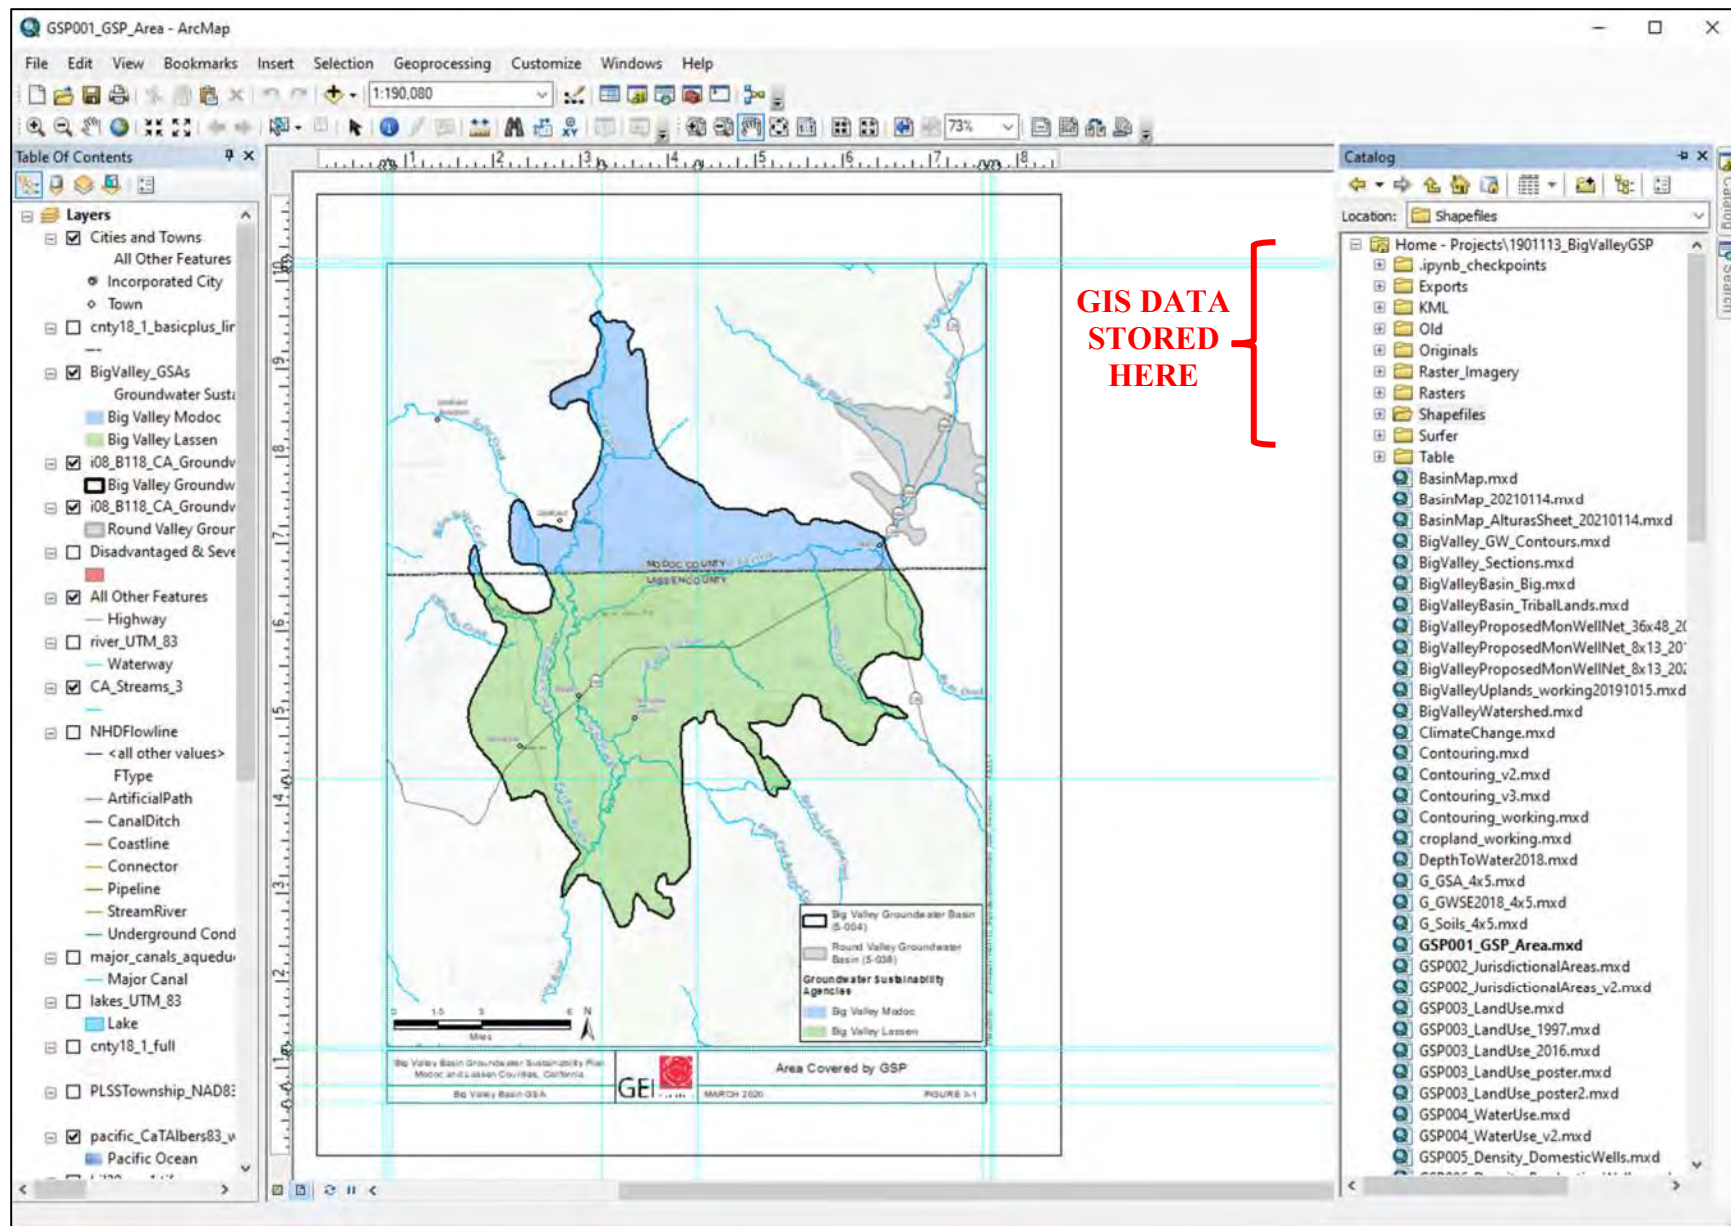

**Figure 10-3 GIS Database**

3076

3077  
3078

[This page is intentionally blank.]

## 10.4 Periodic Evaluations of GSP (5-Year Updates)

Updates and amendments to the GSP can be performed at any time, but at a minimum the GSAs must submit an update and evaluation of the plan every 5 years. (§356.4) While much of the content of the GSP will likely remain unchanged for these 5-year updates, the Regulations require that most chapters of the plan be updated and supplemented with any new information obtained in the preceding 5 years. Chapters that are likely to require significant updates and re-evaluation include:

- Chapter 4 – Hydrogeologic Conceptual Model
- Chapter 5 – Groundwater Conditions
- Chapter 6 – Water Budget
- Chapter 7 – Sustainable Management Criteria
- Chapter 8 – Monitoring Network
- Chapter 9 – Projects and Management Actions

Similar to this first version of the GSP, the Basin Setting (Chapters 4-6) will need to be signed and stamped by a California Professional Geologist or Engineer.

## 10.5 Implementation Schedule


**Figure 10-5** shows the implementation schedule. *See* Chapter 9 – Projects and Management Actions for the schedules for individual projects that are still under development.

## 10.6 Cost of Implementation

The legislation and regulations provide little guidance on how to develop and define costs. An analysis of GSPs from critically overdrafted basins found a broad variety of approaches, categories of costs and level of detail, from a single cost with no detail or justification to detailed costs for multiple categories. The purpose of this section is to present some information of cost ranges given for other basins and to give estimates of costs for the categories of implementation presented in this chapter, listed below. These costs may change based on how the GSAs choose to implement the GSP (e.g., the amount and type of public outreach and the amount and type of support sought from outside hydrology professionals such as consultants and/or UCCE).

- GSA Administration and Public Outreach
- Monitoring and Data Management
- Annual Reporting
- Plan Evaluation (5-year updates)
- Projects and Management Actions



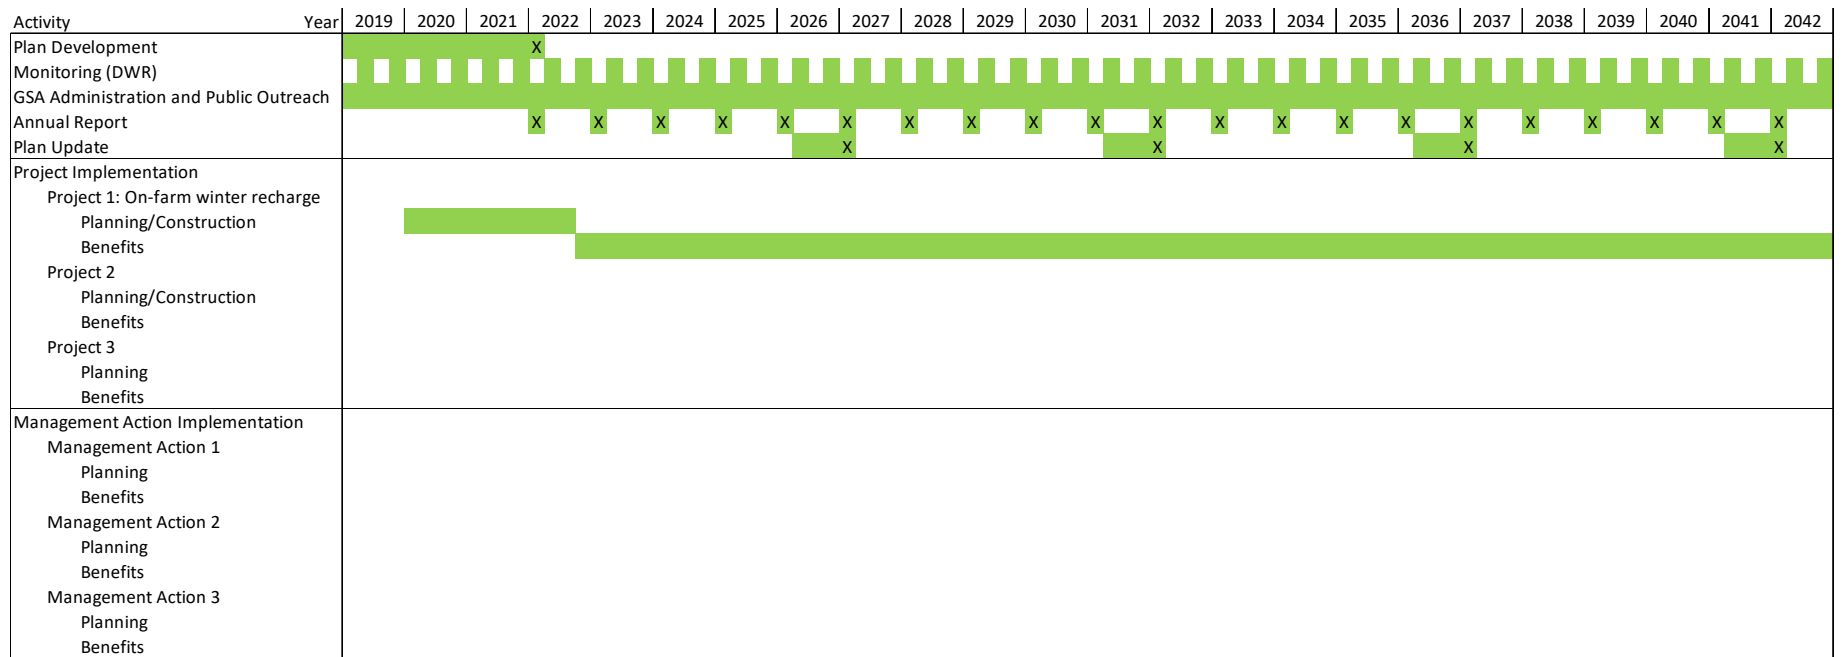

**Figure 10-4 Implementation Schedule**

Cost is a fundamental concern to the GSAs and stakeholders in the BVGB, as the Basin is a disadvantaged community and there is little to no revenue generated in the counties to fund the state unfunded requirements of SGMA. This is a big burden for a small, disadvantaged Basin that has no incorporated cities, low value crops and no revenue stream to pay the costs for the mandated GSP. Therefore, the approach in implementing the plan and estimating costs is to leverage as much outside funding and technical support as possible to cover costs. For costs that must be borne by the GSAs, efficient implementation methods while still meeting SGMA requirements to support the GSP is the desired outcome. **Table 10-3** shows a summary of the costs from GSPs submitted in 2020. As mentioned, not every GSP had every category of costs listed, but the number of GSPs that did detail costs for each category is shown. It should be noted that Big Valley is extremely unique in a variety of ways documented in this GSP.

**Table 10-3 GSP Implementation Cost Statistics for 2020 GSPs in California**

	Annual Cost Details						5-Year Update
	Total Annual	GSA Admin	Public Outreach	Annual Monitoring	DMS Update	Annual Report	
count	34	21	11	23	8	15	20
min	\$ 50,000	\$ 51,000	\$ 5,000	\$ 20,000	\$ 10,000	\$ 20,000	\$ 50,000
max	\$ 2,596,384	\$ 1,538,794	\$ 75,000	\$ 1,057,590	\$ 170,000	\$ 350,000	\$ 1,400,000
mean	\$ 981,296	\$ 607,861	\$ 27,573	\$ 293,907	\$ 42,875	\$ 56,267	\$ 455,369
median	\$ 720,100	\$ 418,900	\$ 20,000	\$ 136,000	\$ 20,000	\$ 25,000	\$ 330,000

Source: Fricke 2020

## 10.6.1 GSA Administration and Public Outreach

The fundamental activities that will need to be performed by the GSAs are public outreach and coordination of GSP activities. Public outreach may entail updates at County Board of Supervisors' meetings and/or public outreach meetings. At a minimum the GSAs will receive and respond to public input on the Plan and inform the public about progress implementing the GSP as required by §354.10(d)(4) of the Regulations. Coordination activities would include ensuring monitoring is performed, annual reports to DWR, 5-year GSP updates, and projects and management action coordination. Based on current grants which have funded filling of data gaps and identifying recharge opportunities, the GSA administrative costs of projects and management actions may be largely covered by grant funds.

In other GSPs already submitted, 21 itemized GSA administration and their estimates ranged in cost from \$51,000 to over \$1.5 million (M) per year, with a median of about \$200,000. However, most of these basins are much larger than Big Valley, have more complex governance structures (i.e., have multiple GSPs in the Basin) and have more stakeholder groups. This cost for Big Valley could vary depending on the nature of public outreach written in the GSP.

## 10.6.2 Monitoring and Data Management

Twenty-three GSPs submitted to DWR to date have itemized annual monitoring with cost estimates ranging from \$20,000 to over \$1M per year with a median of about \$65,000. Twelve GSPs itemized DMS updates with costs ranging from \$3,000 to \$170,000 with a median cost of \$15,000.

3146 DWR staff currently measures water levels in the Basin and posts them on their website and has  
3147 indicated that they will continue to do so for the foreseeable future. DWR has also indicated that they  
3148 could monitor water levels in the newly constructed monitoring wells. If DWR follows through on this  
3149 assumption, there would be little to no costs to the GSAs for monitoring. The GSAs would need to  
3150 download and populate the DMS tools detailed above. However, for costing purposes, we have assumed  
3151 this to be covered under the Annual Report cost category.

3152 If DWR chooses to discontinue its water level monitoring of wells in Big Valley, the cost could be on  
3153 the order of \$2,000 to \$3,000, which equates to 40 to 60 staff-hours.

### 3154 **10.6.3 Annual Reporting**

3155 Annual report costs were estimated in 15 GSPs ranging from \$20,000 to \$350,000 with a median cost of  
3156 \$25,000. Annual reports have substantial requirements, including assembling the data, processing and  
3157 generating the necessary charts, maps and tables and writing the text described in Section 10.2 – GSP  
3158 Annual Reporting. There are ways to streamline and automate the process of retrieving, reformatting and  
3159 returning the data to the state, many of which are described in Section 10.2.3 – Plan Progress. The level  
3160 of effort and cost will be reduced over the course of the first few years, but an initial estimate of \$25,000  
3161 for developing an annual report, then dropping to perhaps about \$10,000, if the annual report is  
3162 developed, written and submitted by GSA staff, this would equate to about 200 staff-hours.

### 3163 **10.6.4 Plan Evaluation (5-Year Updates)**

3164 The cost of updates to the GSP will be lower than the cost of initially developing the GSP. However, the  
3165 Regulations require all parts of the GSP to be updated with recent data and information and will require  
3166 substantial effort from a licensed professional. Of the 20 GSPs submitted that had GSP update cost  
3167 estimates, they ranged from \$50,000 to \$1.4M with a median cost of \$330,000. However, many of the  
3168 GSPs already submitted are in basins with multiple GSPs. In those types of basins, the Basin Setting  
3169 (Chapters 4-6) is typically performed on a Basin-wide basis. Big Valley will have to update the  
3170 complete document. Therefore, a range of about \$200,000 to \$300,000 is estimated to update the GSP.

### 3171 **10.6.5 Projects and Management Actions**

3172 Costs of projects and management actions are addressed in Chapter 9 – Projects and Management  
3173 Actions. If, and when, the GSAs seek outside funding, the costs will be put out to bid to ensure the  
3174 reasonableness of the costs when implemented.

3175 **Table 10-4** summarizes the cost estimates of annual and 5-year updates discussed above. When the  
3176 GSAs seek outside funding, the costs will be put out to bid to ensure the reasonableness of the costs.

3177 **Table 10-4 Summary of Big Valley Cost Estimates**

		Annual Cost Details			
		GSA Admin and Public Outreach	Annual Monitoring and DMS Update	Annual Report	5-Year Update
Low	\$ 30,000	\$ 20,000	\$ -	\$ 10,000	\$ 200,000
High	\$ 68,000	\$ 40,000	\$ 3,000	\$ 25,000	\$ 300,000

## 3179 10.7 Funding Alternatives

3180 This section discusses funding alternatives. As discussed in various parts of this GSP, the GSAs and  
 3181 residents of Big Valley have no ability to take on the ongoing costs of implementing this GSP and  
 3182 contend that SGMA is an unfunded mandate. Therefore, the GSAs are forced to rely on outside sources  
 3183 to fund the Plan. **Table 10-5** describes the various funding options available to the GSAs. The table  
 3184 describes both outside funding (state and federal assistance and grants) and local funding (general fund,  
 3185 fees and taxes). Annual costs are less likely to be funded directly by outside sources because of the  
 3186 premise of SGMA that groundwater basins are best managed locally, and administration, monitoring and  
 3187 reporting costs are most likely to be seen as an obligation for the local GSAs under this premise.  
 3188 However, 5-year updates and particularly projects and management actions are good candidates for  
 3189 outside funding. Some of this outside funding that currently exists could be through the DWR Prop 1  
 3190 grants obtained by the North Cal-Neva and Modoc County could potentially be leveraged to support  
 3191 annual reporting in the next year or two. This depends on the degree that there is overlap between the  
 3192 scopes of work for the grants and the annual report requirements. These two existing grants are laying  
 3193 the groundwork for recharge projects and filling data gaps.

3194 The entire BVGB is a disadvantaged community with much of the Basin designated as severely  
 3195 disadvantaged. The GSAs adamantly oppose new taxes or fees as additional taxes or fees would harm  
 3196 the community and alter the ability of residents to live and work in the Basin. The GSAs will identify  
 3197 and pursue grants to fund the implementation of this GSP. To that end the GSA will look toward  
 3198 funding options presented by the California Financing Coordinating Committee (CFCC) through their  
 3199 Funding Fairs<sup>65</sup>.

3200

<sup>65</sup> More information on CFCC including their 2021 Funding Fairs Handbook is available at <https://www.cfcc.ca.gov/funding-fairs/>.



3201 **Table 10-5 Summary of GSP Funding Mechanisms**

Funding Mechanism		Description
Assistance Programs		DWR offers Technical Services Support and Facilitation Services Support Programs to assistance GSAs in development and implementation of their GSPs. If granted, services provided under these programs are offered at no-cost to the GSAs.
Grant Funding	State Grants	DWR's Sustainable Groundwater Management Grant Program, funded by Proposition 1 and Proposition 68, provides funding for sustainable groundwater planning and implementation projects. Both DWR and the State Water Board offer a number of grant and loan programs that support integrated water management, watershed protection, water quality improvement and access to safe drinking water. Other state agencies and entities with grant or loan programs related to water and environment include the CDFW and California Water Commission.
	Federal Grants	Federal grant and loan programs related to water planning and infrastructure include the Water Infrastructure Finance and Innovation Act, Water Infrastructure Improvement for the Nation Act and the DOI Reclamation's WaterSMART program.
General Funds		Cities and counties maintain a general fund which include funding from taxes, certain fees, state shared revenue, interest income and other revenues. While not a funding mechanism, the general funds from cities and counties may be used to fund or provide in-kind services for GSA activities and GSP implementation.
Fees	Fees	Fees include "various charges levied in exchanges for a specific service" (Hanak et al., 2014). This includes water and wastewater bills, or developer or connection fees, and permitting fees.  Under rules established by Proposition 218 (1996), new property-related fee increases are subject to a public hearing and must be approved by either a simple majority of property owners subject to the fee or by two-thirds of all registered voters (Hanak et al., 2014; League of California Cities, 2019).
	Groundwater Extraction Fees	SGMA grants GSAs certain powers and authorities including the authority to impose fees. Section 10730 of the Water Code states that a GSA may "permit fees and fees on groundwater extraction or other regulated activity, to fund the costs of a groundwater sustainability program, including, but not limited to, preparation, adoption and amendment of a groundwater sustainability plan, and investigations, inspections, compliance assistance, enforcement, and program administration, including a prudent reserve."
	Assessments	Assessments are a specific type of fee that are levied on property to pay for a public improvement or service that benefits that property.
Taxes		Taxes imposed by local agencies include general taxes, special taxes, and property taxes. Taxes generally fall into one of two categories: general or special (Institute for Local Government, 2016). <i>General taxes</i> are defined as "any tax imposed for general governmental purposes." (Cal. Const. art. XIII C, § 1, subd. [a])  <i>Special taxes</i> are "any tax imposed for specific purposes, including a tax imposed for a specific purpose, which is placed into a general fund." (Cal. Const. art. XIII C, § 1, subd. [d]). Proposition 218 (1996) states that special districts, "could not levy general taxes, but only special taxes, and it clarified that local general taxes always required simple majority voter approval and that local special taxes always required two-thirds voter approval."

3202

3203

3204

# 11. Notice and Communications §354.10

3205

## 11.1 Background

3206

3207

3208

3209

3210

3211

3212

3213

SGMA compliance, outreach and communication efforts in the BVGB began before GSP development. When SGMA was signed into law, local agencies in the BVGB explored options for forming GSAs by the June 30, 2017 statutory deadline. On February 23, 2016, Lassen and Modoc counties held a public meeting of the Lassen and Modoc County Boards of Supervisors in Adin to explore whether the District<sup>66</sup> could become a GSA for the Basin and if that option was preferred over the two counties becoming the GSAs. These were the only two options available under existing public agency structures. The preferred options resulting from the meeting was that the two counties become the GSAs for their respective Basin jurisdictions and develop a single, coordinated GSP.

3214

3215

3216

3217

3218

3219

3220

The county boards moved forward to become GSAs, held public hearings and passed resolutions in early 2017. They registered with DWR as the Big Valley Modoc GSA and Big Valley Lassen GSA, each covering the portion of the Basin in their respective county. After becoming established as the GSAs, the counties developed a workplan under guidance from consultants to determine the scope, schedule and cost for GSP development; an application for a state grant was submitted and grant awarded; and the GSAs submitted a notice of intent to develop one GSP to cover the entire BVGB. A timeline of these events is presented in **Table 11-1** below.

3221

**Table 11-1 Pre-GSP Development Outreach Efforts**

Date	Activity
November 2015	Public Outreach meeting in Adin
February 2016	Joint Lassen-Modoc Board of Supervisors meeting to explore GSA options to comply with SGMA
February 2016 to present	Modoc County Groundwater Advisory Committee Meetings (bimonthly)
January 2017	Public outreach meeting in Bieber to solicit comment on the counties becoming GSAs
February 2017	County of Modoc GSA Formation Public Hearing
March 2017	County of Lassen GSA Formation Public Hearing
July-September 2017	GSP Workplan developed to determine scope, schedule and cost of GSP development
November 2017	Lassen County submits application for state grant to fund GSP development
June 2018	Notice of Intent to develop one GSP for the entire BVGB submitted to DWR
November 2018	Lassen County entered into SGMA grant agreement with the state
February 2019	GSP development started

<sup>66</sup> Lassen-Modoc Flood Control and Water Conservation District

## 11.2 Challenges of Developing GSP During COVID Pandemic

A major challenge and constraint during the development of the GSP was the COVID 19 pandemic that started in early 2020. The pandemic made thorough and proper public outreach and participation impossible throughout 2020 and early 2021, the time during which key GSP content was developed and discussed by consultants, GSA staff and the BVAC. Due to state restrictions from the Governor's executive orders, GSA staff had to cancel BVAC meetings, restrict public attendance at meetings and facilitate participation through remote technology. Many interested parties did not feel safe attending meetings in person and remote attendance did not facilitate appropriate participation.

Internet connectivity and quality in this portion of the state is poor to nonexistent and the counties have very limited technological resources. These disadvantaged communities are on the losing end of the digital divide. While the GSAs made every attempt to conduct BVAC meetings with the ability for remote public participation, there were still major logistical and technical challenges both with conducting such meetings as well as members of the public participating. Those participants that had internet connectivity frequently could not hear or understand the dialogue in the Big Valley community venues and could not interact in the most effective way. However, the GSAs made the best of the circumstances and addressed all comments provided through the various means.

The GSAs recognized the obstacles presented by the COVID pandemic early in the efforts to develop a GSP and were proactive in reaching out to both the Governor and Legislature to identify potential solutions. The Governor severely restricted public meetings (and initially did not allow public meetings at all) because of the pandemic. Obviously, this made the GSAs' efforts to develop a GSP with constructive input from the public extremely difficult since, as outlined above, there is limited internet connectivity to conduct meetings remotely. Further, the limited GSA staff and technology was challenged to offer meetings remotely.

One obvious solution would be to recognize the emergency that is occurring across the state (and nation) and provide additional time to submit the required GSP. As such, on August 11, 2020, a letter was sent from the Lassen County Board of Supervisors (acting as the Lassen County GSA) to both the Legislature and the Governor requesting additional time. There was no response from either the Legislature or the Governor, so the Lassen County Board of Supervisors sent follow up letters to the Governor on November 17, 2020, February 16, 2021, March 23, 2021 and April 27, 2021. Neither the Legislature nor the Governor responded. However, a response was eventually received (dated June 3, 2021) from Karla A. Nemeth with DWR, denying said request, even though the Board of Supervisors sent the above letters to the Governor and not to DWR.

In February 2021, State Assembly Member Devon Mathis introduced Assembly Bill 754 which would have extended the GSP deadline. The Lassen and Modoc County Boards of Supervisors sent letters to State Assembly committee leaders in support of the bill. Supervisor Byrne testified before both the Senate and Assembly committees in support of the bill citing the constraints of inadequate broadband in the community for meaningful public participation. The bill was passed by the State Assembly but did not pass out of committee in the State Senate.

3261 Letters from the GSA to the governor and assembly, along with the response letter from DWR are  
3262 included in **Appendix 11A**.

## 3263 **11.3 Goals of Communication and Engagement**

3264 In developing the GSP, the GSAs implemented communication and engagement (C&E) with the goals  
3265 of:

3266 **Educating the public about the importance of the GSP and their input.** Public input is an important  
3267 part of the GSP development process. The local community defines the values of the Basin and the  
3268 priorities for groundwater management. This input guided decision-making and development of the  
3269 GSP, particularly the development of the sustainability goal, sustainable management criteria and  
3270 projects and management actions.

3271 **Engaging stakeholders through a variety of methods.** One size does not fit all when it comes to  
3272 stakeholder engagement in GSP development. This chapter outlines how the GSAs performed C&E at  
3273 multiple venues through a variety of media to reach varied audiences.

3274 **Making public participation easy and accessible.** The C&E described in this chapter describes the  
3275 many methods employed to make it easy for the public to be informed and provide input.

3276 **Providing a roadmap for GSP development.** The GSAs provided a schedule for stakeholders, keeping  
3277 C&E efforts consistent and on track.

## 3278 **11.4 Stakeholder Identification**

3279 The Water Code §10723.2 requires consideration of all beneficial uses and users of groundwater.  
3280 Primary beneficial uses of groundwater in the BVGB include agriculture, domestic use and habitat. In  
3281 addition to farmers and individual well owners in the valley, this includes a small community system in  
3282 Bieber, the Intermountain Conservation Camp and the CDFW which uses groundwater to supplement  
3283 and maintain some habitat in the ACWA in the center of the Basin. Other significant uses include  
3284 industrial uses such as logging, construction and fire suppression.

3285 The Big Valley GSAs recognize that C&E with Big Valley water users and stakeholders is key to the  
3286 success of GSP development and implementation. Particularly important is the engagement of local  
3287 landowners given that the county seats are distant from Big Valley. Both counties have engaged  
3288 stakeholders through various processes and efforts, including Modoc County’s groundwater committee,  
3289 the LCGMP development and Basin Management Objectives program implementation and the BVAC  
3290 described in this chapter. In addition, the GSAs performed several public workshops to solicit more  
3291 input from interested parties. A listing of the BVAC, public workshop and other public outreach  
3292 meetings is included in **Appendix 11B**.

3293 The following is an initial list of interested parties that were contacted during GSA formation and GSP  
3294 development:

- 3295 • Agricultural users



- 3296 • Domestic well owners
- 3297 • Public Water Systems (including Lassen County Waterworks District No. 1)
- 3298 • CDFW
- 3299 • Surface Water User Groups (including BVWUA)
- 3300 • Lassen-Modoc County Flood Control and Water Conservation District
- 3301 • Modoc County Groundwater Advisory Committee
- 3302 • Federal Agencies (including the Forest Service and BLM)
- 3303 • Tribes (including the Pit River Tribe)
- 3304 • DWR
- 3305 • North Cal-Neva

3306 Prior to establishing themselves as the GSAs, the names and contact information for the above groups  
 3307 were compiled in spreadsheets. People on the interested parties lists were under no obligations and  
 3308 received information about GSP development, including meeting announcements and opportunities to  
 3309 provide input and become more involved.

3310 The GSAs developed a website (described below) to facilitate C&E, and anyone interested in GSP  
 3311 development or implementation in the BVGB was able add themselves to the interested parties list. In  
 3312 addition, sign-in sheets at all public meetings allowed attendees to add themselves to the interested  
 3313 parties list.

3314 Outreach with the Pit River Tribe was performed, and tribal contacts were added to the interested parties  
 3315 list when it was first developed in February 2016. Therefore, tribal contacts have received all  
 3316 notifications of GSP development activity. Applications to become members of the BVAC were sent to  
 3317 the tribes. In addition, the Modoc County Groundwater Resources Advisory Committee, a committee of  
 3318 the Modoc County Board and a forum for obtaining updates about GSP development, has a tribal  
 3319 position. Numerous contacts between Modoc County staff and tribal contacts have occurred during GSP  
 3320 development. A list of outreach activities with tribal contacts is included in **Appendix 11C**.

## 3321 **11.5 Venues and Tools**

### 3322 **11.5.1 Stakeholder Survey**

3323 The GSAs performed a C&E survey with the purpose of soliciting information about how stakeholders  
 3324 wish to be involved in the GSP and what concerns they have relevant to the GSP. Paper copies of the  
 3325 survey were available at public meetings and was also available online.<sup>67</sup>

---

<sup>67</sup> <https://www.surveymonkey.com/r/TQ9HCQK>

3326 **11.5.2 Website and Communication Portal**

3327 A website<sup>68</sup> was deployed for GSP development to facilitate communication and track the  
3328 communication in a database. The website was not meant to replace, but to enhance, outreach efforts.  
3329 Tools of the website allowed the GSAs to communicate with interested parties. These tools include the  
3330 following:

- 3331 • **Calendar.** The website included a calendar with meeting dates, locations, times and documents  
3332 such as meeting agendas, meeting minutes, presentations and BVAC packets.
- 3333 • **Interested Parties List.** The website allows users to add themselves to the interested parties list  
3334 and to select whether they wish to receive communication through email or physical mail.
- 3335 • **Documents.** In addition to the meeting documents mentioned above, the website has a general  
3336 documents page where the GSAs posted GSP chapters, scientific references and other supported  
3337 documents related to GSP development.
- 3338 • **E-Blast.** E-mails will be sent to interested parties using the e-blast tool. E-blasts helped to notify  
3339 interested parties with email addresses to receive information about GSP development progress,  
3340 upcoming meetings and new information or documents available.
- 3341 • **Public Comment.** GSP chapters posted on the website were available for public comment. A  
3342 web form was available for anyone to submit comments on draft GSP documents. The form  
3343 allowed the user to comment by page and line number stored the information for GSA review  
3344 and response.

3345 The website address was included on printed materials and announced at public meetings.

3346 **11.5.3 Community Flyers**

3347 Physical copies of flyers announcing upcoming public meetings were posted in heavily trafficked  
3348 locations such as community centers, public buildings, local markets and post offices.

3349 **11.5.4 Newspaper**

3350 All public meetings, including BVAC meetings were announced in the Lassen County Times, the  
3351 Modoc Record and the Mountain Echo.

3352 **11.5.5 Social Media**

3353 Information about GSP development and meeting announcements have been and will continue to be  
3354 made available through social media. UC Cooperative Extension in Modoc County hosts the Devil's  
3355 Garden Research and Education Facebook page, as well as a website with the same name. Through their  
3356 Facebook page<sup>69</sup>, events are publicized and shared with other connected pages in the area to reach a  
3357 wider stakeholder base. This platform also enables workshops and other events to be shared through live

---

<sup>68</sup> <https://bigvalleygsp.org>

<sup>69</sup> <http://www.facebook.com/devilsgardenresearchandeducation>

3358 video and recordings. Recently, a blog detailing stakeholder engagement in Big Valley was published to  
3359 the website.<sup>70</sup>.

## 3360 **11.5.6 Brochure**

3361 In 2021, the GSAs transitioned from the background and scientific portions of the GSP (Chapters 1-6,  
3362 including Basin Setting and Water Budget) to the policy and decision-making portions of the GSP  
3363 (Chapters 7-9, Sustainable Management Criteria, Monitoring Networks and Projects and Management  
3364 Actions). To facilitate engagement of people who may have been coming into the process at that time, a  
3365 four-page informational brochure was developed, summarizing Chapters 1 through 6. This brochure was  
3366 distributed on the website, through email and at public meetings. The brochure is included as  
3367 **Appendix 11D**.

## 3368 **11.5.7 Big Valley Advisory Committee**

3369 The GSAs established the BVAC through an MOU to advise both Lassen and Modoc counties on GSP  
3370 preparation. The goals of the BVAC, as stated in the MOU (**Appendix 1C**), include the following:

- 3371 • Advise the two GSAs on the preparation of a GSP.
- 3372 • Provide a forum for the public to comment during the preparation of the GSP.
- 3373 • Provide recommendations to the two GSAs that would result in actions which have as minimal  
3374 impact as possible on the residents of Big Valley.
- 3375 • Advise the two GSAs on the preparation of a GSP to produce the lowest possible future costs to  
3376 the residents of Big Valley.
- 3377 • Ensure local control of the BVGB be maintained by the two GSAs.
- 3378 • Provide a recommendation to the GSA boards on whether to approve the GSP.

3379 Membership of the BVAC was composed of:

- 3380 • One member of the Lassen County Board of Supervisors selected by said Board.
- 3381 • One alternate member of the Lassen County Board of Supervisors selected by said Board.
- 3382 • One member of the Modoc County Board of Supervisors selected by said Board.
- 3383 • One alternate member of the Modoc County Board of Supervisors selected by said Board.
- 3384 • Two public members selected by the Lassen County Board of Supervisors. Said members must  
3385 either reside or own property within the Lassen County portion of the BVGB.
- 3386 • Two public members selected by the Modoc County Board of Supervisors. Said members must  
3387 either reside or own property within the Modoc County portion of the BVGB.

---

<sup>70</sup> <http://www.devilsgardenucce.org/>

3388 The BVAC operated in compliance with the Ralph M. Brown Act (Brown Act). BVAC meetings were  
3389 noticed and agendas were posted according to the Brown Act. BVAC meetings were open to the public  
3390 and allowed public comment, as much as possible given COVID pandemic restrictions.

3391 During the development of Chapters 7 through 9, the BVAC established Ad Hoc committees to  
3392 investigate, discuss and recommend content for the sustainability goal, sustainable management criteria,  
3393 monitoring network and projects and management actions.

## 3394 **11.6 Decision-Making Process**

3395 The MOA describes the decision-making process for the BVAC. However, while the BVAC made  
3396 recommendations, it was not a formal decision-making body like the Lassen or Modoc GSAs. The  
3397 Lassen County GSA, led by the Lassen County Board of Supervisors and the Modoc County GSA, led  
3398 by the Modoc County Board of Supervisors, were ultimately responsible for adopting and submitting a  
3399 GSP to DWR. The GSAs considered all input received from the BVAC and other interested parties.

3400 To develop each chapter of the GSP, the GSAs followed an iterative process illustrated in **Figure 11-1**.  
3401 The process involved multiple drafts of each chapter, including administrative, public and (often  
3402 multiple) revised drafts. Once the BVAC was satisfied that the chapter was at a point where the GSAs  
3403 were comfortable to move on, they voted to “set aside” the chapter until the entire draft GSP was  
3404 assembled. This recommendation did not indicate approval but was implemented to keep the  
3405 development process moving forward. The GSP was then assembled into a complete draft to undergo  
3406 the same process of administrative, public and revised drafts. The BVAC will then vote whether to  
3407 recommend to the GSA boards if they should approve the GSP. The GSA boards will vote whether to  
3408 approve the GSP prior to submittal to DWR.

## 3409 **11.7 Comments and Incorporation of Feedback**

3410 All formal feedback on the GSP were documented both through the GSP website and from public  
3411 meetings. The comments received, including how each comment was addressed is included in  
3412 **Appendix 11E**.

## 3413 **11.8 Communication and Engagement During Plan** 3414 **Implementation**


3415 The BVAC was established by the GSAs for the specific purpose of advising during development of the  
3416 GSP and making recommendations to the GSA boards on whether to approve the GSP. The MOU  
3417 establishing the BVAC therefore expires after the GSP is adopted by the GSAs and submitted to DWR.  
3418 The C&E during Plan implementation will then shift to the GSA Boards who will continue to inform the  
3419 public about Plan progress and status of projects and management actions as required by §354.10(d)(4)  
3420 of the regulations.

3421 This ongoing C&E will be performed through the forum of meetings of the County Boards of  
3422 Supervisors where GSA staff will give regular reports to the boards and the public along with annual  
3423 reports to be submitted to DWR as required by GSP Regulations. Communication to stakeholders on the



3424 interested parties list will continue to occur *via* email and physical mail. Development of annual reports  
3425 and coordination and implementation of projects and management actions will require significant effort  
3426 from GSA staff. The GSAs are considering the development of an MOU to clearly define roles,  
3427 responsibilities and costs of each GSA.

3428

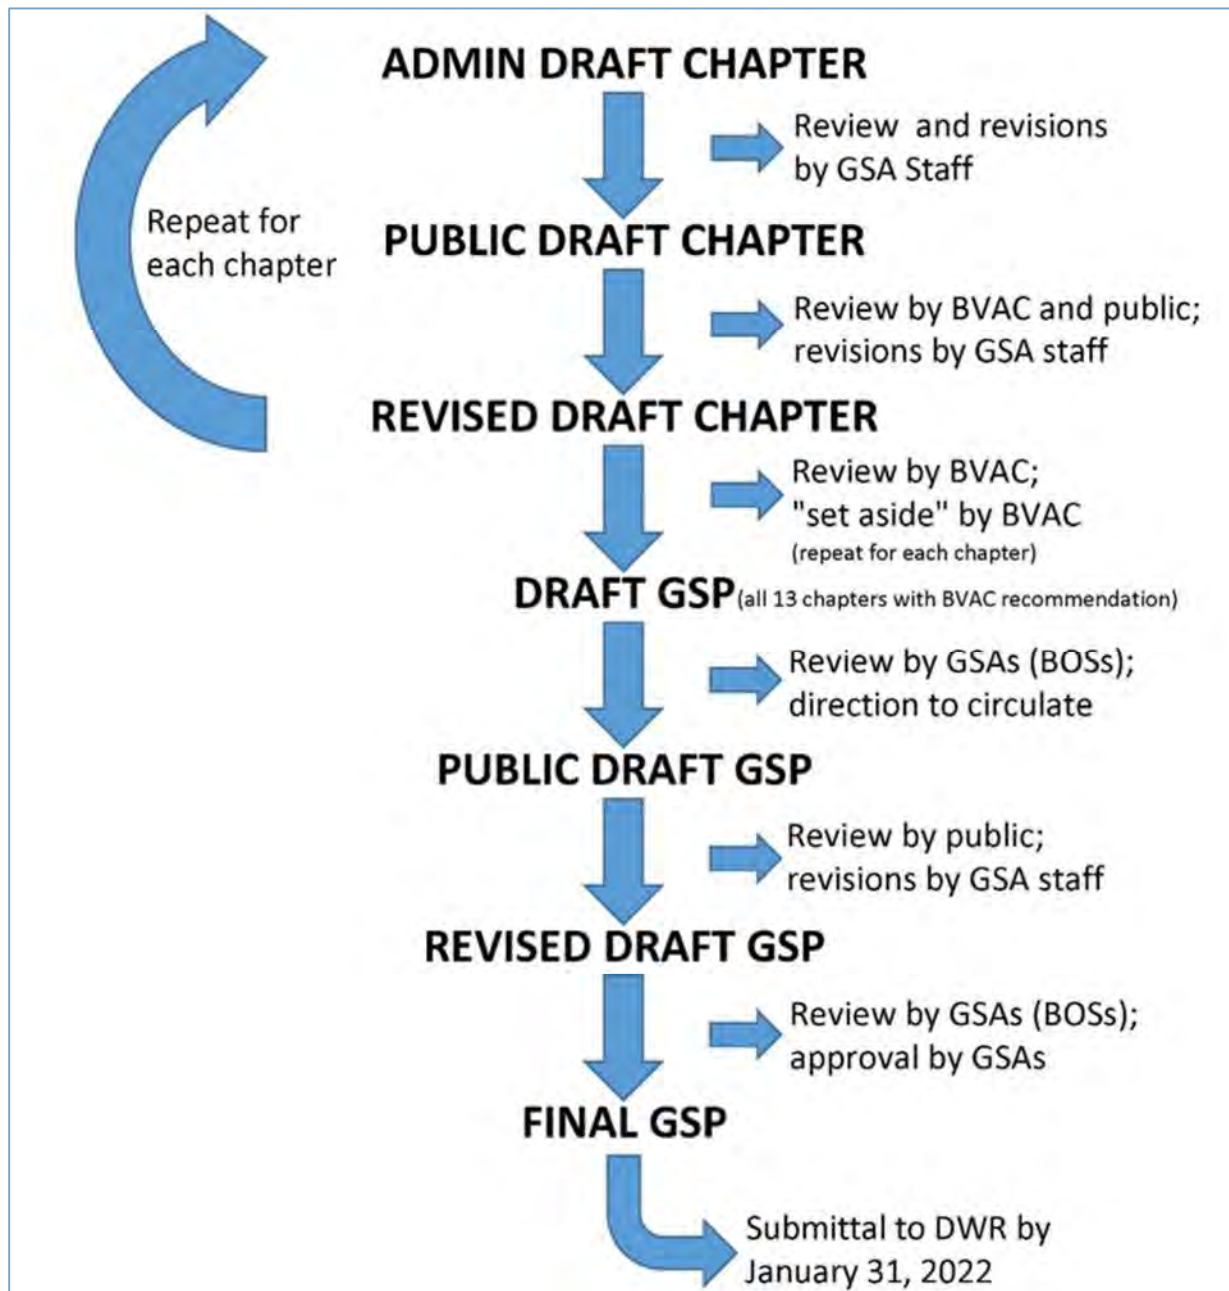

3429  
3430

**Figure 11-1 GSP Development Process**

## 12. References

---

- 3432 Albaugh, Aaron. 2021. Personal communication. Lassen County Supervisor District 4, local farmer,  
3433 landowner, and BVAC member.
- 3434 Ayers, R.S. and Westcot, D.W., 1985. Water Quality for Agriculture. Food and Agriculture  
3435 Organization of the United Nations Irrigation and Drainage Paper 29. Available at:  
3436 <http://www.fao.org/3/t0234e/t0234e00.htm>.
- 3437 Bauder, T.A., Waskom, R.M., Sutherland, P.L. and Davis, J.G., 2014. Irrigation Water Quality Criteria.  
3438 Fact Sheet No. 0.506. Colorado State University Extension. Available at:  
3439 <https://extension.colostate.edu/topic-areas/agriculture/irrigation-water-quality-criteria-0-506/>.
- 3440 Big Valley Advisory Committee (BVAC), 2021. During BVAC meetings, committee members have  
3441 offered first-hand accounts of the widespread use of agricultural lands by waterfowl for feeding,  
3442 while primarily using the state wildlife area for refuge.
- 3443 Brown and Caldwell, 2007. Lassen County Groundwater Management Plan. Available at:  
3444 <http://celassen.ucanr.edu/files/49536.pdf>.
- 3445 Bureau of Indian Affairs (BIA), 2020a. U.S. Domestic Sovereign Nations: Land Areas of Federally  
3446 Recognized Tribes. Available at: <https://biamaps.doi.gov/indianlands/>.
- 3447 \_\_\_\_\_. 2020b. Indian Lands of Federally Recognized Tribes of the United States. Available at:  
3448 <https://www.bia.gov/sites/bia.gov/files/assets/bia/ots/webteam/pdf/idc1-028635.pdf>.
- 3449 California Department of Fish and Wildlife (CDFW), 2020. CDFW Website. Available at:  
3450 <https://wildlife.ca.gov/Lands/Places-to-Visit/Ash-Creek-WA>.
- 3451 California Department of Water Resources (DWR), 1963. Northeastern Counties Ground Water  
3452 Investigation. Bulletin 98.
- 3453 \_\_\_\_\_. 1978. Evaluation of Ground Water Resources: Sacramento Valley, Bulletin 118-6.
- 3454 \_\_\_\_\_. 2003. Bulletin 118 Basin description for the Big Valley Groundwater Basin (5-004).
- 3455 \_\_\_\_\_. 2004. Bulletin 118: California's Groundwater, Basin Description for the Big Valley  
3456 Groundwater Basin (5-004). Available at: [https://water.ca.gov/Programs/Groundwater-](https://water.ca.gov/Programs/Groundwater-Management/Bulletin-118)  
3457 [Management/Bulletin-118](https://water.ca.gov/Programs/Groundwater-Management/Bulletin-118).
- 3458 \_\_\_\_\_. 2016a. Bulletin 118: California's Groundwater, Interim Update 2016. Available at:  
3459 <https://water.ca.gov/Programs/Groundwater-Management/Bulletin-118>.
- 3460 \_\_\_\_\_. 2016b. Groundwater Sustainability Plan Emergency Regulations §351. Available at:  
3461 <https://govt.westlaw.com/calregs/Browse/Home/California/CaliforniaCodeofRegulations?guid=I>

- 3462 [74F39D13C76F497DB40E93C75FC716AA&originationContext=documenttoc&transitionType](https://govt.westlaw.com/calregs/Browse/Home/California/CaliforniaCodeofRegulations?guid=I74F39D13C76F497DB40E93C75FC716AA&originationContext=documenttoc&transitionType=Default&contextData=(sc.Default).)  
3463 [=Default&contextData=\(sc.Default\).](https://govt.westlaw.com/calregs/Browse/Home/California/CaliforniaCodeofRegulations?guid=I74F39D13C76F497DB40E93C75FC716AA&originationContext=documenttoc&transitionType=Default&contextData=(sc.Default).)
- 3464 \_\_\_\_\_. 2016c. California Department of Water Resources Emergency Groundwater Sustainability Plan  
3465 Regulations. Available at:  
3466 [https://govt.westlaw.com/calregs/Browse/Home/California/CaliforniaCodeofRegulations?guid=I](https://govt.westlaw.com/calregs/Browse/Home/California/CaliforniaCodeofRegulations?guid=I74F39D13C76F497DB40E93C75FC716AA&originationContext=documenttoc&transitionType=Default&contextData=(sc.Default).)  
3467 [74F39D13C76F497DB40E93C75FC716AA&originationContext=documenttoc&transitionType](https://govt.westlaw.com/calregs/Browse/Home/California/CaliforniaCodeofRegulations?guid=I74F39D13C76F497DB40E93C75FC716AA&originationContext=documenttoc&transitionType=Default&contextData=(sc.Default).)  
3468 [=Default&contextData=\(sc.Default\).](https://govt.westlaw.com/calregs/Browse/Home/California/CaliforniaCodeofRegulations?guid=I74F39D13C76F497DB40E93C75FC716AA&originationContext=documenttoc&transitionType=Default&contextData=(sc.Default).)
- 3469 \_\_\_\_\_. 2016d. Best Management Practices for the Sustainable Management of Groundwater: Water  
3470 Budget BMP. Available at: [https://water.ca.gov/-/media/DWR-Website/Web-](https://water.ca.gov/-/media/DWR-Website/Web-Pages/Programs/Groundwater-Management/Sustainable-Groundwater-Management/Best-Management-Practices-and-Guidance-Documents/Files/BMP-4-Water-Budget_ay_19.pdf)  
3471 [Pages/Programs/Groundwater-Management/Sustainable-Groundwater-Management/Best-](https://water.ca.gov/-/media/DWR-Website/Web-Pages/Programs/Groundwater-Management/Sustainable-Groundwater-Management/Best-Management-Practices-and-Guidance-Documents/Files/BMP-4-Water-Budget_ay_19.pdf)  
3472 [Management-Practices-and-Guidance-Documents/Files/BMP-4-Water-Budget\\_ay\\_19.pdf](https://water.ca.gov/-/media/DWR-Website/Web-Pages/Programs/Groundwater-Management/Sustainable-Groundwater-Management/Best-Management-Practices-and-Guidance-Documents/Files/BMP-4-Water-Budget_ay_19.pdf).
- 3473 \_\_\_\_\_. 2016e. Monitoring Networks and Identification of Data Gaps BMP. December 2016. Available  
3474 at: [https://water.ca.gov/-/media/DWR-Website/Web-Pages/Programs/Groundwater-](https://water.ca.gov/-/media/DWR-Website/Web-Pages/Programs/Groundwater-Management/Sustainable-Groundwater-Management/Best-Management-Practices-and-Guidance-Documents/Files/BMP-2-Monitoring-Networks-and-Identification-of-Data-Gaps_ay_19.pdf)  
3475 [Management/Sustainable-Groundwater-Management/Best-Management-Practices-and-](https://water.ca.gov/-/media/DWR-Website/Web-Pages/Programs/Groundwater-Management/Sustainable-Groundwater-Management/Best-Management-Practices-and-Guidance-Documents/Files/BMP-2-Monitoring-Networks-and-Identification-of-Data-Gaps_ay_19.pdf)  
3476 [Guidance-Documents/Files/BMP-2-Monitoring-Networks-and-Identification-of-Data-](https://water.ca.gov/-/media/DWR-Website/Web-Pages/Programs/Groundwater-Management/Sustainable-Groundwater-Management/Best-Management-Practices-and-Guidance-Documents/Files/BMP-2-Monitoring-Networks-and-Identification-of-Data-Gaps_ay_19.pdf)  
3477 [Gaps\\_ay\\_19.pdf](https://water.ca.gov/-/media/DWR-Website/Web-Pages/Programs/Groundwater-Management/Sustainable-Groundwater-Management/Best-Management-Practices-and-Guidance-Documents/Files/BMP-2-Monitoring-Networks-and-Identification-of-Data-Gaps_ay_19.pdf).
- 3478 \_\_\_\_\_. 2016f. Monitoring Protocols, Standards and Sites BMP. December 2016. Available at:  
3479 [https://water.ca.gov/-/media/DWR-Website/Web-Pages/Programs/Groundwater-](https://water.ca.gov/-/media/DWR-Website/Web-Pages/Programs/Groundwater-Management/Sustainable-Groundwater-Management/Best-Management-Practices-and-Guidance-Documents/Files/BMP-1-Monitoring-Protocols-Standards-and-Sites_ay_19.pdf)  
3480 [Management/Sustainable-Groundwater-Management/Best-Management-Practices-and-](https://water.ca.gov/-/media/DWR-Website/Web-Pages/Programs/Groundwater-Management/Sustainable-Groundwater-Management/Best-Management-Practices-and-Guidance-Documents/Files/BMP-1-Monitoring-Protocols-Standards-and-Sites_ay_19.pdf)  
3481 [Guidance-Documents/Files/BMP-1-Monitoring-Protocols-Standards-and-Sites\\_ay\\_19.pdf](https://water.ca.gov/-/media/DWR-Website/Web-Pages/Programs/Groundwater-Management/Sustainable-Groundwater-Management/Best-Management-Practices-and-Guidance-Documents/Files/BMP-1-Monitoring-Protocols-Standards-and-Sites_ay_19.pdf)
- 3482 \_\_\_\_\_. 2016g. 2016 Statewide Land Use Mapping. Prepared for DWR by LandIQ. Available at:  
3483 <https://gis.water.ca.gov/app/CADWRLandUseViewer/>.
- 3484 \_\_\_\_\_. 2017. Sustainable Management Criteria BMP (Best Management Practices). Draft,  
3485 November 2017. Available at: [https://water.ca.gov/-/media/DWR-Website/Web-](https://water.ca.gov/-/media/DWR-Website/Web-Pages/Programs/Groundwater-Management/Sustainable-Groundwater-Management/Best-Management-Practices-and-Guidance-Documents/Files/BMP-6-Sustainable-Management-Criteria-DRAFT_ay_19.pdf)  
3486 [Pages/Programs/Groundwater-Management/Sustainable-Groundwater-Management/Best-](https://water.ca.gov/-/media/DWR-Website/Web-Pages/Programs/Groundwater-Management/Sustainable-Groundwater-Management/Best-Management-Practices-and-Guidance-Documents/Files/BMP-6-Sustainable-Management-Criteria-DRAFT_ay_19.pdf)  
3487 [Management-Practices-and-Guidance-Documents/Files/BMP-6-Sustainable-Management-](https://water.ca.gov/-/media/DWR-Website/Web-Pages/Programs/Groundwater-Management/Sustainable-Groundwater-Management/Best-Management-Practices-and-Guidance-Documents/Files/BMP-6-Sustainable-Management-Criteria-DRAFT_ay_19.pdf)  
3488 [Criteria-DRAFT\\_ay\\_19.pdf](https://water.ca.gov/-/media/DWR-Website/Web-Pages/Programs/Groundwater-Management/Sustainable-Groundwater-Management/Best-Management-Practices-and-Guidance-Documents/Files/BMP-6-Sustainable-Management-Criteria-DRAFT_ay_19.pdf)
- 3489 \_\_\_\_\_. 2018a. Natural Communities Commonly Associated with Groundwater (NCCAG) dataset.  
3490 Available at: <https://gis.water.ca.gov/app/NCDatasetViewer/>.
- 3491 \_\_\_\_\_. 2018b. Summary of the “Natural Communities Commonly Associated with Groundwater”  
3492 Dataset. Available at: [https://data.cnra.ca.gov/dataset/natural-communities-commonly-](https://data.cnra.ca.gov/dataset/natural-communities-commonly-associated-with-groundwater)  
3493 [associated-with-groundwater](https://data.cnra.ca.gov/dataset/natural-communities-commonly-associated-with-groundwater).
- 3494 \_\_\_\_\_. 2018c. Department of Water Resources Well Completion Report Map Application. Available at:  
3495 [https://www.arcgis.com/apps/webappviewer/index.html?id=181078580a214c0986e2da28f8623b](https://www.arcgis.com/apps/webappviewer/index.html?id=181078580a214c0986e2da28f8623b37)  
3496 [37](https://www.arcgis.com/apps/webappviewer/index.html?id=181078580a214c0986e2da28f8623b37)
- 3497 \_\_\_\_\_. 2018d. California’s Groundwater, Bulletin 118. Basin Boundary dataset available at:  
3498 <https://sgma.water.ca.gov/webgis/?appid=SGMADataViewer>.

- 3499 \_\_\_\_\_. 2019. Basin Prioritization Website. Available at: [https://water.ca.gov/Programs/Groundwater-](https://water.ca.gov/Programs/Groundwater-Management/Basin-Prioritization)  
3500 [Management/Basin-Prioritization](https://water.ca.gov/Programs/Groundwater-Management/Basin-Prioritization).
- 3501 \_\_\_\_\_. 2020a. California Department of Water Resources Water Management Planning Tool. Available  
3502 at: <https://gis.water.ca.gov/app/boundaries/>.
- 3503 \_\_\_\_\_. 2020b. Handbook for Water Budget Development, With or Without Models, Draft February  
3504 2020. Available at: [https://water.ca.gov/-/media/DWR-Website/Web-](https://water.ca.gov/-/media/DWR-Website/Web-Pages/Programs/Groundwater-Management/Data-and-Tools/Files/Water-Budget-Handbook.pdf)  
3505 [Pages/Programs/Groundwater-Management/Data-and-Tools/Files/Water-Budget-Handbook.pdf](https://water.ca.gov/-/media/DWR-Website/Web-Pages/Programs/Groundwater-Management/Data-and-Tools/Files/Water-Budget-Handbook.pdf).
- 3506 \_\_\_\_\_. 2020c. California Irrigation Management Information System (CIMIS). Available at:  
3507 <https://cimis.water.ca.gov/>.
- 3508 \_\_\_\_\_. 2020d. CADWR Land Use Viewer. Available at:  
3509 <https://gis.water.ca.gov/app/CADWRLandUseViewer/>.
- 3510 \_\_\_\_\_. 2021a. Basin Prioritization Dashboard. Available at: [https://gis.water.ca.gov/app/bp-](https://gis.water.ca.gov/app/bp-dashboards/final/)  
3511 [dashboards/final/](https://gis.water.ca.gov/app/bp-dashboards/final/).
- 3512 \_\_\_\_\_. 2021b. California Data Exchange Center. Available at: <https://cdec.water.ca.gov/>.
- 3513 \_\_\_\_\_. 2021c. California Well Standards. Available at: [https://water.ca.gov/Programs/Groundwater-](https://water.ca.gov/Programs/Groundwater-Management/Wells/Well-Standards/Combined-Well-Standards)  
3514 [Management/Wells/Well-Standards/Combined-Well-Standards](https://water.ca.gov/Programs/Groundwater-Management/Wells/Well-Standards/Combined-Well-Standards).
- 3515 California Geological Survey (CGS). 1958. (Gay, T. E. and Aune, Q. A.) Geologic Map of California,  
3516 Alturas Sheet. 1:250,000. Olaf P. Jenkins Edition.
- 3517 \_\_\_\_\_. 2002. California Geomorphic Provinces. Note 36. Available at:  
3518 <https://www.conservation.ca.gov/cgs/Documents/Publications/CGS-Notes/CGS-Note-36.pdf>.
- 3519 \_\_\_\_\_. 2010. Fault Activity Map of California. Available at: <https://maps.conservation.ca.gov/cgs/fam/>.
- 3520 California Native Plant Society (CNPS). 2020. Calscape. Available at: <https://calscape.org/>.
- 3521 \_\_\_\_\_. 2021. Gardening and Horticulture. Available at: <https://www.cnps.org/gardening>.
- 3522 Conner, Duane. 2020. Personal communication. Local well driller, farmer, landowner, and BVAC  
3523 member who has drilled majority of wells in Big Valley.
- 3524 Cowardin, L. M., Carter, V., Golet, F. C. and LaRoe, E. T. 1979. Classification of Wetlands and  
3525 Deepwater Habitats of the United States. U.S. Fish and Wildlife Service document FWS/OBS-  
3526 79/31, December 1979. Available at: <https://www.nrc.gov/docs/ML1801/ML18019A904.pdf>.
- 3527 Dahlke, H.E., Brown, A.G., Orloff, S., Putnam, S., A. O’Geen. 2018. Managed winter flooding of alfalfa  
3528 recharges groundwater with minimal crop damage. California Agriculture, 72(1).
- 3529 Food and Agriculture Organization of the United Nations (FAO), 1998. Crop Evapotranspiration –  
3530 Guidelines for computing crop requirements – FAO Irrigation and drainage paper 56. Available  
3531 at: <http://www.fao.org/3/X0490e/x0490e0b.htm>.



- 3532 Fricke, R., 2020. Personal communication and unpublished data. Analysis of GSP implementation costs  
3533 presented at 2020 Groundwater Resources Association’s annual conference.
- 3534 GEI Consultants, Inc. 2021. Big Valley Monitoring Well Construction Report. Prepared for North Cal-  
3535 Neva Resource Conservation & Development Council (on behalf of the Modoc County  
3536 Groundwater Sustainability Agency) and Lassen County Groundwater Sustainability Agency.  
3537 Dated April 13, 2021.
- 3538 GeothermEx (Koenig, J.B. and Gardner, M.C.), 1975. Geology of the Big Valley Geothermal Prospect,  
3539 Lassen, Modoc, Shasta and Siskiyou Counties, California. October 1975.
- 3540 Hall, M., Babbitt, C, Saracino, A, Leake, S., 2018. Addressing Regional Surface Water Depletions in  
3541 California. A proposed approach for compliance with the Sustainable Groundwater Management  
3542 Act. Published by the Environmental Defense Fund. Available at:  
3543 [https://www.edf.org/sites/default/files/documents/edf\\_california\\_sgma\\_surface\\_water.pdf](https://www.edf.org/sites/default/files/documents/edf_california_sgma_surface_water.pdf).
- 3544 Hanak, E., Gray, B., Lund, J., Mitchell, D. Fahlund, A., Jessoe, K., MedellinAzua, J, Mischynski, D.  
3545 Nachbaur, J. and Suddeth, R., 2014. Paying for Water in California. Available at:  
3546 [https://www.ca-ilg.org/sites/main/files/file-attachments/basics\\_of\\_municipal\\_revenue\\_2016.pdf](https://www.ca-ilg.org/sites/main/files/file-attachments/basics_of_municipal_revenue_2016.pdf).
- 3547 Hartin, J., P. Geisel, A. Harivandi and R. Elkins. 2014. Sustainable Landscaping in California. UC  
3548 Agriculture and Natural Resources publication 8504. Available at:  
3549 <https://anrcatalog.ucanr.edu/pdf/8504.pdf>.
- 3550 Hunt, L.J.H., Fair, J. and Odland, M. 2018. “Meadow Restoration Increases Baseflow and Groundwater  
3551 Storage in the Sierra Nevada Mountains of California.” *Journal of the American Water*  
3552 *Resources Association* 54 ( 5): 1127– 1136. <https://doi.org/10.1111/1752-1688.12675>.
- 3553 Hutchinson, Bryan. 2020. Personal communication. Manager of Lassen County Waterworks District #1,  
3554 Bieber town water supplier.
- 3555 Institute for Local Government, 2016. Understanding the Basics of Municipal Revenues in California;  
3556 Cities, Counties and Special Districts. Available at: [https://www.ca-ilg.org/sites/main/files/file-](https://www.ca-ilg.org/sites/main/files/file-attachments/basics_of_municipal_revenue_2016.pdf)  
3557 [attachments/basics\\_of\\_municipal\\_revenue\\_2016.pdf](https://www.ca-ilg.org/sites/main/files/file-attachments/basics_of_municipal_revenue_2016.pdf).
- 3558 Klausmeyer et al, 2018. Mapping Indicators of Groundwater Dependent Ecosystems in California:  
3559 Methods Report. San Francisco, California.  
3560 [https://groundwaterresourcehub.org/public/uploads/pdfs/iGDE\\_data\\_paper\\_20180423.pdf](https://groundwaterresourcehub.org/public/uploads/pdfs/iGDE_data_paper_20180423.pdf)
- 3561 Kocis & Dahlke, 2017 “Availability of high-magnitude streamflow for groundwater banking in the  
3562 Central Valley, California.” *Environmental Research Letters*. 12 (8):  
3563 <https://iopscience.iop.org/article/10.1088/1748-9326/aa7b1b/meta>.
- 3564 LaMalfa E.M. and R.J. Ryel. 2008. Differential snowpack accumulation and water dynamics in aspen  
3565 and conifer communities: implications for water yield and ecosystem function. *Ecosystems*  
3566 11:569-58
- 3567 Lassen County Local Agency Formation Commission (LAFCo), 2018. Lassen-Modoc Flood Control  
3568 and Water Conservation District Municipal Service Review and Sphere of Influence Update,  
3569 October 2018.

- 3570 League of California Cities, 2019. Proposition 26 and 218 Implementation Guide, May 2019. Available  
3571 at: <https://www.cacities.org/Prop218andProp26>.
- 3572 Lile, David. 2021. Personal communication and unpublished data. Lassen County Farm Advisor and  
3573 UCCE staff.
- 3574 Lund, Jay. 2014. Expanding water storage capacity in California. California WaterBlog. June 2014.  
3575 Available At: [https://californiawaterblog.com/2014/06/09/should-california-expand-reservoir-](https://californiawaterblog.com/2014/06/09/should-california-expand-reservoir-capacity-by-removing-sediment/)  
3576 [capacity-by-removing-sediment/](https://californiawaterblog.com/2014/06/09/should-california-expand-reservoir-capacity-by-removing-sediment/).
- 3577 Martinez, Tiffany. Personal communication. Modoc County Assistant Chief Administrative Officer.
- 3578 Mata-Gonzalez, R., M. A. B. Abdallah and C. G. Ochoa. 2021. Water use by mature and sapling  
3579 western juniper (*Juniperus occidentalis*) Trees. Rangeland Ecology and Management 74:110-  
3580 113.
- 3581 McClymonds N.E. and O.L Franke, 1972. Water-Transmitting Properties of Aquifers on Long Island,  
3582 New York. USGS Professional Paper 627-E.
- 3583 MacDonald, 1966. Geology of the Cascade Range and Modoc Plateau. in Geology of Northern  
3584 California. California Division of Mines and Geology, Bulletin 190. Edgar H. Bailey, editor, US  
3585 Geological Survey.
- 3586 Miller, R.F., Tausch, R.J., 2001. The role of fire in pinyon and juniper woodlands: a descriptive analysis.  
3587 In: Galley, K.E.M., Wilson, T.P. (Eds.), Proceedings of the Invasive Species: The Role of Fire in  
3588 the Control and Spread of Invasive Species. Misc. Publ. No. 11, Tall Timbers Res. Sta.,  
3589 Tallahassee, FL, pp. 15–30.
- 3590 Mitchell, Kevin. 2020. Personal communication. Local farmer, landowner, and BVAC member.
- 3591 Natural Resources Conservation Service (NRCS). 1986. Urban Hydrology for Small Watersheds.  
3592 Technical Release 55. Available at  
3593 [https://www.nrcs.usda.gov/Internet/FSE\\_DOCUMENTS/stelprdb1044171.pdf](https://www.nrcs.usda.gov/Internet/FSE_DOCUMENTS/stelprdb1044171.pdf).
- 3594 \_\_\_\_\_. 2012. Hydrologic Soils Group Classifications. Available at:  
3595 [https://www.nrcs.usda.gov/wps/PA\\_NRCSCConsumption/download?cid=nrcseprd1296623&ext=](https://www.nrcs.usda.gov/wps/PA_NRCSCConsumption/download?cid=nrcseprd1296623&ext=pdf)  
3596 [pdf](https://www.nrcs.usda.gov/wps/PA_NRCSCConsumption/download?cid=nrcseprd1296623&ext=pdf).
- 3597 \_\_\_\_\_. 2015. Illustrated Guide to Soil Taxonomy. Version 2.0 September 2015. Available at:  
3598 [https://www.nrcs.usda.gov/wps/PA\\_NRCSCConsumption/download?cid=stelprdb1247203&ext=p](https://www.nrcs.usda.gov/wps/PA_NRCSCConsumption/download?cid=stelprdb1247203&ext=pdf)  
3599 [df](https://www.nrcs.usda.gov/wps/PA_NRCSCConsumption/download?cid=stelprdb1247203&ext=pdf).
- 3600 \_\_\_\_\_. 2020. Personal Communication with Alturas office of NRCS.
- 3601 Neasham, Ernest, 1985. Fall River Valley: An Examination of Historical Sources: Fall River Valley and  
3602 the intermountain area from the earliest times until 1890. Citadel Press, p.10.
- 3603 Norris, R.M. and Webb, R.W., 1990. Geology of California. ISBN 978-0471509806

- 3604 Northeastern California Water Association (NECWA). 2017. Upper Pit River Watershed Integrated  
3605 Regional Water Management Plan. Adopted December 5, 2013, updated review draft September  
3606 2017. Prepared by Burdick & Company, Auburn, California in collaboration with Upper Pit  
3607 River Watershed Regional Water Management Group.
- 3608 Northwest Alliance for Computational Science and Engineering (NACSE). 2020. Parameter-elevation  
3609 Regressions on Independent Slopes Model (PRISM). Available at:  
3610 <https://prism.oregonstate.edu/explorer/>.
- 3611 Norwood, Gaylon. 2021. Personal communication. Lassen County Assistant Director of Planning and  
3612 Building Services.
- 3613 Nunn, Jimmy. 2021. Personal communication. Local farmer, landowner, and BVAC member.
- 3614 Ochoa, C., P. Caruso and T. Deboodt. 2016. Upland-valley hydrologic connectivity: Camp Creek Paired  
3615 Watershed Study. In Ecology and Hydrology of Western Juniper Special Report Oregon State  
3616 University and USDA Agriculture Research Service.  
3617 <https://ecohydrology.oregonstate.edu/project/juniper-paired-watershed-study-central-oregon>
- 3618 Ohm, John. 2021. Personal communication. Local farmer, landowner, and BVAC member.
- 3619 Orange, M.N., Matyac, J.S. and Snyder, R.L., 2004. Consumptive Use Program (CUP) Model, Acta  
3620 Hort. 664, 461-468. Available at: [https://www.ishs.org/ishs-article/664\\_58](https://www.ishs.org/ishs-article/664_58).
- 3621 Organization for Economic Co-operation and Development (OECD). 2015. Stakeholder Engagement for  
3622 Inclusive Water Governance, OECD Studies on Water, OECD Publishing, Paris.  
3623 <http://dx.doi.org/10.1787/9789264231122-en>
- 3624 Orloff, S., T. Getts, D. Sumner, D. Stewart and C. Gutierrez. 2016. Sample Costs to Establish and  
3625 Produce Orchardgrass Hay. UC ANR.  
3626 [https://coststudyfiles.ucdavis.edu/uploads/cs\\_public/86/b2/86b28877-5976-4d3a-b0e7-  
3627 862314057bf1/16orchardgrass\\_intermountain\\_752016.pdf](https://coststudyfiles.ucdavis.edu/uploads/cs_public/86/b2/86b28877-5976-4d3a-b0e7-862314057bf1/16orchardgrass_intermountain_752016.pdf)
- 3628 Pilliod, D.S., Rohde, A.T., Charnley, S., Davee, R., Dunham, J., Gosnell, H., Grant, G., Hausner, M.,  
3629 Huntington, J., Nash, C. 2018. Survey of Beaver-related Restoration Practices in Rangeland  
3630 Streams of the Western USA. Environmental Management 61, 58–68 (2018).  
3631 <https://doi.org/10.1007/s00267-017-0957-6>
- 3632 Putnam, D.H. and E. Lin. 2016. Nitrogen Dynamics in Cropping Systems - Why Alfalfa is Important. IN  
3633 Proceedings, CA Plant and Soil Conference, 2-3 February 2016. Fresno, CA. CA-ASA.  
3634 <http://calasa.ucdavis.edu/files/250178.pdf>
- 3635 Regional Water Quality Control Board (RWQCB) 2021. Region 5 description of OWTS program.  
3636 Available at: [https://www.waterboards.ca.gov/centralvalley/water\\_issues/owts/#lamps](https://www.waterboards.ca.gov/centralvalley/water_issues/owts/#lamps).
- 3637 Ryel, R.J., E. LaMalfa and J. Leffler. 2011. Water relations and water yield in aspen and conifer forests.  
3638 Presentation at Forest and Watershed Health Symposium, UC Cooperative Extension, Susanville  
3639 CA <http://celassen.ucanr.edu/files/84849.pdf>

- 3640 Saska, P.C., R.C. Bales, C.L. Tague, J.J. Battles, B.W. Tobin, M.H. Conklin. 2019. Fuels treatment and  
3641 wildfire effects on runoff from Sierra Nevada mixed-conifer forests. *Ecohydrology*.
- 3642 Smerdon, B.D., T.E. Redding and J. Beckers. 2009. An overview of the effects of forest management on  
3643 groundwater hydrology. *BC Journal of Ecosystems and Management* 10(1):22–44.  
3644 [http://citeseerx.ist.psu.edu/viewdoc/download;jsessionid=89D5A72A9FE92D0BCF85101E9551](http://citeseerx.ist.psu.edu/viewdoc/download;jsessionid=89D5A72A9FE92D0BCF85101E955178C4?doi=10.1.1.533.4354&rep=rep1&type=pdf)  
3645 [78C4?doi=10.1.1.533.4354&rep=rep1&type=pdf](http://citeseerx.ist.psu.edu/viewdoc/download;jsessionid=89D5A72A9FE92D0BCF85101E955178C4?doi=10.1.1.533.4354&rep=rep1&type=pdf).
- 3646 Snell, Laura, 2020. Personal communication, Modoc County Farm Advisor and UCCE staff.
- 3647 Stephens, Scott L., Brandon M. Collins, Eric Biber, Peter Z. Fulé. 2016. U.S. federal fire and forest  
3648 policy: emphasizing resilience in dry forests. *Ecosphere*. Volume 7: Issue 11.
- 3649 Stadtler, Phil. 2007. I Made a Lot of Tracks, pages 134-135. Published by CP Media. ISBN: 978-  
3650 0975984123.
- 3651 State Water Resources Control Board (State Water Board). 2019. GAMA Groundwater Information  
3652 System website. Accessed 2019. Available at:  
3653 <https://gamagroundwater.waterboards.ca.gov/gama/gamamap/public/>.
- 3654 \_\_\_\_\_. 2020a. GAMA Groundwater Information System website accessed March 19, 2020. Available  
3655 at: <https://gamagroundwater.waterboards.ca.gov/gama/datadownload.asp>.
- 3656 \_\_\_\_\_. 2020b. GeoTracker website accessed May 12, 2020. Available at:  
3657 <https://geotracker.waterboards.ca.gov/>.
- 3658 \_\_\_\_\_. 2020c. Water Quality Control Plan for the Sacramento and San Joaquin River Basins. Available  
3659 at: [https://www.waterboards.ca.gov/centralvalley/water\\_issues/basin\\_plans/#basinplans](https://www.waterboards.ca.gov/centralvalley/water_issues/basin_plans/#basinplans)
- 3660 \_\_\_\_\_. 2021. Division of Drinking Water’s Safe Drinking Water Information System. Available at:  
3661 <https://sdwis.waterboards.ca.gov/PDWW/>.
- 3662 The Nature Conservancy (TNC). 2020. Plant Rooting Depth Database. Available at:  
3663 <https://groundwaterresourcehub.org/>.
- 3664 Towill, Inc. 2021. InSAR Data Accuracy for California Groundwater Basins. CGPS Data Comparative  
3665 Analysis. Final Report April 7, 2021. Prepared for the California Department of Water  
3666 Resources. Available at: [https://data.cnra.ca.gov/dataset/tre-altamira-insar-](https://data.cnra.ca.gov/dataset/tre-altamira-insar-subsidence/resource/a1949b59-2435-4e5d-bb29-7a8d432454f5)  
3667 [subsidence/resource/a1949b59-2435-4e5d-bb29-7a8d432454f5](https://data.cnra.ca.gov/dataset/tre-altamira-insar-subsidence/resource/a1949b59-2435-4e5d-bb29-7a8d432454f5).
- 3668 United States Bureau of Reclamation (Reclamation), 1979. Ground-Water Geology and Resources  
3669 Appendix, Allen Camp Unit, California, Central Valley Project, California, Pit River Division,  
3670 Allen Camp Unit, Definite Plan. October 1979.
- 3671 United States Census Bureau (USCB), 2020. Census data. Available at:  
3672 <https://data.census.gov/cedsci/profile?g=1600000US0606336>.
- 3673 \_\_\_\_\_. 2021. State and County Quickfacts. Available at: [https://www.census.gov/programs-](https://www.census.gov/programs-surveys/sis/resources/data-tools/quickfacts.html)  
3674 [surveys/sis/resources/data-tools/quickfacts.html](https://www.census.gov/programs-surveys/sis/resources/data-tools/quickfacts.html).



3675 United States Department of the Interior Water and Power Resources Service (DOI). 1981. Concluding  
 3676 Report. Allen Camp Unit: Pit River Division Central Valley Project California. 90 STAT. 1331.  
 3677 May 1981

3678 United States Forest Service (USFS), 1991. Modoc National Forest Land and Resource Management  
 3679 Plan. Available at: <https://www.fs.usda.gov/main/modoc/landmanagement/planning>.

3680 United States Geological Survey (USGS), 2016. National Elevation Dataset. Digital Elevation Model  
 3681 provided by USGS through the National Map. Based on data downloaded in 2016. Available at:  
 3682 <https://www.usgs.gov/core-science-systems/national-geospatial-program/national-map>.

3683 \_\_\_\_\_. 2020a. National Hydrography Dataset. Available at: [https://www.usgs.gov/core-science-](https://www.usgs.gov/core-science-systems/ngp/national-hydrography)  
 3684 [systems/ngp/national-hydrography](https://www.usgs.gov/core-science-systems/ngp/national-hydrography).

3685 \_\_\_\_\_. 2020b. National Water Information System. Available at: <https://waterdata.usgs.gov/nwis>.

3686 Walley FL, Tomm GO, Matus A, et al. 1996. Allocation and cycling of nitrogen in an alfalfa-  
 3687 bromegrass sward. Agronomy Journal 88:834–43.

3688 WateReuse Association, 2020. Water Reuse 101 Glossary. Available at:  
 3689 <https://watereuse.org/educate/water-reuse-101/glossary/>

3690 Wilson R., G. Galdi, D. Stewart and D. Sumner. 2020 Sample Costs to Establish and Produce Alfalfa  
 3691 Hay. UC ANR. [https://coststudyfiles.ucdavis.edu/uploads/cs\\_public/c4/36/c436fc40-8c6b-4ebb-97f6-](https://coststudyfiles.ucdavis.edu/uploads/cs_public/c4/36/c436fc40-8c6b-4ebb-97f6-e407160608bc/2020alfalfascottvalley-mixed_irrigation-1.pdf)  
 3692 [e407160608bc/2020alfalfascottvalley-mixed\\_irrigation-1.pdf](https://coststudyfiles.ucdavis.edu/uploads/cs_public/c4/36/c436fc40-8c6b-4ebb-97f6-e407160608bc/2020alfalfascottvalley-mixed_irrigation-1.pdf)  
 3693

## **Appendix 1A   Background Information**

---

**DEPARTMENT OF WATER RESOURCES**

NORTHERN REGION OFFICE  
2440 MAIN STREET  
RED BLUFF, CA 96080-2356



April 15, 2016

Mr. Richard Egan, Administrative Officer  
County of Lassen  
Administrative Services  
221 S. Roop Street, Suite 4  
Susanville, California 96130

Dear Mr. Egan

This letter is in response to your request for information regarding the number of irrigated acres reported in the Big Valley Basin prioritization dataset.

As part of the California Statewide Groundwater Elevation Monitoring (CASGEM) Program legislation, and pursuant to the California Water Code, Section 10933, the Department of Water Resources (DWR) is required to prioritize California's 515 groundwater basins. CASGEM directs DWR to consider, to the extent available, all of the data components listed below:

1. The population overlying the basin
2. The rate of current and projected growth of the population overlying the basin
3. The number of public supply wells that draw from the basin
4. The total number of wells that draw from the basin
5. The irrigated acreage overlying the basin
6. The degree to which persons overlying the basin rely on groundwater as their primary source of water
7. Any documented impacts on the groundwater within the basin, including overdraft, subsidence, saline intrusion, and other water quality degradation
8. Any other information determined to be relevant by DWR (subsequently modified in 2014 to include adverse impacts on local habitat and local streamflow)

In response to the CASGEM legislation, each groundwater basin was prioritized with the best available data and statistically given one of the following rankings: very low, low, medium, or high. To calculate the total irrigated acreage for the initial prioritization, DWR relied on a land survey using detailed analysis units (DAU). Because the DAUs cover a different area than the groundwater basin, DWR estimated the proportion of overlap. For the Big Valley Basin, DWR estimated the irrigated acres for Big Valley groundwater basin based on the proportional amount of irrigated lands in the DAU and additional information gleaned from satellite imagery, ultimately arriving at a figure of 34,129 acres. Recognizing this method was an estimate, all of the groundwater basins were further analyzed by using their actual basin areas for the ranking. This step would have reduced the estimated value of irrigated acreage for the Big Valley basin to 25,545 acres but, for some reason, that did not occur and the value remained at 34,129 acres based on the estimated proportion from the DAU.



On the other hand, the portion of land in the basin identified as partially irrigated land or meadow pasture, which should have been included in the irrigated acreage calculation, was inadvertently omitted. Including this additional area of 26,260 acres brings the total irrigated acreage for the basin to over 51,800 acres.

DWR completed the initial draft basin prioritization in December of 2013. Public outreach for the draft basin prioritization consisted of three public workshops throughout the State and a statewide Webinar where DWR explained the basin prioritization process and requested feedback and comments. The public outreach for basin prioritization was followed by a three-month window where local agencies and water resource managers were encouraged to provide comments and information. During this time, DWR received and addressed a number of comments and data, and made adjustments to the basin prioritizations accordingly, but DWR did not receive any comments regarding the irrigated lands estimate for the Big Valley Basin. The basin prioritization was finalized in June 2014.

In September 2014, the Sustainable Groundwater Management Act (SGMA) was passed requiring all CASGEM medium and high priority basins to comply with the new SGMA law. SGMA also directed DWR to develop regulations to allow local agencies to revise their groundwater basin boundaries to help improve sustainable groundwater management, to update the basin prioritization once the basin boundaries have been modified, and to consider a new SGMA requirements for data component number eight on the previous page that includes adverse groundwater impacts on local habitat and local stream flows during the next basin prioritization update. (See the list of data components shown on the previous page.) The basin boundary regulation was adopted on October 21, 2015, and the solicitation for groundwater basin boundary changes ended in March 31, 2016. The 2016 basin boundary modifications will change basin areas and the number of basins, which could result in ranking changes for some basins. In addition, DWR is currently working with agencies and local water managers to identify the best available data, to gather and update many of the individual basin prioritization data components, and to improve the overall quality of the basin prioritization. Improvements to the basin prioritization data will include the following updated information:

1. Population and population growth will be recalculated for each of the modified basins, with new ranking breakpoints as necessary.
2. Public Supply Wells will be reprocessed for all basins with the assistance of California State Water Resources Control Board, Division of Drinking Water, employing additional selection criteria, with new ranking breakpoints as necessary.
3. The number of Total Wells will be reprocessed for all basins using DWR's Online System for Well Completion Reports (OSWCR), employing production well selection criteria, with new ranking breakpoints as necessary;
4. Groundwater Reliance (Groundwater Use and percent of total supply) and Irrigated Acreage will be updated for all basins using the latest land use surveys (possibly 2015 statewide) and 2014 water year information.
5. Existing groundwater-related impacts will be reviewed and updated.
6. Potential adverse impacts to local habitat and streamflow due to groundwater extraction will be identified, and a process will be established for ranking these impacts.



DWR plans to begin public outreach for the updated draft basin prioritization in fall 2016, with the final basin prioritization update occurring between December 2016 and February 2017. Unfortunately, it is not possible to reprioritize individual basins outside of this process. Because the individual basin priority is dependent on the relative statewide distribution of each data component, there is no way to predict how the updated prioritization would affect the ranking of any particular basin. Even for those basins where it is known that individual data components have been changed due to improved data, the overall basin priority may remain the same, or even increase due to new SGMA requirements for data component number eight and improvements to the other seven data components. DWR is using new data to estimate irrigated acreage in the Big Valley Basin and, as noted above, the newer data, which was provided to Lassen County Administrative Office, supports a higher value (approximately 51,000 acres).

In closing, I encourage you to visit DWR's basin prioritization website at the following address: [http://www.water.ca.gov/groundwater/casgem/basin\\_prioritization.cfm](http://www.water.ca.gov/groundwater/casgem/basin_prioritization.cfm). The website contains all of the groundwater basin ranking results, as well as the methodology used in the statistical analysis. If you have additional question concerning basin prioritization or if you might possibly have additional data associated with components one through eight (shown on the first page of this letter) that you would like DWR to consider during the next basin prioritization update, please contact Roy Hull, Engineering Geologist, at (530) 529-7337.

If you have any questions or need additional information, please contact me at (530) 528-7403.

Sincerely,



William Ehorn, Chief  
Regional Planning Branch

cc: Scott Morgan, DWR Legal

# County of Lassen

## ADMINISTRATIVE SERVICES



**ROBERT F. PYLE**

District 1

**JIM CHAPMAN**

District 2

**JEFF HEMPHILL**

District 3

**AARON ALBAUGH**

District 4

**TOM HAMMOND**

District 5

CERTIFIED MAIL/ RETURN RECEIPT

7015 0640 0005 0681 0168; 7015 0640 0005 0681 0175

March 18, 2016

Regional Planning Branch  
Department of Water Resources  
901 P Street, Room 213  
Sacramento, CA 94236

Department of Water Resources  
P.O. Box 942836  
Sacramento, CA 94236

RE: Basin Boundary Modification - Big Valley, Bulletin 118 Basin 5-4

To Whom It May Concern:

This letter is intended to supplement a request by Lassen County to modify Bulletin 118 Basin 5-4 (Big Valley) as permitted under water code, section 340. The adjustment request is External and Scientific and primarily correlates to unmanaged (in terms of contemplating groundwater recharge) portions of the watershed directly impacting recharge in Big Valley.

### Summary

The proposed boundary adjustment does not examine, or seek to alter, the extent of water-bearing formations identified in the Bulletin 118 Hydrogeologic analysis. Fundamentally (because Big Valley has been designated as medium priority by the Department of Water Resources), this request is an attempt by Lassen County to ensure management of Big Valley, as required by the Sustainable Groundwater Management Act (SGMA), is successful. Lassen County considers the proposed boundary adjustment to be a critical step toward effective and sustainable management because it empowers the Groundwater Sustainability Agency (GSA) with the ability to identify, consider, and mitigate potential impacts to basin recharge, originating in the basins watershed.

### Description

Watershed and subwatershed hydrologic unit boundaries created by the Natural Resource Conservation Service (NRCS) form the proposed perimeter of the basin, after the adjustment. This data set was designed by the NRCS to be used as a tool for water-resource management and planning activities. The original dataset boundaries were adjusted by Lassen County at two

**Richard Egan**  
County Administrative Officer  
email: [regan@co.lassen.ca.us](mailto:regan@co.lassen.ca.us)

**Julie Morgan**  
Assistant to the CAO  
email: [jmorgan@co.lassen.ca.us](mailto:jmorgan@co.lassen.ca.us)

**Regina Schaap**  
Administrative Assistant  
email: [rschaap@co.lassen.ca.us](mailto:rschaap@co.lassen.ca.us)

County Administration Office  
221 S. Roop Street, Suite 4  
Susanville, CA 96130  
Phone: 530-251-8333  
Fax: 530-251-2663



points to exclude subwatershed boundaries providing recharge for two or more Bulletin 118 basins.

The NRCS data (table 1 below) assign 9 subwatershed basins to Big Valley totaling approximately 380 square miles. However, an adjustment of roughly 200 acres was applied to the Butte Creek subwatershed polygon, in order to include a portion of the Big Valley basin that had been assigned to the Bulletin 118 Basin 5-36 (Round Valley) watershed.

Table 1: Watershed data

OBJECTID	ACRES	HU_10_NAME	HU_12_NAME	HU_12_TYPE	STATES	SHAPE_Length	SHAPE_Area	
99800	31362	Blacks Canyon-Pit River	Roberts Reservoir-Pit River	S	CA	0.663846	0.013641	1
99589	11815	Juniper Creek	Deer Spring-Juniper Creek	S	CA	0.534262	0.005124	1
99607	9327	Butte Creek-Ash Creek	Hot Springs Slough	U	CA	0.284423	0.004047	1
99624	51531	Widow Valley Creek-Pit River	Bull Run Slough-Pit River	S	CA	0.878017	0.022349	1
99640	24868	Butte Creek-Ash Creek	Butte Creek	S	CA	0.594983	0.01079	1
99641	26769	Willow Creek	Lower Willow Creek	S	CA	0.682247	0.011607	1
99681	20256	Widow Valley Creek-Pit River	Widow Valley Creek	S	CA	0.493075	0.008799	1
99704	43355	Butte Creek-Ash Creek	Big Swamp-Ash Creek	S	CA	0.883789	0.018833	1
99746	24340	Taylor Reservoir	Taylor Creek	S	CA	0.723431	0.010581	1

The proposed boundary will include roughly 50,000 acres of federally managed timberland, 40,000 acres of privately managed timberland, and 60,000 acres of private and public range/grassland currently outside of the Big Valley (Bulletin 118) perimeter. Presently, management of these lands encompassing the Big Valley watershed does not actively consider implications to groundwater recharge. Lassen County contends that effective management of a groundwater basin must consider connectivity of groundwater/ surface water systems. The most basic form of combined groundwater surface water management seeks to ensure sustainable groundwater supplies, by managing and maintaining watersheds and thereby promoting desirable streamflow.

Watershed development to enhance groundwater would promote the use of natural resources, while mitigating the detrimental impacts of land-use activities on soil and water. This proposed adjustment and management approach recognizes that soil, water, and land use occurring in the upland watersheds, are all fundamentally connected to groundwater basins. Some components of watershed development and its role to groundwater are listed in Table 2 below.

Table 2 Common Components of watershed development and its role.

Activity	Objective	Impact
Check dams	Stop/slow down water runoff in gullies	Recharge of groundwater and nearby wells.
		Creations of open water bodies
Ponds	Groundwater recharge water for cattle	Recharge of groundwater. Creation of big open water bodies
Gully plugs, Gabions	Primarily to trap sediment/silt in gullies and to stabilize	Keeps sediment out of downstream areas. Increased water infiltration due to slowing down water

The intended impact of this proposal, to adjust the Big Valley basin boundary, is to ensure that watershed development is a function of the GSA through an adopted Groundwater Sustainability Plan (GSP). A coordinated management approach, which includes watershed development aimed at increasing groundwater recharge and overall water resource availability, will be necessary to ensure successful implementation of a GSP.

Lassen County has been in contact with Modoc County, the only other Local Agency with jurisdiction over Big Valley, and they are aware of this request. Please contact the Department of Planning and Building Services at (530) 251-8269, if there are any questions.

Sincerely,



FOI: Richard Egan  
County Administrative Officer


RE:MLA:mm

Cc: Supervisor Chapman, Chairman District 2; Supervisor Pyle, District 1; Supervisor Hemphill, District 3; Supervisor Albaugh, District 4; Supervisor Hammond, District 5; Bob Burns, County Counsel; Richard Egan, County Administrative Officer.

S:\PLA\Admin\FILES\1252\Response to denial of Big Valley boundary adjustment



# PROPOSED BOUNDARY ADJUSTMENT

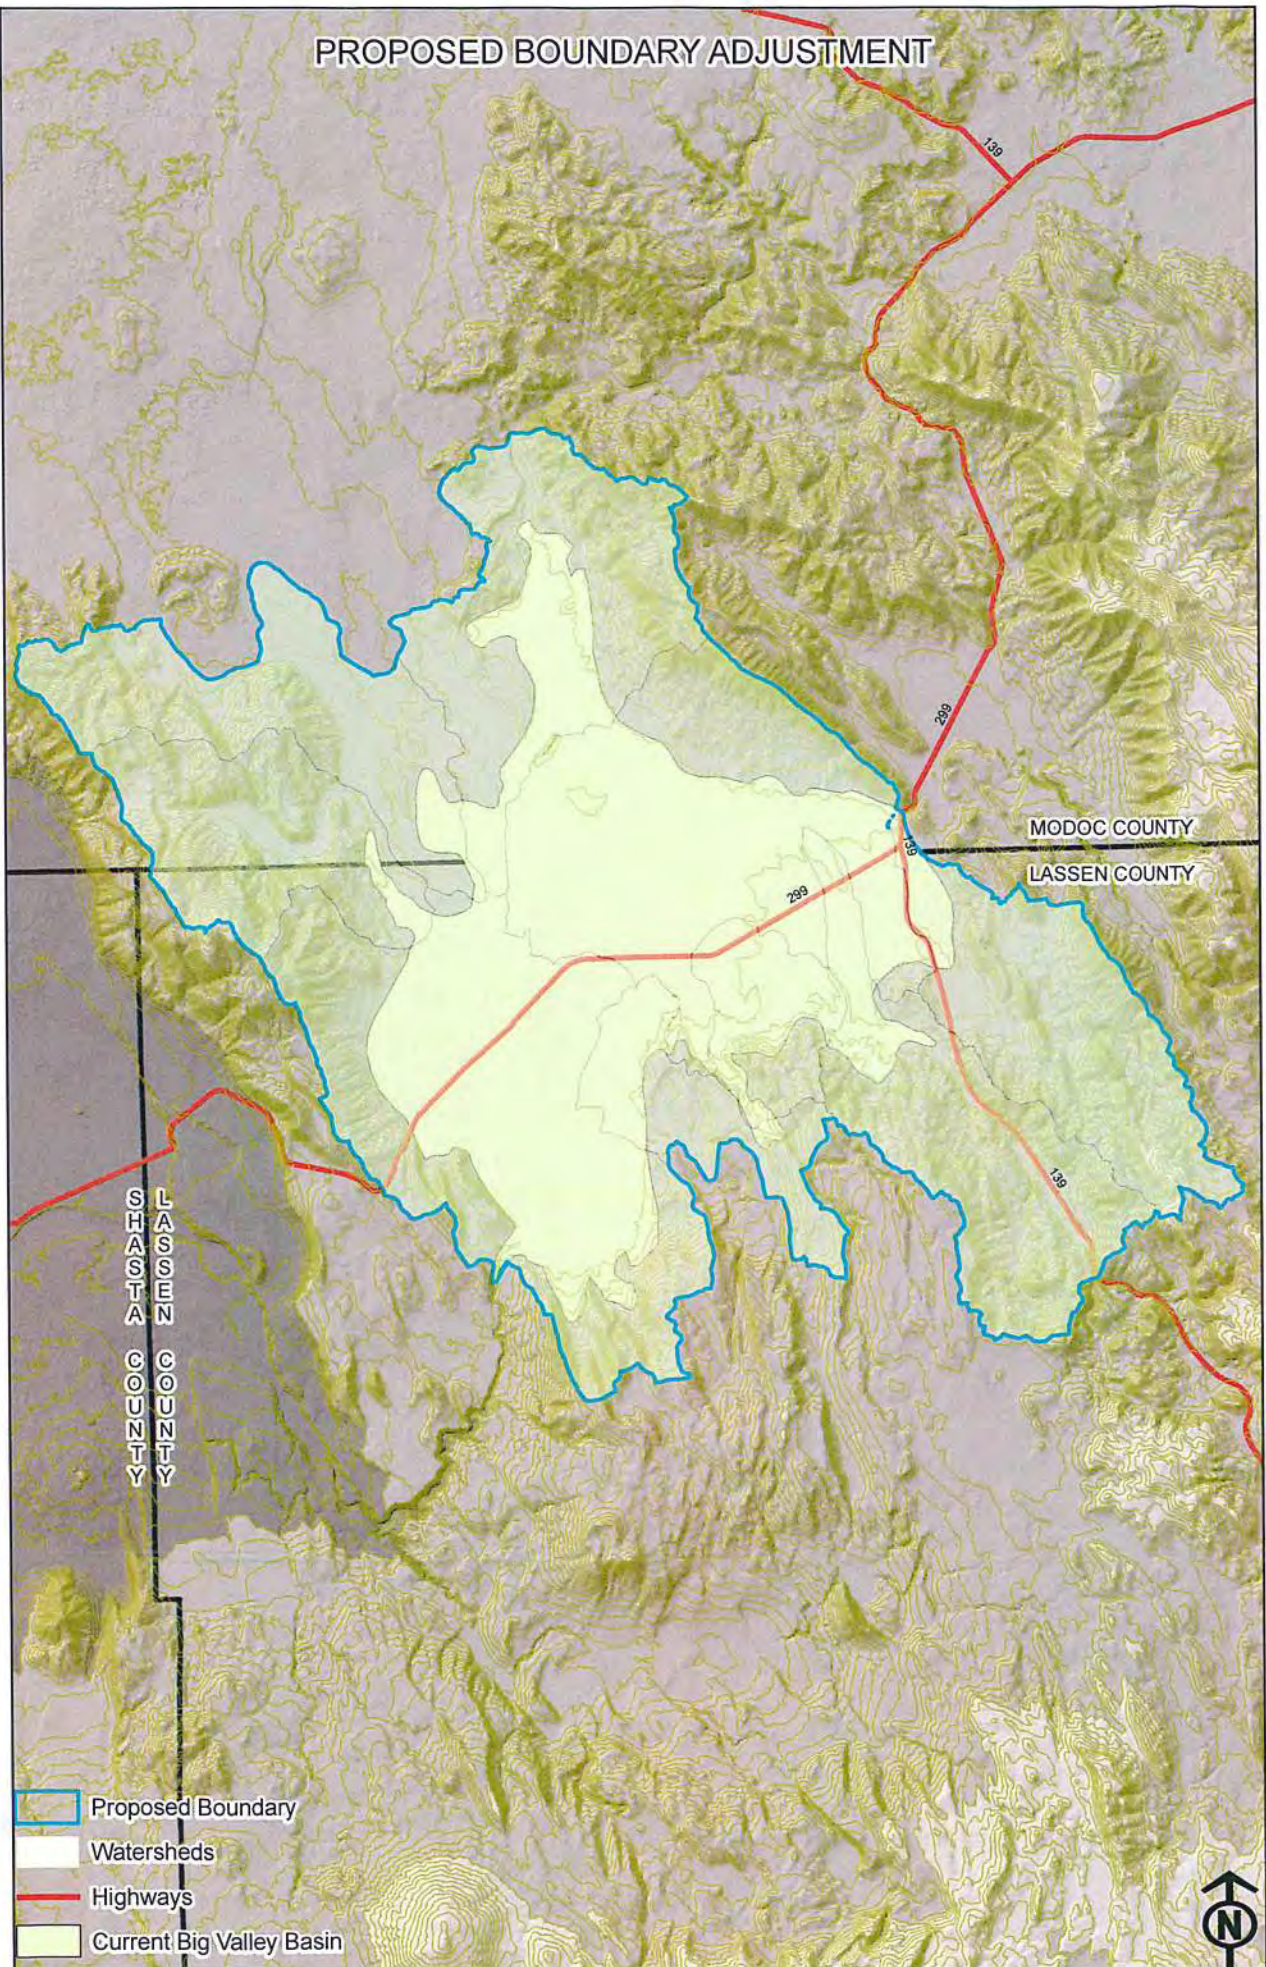

0 1.75 3.5 7 Miles



**Table 1. 2016 Final Basin Boundary Modifications**

Basin/Subbasin	Request Agency	Lead Region Office	Short Description	Modification Type	Recommendation	Regulatory Basis for Denial Article 6	Summary Draft Decisions
<a href="#">1-02.01 KLAMATH RIVER VALLEY - TULELAKE</a>	Tulelake Irrigation District	NRO	Tulelake Irrigation District (TID) is exploring a modification to the Tule Lake...	Scientific External	<b>Approved</b>		This request was approved because it met the technical requirements of the regulation and provided the necessary supporting documentation, technical studies, local outreach and/or notification.
<a href="#">5-04 BIG VALLEY</a>	Lassen County	NRO	Watershed and subwatershed hydrologic unit boundaries form the proposed perimeter...	Scientific External	<b>Denied</b>	345.2(c) and (d)	This request did not include sufficient detail and/or required components necessary to support approval of the request. The proposed modification included volcanic rock geologic units (not alluvial basin material) and evidence was not provided to substantiate the connection to the porous permeable alluvial basin, nor were conditions presented that could potentially support radial groundwater flow as observed in alluvial basins.
<a href="#">5-21.52 SACRAMENTO VALLEY - COLUSA, 5-21.51 SACRAMENTO VALLEY - CORNING</a>	Tehama County Flood Control & Water Conservation District	NRO	Jurisdictional Consolidation of the Tehama County portion of the Colusa Subbasin...	Jurisdiction Consolidation	<b>Approved</b>		This request was approved because it met the technical requirements of the regulation and provided the necessary supporting documentation, technical studies, local outreach and/or notification.
<a href="#">2-9.04 SANTA CLARA VALLEY - EAST BAY PLAIN, 2-9.01 SANTA CLARA VALLEY - NILES CONE</a>	Alameda County Water District	NCRO	Request to correct the boundary of the Niles Cone Groundwater Basin (Niles Cone...	Jurisdiction Internal	<b>Approved, as modified</b>		This request was approved with minor modifications to the eastern boundary to align with the lateral extent of alluvium. The request for jurisdictional modification was supported by sufficient technical information and necessary affected local agencies provided letters in support of the modification.
<a href="#">3-03.01 GILROY-HOLLISTER VALLEY - LLAGAS AREA</a>	Santa Clara Valley Water District	NCRO	Modify eastern Llagas Subbasin boundary to match extent of water-bearing sediment...	Scientific External	<b>Approved</b>		This request was approved because it met the technical requirements of the regulation and provided the necessary supporting documentation, technical studies, local outreach and/or notification.
<a href="#">5-21.60 SACRAMENTO VALLEY - NORTH YUBA</a>	Yuba County Water Agency	NCRO	Subdivision of the North Yuba Subbasin along the Butte-Yuba county line	Jurisdiction Subdivision	<b>Approved, as modified</b>		The modification request was originally submitted as a jurisdictional subdivision, however, during the review of the request it was revealed that the Department introduced a significant error in the basin boundary sometime between 2003 and 2014, resulting in a portion of Butte County being applied to the North Yuba subbasin. The Department corrected the error during this modification submission period.
<a href="#">5-21.61 SACRAMENTO VALLEY - SOUTH YUBA, 5-21.64 SACRAMENTO VALLEY - NORTH AMERICAN</a>	Placer County	NCRO	Request to adjust the subbasin boundary to align with the Yuba / Placer county ...	Jurisdiction Internal	<b>Approved</b>		This request was approved because it met the technical requirements of the regulation and provided the necessary supporting documentation, technical studies, local outreach and/or notification.
<a href="#">5-21.67 SACRAMENTO VALLEY - YOLO, 5-21.52 SACRAMENTO VALLEY - COLUSA, 5-21.68 SACRAMENTO VALLEY - CAPAY VALLEY, 5-21.66 SACRAMENTO VALLEY - SOLANO</a>	Yolo County Flood Control And Water Conservation District	NCRO	County Basin Consolidation of four subbasins within Yolo County to existing County...	Jurisdiction Internal, Jurisdiction Consolidation	<b>Approved, as modified</b>		The request was approved as a county consolidation of basins within Yolo County with additional internal jurisdictional modifications. The internal jurisdictional modifications included exclusion of some local agency areas within Yolo County which remained in the Solano subbasin. There were also minor jurisdictional modifications applied to the eastern edge of the proposed subbasin and coincident boundaries of Sutter, North American and South American subbasins to align the boundary along county boundaries rather than along hydrologic features.
<a href="#">5-22.01 SAN JOAQUIN VALLEY - EASTERN SAN JOAQUIN, 5-22.16 SAN JOAQUIN VALLEY - COSUMNES</a>	Eastern San Joaquin County Groundwater Basin Authority	NCRO	A boundary modification to merge a portion of the Cosumnes Subbasin into the Ea...	Jurisdiction Internal	<b>Approved</b>		This request was approved because it met the technical requirements of the regulation and provided the necessary supporting documentation, technical studies, local outreach and/or notification.

# County of Lassen ADMINISTRATIVE SERVICES



**CHRIS GALLAGHER**

*District 1*

**DAVID TEETER**

*District 2*

**JEFF HEMPHILL**

*District 3*

**AARON ALBAUGH**

*District 4*

**TOM HAMMOND**

*District 5*

**Richard Egan**  
County Administrative Officer  
email: [coadmin@co.lassen.ca.us](mailto:coadmin@co.lassen.ca.us)

**Julie Morgan**  
Assistant to the CAO  
email: [jmorgan@co.lassen.ca.us](mailto:jmorgan@co.lassen.ca.us)

**Regina Schaap**  
Executive Assistant to the CAO  
email: [rschaap@co.lassen.ca.us](mailto:rschaap@co.lassen.ca.us)

County Administration Office  
221 S. Roop Street, Suite 4  
Susanville, CA 96130  
Phone: 530-251-8333  
Fax: 530-251-2663

August 14, 2018

Trevor Joseph  
Department of Water Resources  
Sustainable Groundwater Management Office  
P.O. Box 942836  
Sacramento CA 94236-0001

Dear Mr. Joseph:

This letter is in regard to the proposed ranking of the Big Valley Groundwater Basin as a medium priority basin pursuant to the Sustainable Groundwater Management Act (Part 2.74 of the California Water Code). The Lassen County Board of Supervisors has elected to be the Groundwater Sustainability Agency for the Lassen County portion of the basin and the Modoc County Board of Supervisors has elected to be the Groundwater Sustainability Agency for the Modoc County portion of the basin pursuant to said Act and has been designated as such. Lassen and Modoc County are working in a coordinated effort to comply with the Sustainable Groundwater Management Act by retaining local control for the benefit of our constituents.

This letter is to provide comments regarding the above ranking and present justification for consideration to reduce the 2018 Big Valley Groundwater Basin prioritization score.

The 2018 ranking considered the following additional criteria that were not previously considered for the 2014 prioritization (2018 SGMA Basin Prioritization Process and Results):

- The updated SGMA provision in component 8 that requires consideration of “...*adverse impacts on local habitat and local stream flows*”;
- Other information from a sustainable groundwater management perspective in accordance with the provision “*Any other information determined to be relevant by the Department...*”;
- Use of updated datasets and information in accordance with the provision “...*to the extent data are available*”.

Based on the SGMA updates to component 8, the 2018 SGMA Basin Prioritization considered the following four new sub-components:

- Adverse impacts on local habitat and local streamflows

- Adjudicated areas
- Critically overdrafted basins
- Groundwater related transfers

Lassen and Modoc County have carefully evaluated the information and data provided to establish the 2018 SGMA Basin Prioritization results. The datasets, methodologies, and documentation provided for this process are an improvement over the previous prioritization, and DWR made efforts to standardize the datasets and criteria used for nearly all the components including Component 7: Impacts. However, DWR did not make adequate consideration of the severity of the impacts for Component 7 and did not apply consistent methodologies and justification for Component 8. Particular inadequacies related to Big Valley's prioritization include:

#### **Component 7 Impacts: Declining Groundwater Levels**

Groundwater levels in Big Valley have remained stable in some areas and declined in others over the last 10 years. Declines have been as much as 30 feet, but have been rising since 2016. Prioritization points for declining groundwater level are appropriate in this basin, however the identical score was given to all basins in the state with documented water level declines. This includes critically overdrafted basins where water levels have declined hundreds of feet, chronically over the course of many decades. Evaluating Big Valley's water level declines on par with these basins does not adequately represent Big Valley's priority in the state and therefore we would like to request DWR reconsider the points associated with this portion of the scoring criteria.

#### **Component 7 Impacts: Water Quality**

This scoring appears to be based on 14 measurements that exceeded the Secondary MCL (maximum contaminant level) for iron and manganese at the two wells used to supply water to the town of Bieber. Although secondary MCLs are enforceable standards in California, they are *not* due to public health concerns but, due to nuisance and aesthetics such as taste, color, and odor. Iron and manganese are not typically concerns for agricultural use, which is the primary beneficial use in Big Valley. Iron and manganese are naturally occurring minerals that are prevalent in volcanic areas such as Big Valley. These water quality issues are therefore not due to mismanagement of the resource and conversely cannot be substantially addressed through better management. Again, DWR did not make adequate consideration of the severity of this issue, with Big Valley receiving the same number of points as areas of the state that have significant issues with salinity, nitrate, and toxic metals that have a much greater impact on beneficial uses and human health and have the potential to be better managed under SGMA.

Further we ask that DWR consider methodologies for Component 7 to account for the severity of each impact. If those methodologies cannot be developed, we ask that DWR use their discretion to adjust points in consideration of the low level of severity of these impacts for Big Valley.

#### **Component 8b: Other Information Deemed Relevant by the Department**

While DWR did apply their methodologies consistently for Components 1 through 7, they were not consistent with Component 8 and provided little justification in applying five (5) points to Big Valley Basin for:



1. "Headwaters for Pit River/Central Valley Project - Lake Shasta"
2. "Extensive restoration project at Ash Creek State Wildlife Area has improved groundwater levels in immediate vicinity of project but declining groundwater levels over past 10 years persist outside of project area which includes numerous wetlands and tributaries to the Pit River."

This limited information about the application of DWR's discretion on these points begs numerous questions such as:

1. What headwaters does this refer to? Headwaters of the Pit River? Headwaters of the CVP? Headwaters of Lake Shasta?
2. What are DWR's concerns relative to Big Valley's position within the watershed?
3. What concerns does DWR have specific to Big Valley, given that there are numerous other groundwater basins within the Pit River, Lake Shasta, CVP and State Water Project watersheds that were not awarded these points?
4. Why are water levels in the vicinity of Ash Creek and other wetlands considered "other information deemed relevant"? Wasn't this information already considered in Component 7: Declining Groundwater Levels and Component 8a: Streamflow and Habitat?

Due to the need for further clarification on the preceeding questions regarding component 8b, both Lassen and Modoc GSAs would like to request the points associated with this portion of the scoring criteria be reconsidered.

Lassen and Modoc County understand the vast complexity of evaluating each basins data and information, however, we feel a further assessment of the 2018 SGMA Basin Prioritization score is desired by both GSAs. For the above reasons, Lassen and Modoc County GSAs would like to request an assessment of the questions regarding the basins data, detailed in this letter, to be reviewed for a potential lowering of the overall basin score. We appreciate the consideration of our comments and look forward to hearing from you.

Sincerely,

Chris Gallagher, Chairman  
Lassen County Board of Supervisors

Patricia Cullins, Chair  
Modoc County Board of Supervisors

## **Appendix 2A   Resolutions Establishing Lassen and Modoc Counties as the GSAs for the BVGB**

---

RESOLUTION NO. 17-013

A RESOLUTION OF THE BOARD OF SUPERVISORS OF LASSEN COUNTY ELECTING  
TO BE THE GROUNDWATER SUSTAINABILITY AGENCY FOR ALL PORTIONS OF THE  
BIG VALLEY (BASIN NUMBER 5-004) GROUNDWATER BASIN LOCATED WITHIN  
LASSEN COUNTY, PURSUANT TO THE SUSTAINABLE GROUNDWATER  
MANAGEMENT ACT OF 2014

WHEREAS, the Legislature has adopted, and the Governor has signed into law, Senate Bills 1168 and 1319 and Assembly Bill 1739, known collectively as the Sustainable Groundwater Management Act of 2014 (SGMA); and

WHEREAS, the Sustainable Groundwater Management Act of 2014 went into effect on January 1, 2015; and

WHEREAS, the legislative intent of SGMA is to, among other goals, provide for sustainable management of groundwater basins and sub-basins defined by the California Department of Water Resources (DWR), to enhance local management of groundwater, to establish minimum standards for sustainable groundwater management, and to provide specified local agencies with authority and technical and financial assistance necessary to sustainably manage groundwater; and

WHEREAS, the Sustainable Groundwater Management Act of 2014 enables the State Water Resources Control Board to intervene in groundwater basins unless a local public agency or combination of local public agencies form a groundwater sustainability agency (GSA) or agencies by June 30, 2017; and

WHEREAS, retaining local jurisdiction over water management and land use is essential to sustainably manage groundwater and to the vitality of Lassen County's economy, communities and environment; and

WHEREAS, any local public agency that has water supply, water management or land use responsibilities within a groundwater basin may elect to be the groundwater sustainability agency for that basin; and

WHEREAS, Lassen County is a local public agency organized as a general law County under the State Constitution; and

WHEREAS, in 1995 the California Supreme Court declined to review an appeal of a lower court decision, *Baldwin v. County of Tehama* (1994), that holds that State law does not occupy the field of groundwater management and does not prevent cities and counties from adopting ordinances to manage groundwater under their police powers; and

WHEREAS, in 1999 the Lassen County Board of Supervisors adopted Ordinance Number 539 (codified at Chapter 17.01 of County Code), requiring a permit to export any groundwater from Lassen County; and

WHEREAS in 2007, the Lassen County Board of Supervisors adopted a *Groundwater*

*Management Plan*; as authorized by California Water Code Section 10753(a); and

WHEREAS, in 2012 the Lassen County Board of Supervisors adopted Ordinance Number 2012-001 (codified at Chapter 17.02 of County Code), which in part adopts a basin management objective program to facilitate the understanding and public dissemination of groundwater information in Lassen County; and

WHEREAS, in December of 2015, the Lassen County Board of Supervisors adopted the *Groundwater Monitoring Plan for Lassen County*, which was in turn approved by the California Department of Water Resources, making Lassen County the designated monitoring entity pursuant to the California Statewide Groundwater Elevation Monitoring (CASGEM) program; and

WHEREAS, the County overlies those portions of the Big Valley (Basin 5-004) Groundwater Basin located within Lassen County; and

WHEREAS, Section 10723.2 of the Sustainable Groundwater Management Act of 2014 requires that a GSA consider the interests of all beneficial uses and users of groundwater, as well as those responsible for implementing groundwater sustainability plans; and

WHEREAS, Section 10723.8 of the Sustainable Groundwater Management Act of 2014 requires that a local agency electing to be a GSA notify the California Department of Water Resources of its election and its intent to undertake sustainable groundwater management within a basin; and

WHEREAS, On January 26, 2017, the Lassen County Planning and Building Services Department conducted a public meeting within the affected basin, in the community of Bieber, to solicit comment as to whether the Board of Supervisors should or should not be the sustainable groundwater agency for the Big Valley Basin. Notice of said public meeting was published in the Lassen County Times, Mountain Echo, and Modoc County Record; mailed to the list of interested parties; and posted at various places around the basin where announcements are posted; and

WHEREAS, The January 26, 2017, meeting resulted in the identification of additional “interested parties”, that were added to the previously compiled list of interested parties.

WHEREAS, the County held a public hearing on this date after publication of notice pursuant to Government Code section 6066 to consider adoption of this Resolution. Notice, as provided for at Government Code Section 6066 was published in the Lassen County Times, Mountain Echo, and Modoc County Record; mailed to the list of interested parties; and posted at various places around the basin where announcements are posted; and

WHEREAS, it would be in the public interest of the people of Lassen County for the County to become the groundwater sustainability agency for all those portions of the Big Valley (Basin 5-004) Groundwater Basin located within Lassen County; and

WHEREAS, the County and other local public agencies have a long history of coordination and cooperation on water management; and



WHEREAS, it is the intent of the County to work cooperatively with other local agencies and Counties to manage the aforementioned groundwater basin in a sustainable fashion; and

WHEREAS, The Environmental Review Officer of Lassen County has determined that the action taken under this Resolution is exempt from the California Environmental Quality Act (Public Resources Code §21000, et seq.) ("CEQA") Under the Class 7 and Class 8, CEQA Guidelines Exemptions §§15307, 15308, and 15320 because the formation of a GSA, as provided for under state law, is meant to assure the maintenance, restoration, or enhancement of a natural resource and the regulatory process involves procedures for the protection of the environment.

NOW, THEREFORE BE IT RESOLVED AS FOLLOWS:

1. The foregoing recitals are true and correct.
2. The Board of Supervisors further finds that:
  - a. The Board of Supervisors hereby concurs with the Lassen County Environmental Review Officer that adoption of this Resolution is exempt from the California Environmental Quality Act under CEQA Guidelines Exemptions §§15307, 15308, and 15320. The Environmental Review Officer is hereby directed to file a Notice of Exemption with the Lassen County Clerk for the actions taken in this Resolution.
  - b. The proposed boundaries of the basin that the County intends to manage under the Sustainable Groundwater Management Act of 2014 shall be the entirety of the boundaries for the aforementioned groundwater basin, as set forth in California Department of Water Resources Bulletin 118 (updated in 2003), that lie within the County of Lassen; provided that the Board of Supervisors is authorized and directed to evaluate whether basin boundaries should be adjusted in a manner that will improve the likelihood of achieving sustainable groundwater management.
  - c. Lassen County hereby elects to become the groundwater sustainability agency, as defined at Section 10721 of the California Water Code, for all those portions of the Big Valley (Basin 5-004) Groundwater Basin located within Lassen County.
  - d. Within thirty days of the date of this Resolution, the Director of the Planning and Building Services Department is directed to provide notice of this election to the California Department of Water Resources in the manner required by law. Such notification shall include a map of the portion of the basin that the County intends to manage under the Sustainable Groundwater Management Act of 2014, a copy of this resolution, a list of interested parties developed pursuant to Section 10723.2 of the Act, and an explanation of how their interests will be considered in the development and operation of the groundwater sustainability agency and the development and implementation of the agency's groundwater sustainability plan.
  - e. The Director of the Planning and Building Services Department and legal counsel are hereby directed to promptly prepare a Memorandum of Understanding with Modoc County to collaboratively develop a groundwater sustainability plan for

the Big Valley (Basin 5-004) Groundwater Basin for Board consideration.

- f. The Director of the Planning and Building Services Department shall begin discussions with other local agencies in this basin in order to begin the process of developing a groundwater sustainability plan for the basin, in consultation and close coordination with other local agencies, as contemplated by the Act.
- g. The Director of the Planning and Building Services Department be directed to report back to the Board at least quarterly on the progress toward developing the groundwater sustainability plan.


The foregoing resolution was adopted at a regular meeting of the Lassen County Board of Supervisors of the County of Lassen, State of California, held on the 14th day of March, 2017 by the following vote:

AYES: Supervisors Gallagher, Teeter, Hemphill, Albaugh and Hammond

NOES: NONE

ABSTAIN: NONE

ABSENT: NONE

  
Chairman of the Board of Supervisors  
County of Lassen, State of California

ATTEST:  
JULIE BUSTAMANTE  
Clerk of the Board

BY   
~~SUSAN OSGOOD~~, Deputy Clerk of the Board  
Crystle Henderson

Crystle Henderson  
I, ~~SUSAN OSGOOD~~, Deputy Clerk of the Board of the Board of Supervisors, County of Lassen, do hereby certify that the foregoing resolution was adopted by the said Board of Supervisors at a regular meeting thereof held on the 14th day of March, 2017.

  
Deputy Clerk of the County of Lassen Board of Supervisors

**RESOLUTION # 2017-09**

**A RESOLUTION OF THE BOARD OF SUPERVISORS  
OF THE COUNTY OF MODOC  
ELECTING TO BE THE GROUNDWATER SUSTAINABILITY AGENCY FOR  
PORTIONS OF THE BIG VALLEY GROUNDWATER BASIN  
(BASIN NUMBER 5-004) WITHIN MODOC COUNTY**

**WHEREAS**, the Legislature has adopted, and the Governor has signed into law, Senate Bills 1168 and 1319 and Assembly Bill 1739, known collectively as the Sustainable Groundwater Management Act of 2014; and

**WHEREAS**, the Sustainable Groundwater Management Act of 2014 went into effect on January 1, 2015; and

**WHEREAS**, the Sustainable Groundwater Management Act of 2014 enables the State Water Resources Control Board to intervene in groundwater basins unless a local public agency or combination of local public agencies form a Groundwater Sustainability Agency or Agencies (GSA) by June 30, 2017; and

**WHEREAS**, retaining local jurisdiction over water management and land use is essential to sustainably manage groundwater and to the vitality of Modoc County's economy, communities, and environment, and

**WHEREAS**, any local public agency that has water supply, water management, or land use responsibilities within a groundwater basin may elect to be the Groundwater Sustainability Agency for that basin; and

**WHEREAS**, Modoc County is a public agency as defined by 10721 of the Water Code; and

**WHEREAS**, under Section 10723(a), the County is responsible for portions of the Big Valley Groundwater Basin as shown on the map hereto in "Exhibit A"; and

**WHEREAS**, the County overlies those portions of the Big Valley 5-004 located within Modoc County; and

**WHEREAS**, Section 10723.2 of the Sustainable Groundwater Management Act of 2014 requires that a GSA consider the interests of all beneficial uses and users of groundwater, as well as those responsible for implementing groundwater sustainability plans; and

**WHEREAS**, Section 10723.8 of the Sustainable Groundwater Management Act of 2014 requires that a local agency electing to be a GSA notify the Department of Water Resources of its election and its intent to undertake sustainable groundwater management within a basin; and

**WHEREAS**, the County held a public hearing on this date after publication of notice in the Modoc Record pursuant to Government Code section 6066 to consider adoption of this Resolution; and

**WHEREAS**, it would be in the public interest of the people of Modoc County for the County to become the groundwater sustainability agency for all those portions of the Big Valley 5-004 Groundwater Basin located within Modoc County; and

**WHEREAS**, the County and other local public agencies have a long history of coordination and cooperation on water management; and

**WHEREAS**, it is the intent of the County to work cooperatively with other local agencies and Counties to manage the aforementioned groundwater basins in a sustainable fashion;

**NOW, THEREFORE, BE IT RESOLVED**, that Modoc County hereby elects to become the Groundwater Sustainability Agency for all those portions of the Big Valley 5-004 Groundwater Basin located within Modoc County.

**BE IT FURTHER RESOLVED** that the proposed boundaries of the basin that the County intends to manage under the Sustainable Groundwater Management Act of 2014 shall be the entirety of the boundaries for the aforementioned basin, as set forth in California Department of Water Resources Bulletin 118 (updated in 2003), that lie within the County of Modoc; provided that the Board of Supervisors is authorized and directed to evaluate whether basin boundaries should be adjusted in a manner that will improve the likelihood of achieving sustainable groundwater management.

**BE IT FURTHER RESOLVED** that within thirty days of the date of this Resolution, the designated Staff Liaison to the Groundwater Resources Advisory Committee ("GRAC") is directed to provide notice of this election to the California Department of Water Resources in the manner required by law. Such notification shall include a map of the portion of the basin that the County intends to manage under the Sustainable Groundwater Management Act of 2014, a copy of this resolution, a list of interested parties developed pursuant to Section 10723.2 of the Act, and an explanation of how their interests will be considered in the development and operation of the groundwater sustainability agency and the development and implementation of the agency's groundwater sustainability plan.



**BE IT FURTHER RESOLVED** that the designated Staff Liaison to the GRAC and County Counsel are hereby directed to promptly prepare a Memorandum of Understanding with Lassen County to collaboratively develop a Groundwater Sustainability Plan for the Big Valley 5-04 Groundwater Basin for Board consideration.

**BE IT FURTHER RESOLVED** that the designated Staff Liaison to the GRAC shall begin discussions with other local agencies in this basin in order to begin the process of developing groundwater sustainability plans for the basin, in consultation and close coordination with other local agencies, as contemplated by the Act.

**BE IT FURTHER RESOLVED** that that the designated Staff Liaison to the GRAC or the Chairman of the GRAC be directed to report back to the Board at least quarterly on the progress toward developing the groundwater sustainability plans.

**PASSED AND ADOPTED** by the Board of Supervisors of the County of Modoc, State of California, on the 28th day of February, 2017 by the following vote:

Motion Approved:

**RESULT:** APPROVED [UNANIMOUS]

**MOVER:** David Allan, Supervisor District I

**SECONDER:** Patricia Cullins, Supervisor District II

**AYES:** David Allan, Supervisor District I, Patricia Cullins, Supervisor District II, Kathie Rhoads, Supervisor District III, Geri Byrne, Supervisor District V


**ABSENT:** Elizabeth Cavasso, Supervisor District IV



BOARD OF SUPERVISORS  
OF THE COUNTY OF MODOC

  
\_\_\_\_\_  
Geri Byrne, Chair  
Modoc County Board of Supervisors

ATTEST:

  
\_\_\_\_\_  
Tiffany Martinez  
Deputy Clerk of the Board

## **Appendix 2B    MOU Establishing the Big Valley Groundwater Advisory Committee**

---

**MEMORANDUM OF UNDERSTANDING  
FORMING THE BIG VALLEY GROUNDWATER BASIN ADVISORY COMMITTEE  
(BVAC) TO ADVISE THE LASSEN AND MODOC GROUNDWATER SUSTAINABILITY  
AGENCIES DURING THE DEVELOPMENT OF THE GROUNDWATER  
SUSTAINABILITY PLAN REQUIRED UNDER THE 2014 SUSTAINABLE  
GROUNDWATER MANAGEMENT ACT FOR THE  
BIG VALLEY GROUNDWATER BASIN**

**1. Background**

The Sustainable Groundwater Management Act (SGMA) is codified as Part 2.74 of the California Water Code (Section 10720 et seq). The regulations adopted to enforce the provisions of the Act are found in Section 350 et seq, Division 2, Chapter 1.5, Subchapter 2 of Title 23 of the California Code of Regulations. The Sustainable Groundwater Management Act (SGMA) became effective January 1, 2015.

This memorandum of understanding pertains to the Big Valley Groundwater Basin (BVGB), which has been designated as a “medium priority” basin by the California Department of Water Resources (DWR). This designation as a medium priority basin requires preparation of a Groundwater Sustainability Plan (GSP) under the Act.

The SGMA was created to ensure groundwater basins throughout the state are managed to reliably meet the needs of all users, while mitigating changes in the quality and quantity of groundwater. The intent of the Act as described in section 10720.1 of the Water Code is to:

- Provide for the sustainable management of groundwater basins.
- Enhance local management of groundwater consistent with rights to use or store groundwater.
- Establish minimum standards for sustainable groundwater management.
- Provide local groundwater agencies with the authority and the technical and financial assistance necessary to sustainably manage groundwater.
- Avoid or minimize subsidence.
- Improve data collection and understanding about groundwater.
- Increase groundwater storage and remove impediments to recharge.
- Manage groundwater basins through the action of local governmental agencies to the greatest extent feasible, while minimizing state intervention to only when necessary to ensure that local agencies manage groundwater in a sustainable manner.

The role of the Groundwater Sustainability Agency (GSA) is to create a GSP and then to implement and enforce that plan. The plan must include measurable objectives that can be used to demonstrate the basin is sustainably managed within twenty (20) years of implementation.

## 2. Purpose

The purpose of this memorandum is to:

- a. Establish the Big Valley Groundwater Basin Advisory Committee (BVAC) and its responsibilities.
- b. Establish the membership of the BVAC.
- c. Describe how meetings of the BVAC will be conducted and how information, findings, conclusions, decisions, etc. of the BVAC will be conveyed to the Lassen County Groundwater Sustainability Agency (GSA) and to the Modoc County Groundwater Sustainability Agency (GSA).

## 3. Recitals

- a. In September 2014, the Governor signed into law a legislative package (three bills), collectively known as the Sustainable Groundwater Management Act (SGMA), which requires local agencies with land use and/or water management or water supply authority to do certain things to reach sustainability of medium and high priority groundwater basins as designated by the State of California Department of Water Resources (DWR). SGMA became effective on January 1, 2015.
- b. The Big Valley Groundwater Basin has been designated a medium priority basin by the DWR.
- c. This MOU is dedicated to the Big Valley Groundwater Basin, not any other basin in either Lassen or Modoc Counties.
- d. The Lassen and Modoc County Board of Supervisors have adopted resolutions (17-013 and 2017-09 respectively) declaring themselves to be the Groundwater Sustainability Agency (GSA) for the portion of the Big Valley Groundwater Basin within their respective jurisdictions.
- e. No other agency pursued GSA status and therefore Lassen and Modoc Counties were awarded exclusive GSA status by DWR for the portion of the Big Valley Groundwater Basin within their respective jurisdictions.
- f. GSAs are required to develop Groundwater Sustainability Plans (GSP) for all medium and high priority basins, and said GSP for the BVGB is to be submitted to the DWR by January 31, 2022.
- g. Absent a qualified planning process which produces a Groundwater Sustainability Plan, the State Water Resources Control Board (State Board) is authorized to declare that the subbasins are out of compliance and thereby they will intervene and place the subbasins on probation with regard to SGMA.
- h. Lassen County has been awarded a grant (Grant Number 4600012669) to provide funding for the preparation of a GSP for the BVGB.



- i. Lassen and Modoc Counties intend to work cooperatively in the preparation of a GSP for the BVGB and prepare one GSP that covers the entirety of the basin.
- j. Lassen and Modoc Counties see the value of stakeholder input into the development and implementation of a Groundwater Sustainability Plan for the Big Valley Groundwater Basin.
- k. It is the intent of this MOU to form an advisory committee that would advise both Lassen and Modoc Counties on the preparation of a GSP for the basin.

**4. Goals of the BVAC are as follows:**

- a. Work collaboratively and transparently with other members to identify common goals, foster mutual understanding, and develop a GSP that all members and their constituents can live with and support;
- b. Develop a common understanding of existing groundwater resources, including groundwater dependent habitats, public trust resources and the current and future needs of all beneficial uses and users in the Big Valley groundwater basin, as well as current and future water needs;
- c. Solicit and incorporate community and stakeholder interests into committee discussions and emerging committee agreements in order to develop a locally-informed and broadly supported GSP;
- d. Consider and integrate science, to the best of its ability and with support from qualified scientific consultants, during GSP development and implementation;
- e. Support implementation efforts guided by GSP goals to use, monitor, and manage water resources in a sustainable manner, ensure local control, address current and future local water needs, and support the agricultural economy, Adin, Bieber, Nubieber, Lookout, and outlying communities, tourist visitation and fish and wildlife habitat in the basin;
- f. Negotiate in good faith to achieve consensus on management of groundwater resources in the Big Valley groundwater basin into the future;
- g. Advise the Lassen and Modoc GSAs on the preparation of a Groundwater Sustainability Plan (GSP);
- h. Provide a forum for the public to comment during the preparation of the GSP;
- i. Provide recommendations to the Lassen and Modoc GSAs that would result in actions which have as minimal impact as possible on the residents of Big Valley groundwater basin;
- j. Advise the Lassen and Modoc GSAs on the preparation of a GSP to produce the lowest possible future costs to the residents of Big Valley; and
- k. Ensure local control of the Big Valley Groundwater Basin be maintained by the Lassen and Modoc GSAs.

As a standing committee of the Lassen and Modoc GSA's, the Advisory Committee will operate in compliance with the Ralph M. Brown Act (Brown Act). Committee meetings will be noticed and agendas posted according to the Brown Act. All meetings will be open to the public and allow public comment. Speakers will generally be limited to three minutes, but time may be adjusted based upon meeting circumstances. As needed, the Chair may place time limits on public comments to ensure that the committee is reasonably able to address all agenda items

during the course of a meeting. The Lassen GSA will announce committee meetings on its website and through its regular communication channels. Recommendations and advice from the committee will be presented to the Lassen and Modoc GSA's through their staff.

## **5. BVAC Membership Composition**

1. One (1) member of the Lassen County Board of Supervisors selected by said Board.
2. One (1) alternate member of the Lassen County Board of Supervisors selected by said Board
3. One (1) member of the Modoc County Board of Supervisors selected by said Board.
4. One (1) alternate member of the Modoc County Board of Supervisors selected by said Board
5. Two (2) public members selected by the Lassen County Board of Supervisors. Said members must either reside or own property within the Lassen County portion of the Big Valley Groundwater Basin.
6. Two (2) public members selected by the Modoc County Board of Supervisors. Said members must either reside or own property within the Modoc County portion of the Big Valley Groundwater Basin.

### **Member vacancies**

If a vacancy occurs, the respective GSA will select a new committee member. Applications or letter of intent for all members of the committee must be kept on file with the respective GSA. An appointing GSA must notify the other GSA in writing if a member of the BVAC has been replaced.

### **Committee Member Terms**

- Committee members serve four (4) year terms starting from the date of their appointment. If any committee member decides, for any reason, to terminate his or her role, he/she will notify GSA staff as soon as possible after making such a determination. Committee members interested in serving beyond four (4) years must re-apply through the GSA's application process.
- The chair and vice-chair will serve one a (1) year term. At the culmination of the term of a chair or vice-chair, the committee will use its decision-making procedures to nominate and confirm a new chair and vice-chair. Any interested chair or vice chair may be nominated for a second term, however, no chair or vice-chair shall serve more than two (2) consecutive terms.

## **6. BVAC Roles and Responsibilities**

This section describes roles and responsibilities that the Big Valley Advisory Committee Members commit to during development and implementation of the Big Valley groundwater basin GSP.

### **Convener**

The Lassen and Modoc GSA's, are the final decision maker in the GSP process. The GSA's will:

- Provide guidance, evaluation and feedback that directs GSA staff and Advisory Committee members to build and implement an effective GSP;

- Work collaboratively with GSA staff, Advisory Committee members, consultants, and constituents;
- Receive, evaluate, and decide on all GSP and SGMA related actions that come in the form of advice and recommendations from the Big Valley Advisory Committee;
- Welcome feedback that pertains to the GSP from all diverse stakeholder interests in each groundwater basin; and
- Serve as a representative for the basin, making decisions in the best interest of achieving and maintaining long-term groundwater sustainability for all beneficial uses and users of water in the basin.

#### **Advisory Committee Members**

Members of the Advisory Committee (“members”) collectively represent the diversity of beneficial groundwater uses and users in the Big Valley groundwater basin. Committee members commit to:

- Serve as strong, effective advocates and educators for the interest group (constituency) represented;
- Nominate and confirm a committee chair and vice chair every year;
- Arrive at each meeting fully prepared to discuss all agenda items and relevant issues. Preparation may include, but is not limited to, reviewing previous meeting summaries, draft and final GSP chapters, and other information distributed in advance of each meeting;
- Develop an innovative problem-solving approach in which the interests and viewpoints of all members are considered;
- Explore all options to resolve disagreements, including, as needed, one-on-one discussions with GSA staff, or, at Advisory Committee meetings, interest-based caucuses or small group discussions;
- Act as liaisons throughout the GSP development and implementation process to educate, inform and solicit input from the wider local community and interested constituencies not represented on the committee;
- Present constituent views on the issues being discussed and commit to engage in civil, respectful and constructive dialogue with other members, as well as GSA staff, technical team members and potentially a facilitator;
- Ensure accuracy of information dissemination during or outside meetings, and correct false information as needed or appropriate;
- Avoid representing individual viewpoints as those of the committee and respect confidential conversations;
- Work collaboratively to ensure broad constituent understanding and support for any advice and recommendations that the committee shares with the Lassen and Modoc GSA Boards;
- Coordinate with Lassen and Modoc GSA staff regarding recommendations for any additional committee tasks that should be undertaken by the committee, and which items shall be presented to the GSA Boards for its review and approval;
- Operate at all times in compliance with the Brown Act;
- Attend meetings consistently – participation in 75% of the meetings is the minimum expectation. *(Given the volume of information to be considered and discussed, it is*

*essential that members actively participate in committee meetings on a consistent basis. It is understood that professional and personal commitments may at times prevent members from attending committee meetings. In such cases, members shall notify Lassen GSA staff no less than 24 hours in advance to be excused from attending any given committee meeting. As needed, staff will reach out to members who are not actively participating to give them the opportunity to explain their absence and reaffirm their interest to participate on the committee, and thus not lose their seat. Members who do not meet the threshold for active participation, and have not expressed an interest to continue participating, will, at the recommendation of Lassen and Modoc GSA staff, be automatically removed by the appropriate GSA Board from the committee. Alternates may attend in the absence of a committee member but must alert the Lassen and Modoc GSA staff prior to the meeting.); and*

- Recuse him/herself from discussion and voting if he/she has a personal interest or stake in the outcome [BVAC members are subject to recusal due to conflicts of interest (as that term is defined by the Political Reform Act) in accordance with Government Code Title 9, Political Reform; Chapter 7, Conflicts of Interest].

Through its public meetings, the committee shall serve as an additional forum for public dialogue on SGMA and GSP development. Finally, with approval by the Lassen and Modoc GSA's, committee tasks may be amended, repealed, or additionally added at any time with the intent to comply with SGMA related activities provided said activities comply under the authorities granted by SGMA law. Alternates may vote on all matters before the BVAC in the absence of the appointed member. Each alternate shall be informed of the business of the BVAC and the actions to be taken when acting on behalf of a member.

**The following are desired attributes for BVAC members:**

- a. Have knowledge and experience in water resources management.
- b. Represent an agency, organization, tribe, academia, or interest that is under-represented in the region (e.g., disadvantaged communities or unincorporated areas).
- c. Have the ability and desire to objectively articulate the perspective of his/her BVAC seat and caucus at a level beyond that of his/her individual interest.
- d. Provide recommendations with the best interests of the entire Big Valley region in mind.

**7. Appointment**

Members of the BVAC shall be appointed by the respective Board of Supervisors acting as the GSA. Members will serve at the pleasure of said Boards and may be terminated at any time without cause. Persons interested in serving on the BVAC shall submit a letter of interest or application to the pertinent Clerk of the Board of Supervisors which includes the following:

- a. Current level of SGMA knowledge;
- b. Knowledge of groundwater in the Big Valley Groundwater Basin;
- c. Their ability to commit to attending meetings of the Advisory Committee
- d. Committee members should have demonstrated ability to work collaboratively with others of differing viewpoints and achieve good faith compromise.



## 8. BVAC Chair and Vice Chair Roles

The BVAC Chair and Vice Chair must be BVAC members. The Chair and Vice Chair will be determined by a majority vote of the BVAC. The Chair and Vice Chair shall serve for one (1) year term (multiple terms may be held, not to exceed two (2) years).

Although not required, the following attributes are desirable for the Chair and Vice Chair:

- Chair: prior experience working in the role of a Chair of a committee.
- Vice Chair: attributes and ability to assume Chair role and responsibilities, but not necessarily as much experience as the Chair.
- Chair and Vice Chair should come from different GSAs.
- Familiar with the purpose, structure, and content of meetings.
- Willing and able to attend each BVAC meeting until the GSP is drafted. The GSP must be submitted to the DWR by January 31, 2022.
- Ability to even-handedly articulate all interests.
- Consensus-builder.

The role of the Chair and Vice Chair will vary between BVAC meetings; however, the Vice Chair's primary role is to take on Chair responsibilities in the absence of the Chair and/or at the discretion of the Chair. General responsibilities for the Chair are as follows:

- a. Review BVAC agenda prior to finalization and distribution to stakeholders (one week prior to BVAC meetings);
- b. Meet with staff prior to each BVAC meeting to go over the BVAC agenda and presentation(s) so that the BVAC meeting runs smoothly and without interruption;
- c. Manage the BVAC agenda, select members to speak in turn, and keep the BVAC on task and on time;
- d. Convene each BVAC meeting and initiate introductions;
- e. Organize and call on public speakers during appropriate agenda items (if applicable) and determine public comment procedures;
- f. Identify when the BVAC has reached an impasse and needs to move forward with formal voting to resolve an issue;
- g. Summarize key decisions and action items at the end of each BVAC meeting.
- h. Close meetings;
- i. Ensure that notes are prepared summarizing discussion, agreements, and decisions; and
- j. Review and provide comments on BVAC meeting notes.

## 9. Meetings

Meetings will be conducted on a monthly basis or as often as is needed during preparation of the Big Valley Groundwater Basin GSP. Meetings shall be noticed in accordance with the Brown Act. The Lassen County Department of Planning and Building Services will coordinate Brown Act noticing and any other noticing that is executed. The Lassen County Department of Planning and Building Services will prepare and disseminate packets in advance of all meetings, if applicable. Said Department shall serve as staff to the BVAC, and be the repository of all associated records, with a copy of all records sent to the Modoc County Clerk of the Board. The

Director of the Lassen County Planning and Building Services Department or his or her designee shall serve as secretary of the BVAC and may comment on any item but does not have a vote. The designated Modoc County GSA groundwater staff member may comment on any item but does not have a vote. Legal counsel shall be provided by the Modoc County Counsel.

Meetings shall be conducted in accordance with this MOU, SGMA and any other applicable rules or regulations. A quorum is required to convene. The BVAC Chair or Vice Chair will determine if a quorum exists at any BVAC meeting. Formal voting may not occur without a quorum of BVAC members; however, presentations and discussion of agenda topics may occur. A quorum shall be defined as having at least four BVAC representatives, present at every meeting.

#### **Meeting Location**

All meetings of the Big Valley Groundwater Advisory Committee must be held within the boundary of the Big Valley Groundwater basin. Lassen GSA staff will work collaboratively with the Chair to determine a location which will encourage the most participation from all stakeholders. Meeting locations shall remain consistent to prevent reduced participation from all stakeholders.

### **10. Public Comments at BVAC Meetings**

BVAC meetings are open to the public, and public comments are welcomed and encouraged. To ensure that members of the public have an adequate chance to provide comments, the BVAC Chair will invite public comments by members of the public in attendance on any agenda item in which the BVAC is making a decision or formulating a recommendation. An open public comment period will be offered at the end of BVAC meetings to allow members of the public to speak to non-agenda topics.

If there is substantial public interest or comment on a topic, the BVAC Chair or Vice Chair may implement the following procedures to ensure that such comments are received in a timely manner:

- Members of the public will be asked to fill out a speaker card to indicate their name, affiliation, contact, and the specific agenda item they wish to speak to (if applicable).
- Speaker cards will be limited to one per person per agenda item. Participants may submit multiple speaker cards to address multiple agenda items.
- The BVAC Chair or Vice Chair will invite those who submitted speaker cards to address the agenda item prior to calling for a consensus decision and/or vote on that item.
- Speaker cards will generally allow three minutes of public speaking time per speaker. However, in the event that there are a large number of public speaker comments, it will be up to the discretion of the BVAC Chair or Vice Chair to reduce the time for each public speaker to ensure that all agenda items are addressed and that the BVAC meeting closes on time.

### **11. Decision-making Procedures**

In order to hold a meeting and conduct its work, a quorum of the Big Valley GSA Advisory Committee must be present.

- 1) **Consensus as the Fundamental Principle:** The advisory committee shall strive for consensus (agreement among all participants) in all of its decision-making. Working toward consensus is a fundamental principle which will guide group efforts, particularly when crafting any draft or final advisory committee proposals, reports or recommendations for GSA Boards consideration. If the committee is unable to reach consensus, the range of opinions provided, including areas of agreement and disagreement, will be documented in meeting summaries or otherwise communicated in written reports when advisory committee work is shared with the GSA Boards.
- 2) **Definition of Consensus:** Consensus means all committee members either fully support or can live with a particular decision and believe that their constituents can as well. In reaching consensus, some committee members may strongly endorse a particular proposal, report or recommendation while others may simply accept it as "workable." Others may only be able to "live with it" as less than desired but still acceptable. Still others may choose to "stand aside" by verbally noting disagreement, yet allowing the group to reach consensus without them, or by abstaining altogether. Any of these actions constitutes consensus.
- 3) **Types of Decision-Making:**
  - a. Administrative: Decisions about the daily administrative activities of the committee—including, but not limited to meeting logistics, meeting dates and times, agenda revisions and schedules. *Administrative decisions* will typically be put forward to the group by Lassen County Department of Planning and Building Services staff. As needed, staff will consult with the committee. Any administrative decisions by the committee will be made on a simple majority vote of all members present at a meeting. The committee will defer to the decision-making procedures outlined in this section of the MOU in circumstances where it is unclear if a committee decision is *administrative* in nature, or represents a more substantive *GSP/SGMA* decision (described below).
  - b. Groundwater Sustainability Planning/SGMA Advice and Recommendations: Advice and recommendations about the Big Valley GSP—including but not limited to topics mandated by SGMA and other groundwater related topics that the committee chooses to address. All *GSP/SGMA advice and recommendation decisions* will be made by the decision-making procedures outlined in this section of the MOU.
- 4) **Consensus with Accountability:** Consensus seeking efforts recognize that a convened group such as Big Valley Advisory Committee makes recommendations, but is not a formal decision-making body like the Lassen or Modoc GSA's. That said, achieving consensus is the goal, as this allows all stakeholder interests represented on the committee to communicate a unified group perspective to the GSA Boards as it considers public policy decisions and actions which may affect the constituencies that members represent, and the wider community. Using a model of consensus with accountability, all committee members shall commit to two principles:
  - a. All members are expected to routinely express their interests and analyze conditions to ensure they have clarity on how their interests and those of others may shift over time;

- b. All members shall negotiate agreements in a manner that serves their interests, and offers either neutral impact to others, or ideally provides benefit to others' interests as well as their own.

Operating by consensus with accountability will encourage multi-interest solutions based on shared member interests. Such solutions are in turn more sustainable and durable as they represent shared agreements rather than majority/minority dynamics. Most consensus building during the course of GSP development and SGMA implementation will be based on verbal dialogue, deliberation and iterative development of group ideas. The Chair may commonly ask, when it appears consensus or near consensus agreement has emerged or is emerging, if any member cannot live with said agreement. For any final decisions, committee members will demonstrate consensus, or lack thereof, in the following manner:

*Nay:* *I do not support the proposal.*

*Aye:* *I support the proposal.*

*Stand Aside:* *Member verbally notes he/she is willing to stand aside and allow group consensus*

*Abstention:* *At times, a pending decision may be infeasible for a participant to weigh in on. Member verbally notes he/she abstains. Abstentions do not prevent group consensus.*

Any member that stands aside or abstains from a decision is encouraged to explain why his/her choice is in his/her best interest.

- 5) **Less than 100% Consensus Decision Making:** The advisory committee is consensus seeking but shall not limit itself to strict consensus if 100% agreement among all participants cannot be reached after all interests and options have been thoroughly identified, explored and discussed. Less-than-consensus decision-making shall not be undertaken lightly. If the committee cannot come to 100% agreement, it could set aside the particular issue while it continues work on other issues, then revisit the disagreement later in the process. Finally, the committee recognizes that certain deadlines must be met during the collaborative process to ensure completion of all SGMA opportunities and requirements on time.

If, after thoroughly exploring all ideas and options, consensus is absent or otherwise not forthcoming, the committee, with assistance from the GSA staff, will clearly document majority and minority viewpoints. The Chair and Vice-Chair will then work with GSA staff to incorporate all viewpoints into the meeting summary, and, as warranted, prepare a committee report to the GSA Boards. The chair, in coordination with GSA staff, will then present the report to the GSA Boards, ensuring that all majority and minority viewpoints are clearly communicated and accurately represent the outcomes of committee discussions. Any committee member holding minority viewpoints will have the opportunity, if he/she is not comfortable with the process, to present his/her viewpoints directly to the GSA Boards at the



time the report is presented. Members wishing to do this will express their interest and minority viewpoints with GSA staff in advance of said GSA Board meetings.

- 6) **Decision Outcomes:** Advisory committee decisions will be made at appropriate meetings and, in accordance with the Brown Act, will be publicly noticed in advance and shared via the Lassen County GSA's website and SGMA interested parties email list. As described above, all committee proposals, reports and recommendations will reflect the outcomes of collaborative member discussions. All consensus agreements and other negotiated outcomes during GSP development and implementation, as well as discussion outcomes when consensus is not forthcoming, will be documented, as described above, and shared with the GSA Boards.

## 12. Collaborative Process Agreements and Meeting Ground Rules

Members commit to the following process agreements during discussion, deliberation and attempts to find consensus-based solutions to sustainable groundwater management in the Big Valley groundwater basin. Moreover, members also agree to abide by meeting ground rules in order to intentionally and consistently engage each other in civil and constructive dialogue during the collaborative process.

### *Process Agreements*

- **Strive to focus on interests versus positions.** A focus on interests instead of positions will help reveal the needs, hopes or concerns behind any member's words. By extension this can help identify shared interests among committee members and, based on those shared interests, multiple options for mutually beneficial agreements.
- **Foster mutual understanding and attempt to address the interests and concerns of all participants.** For the collaborative process to be successful, all members must seek to understand the interests and concerns of other members, then strive to reach agreements that take all member interests under consideration.
- **Inform, educate and seek input from community constituents.** To the extent possible, members will share information and solicit input from their constituents, scientific advisors, and others about ongoing committee discussions and potential agreements or recommendations as they emerge.
- **View challenges as problems to be solved rather than battles to be won.** Challenges will at times arise during discussion of issues. Remember to focus on the challenge versus on each other. Search for multi-interest solutions, rather than win/lose agreements.
- **Be creative and innovative problem solvers.** Creative thinking and problem solving are essential to success in any collaboration. Get beyond the past, climb out of the perceived "box" and attempt to think about the problem, and potential solutions, in new ways.
- **Negotiate in good faith.** All members agree to candidly and honestly participate in decision making, to act in good faith in all aspects of this effort, and to communicate their interests in

group meetings. Good faith also requires that parties not make commitments for which they cannot or do not intend to honor.

- **Consider the long-term view.** SGMA requires submission and approval of a Big Valley GSP by January 31<sup>st</sup>, 2022. Taking a long-term view of the planning horizon, may help inform collaborative discussions, reduce conflict and thereby ensure long-term sustainability of groundwater resources.

#### *Ground rules*

- **Use common conversational courtesy and treat each other with respect.** Civil and respectful dialogue tends to foster a constructive, thorough and solutions-oriented environment within multi-stakeholder groups.
- **Remember that all ideas and points of view linked to the committee's charge have value.** All ideas have value in this setting. Simply listen, you do not have to agree. If you hear something you do not agree with or you think is silly or wrong, please remember that a fundamental purpose of this forum is to encourage diverse ideas.
- **Be candid, listen actively and seek to understand others.** This promotes genuine dialogue and mutual understanding. Mutual understanding in turn helps parties identify shared interests. Shared interests set the foundation to finding and developing mutually acceptable agreements.
- **Be concise and share the air.** Keep in mind that time is limited at meetings. Be concise when sharing your perspective so that all members can participate in the discussion. And remember, people's time is precious, treat it with respect.
- **Avoid editorial comments.** At times it will be tempting to try and interpret the intentions or motivations of others. Please avoid this temptation and instead speak to your own interests and the motivation behind them.
- **Stay focused on the meeting agenda.** The committee is a Brown Act compliant body. As such it is important to stay focused on the posted agenda for any given meeting.
- **Welcome levity and humor to the discussions.** Work around water can at times be daunting and filled with challenges. Levity and humor is both welcome and helpful at times, as long as it does not come at the expense of others.
- **Turn cell phones off or to vibrate.** Help the group avoid distractions by turning cell phones to vibrate, not checking email during meetings and, if you must take a call, taking it outside the room.

### **13. Communications/Media Relations**

Members are asked to speak only for themselves or the constituency they represent when asked by external parties, including the media, about the committee's work, unless there has been a formal adoption of a statement, report or recommendations by the committee. Members will refer media inquiries to GSA staff while also having the freedom to express their own opinions to the

media. Members should inform media and external parties that they only speak for themselves and do not represent other members or the committee as a whole. The temptation to discuss someone else's statements or positions should be avoided.

#### **14. Indemnification/Defense**

Claims Arising from Acts or Omissions.

No GSA, nor any officer or employee of a GSA, shall be responsible for any damage or liability occurring by reason of anything done or omitted to be done by another GSA under or in connection with this MOU. The GSA's further agree, pursuant to California Government Code section 895.4, that each GSA shall fully indemnify and hold harmless each other GSA and its agents, officers, employees and contractors from and against all claims, damages, losses, judgements, liabilities, expenses, and other costs, including litigation costs and attorney fees, arising out of, resulting from, or in connection with any work delegated to or action taken or omitted to be taken by such GSA under this MOU.

#### **15. Litigation**

In the event that any lawsuit is brought by a third party against any Party based upon or arising out of the terms of this MOU, the Parties shall cooperate in the defense of the action. Each Party shall bear its own legal costs associated with such litigation.

#### **16. Books and Records**

Each Governing Body will be entitled to receive copies of documents, records, historical data, data compiled through consultants and any and all information related to groundwater within the Big Valley Groundwater basin developed pursuant to this MOU; provided that nothing in this paragraph shall be construed to operate as a waiver of any right to assert any privilege that might apply to protect the disclosure to information or materials subject to the attorney-client privilege, attorney work product privilege, or other applicable privilege or exception to disclosure.

#### **17. Miscellaneous**

##### **A. Term of Agreement.**

This MOU shall remain in full force and effect until the date upon which all Parties have executed a document terminating the provisions of this MOU.

##### **B. No Third-Party Beneficiaries.**

This MOU is not intended and will not be construed to confer a benefit or create any right on any third party, or the power or right to bring an action to implement any of its terms.

##### **C. Amendments.**

This MOU may be amended only by written instrument duly signed and executed by all Parties.

D. Compliance with Law.

In performing their respective obligations under this MOU, the Parties shall comply with and conform to all applicable laws, rules, regulations and ordinances.

E. Construction of Agreement.

This MOU shall be construed and enforced in accordance with the laws of the United States and the State of California.

18. All notice required by this MOU will be deemed to have been given when made in writing and delivered or mailed to the respective representatives of the Parties at their respective addresses as follows:

For the County of Modoc:  
Clerk of the Board  
204 South Court Street  
Alturas, CA 96101

For the County of Lassen:  
Lassen County Planning and Building Services  
707 Nevada Street, Suite 5  
Susanville, CA 96130



## 19. Signature

The parties hereto have executed this Memorandum of Understanding as of the dates shown below.

The effective date of this MOU is the latest signature date affixed to this page. This MOU may be executed in multiple originals or counterparts. A complete original of this MOU shall be maintained in the records of each of the parties.

### COUNTY OF LASSEN

By: \_\_\_\_\_ Date: \_\_\_\_\_  
Chairman, Lassen County Board of Supervisors

ATTEST:

By: \_\_\_\_\_ Date: \_\_\_\_\_  
Clerk of the Board

APPROVED AS TO FORM:

\_\_\_\_\_ Date: \_\_\_\_\_  
Lassen County Counsel

### COUNTY OF MODOC

By: *Dan Rhoads* Date: MAY 21 2019  
Chairman, Modoc County Board of Supervisors

ATTEST:

By: *Tiffany A. Martinez* Date: MAY 21 2019  
Clerk of the Board

APPROVED AS TO FORM:


*[Signature]* Date: MAY 21 2019  
Modoc County Counsel

19. Signature


The parties hereto have executed this Memorandum of Understanding as of the dates shown below.

The effective date of this MOU is the latest signature date affixed to this page. This MOU may be executed in multiple originals or counterparts. A complete original of this MOU shall be maintained in the records of each of the parties.

COUNTY OF LASSEN

By:  Date: 6-11-19  
Chairman, Lassen County Board of Supervisors


ATTEST:

By:  Date: 6/11/2019  
Clerk of the Board

APPROVED AS TO FORM:

\_\_\_\_\_  
Lassen County Counsel Date: \_\_\_\_\_

COUNTY OF MODOC

By:  Date: MAY 21 2019  
Chairman, Modoc County Board of Supervisors

ATTEST:

By:  Date: MAY 21 2019  
Clerk of the Board

APPROVED AS TO FORM:


\_\_\_\_\_  
Modoc County Counsel Date: MAY 23 2019

## **Appendix 4A   Aquifer Test Results**

---

### Pumping Test

MW1-1		Adin Airport	
Time	Minutes	Depth to Water (ft)	Drawdown
10:59	0.0	31.6	0
11:00	0.1	34	2.4
11:03	3	34.6	3
11:05	5	34.6	3
11:07	7	35	3.4
11:10	10	35	3.4
11:15	15	35.6	4
11:20	20	35.6	4
11:25	25	35.9	4.3
11:30	30	35.9	4.3
11:35	35	35.9	4.3
11:40	40	35.9	4.3
11:45	45	35.9	4.3
11:50	50	35.9	4.3
11:55	55	35.9	4.3
12:00	60	35.9	4.3
12:01	61	32.6	1
12:02	62	32.6	1
12:05	65	32.4	0.8
12:08	68	32.5	0.9
12:10	70	32.4	0.8
12:15	75	32.4	0.8

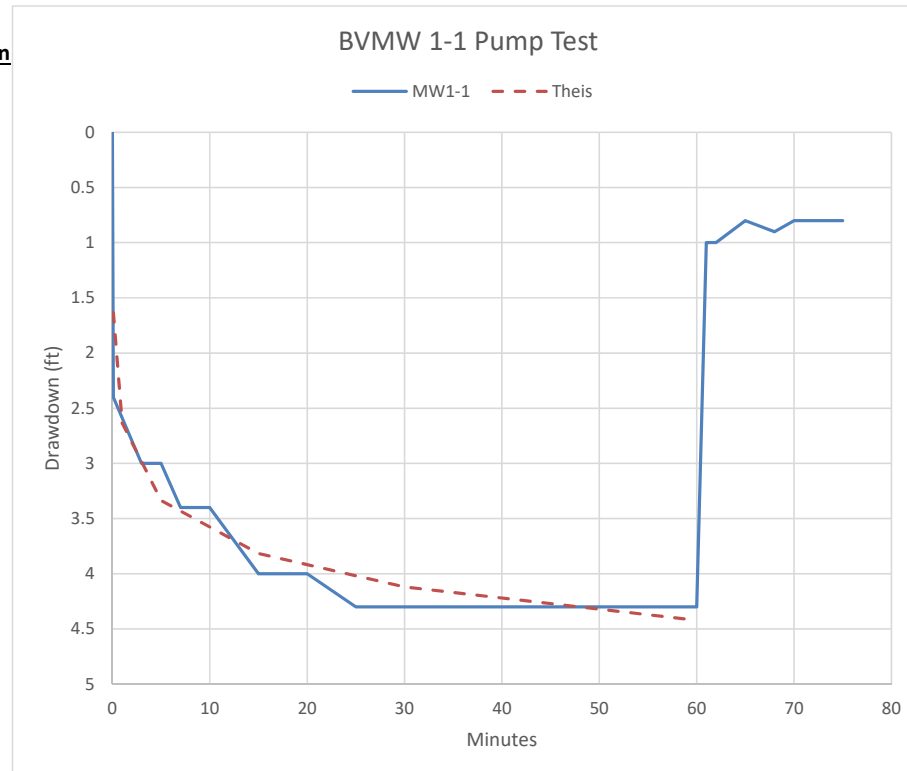

### Theis Solution


Thickness (b)	50 ft
Flow (Q)	8 gpm
Well Efficiency	0.7 unitless
Transmissivity (T)	3000 gpd/ft
Radius (r)	1 ft
Storativity (S)	1.5E-03 unitless
Hydraulic Conductivity (K)	8 ft/d



### Pumping Test

#### MW2-1

<u>Time</u>	<u>Minutes</u>	<u>Depth to Water (ft)</u>	<u>Drawdown</u>
7:40	0	26	0
7:41	0.1	33	7
7:45	5	34	8
7:48	8	36	10
7:50	10	39	13
7:55	15	39	13
8:00	20	40	14
8:05	25	40	14
8:10	30	41	15
8:15	35	42	16
8:20	40	41.6	15.6
8:25	45	42	16
8:30	50	42	16
8:35	55	42	16
8:40	60	42	16

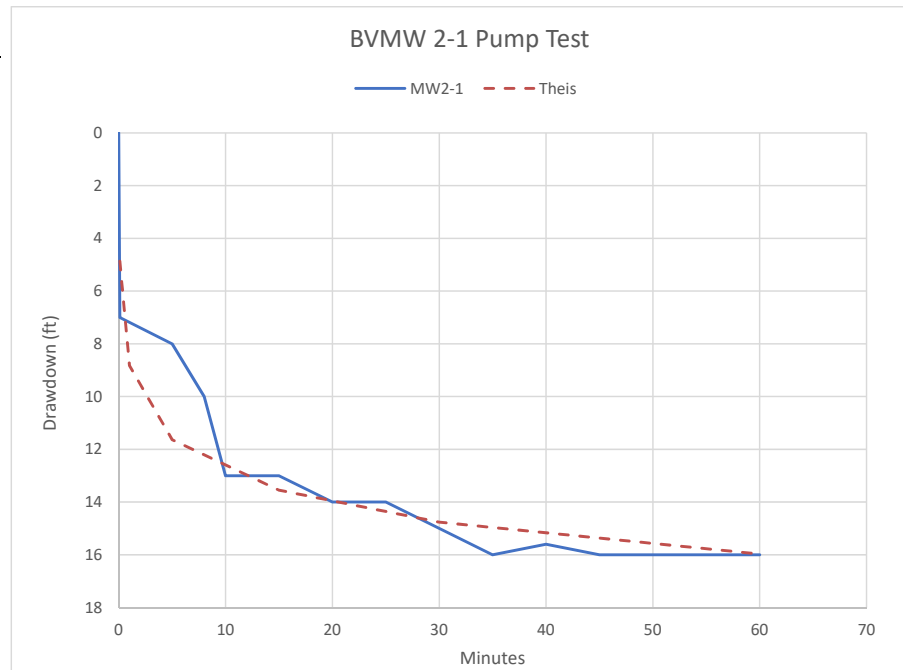


### Theis Solution

Thickness (b)	40	ft
Flow (Q)	8	gpm
Well Efficiency	13	unitless
Transmissivity (T)	750	gpd/ft
Radius (r)	1	ft
Storativity (S) <sub>1</sub>	0	unitless
Hydraulic Conductivity (K)	3	ft/d

### Pumpng Test

MW3-1		Lookout	
Time	Minutes	Depth to Water (ft)	Drawdown
9:20	0	18	0
9:21	0.1	34	16
9:22	2	38	20
9:23	3	40	22
9:25	5	41	23
9:30	10	42	24
9:35	15	44	26
9:40	20	44	26
9:45	25	44	26
9:50	30	44	26
9:55	35	45	27
10:00	40	45	27
10:05	45	45	27
10:10	50	45.5	27.5
10:15	55	45.5	27.5
10:20	60	45.5	27.5
10:25	65	36	18
10:30	70	32	14

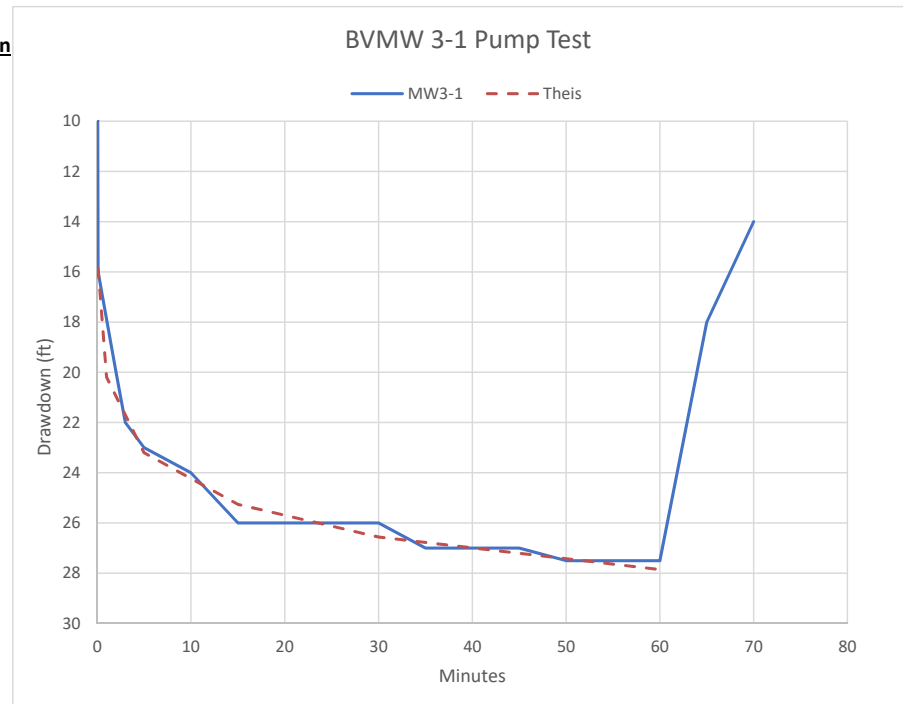


### Theis Solution

Thickness (b)	50	ft
Flow (Q)	8	gpm
Well Efficiency	13	unitless
Transmissivity (T)	700	gpd/ft
Radius (r)	1	ft
Storativity (S)1	0.000003	unitless
Hydraulic Conductivity (	1.87	ft/d

### Pumping Test

#### MW4-1

<u>Time</u>	<u>Minutes</u>	<u>Depth to Water (ft)</u>	<u>Drawdown</u>
1:55	0	33.5	0
1:57	0.2	34	0.5
1:58	1	34	0.5
1:59	2	34	0.5
2:00	3	34.5	1
2:05	8	34.5	1
2:10	13	34.5	1
2:15	18	34.5	1
2:20	23	35	1.5
2:25	28	35	1.5
2:30	33	35	1.5
2:35	38	35	1.5
2:40	43	35.5	2
2:45	48	35.5	2
2:50	53	35.5	2
2:55	58	35.5	2
3:00	63	35.5	2
3:01	64	35	1.5
3:02	65	34	0.5
3:03	66	33.5	0
3:04	67	33.5	0
3:05	68	33.5	0

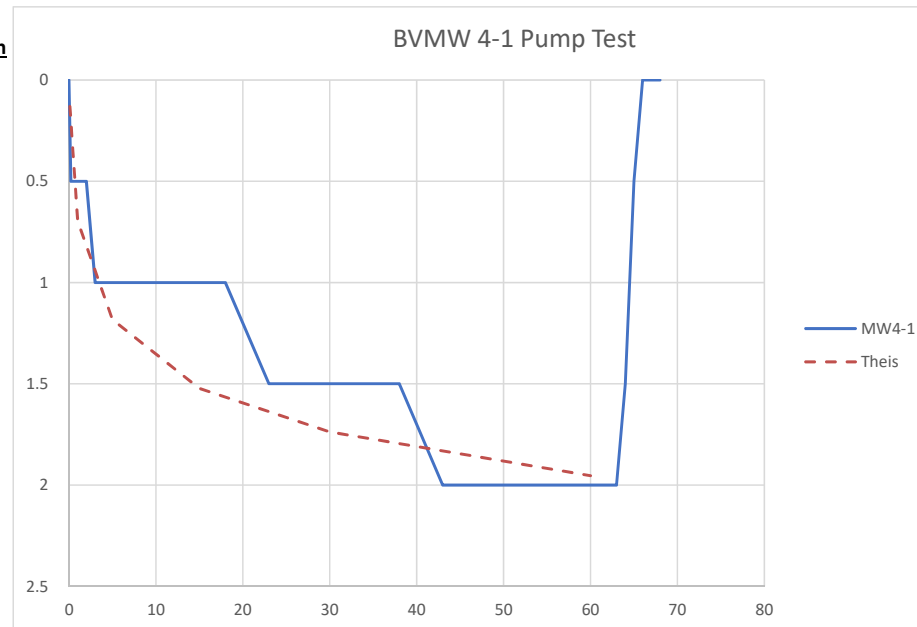


### Theis Solution

Thickness (b)	30	ft
Flow (Q)	8	gpm
Well Efficiency	13	unitless
Transmissivity (T)	4200	gpd/ft
Radius (r)	1	ft
Storativity (S)	0.1	unitless
Hydraulic Conductivity (K)	19	ft/d

## Pumping Test

### MW5-1

Time	Minutes	Depth to Water (ft)	Drawdown
11:50	0	42	0
11:51	1	44	2
11:52	2	44	2
11:57	7	44.2	2.2
12:00	10	44.6	2.6
12:05	15	45	3
12:10	20	45	3
12:15	25	45	3
12:20	30	45	3
12:30	40	45	3
12:35	45	45	3
12:40	50	45	3
12:45	55	44.6	2.6
12:50	60	44.6	2.6
12:57	63	43	1
12:58	64	42	0

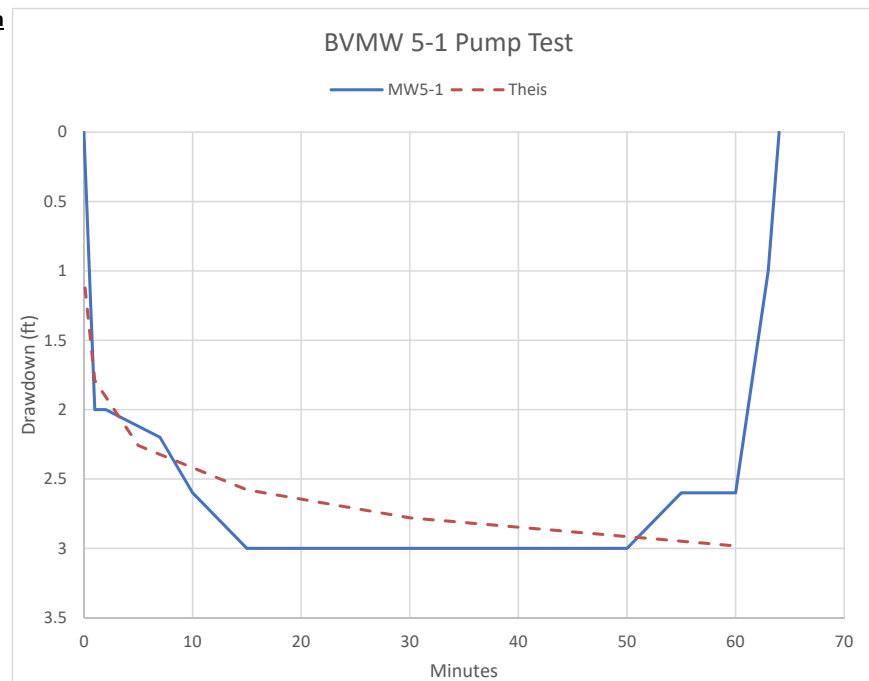

## Theis Solution

Thickness (b)	50	ft
Flow (Q)	8	gpm
Well Efficiency	13	unitless
Transmissivity (T)	4500	gpd/ft
Radius (r)	1	ft
Storativity (S) <sub>1</sub>	0.002	unitless
Hydraulic Conductivity (K)	12	ft/d



## **Appendix 5A    Water Level Hydrographs**

---

# Groundwater Level Report


Date: 8/17/2021

Well Information	
Well ID	022094_38N07E20B006M
Well Name	20B6
State Number	38N07E20B006M
WCR Number	128135
Site Code	411242N1211866W001
Well Location	
County	Lassen
Basin	Big Valley
Hydrologic Region	Sacramento River
Station Organization	Lassen County Department of Planning and Building Services
Well Type Information	
Well Use	Residential
Completion Type	Single Well

Well Coordinates/Geometry		
Location	Lat:	41.1242
	Long:	-121.1866
Well Depth	183.00 ft	
Ground Surface Elevation	4126.30 ft	
Ref. Point Elevation	4127.30 ft	
Screen Depth Range	-	
Screen Elevation Range	-	
Well Period of Record		
Period-of-Record	1979..2021	
WS Elev-Range	Min:	4076.9 ft
	Max	4116.6 ft

Trend Analysis		
Seasonal Data Method		Max/Min
Show Trend 1		Spring Data
Date Range (Optional)	Start WY:	1979
	End WY:	2021
Extend Trend Line		No
Trend Results	Slope	(0.692 ft/yr)
Show Trend 2		None
Date Range (Optional)	Start WY:	
	End WY:	
Extend Trend Line		Yes
Trend Results	Slope	-

## Water Surface Elevation (WSE) Hydrograph

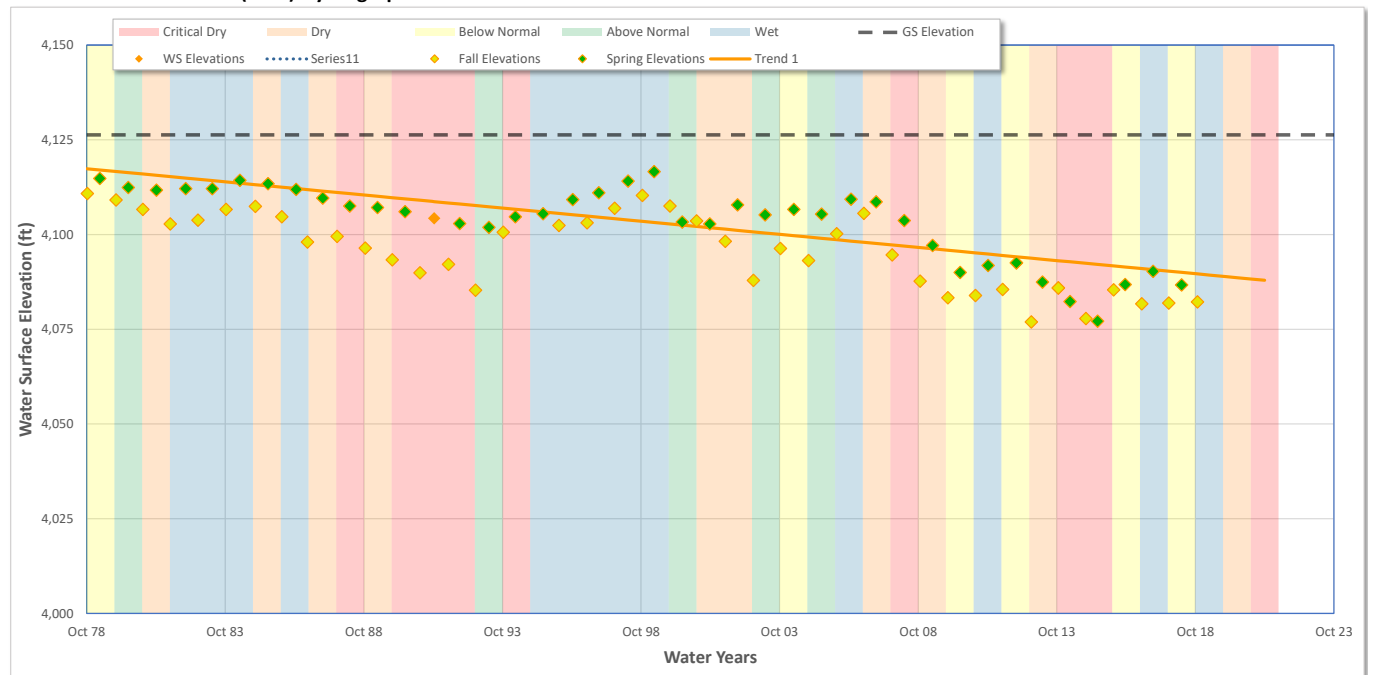

# Groundwater Level Report


Date: 8/17/2021

Well Information	
Well ID	022095_38N07E24J002M
Well Name	24J2
State Number	38N07E24J002M
WCR Number	5327
Site Code	411228N1211054W001
Well Location	
County	Lassen
Basin	Big Valley
Hydrologic Region	Sacramento River
Station Organization	Lassen County Department of Planning and Building Services
Well Type Information	
Well Use	Irrigation
Completion Type	Single Well

Well Coordinates/Geometry		
Location	Lat:	41.1226
	Long:	-121.1054
Well Depth	192.00 ft	
Ground Surface Elevation	4138.40 ft	
Ref. Point Elevation	4139.40 ft	
Screen Depth Range	1 to 192 ft	
Screen Elevation Range	4128 to 3937 ft	
Well Period of Record		
Period-of-Record	1979..2021	
WS Elev-Range	Min:	4056.7 ft
	Max	4137.7 ft

Trend Analysis	
Seasonal Data Method	Max/Min
Show Trend 1	Spring Data
Date Range (Optional)	Start WY: 1979
	End WY: 2021
Extend Trend Line	No
Trend Results	Slope (1.115 ft/yr)
Show Trend 2	None
Date Range (Optional)	Start WY:
	End WY:
Extend Trend Line	Yes
Trend Results	Slope -

## Water Surface Elevation (WSE) Hydrograph

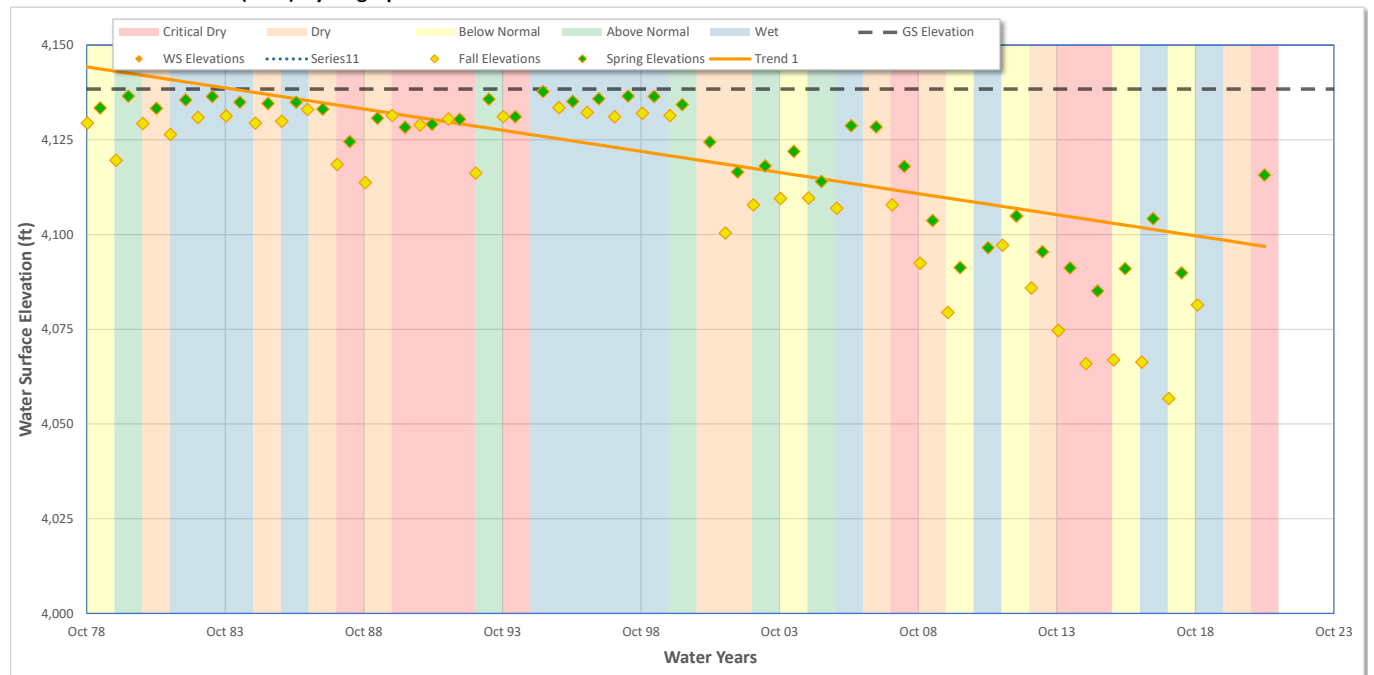

# Groundwater Level Report


Date: 8/17/2021

Well Information	
Well ID	022096_38N07E32A002M
Well Name	32A2
State Number	38N07E32A002M
WCR Number	-
Site Code	410950N1211839W001
Well Location	
County	Lassen
Basin	Big Valley
Hydrologic Region	Sacramento River
Station Organization	Lassen County Department of Planning and Building Services
Well Type Information	
Well Use	Other
Completion Type	Single Well

Well Coordinates/Geometry		
Location	Lat:	41.0950
	Long:	-121.1839
Well Depth		49.00 ft
Ground Surface Elevation		4118.80 ft
Ref. Point Elevation		4119.50 ft
Screen Depth Range		-
Screen Elevation Range		-
Well Period of Record		
Period-of-Record		1959..2021
WS Elev-Range	Min:	4106.7 ft
	Max	4118.8 ft

Trend Analysis	
Seasonal Data Method	Max/Min
Show Trend 1	Spring Data
Date Range (Optional)	Start WY: 1979
	End WY: 2021
Extend Trend Line	No
Trend Results	Slope (0.055 ft/yr)
Show Trend 2	None
Date Range (Optional)	Start WY:
	End WY:
Extend Trend Line	Yes
Trend Results	Slope -

## Water Surface Elevation (WSE) Hydrograph

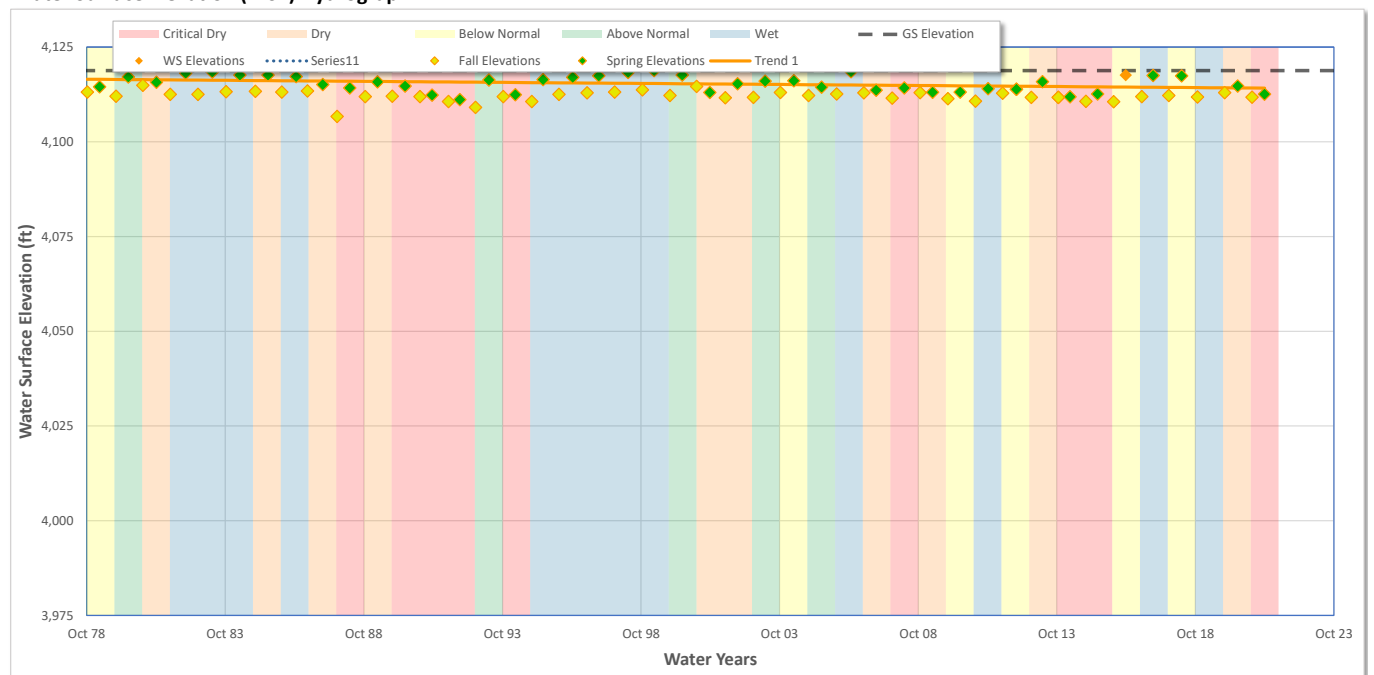



# Groundwater Level Report


Date: 8/17/2021

Well Information	
Well ID	022097_38N08E16D001M
Well Name	16D1
State Number	38N08E16D001M
WCR Number	090143
Site Code	411359N1210625W001
Well Location	
County	Lassen
Basin	Big Valley
Hydrologic Region	Sacramento River
Station Organization	Lassen County Department of Planning and Building Services
Well Type Information	
Well Use	Irrigation
Completion Type	Single Well

Well Coordinates/Geometry		
Location	Lat:	41.1358
	Long:	-121.0625
Well Depth		491.00 ft
Ground Surface Elevation		4171.40 ft
Ref. Point Elevation		4171.60 ft
Screen Depth Range		-
Screen Elevation Range		-
Well Period of Record		
Period-of-Record		1982..2021
WS Elev-Range	Min:	4078.7 ft
	Max	4162.4 ft

Trend Analysis		
Seasonal Data Method		Max/Min
Show Trend 1		Spring Data
Date Range (Optional)	Start WY:	1979
	End WY:	2021
Extend Trend Line		No
Trend Results	Slope	(1.206 ft/yr)
Show Trend 2		None
Date Range (Optional)	Start WY:	
	End WY:	
Extend Trend Line		Yes
Trend Results	Slope	-

## Water Surface Elevation (WSE) Hydrograph

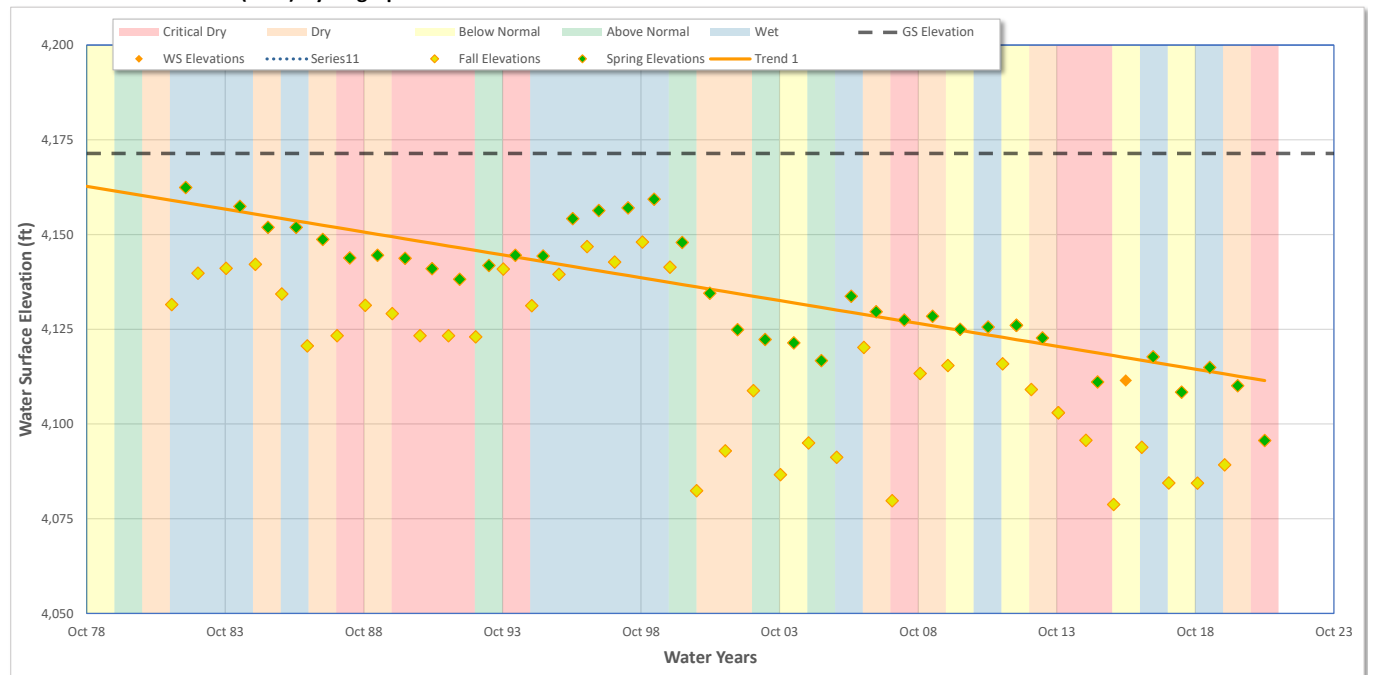

# Groundwater Level Report


Date: 8/17/2021

Well Information	
Well ID	022098_38N08E17K001M
Well Name	17K1
State Number	38N08E17K001M
WCR Number	218
Site Code	411320N1210766W001
Well Location	
County	Lassen
Basin	Big Valley
Hydrologic Region	Sacramento River
Station Organization	Lassen County Department of Planning and Building Services
Well Type Information	
Well Use	Residential
Completion Type	Single Well

Well Coordinates/Geometry		
Location	Lat:	41.1320
	Long:	-121.0766
Well Depth	180.00 ft	
Ground Surface Elevation	4153.30 ft	
Ref. Point Elevation	4154.30 ft	
Screen Depth Range	30 to 180 ft	
Screen Elevation Range	4259 to 4109 ft	
Well Period of Record		
Period-of-Record	1957..2021	
WS Elev-Range	Min:	4115.1 ft
	Max	4150.0 ft

Trend Analysis	
Seasonal Data Method	Max/Min
Show Trend 1	Spring Data
Date Range (Optional)	Start WY: 1979
	End WY: 2021
Extend Trend Line	No
Trend Results	Slope (0.525 ft/yr)
Show Trend 2	None
Date Range (Optional)	Start WY:
	End WY:
Extend Trend Line	Yes
Trend Results	Slope -

## Water Surface Elevation (WSE) Hydrograph

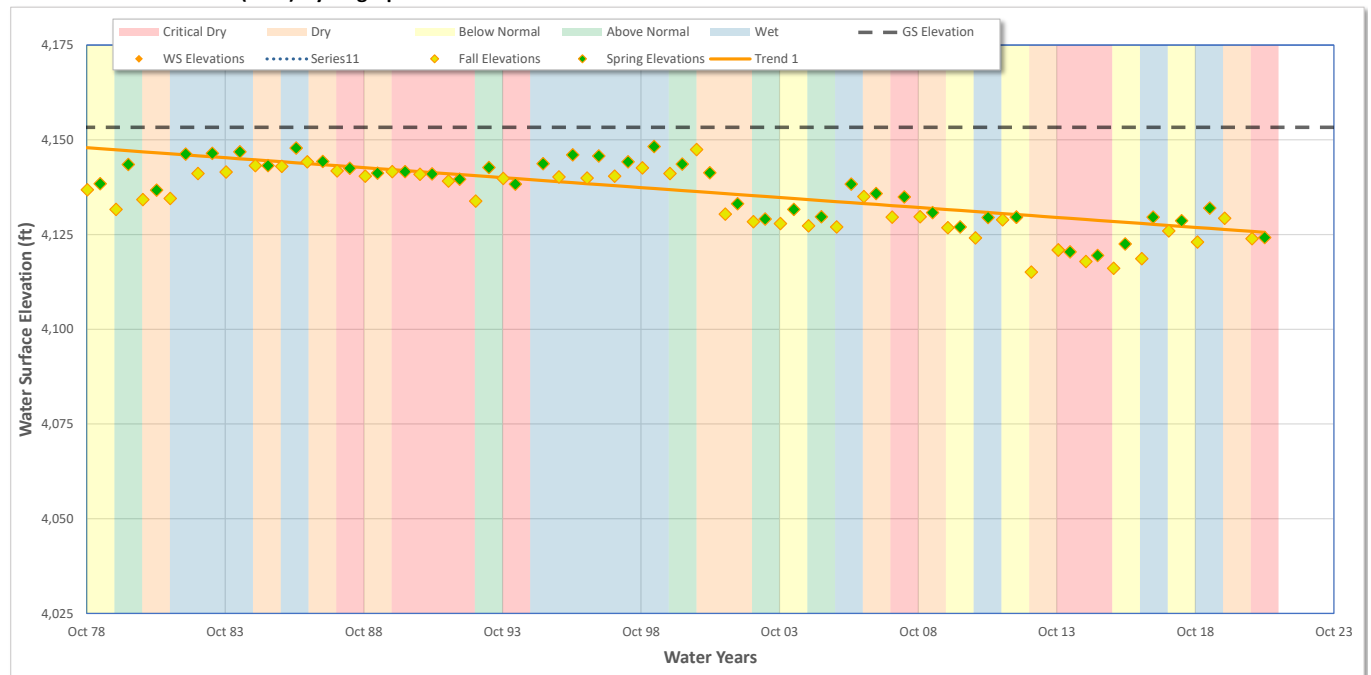

# Groundwater Level Report


Date: 8/17/2021

Well Information	
Well ID	022099_38N09E18E001M
Well Name	18E1
State Number	38N09E18E001M
WCR Number	138559
Site Code	411356N1209900W001
Well Location	
County	Lassen
Basin	Big Valley
Hydrologic Region	Sacramento River
Station Organization	Lassen County Department of Planning and Building Services
Well Type Information	
Well Use	Irrigation
Completion Type	Single Well

Well Coordinates/Geometry		
Location	Lat:	41.1356
	Long:	-120.9900
Well Depth	520.00 ft	
Ground Surface Elevation	4248.40 ft	
Ref. Point Elevation	4249.50 ft	
Screen Depth Range	-	
Screen Elevation Range	-	
Well Period of Record		
Period-of-Record	1981..2021	
WS Elev-Range	Min:	4162.0 ft
	Max	4234.1 ft

Trend Analysis	
Seasonal Data Method	Max/Min
Show Trend 1	Spring Data
Date Range (Optional)	Start WY: 1979 End WY: 2021
Extend Trend Line	No
Trend Results	Slope (0.758 ft/yr)
Show Trend 2	None
Date Range (Optional)	Start WY: End WY:
Extend Trend Line	Yes
Trend Results	Slope -

## Water Surface Elevation (WSE) Hydrograph

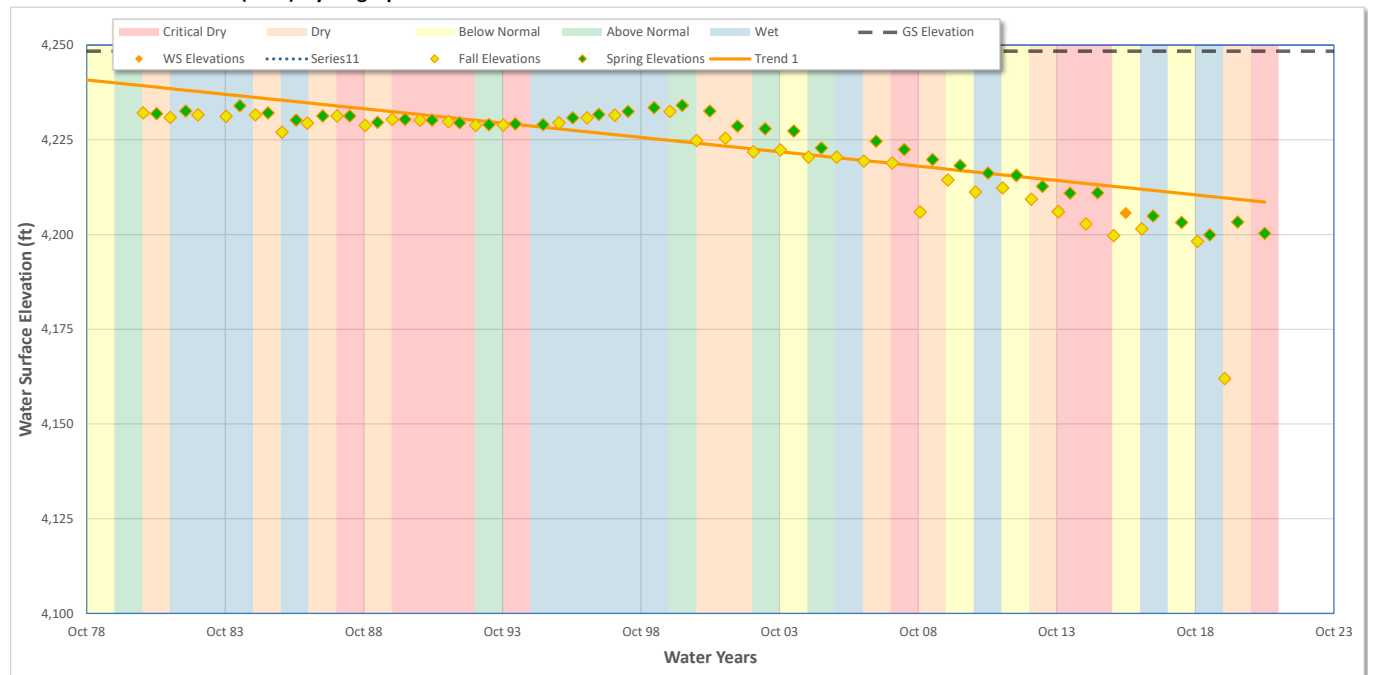

# Groundwater Level Report


Date: 8/17/2021

Well Information	
Well ID	022100_38N09E18M001M
Well Name	18M1
State Number	38N09E18M001M
WCR Number	138563
Site Code	411305N1209896W001
Well Location	
County	Lassen
Basin	Big Valley
Hydrologic Region	Sacramento River
Station Organization	Lassen County Department of Planning and Building Services
Well Type Information	
Well Use	Irrigation
Completion Type	Single Well

Well Coordinates/Geometry		
Location	Lat:	41.1305
	Long:	-120.9897
Well Depth		525.00 ft
Ground Surface Elevation		4288.40 ft
Ref. Point Elevation		4288.90 ft
Screen Depth Range		-
Screen Elevation Range		-
Well Period of Record		
Period-of-Record		1981..2021
WS Elev-Range	Min:	4192.3 ft
	Max	4232.7 ft

Trend Analysis	
Seasonal Data Method	Max/Min
Show Trend 1	Spring Data
Date Range (Optional)	Start WY: 1979
	End WY: 2021
Extend Trend Line	No
Trend Results	Slope (0.599 ft/yr)
Show Trend 2	None
Date Range (Optional)	Start WY:
	End WY:
Extend Trend Line	Yes
Trend Results	Slope -

## Water Surface Elevation (WSE) Hydrograph

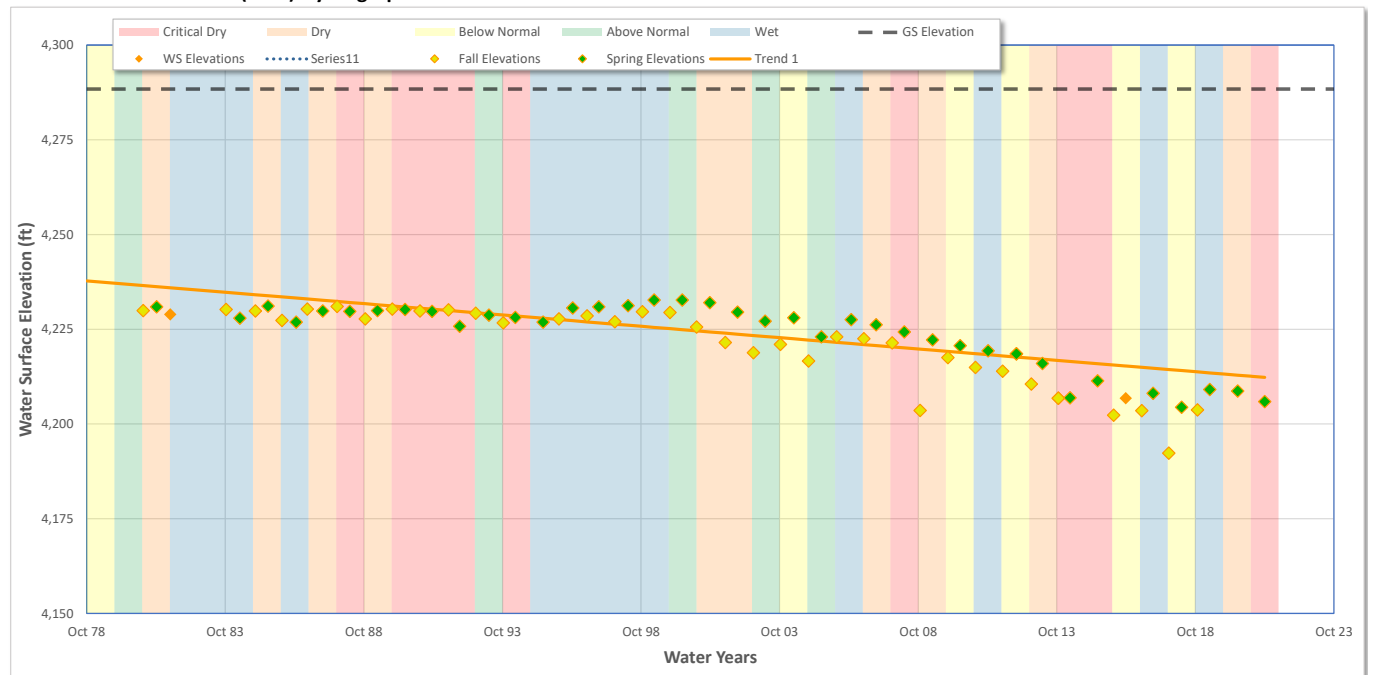



# Groundwater Level Report


Date: 8/17/2021

Well Information	
Well ID	022102_39N07E26E001M
Well Name	26E1
State Number	39N07E26E001M
WCR Number	127484
Site Code	411911N1211354W001
Well Location	
County	Modoc
Basin	Big Valley
Hydrologic Region	Sacramento River
Station Organization	Modoc County Planning Department
Well Type Information	
Well Use	Irrigation
Completion Type	Single Well

Well Coordinates/Geometry		
Location	Lat:	41.1911
	Long:	-121.1354
Well Depth		400.00 ft
Ground Surface Elevation		4133.40 ft
Ref. Point Elevation		4135.00 ft
Screen Depth Range		20 to 400 ft
Screen Elevation Range		4187 to 3807 ft
Well Period of Record		
Period-of-Record		1979..2021
WS Elev-Range	Min:	4088.9 ft
	Max	4131.3 ft

Trend Analysis		
Seasonal Data Method		Max/Min
Show Trend 1		Spring Data
Date Range (Optional)	Start WY:	1979
	End WY:	2021
Extend Trend Line		No
Trend Results	Slope	(0.044 ft/yr)
Show Trend 2		None
Date Range (Optional)	Start WY:	
	End WY:	
Extend Trend Line		Yes
Trend Results	Slope	-

## Water Surface Elevation (WSE) Hydrograph

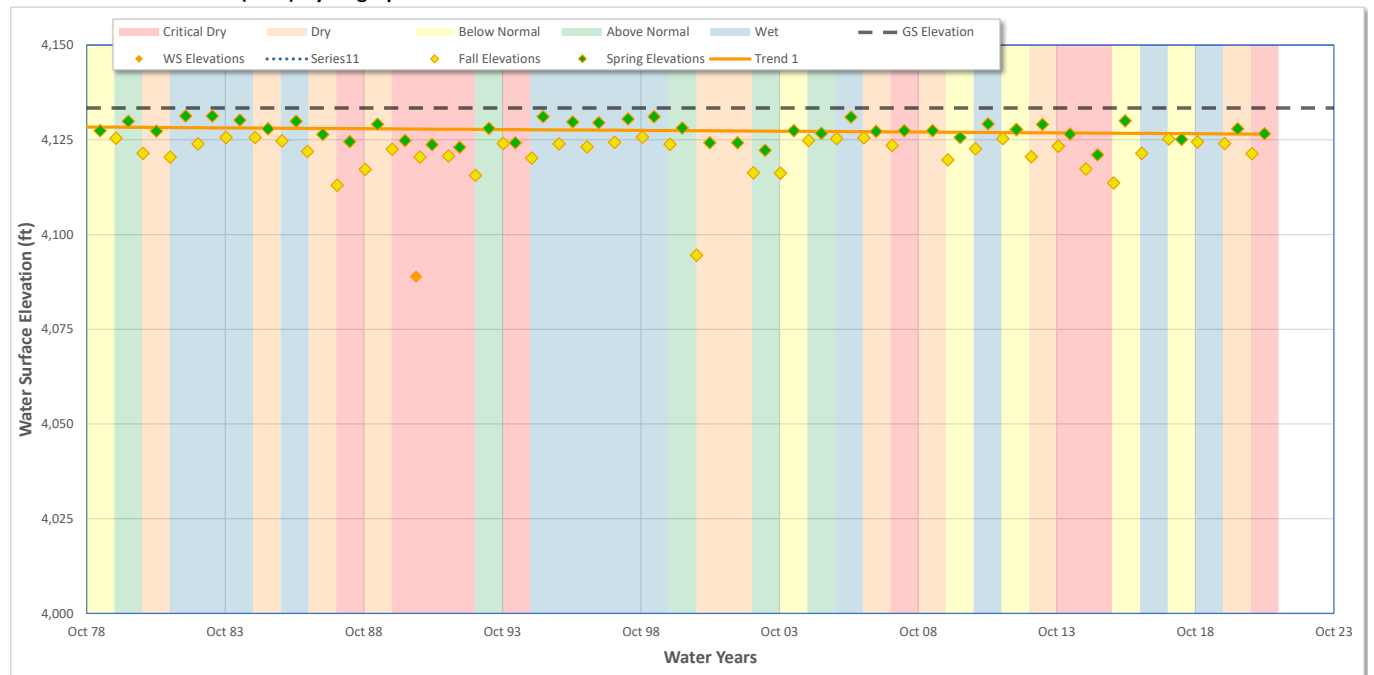

# Groundwater Level Report


Date: 8/17/2021

Well Information	
Well ID	022103_39N08E21C001M
Well Name	21C1
State Number	39N08E21C001M
WCR Number	127008
Site Code	412086N1210574W001
Well Location	
County	Modoc
Basin	Big Valley
Hydrologic Region	Sacramento River
Station Organization	Modoc County Planning Department
Well Type Information	
Well Use	Irrigation
Completion Type	Single Well

Well Coordinates/Geometry		
Location	Lat:	41.2084
	Long:	-121.0576
Well Depth		300.00 ft
Ground Surface Elevation		4161.40 ft
Ref. Point Elevation		4161.70 ft
Screen Depth Range		30 to 40 ft
Screen Elevation Range		4114 to 4104 ft
Well Period of Record		
Period-of-Record		1979..2021
WS Elev-Range	Min:	4082.1 ft
	Max	4148.5 ft

Trend Analysis		
Seasonal Data Method		Max/Min
Show Trend 1		Spring Data
Date Range (Optional)	Start WY:	1979
	End WY:	2021
Extend Trend Line		No
Trend Results	Slope	(0.699 ft/yr)
Show Trend 2		None
Date Range (Optional)	Start WY:	
	End WY:	
Extend Trend Line		Yes
Trend Results	Slope	-

## Water Surface Elevation (WSE) Hydrograph

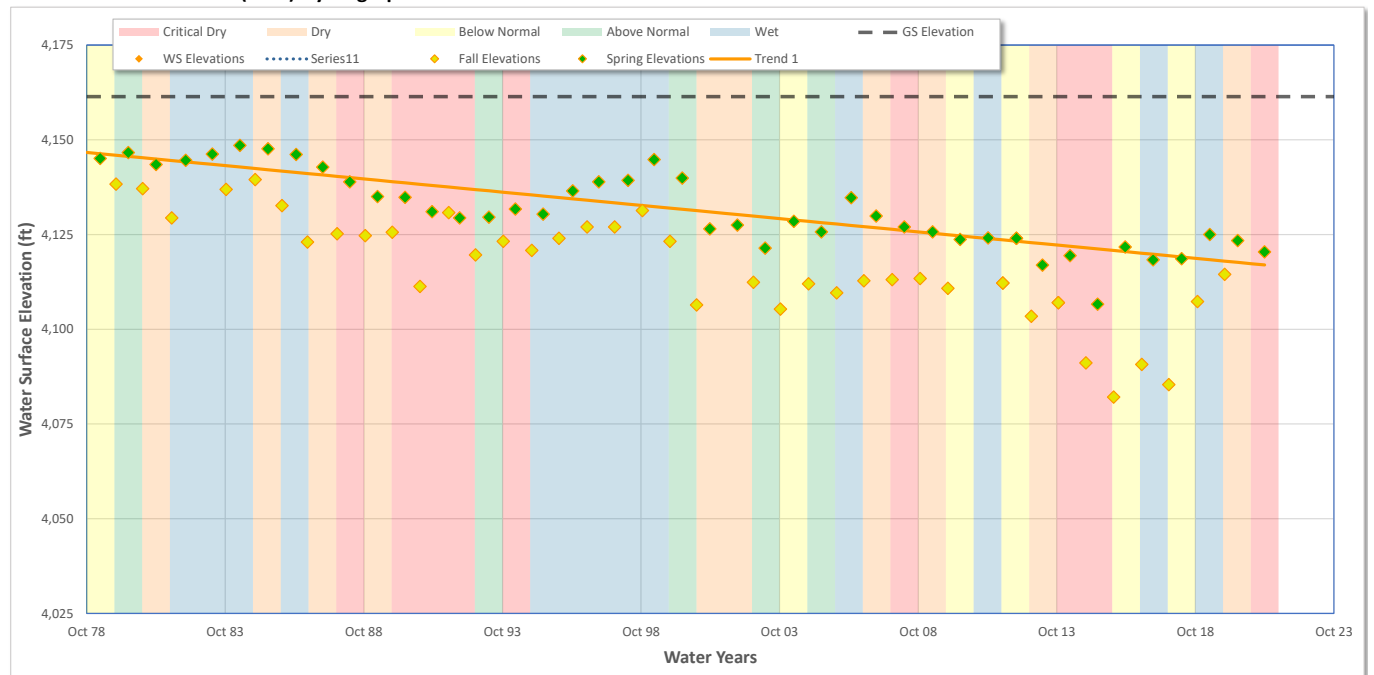

# Groundwater Level Report


Date: 8/17/2021

Well Information	
Well ID	022107_39N09E28F001M
Well Name	28F1
State Number	39N09E28F001M
WCR Number	-
Site Code	411907N1209447W001
Well Location	
County	Modoc
Basin	Big Valley
Hydrologic Region	Sacramento River
Station Organization	Modoc County Planning Department
Well Type Information	
Well Use	Residential
Completion Type	Single Well

Well Coordinates/Geometry		
Location	Lat:	41.1907
	Long:	-120.9447
Well Depth		73.00 ft
Ground Surface Elevation		4206.60 ft
Ref. Point Elevation		4207.10 ft
Screen Depth Range		-
Screen Elevation Range		-
Well Period of Record		
Period-of-Record		1982..2021
WS Elev-Range	Min:	4194.6 ft
	Max	4202.1 ft

Trend Analysis	
Seasonal Data Method	Max/Min
Show Trend 1	Spring Data
Date Range (Optional)	Start WY: 1979
	End WY: 2021
Extend Trend Line	No
Trend Results	Slope (0.055 ft/yr)
Show Trend 2	None
Date Range (Optional)	Start WY:
	End WY:
Extend Trend Line	Yes
Trend Results	Slope -

## Water Surface Elevation (WSE) Hydrograph

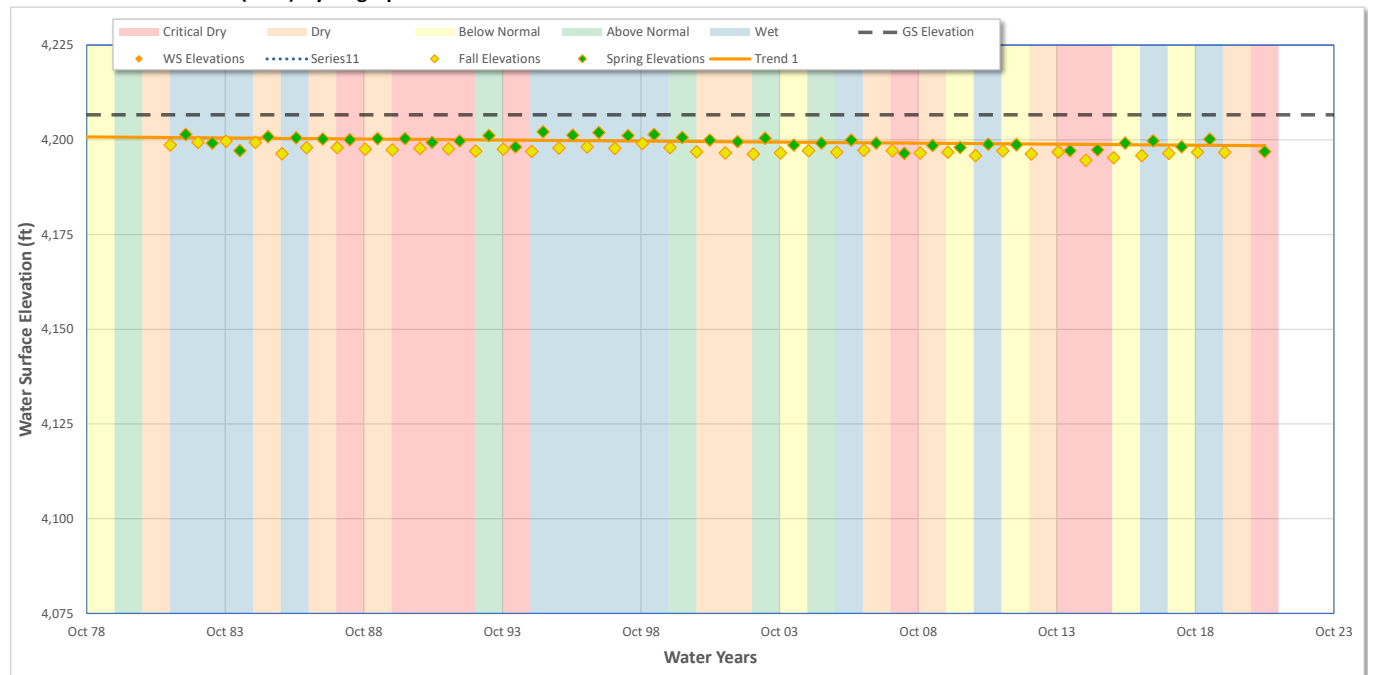

# Groundwater Level Report


Date: 8/17/2021

Well Information	
Well ID	036667_37N07E13K002M
Well Name	13K2
State Number	37N07E13K002M
WCR Number	90029
Site Code	410413N1211147W001
Well Location	
County	Lassen
Basin	Big Valley
Hydrologic Region	Sacramento River
Station Organization	Lassen County Department of Planning and Building Services
Well Type Information	
Well Use	Irrigation
Completion Type	Single Well

Well Coordinates/Geometry		
Location	Lat:	41.0413
	Long:	-121.1147
Well Depth	260.00 ft	
Ground Surface Elevation	4127.40 ft	
Ref. Point Elevation	4127.90 ft	
Screen Depth Range	-	
Screen Elevation Range	-	
Well Period of Record		
Period-of-Record	1982..2021	
WS Elev-Range	Min:	4061.9 ft
	Max	4109.7 ft

Trend Analysis		
Seasonal Data Method		Max/Min
Show Trend 1		Spring Data
Date Range (Optional)	Start WY:	1979
	End WY:	2021
Extend Trend Line		No
Trend Results	Slope	(0.728 ft/yr)
Show Trend 2		None
Date Range (Optional)	Start WY:	
	End WY:	
Extend Trend Line		Yes
Trend Results	Slope	-

## Water Surface Elevation (WSE) Hydrograph

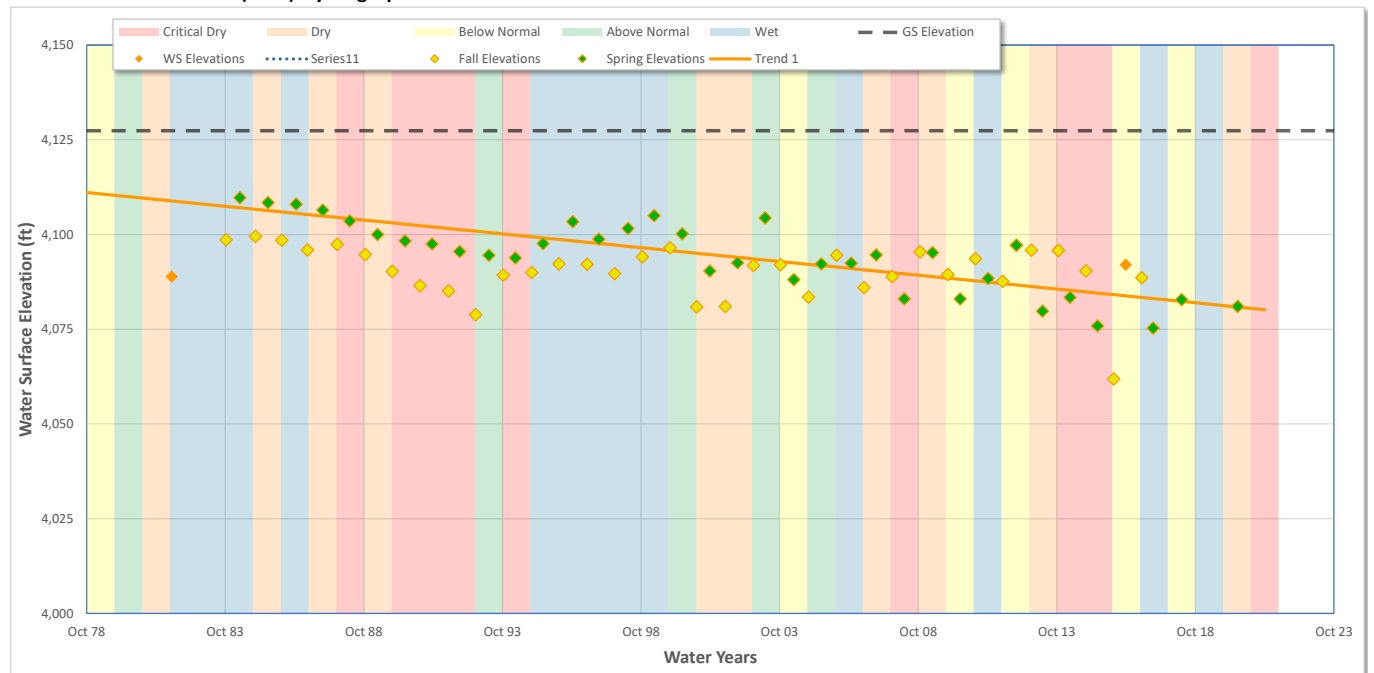



# Groundwater Level Report


Date: 8/17/2021

Well Information	
Well ID	036669_38N07E12G001M
Well Name	12G1
State Number	38N07E12G001M
WCR Number	49866
Site Code	411467N1211110W001
Well Location	
County	Lassen
Basin	Big Valley
Hydrologic Region	Sacramento River
Station Organization	Lassen County Department of Planning and Building Services
Well Type Information	
Well Use	Residential
Completion Type	Single Well

Well Coordinates/Geometry		
Location	Lat:	41.1467
	Long:	-121.1110
Well Depth		116.00 ft
Ground Surface Elevation		4143.38 ft
Ref. Point Elevation		4144.38 ft
Screen Depth Range		-
Screen Elevation Range		-
Well Period of Record		
Period-of-Record		1979..1994
WS Elev-Range	Min:	4131.0 ft
	Max	4138.7 ft

Trend Analysis		
Seasonal Data Method		Max/Min
Show Trend 1		Spring Data
Date Range (Optional)	Start WY:	1979
	End WY:	2021
Extend Trend Line		No
Trend Results	Slope	(0.189 ft/yr)
Show Trend 2		None
Date Range (Optional)	Start WY:	
	End WY:	
Extend Trend Line		Yes
Trend Results	Slope	-

## Water Surface Elevation (WSE) Hydrograph

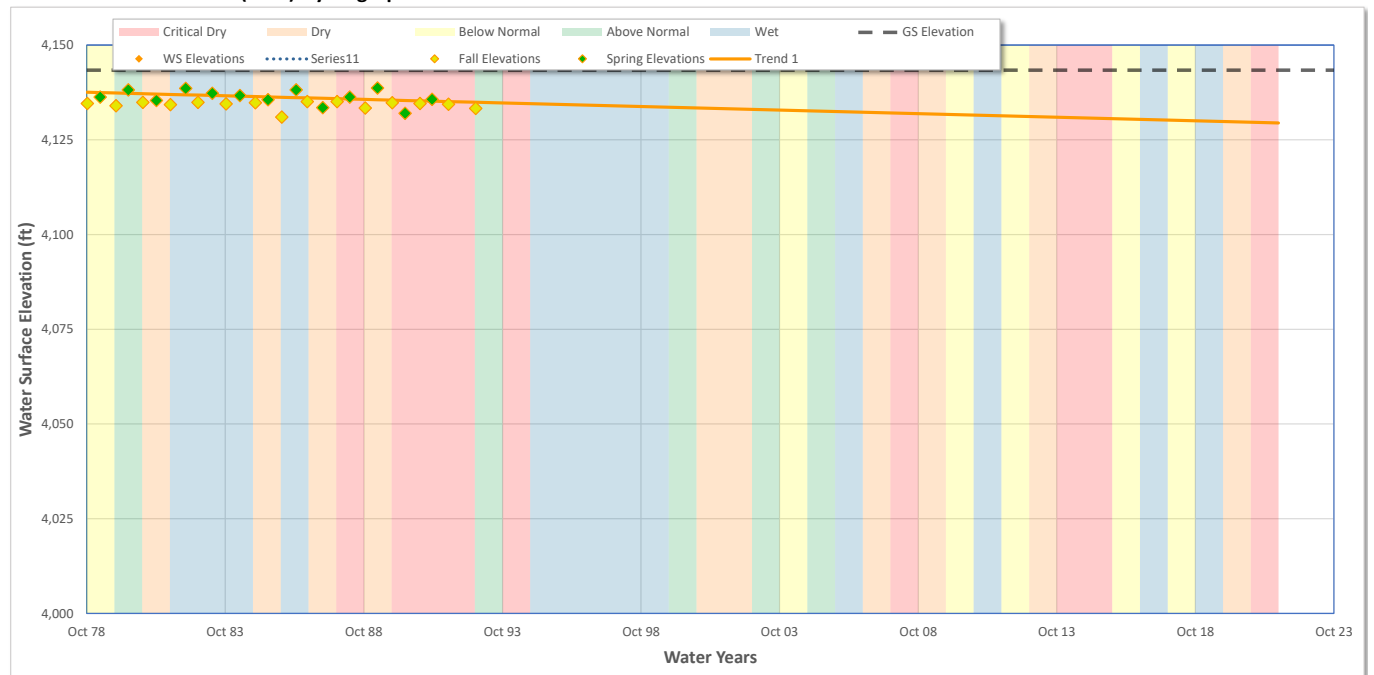

# Groundwater Level Report


Date: 8/17/2021

Well Information	
Well ID	036670_38N07E23E001M
Well Name	23E1
State Number	38N07E23E001M
WCR Number	38108
Site Code	411207N1211395W001
Well Location	
County	Lassen
Basin	Big Valley
Hydrologic Region	Sacramento River
Station Organization	Lassen County Department of Planning and Building Services
Well Type Information	
Well Use	Residential
Completion Type	Single Well

Well Coordinates/Geometry		
Location	Lat:	41.1207
	Long:	-121.1395
Well Depth	84.00 ft	
Ground Surface Elevation	4123.40 ft	
Ref. Point Elevation	4123.40 ft	
Screen Depth Range	-	
Screen Elevation Range	-	
Well Period of Record		
Period-of-Record	1979..2021	
WS Elev-Range	Min:	4070.4 ft
	Max	4109.1 ft

Trend Analysis	
Seasonal Data Method	Max/Min
Show Trend 1	Spring Data
Date Range (Optional)	Start WY: 1979
	End WY: 2021
Extend Trend Line	No
Trend Results	Slope (0.379 ft/yr)
Show Trend 2	None
Date Range (Optional)	Start WY:
	End WY:
Extend Trend Line	Yes
Trend Results	Slope -

## Water Surface Elevation (WSE) Hydrograph

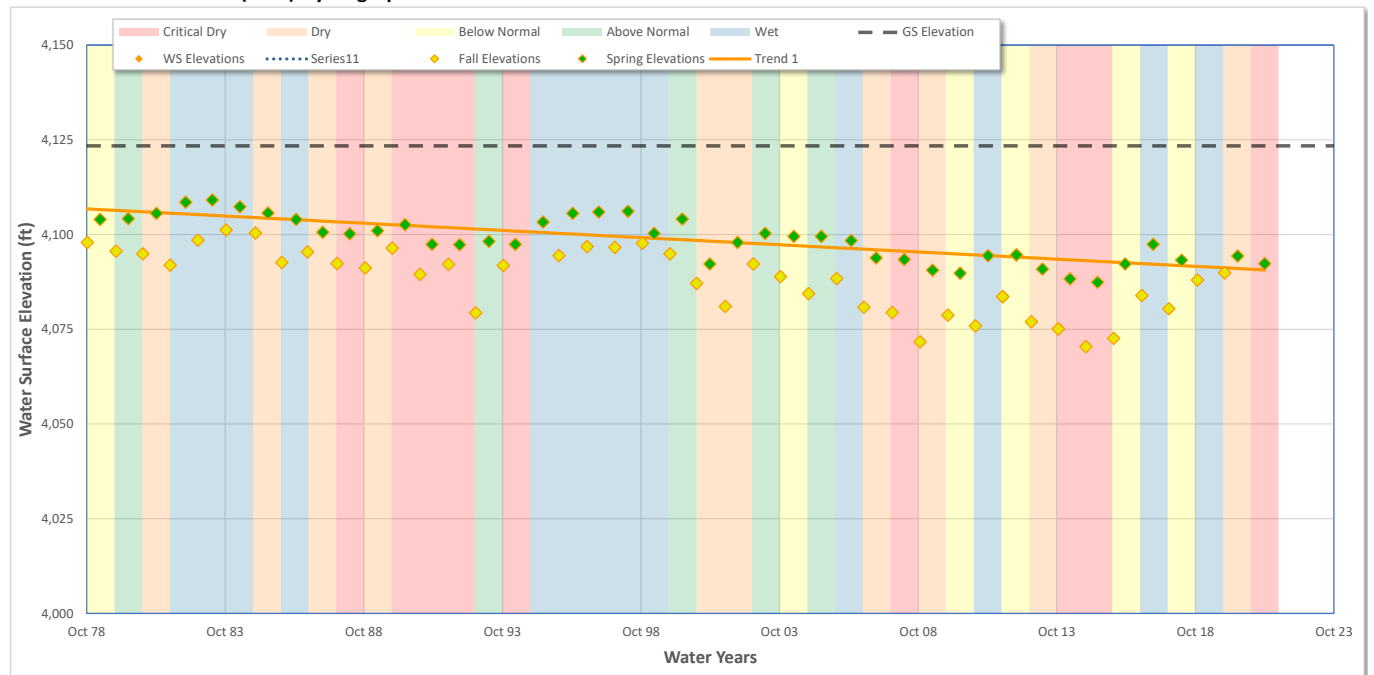

# Groundwater Level Report


Date: 8/17/2021

Well Information	
Well ID	036671_38N08E03D001M
Well Name	03D1
State Number	38N08E03D001M
WCR Number	16564
Site Code	411647N1210358W001
Well Location	
County	Lassen
Basin	Big Valley
Hydrologic Region	Sacramento River
Station Organization	Lassen County Department of Planning and Building Services
Well Type Information	
Well Use	Irrigation
Completion Type	Single Well

Well Coordinates/Geometry		
Location	Lat:	41.1646
	Long:	-121.0360
Well Depth	280.00 ft	
Ground Surface Elevation	4163.40 ft	
Ref. Point Elevation	4163.40 ft	
Screen Depth Range	50 to 280 ft	
Screen Elevation Range	4093 to 3863 ft	
Well Period of Record		
Period-of-Record	1982..2021	
WS Elev-Range	Min:	4071.6 ft
	Max	4148.6 ft

Trend Analysis		
Seasonal Data Method		Max/Min
Show Trend 1		Spring Data
Date Range (Optional)	Start WY:	1979
	End WY:	2021
Extend Trend Line		No
Trend Results	Slope	(1.158 ft/yr)
Show Trend 2		None
Date Range (Optional)	Start WY:	
	End WY:	
Extend Trend Line		Yes
Trend Results	Slope	-

## Water Surface Elevation (WSE) Hydrograph

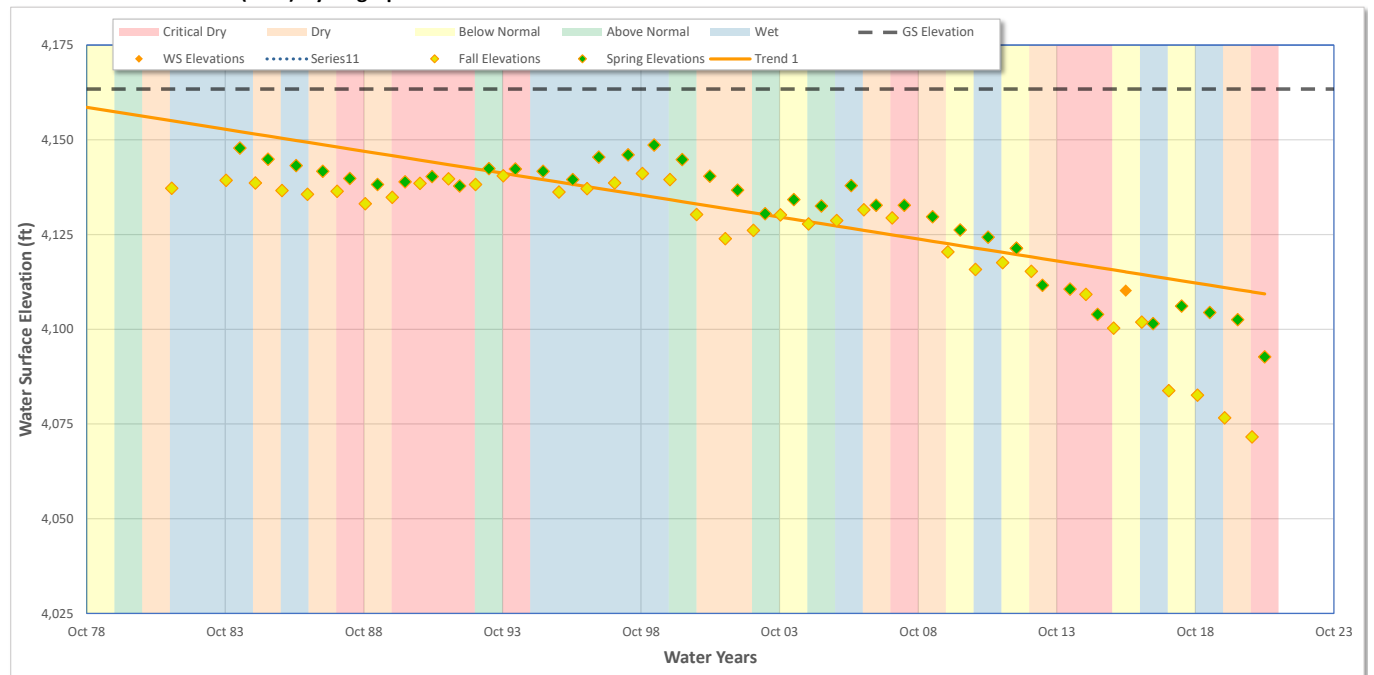

# Groundwater Level Report


Date: 8/17/2021

Well Information	
Well ID	036672_38N09E08F001M
Well Name	08F1
State Number	38N09E08F001M
WCR Number	49934
Site Code	411493N1209656W001
Well Location	
County	Lassen
Basin	Big Valley
Hydrologic Region	Sacramento River
Station Organization	Lassen County Department of Planning and Building Services
Well Type Information	
Well Use	Other
Completion Type	Single Well

Well Coordinates/Geometry		
Location	Lat:	41.1493
	Long:	-120.9656
Well Depth		217.00 ft
Ground Surface Elevation		4253.40 ft
Ref. Point Elevation		4255.40 ft
Screen Depth Range		-
Screen Elevation Range		-
Well Period of Record		
Period-of-Record		1979..2021
WS Elev-Range	Min:	4220.5 ft
	Max	4229.8 ft

Trend Analysis		
Seasonal Data Method		Max/Min
Show Trend 1		Spring Data
Date Range (Optional)	Start WY:	1979
	End WY:	2021
Extend Trend Line		No
Trend Results		Slope 0.110 ft/yr
Show Trend 2		None
Date Range (Optional)	Start WY:	
	End WY:	
Extend Trend Line		Yes
Trend Results		Slope -

## Water Surface Elevation (WSE) Hydrograph

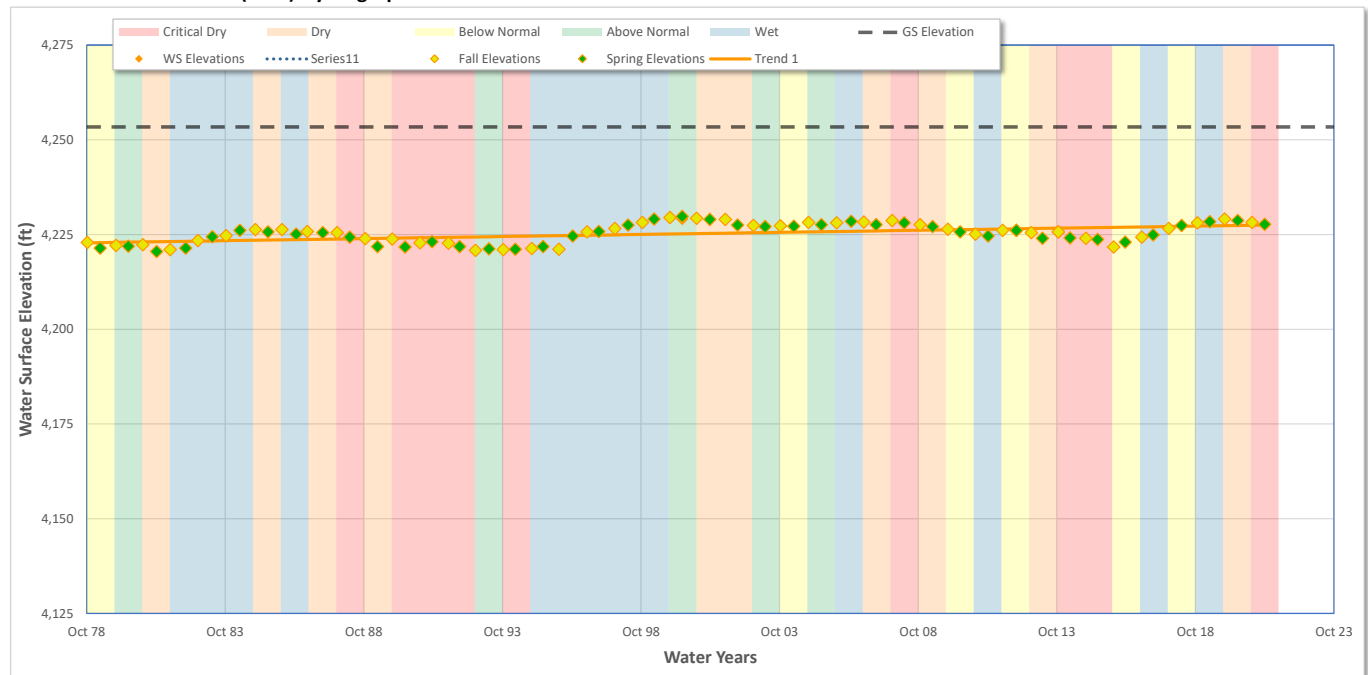



# Groundwater Level Report


Date: 8/17/2021

Well Information	
Well ID	036673_39N07E01A001M
Well Name	01A1
State Number	39N07E01A001M
WCR Number	14565
Site Code	412539N1211050W001
Well Location	
County	Modoc
Basin	Big Valley
Hydrologic Region	Sacramento River
Station Organization	Modoc County Planning Department
Well Type Information	
Well Use	Stockwatering
Completion Type	Single Well

Well Coordinates/Geometry		
Location	Lat:	41.2539
	Long:	-121.1050
Well Depth		300.00 ft
Ground Surface Elevation		4183.40 ft
Ref. Point Elevation		4184.40 ft
Screen Depth Range		-
Screen Elevation Range		-
Well Period of Record		
Period-of-Record		1979..2021
WS Elev-Range	Min:	4035.4 ft
	Max	4163.9 ft

Trend Analysis		
Seasonal Data Method		Max/Min
Show Trend 1		Spring Data
Date Range (Optional)	Start WY:	1979
	End WY:	2021
Extend Trend Line		No
Trend Results	Slope	(1.123 ft/yr)
Show Trend 2		None
Date Range (Optional)	Start WY:	
	End WY:	
Extend Trend Line		Yes
Trend Results	Slope	-

## Water Surface Elevation (WSE) Hydrograph

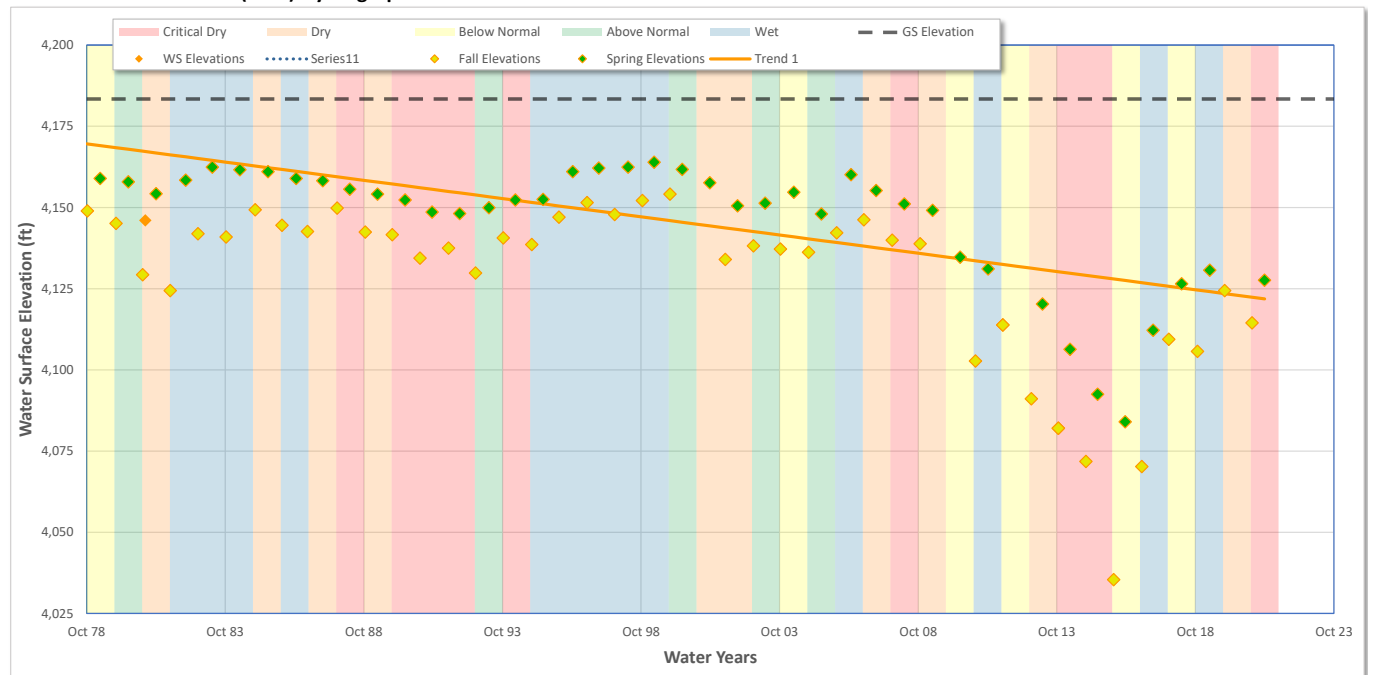

# Groundwater Level Report


Date: 8/17/2021

Well Information	
Well ID	036754_39N08E18N002M
Well Name	18N2
State Number	39N08E18N002M
WCR Number	127457
Site Code	412144N1211013W001
Well Location	
County	Modoc
Basin	Big Valley
Hydrologic Region	Sacramento River
Station Organization	Modoc County Planning Department
Well Type Information	
Well Use	Residential
Completion Type	Single Well

Well Coordinates/Geometry		
Location	Lat:	41.2144
	Long:	-121.1013
Well Depth		250.00 ft
Ground Surface Elevation		4163.40 ft
Ref. Point Elevation		4164.40 ft
Screen Depth Range		-
Screen Elevation Range		-
Well Period of Record		
Period-of-Record		1979..2021
WS Elev-Range	Min:	4136.6 ft
	Max	4160.2 ft

Trend Analysis		
Seasonal Data Method		Max/Min
Show Trend 1		Spring Data
Date Range (Optional)	Start WY:	1979
	End WY:	2021
Extend Trend Line		No
Trend Results	Slope	(0.104 ft/yr)
Show Trend 2		None
Date Range (Optional)	Start WY:	
	End WY:	
Extend Trend Line		Yes
Trend Results	Slope	-

## Water Surface Elevation (WSE) Hydrograph

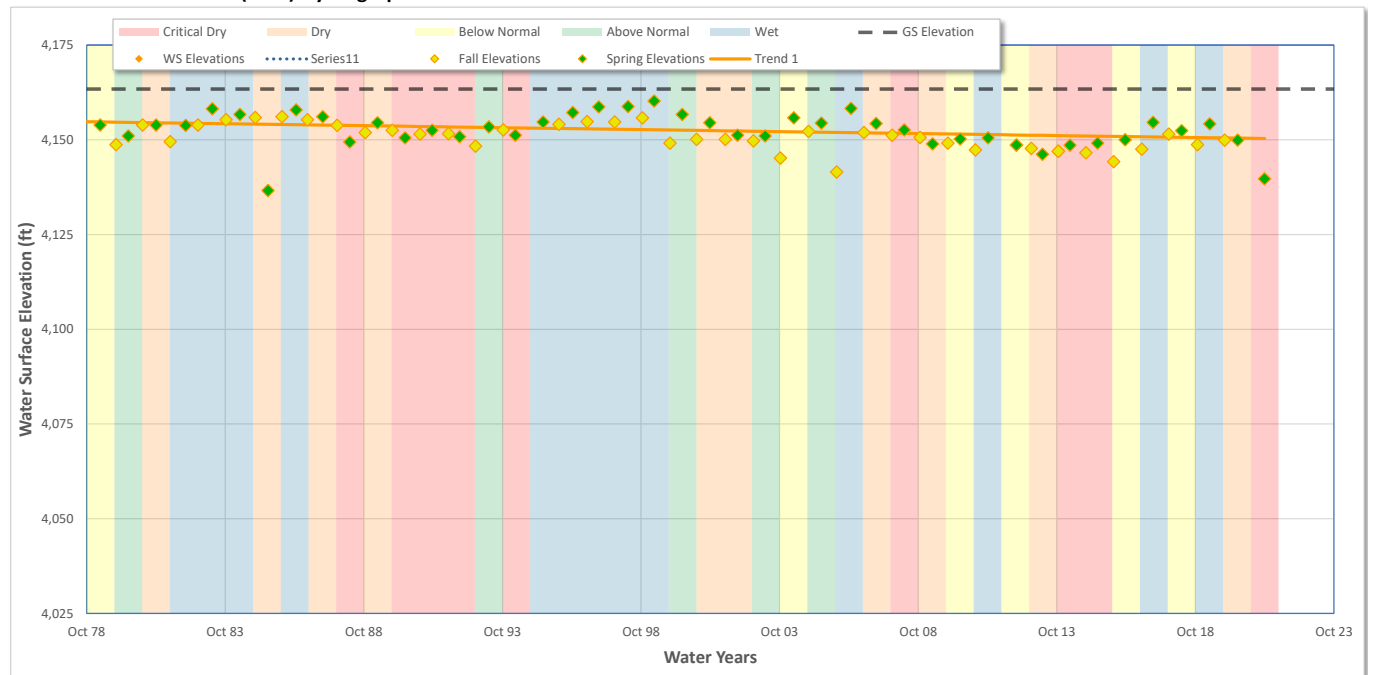

# Groundwater Level Report


Date: 8/17/2021

Well Information	
Well ID	036757_39N09E32R001M
Well Name	32R1
State Number	39N09E32R001M
WCR Number	-
Site Code	411649N1209569W001
Well Location	
County	Lassen
Basin	Big Valley
Hydrologic Region	Sacramento River
Station Organization	Lassen County Department of Planning and Building Services
Well Type Information	
Well Use	Irrigation
Completion Type	Single Well

Well Coordinates/Geometry		
Location	Lat:	41.1680
	Long:	-120.9570
Well Depth		-
Ground Surface Elevation		4243.40 ft
Ref. Point Elevation		4243.60 ft
Screen Depth Range		-
Screen Elevation Range		-
Well Period of Record		
Period-of-Record		1981..2021
WS Elev-Range	Min:	4161.2 ft
	Max	4205.5 ft

Trend Analysis		
Seasonal Data Method		Max/Min
Show Trend 1		Spring Data
Date Range (Optional)	Start WY:	1979
	End WY:	2021
Extend Trend Line		No
Trend Results	Slope	(0.964 ft/yr)
Show Trend 2		None
Date Range (Optional)	Start WY:	
	End WY:	
Extend Trend Line		Yes
Trend Results	Slope	-

## Water Surface Elevation (WSE) Hydrograph

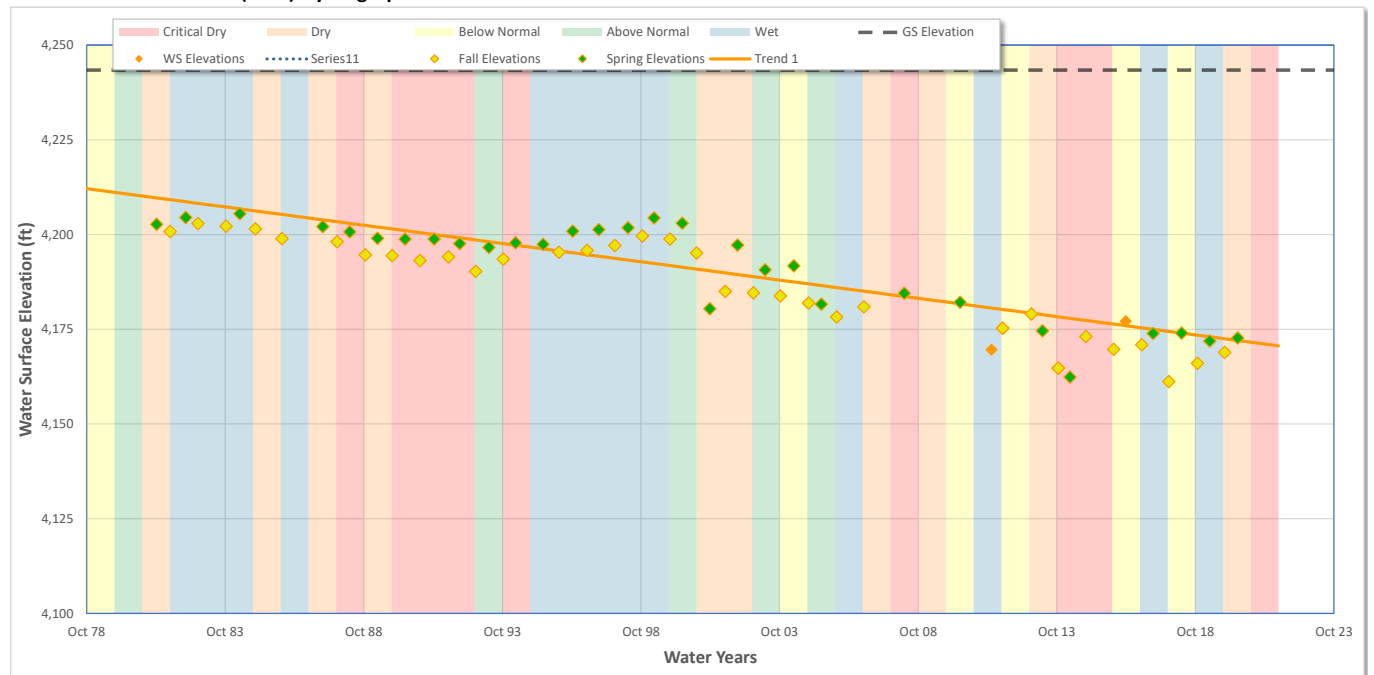

# Groundwater Level Report


Date: 8/17/2021

Well Information	
Well ID	039199_37N08E06C001M
Well Name	06C1
State Number	37N08E06C001M
WCR Number	14580
Site Code	410777N1210986W001
Well Location	
County	Lassen
Basin	Big Valley
Hydrologic Region	Sacramento River
Station Organization	Lassen County Department of Planning and Building Services
Well Type Information	
Well Use	Irrigation
Completion Type	Single Well

Well Coordinates/Geometry		
Location	Lat:	41.0777
	Long:	-121.0986
Well Depth		400.00 ft
Ground Surface Elevation		4133.40 ft
Ref. Point Elevation		4133.90 ft
Screen Depth Range		-
Screen Elevation Range		-
Well Period of Record		
Period-of-Record		1982..2016
WS Elev-Range	Min:	4066.2 ft
	Max	4126.8 ft

Trend Analysis		
Seasonal Data Method		Max/Min
Show Trend 1		Spring Data
Date Range (Optional)	Start WY:	1979
	End WY:	2021
Extend Trend Line		No
Trend Results	Slope	(1.301 ft/yr)
Show Trend 2		None
Date Range (Optional)	Start WY:	
	End WY:	
Extend Trend Line		Yes
Trend Results	Slope	-

## Water Surface Elevation (WSE) Hydrograph

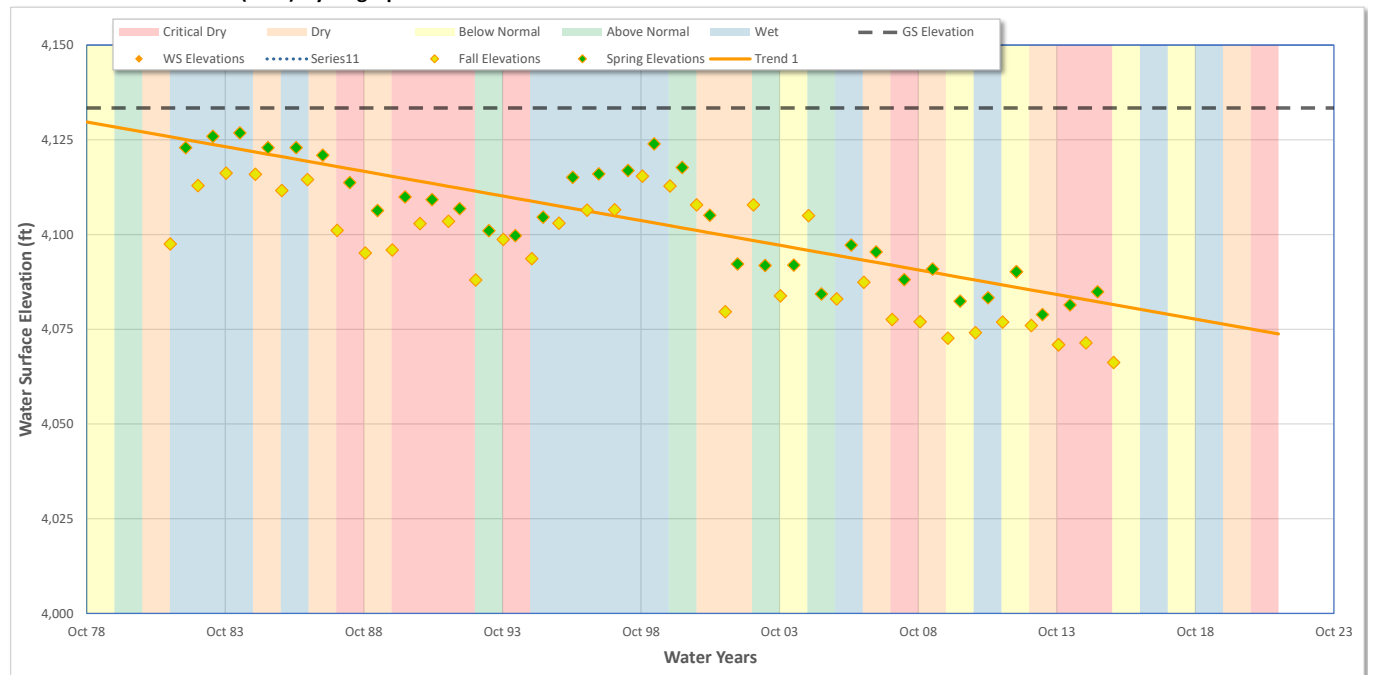



# Groundwater Level Report


Date: 8/17/2021

Well Information	
Well ID	051402_ACWA-1
Well Name	ACWA-1
State Number	38N08E07A001M
WCR Number	0962825
Site Code	411508N1210900W001
Well Location	
County	Lassen
Basin	Big Valley
Hydrologic Region	Sacramento River
Station Organization	Lassen County Department of Planning and Building Services
Well Type Information	
Well Use	Irrigation
Completion Type	Single Well

Well Coordinates/Geometry		
Location	Lat:	41.1508
	Long:	-121.0900
Well Depth	780.00 ft	
Ground Surface Elevation	4142.00 ft	
Ref. Point Elevation	4142.75 ft	
Screen Depth Range	60 to 780 ft	
Screen Elevation Range	4083 to 3363 ft	
Well Period of Record		
Period-of-Record	2016..2021	
WS Elev-Range	Min:	4039.2 ft
	Max	4126.4 ft

Trend Analysis	
Seasonal Data Method	Max/Min
Show Trend 1	Spring Data
Date Range (Optional)	Start WY: 2016
	End WY: 2021
Extend Trend Line	No
Trend Results	Slope (1.253 ft/yr)
Show Trend 2	None
Date Range (Optional)	Start WY:
	End WY:
Extend Trend Line	Yes
Trend Results	Slope -

## Water Surface Elevation (WSE) Hydrograph

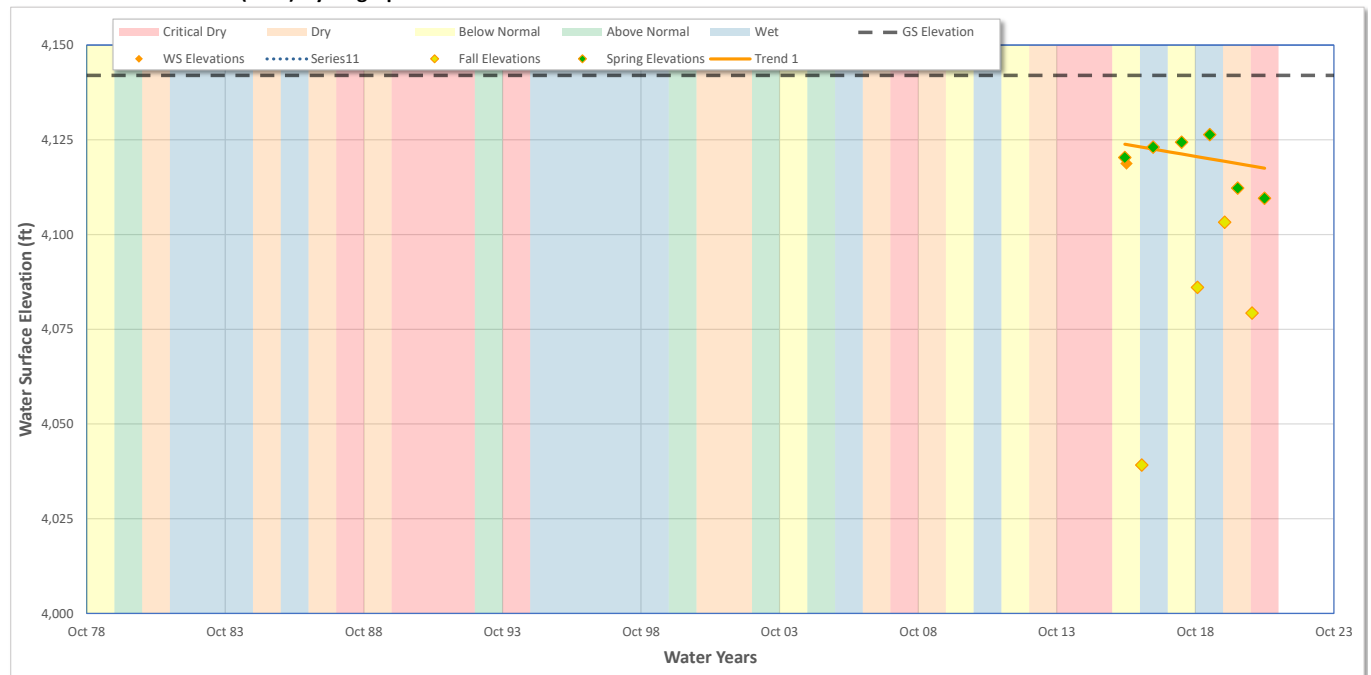

# Groundwater Level Report


Date: 8/17/2021

Well Information	
Well ID	051403_ACWA-2
Well Name	ACWA-2
State Number	39N08E33P002M
WCR Number	484622
Site Code	411699N1210579W001
Well Location	
County	Lassen
Basin	Big Valley
Hydrologic Region	Sacramento River
Station Organization	Lassen County Department of Planning and Building Services
Well Type Information	
Well Use	Irrigation
Completion Type	Single Well

Well Coordinates/Geometry		
Location	Lat:	41.1699
	Long:	-121.0579
Well Depth	800.00 ft	
Ground Surface Elevation	4153.00 ft	
Ref. Point Elevation	4153.20 ft	
Screen Depth Range	50 to 800 ft	
Screen Elevation Range	4093 to 3343 ft	
Well Period of Record		
Period-of-Record	2016..2021	
WS Elev-Range	Min:	4126.4 ft
	Max	4139.4 ft

Trend Analysis		
Seasonal Data Method	Max/Min	
Show Trend 1	Spring Data	
Date Range (Optional)	Start WY:	2016
	End WY:	2021
Extend Trend Line	No	
Trend Results	Slope	0.283 ft/yr
Show Trend 2	None	
Date Range (Optional)	Start WY:	
	End WY:	
Extend Trend Line	Yes	
Trend Results	Slope	-

## Water Surface Elevation (WSE) Hydrograph

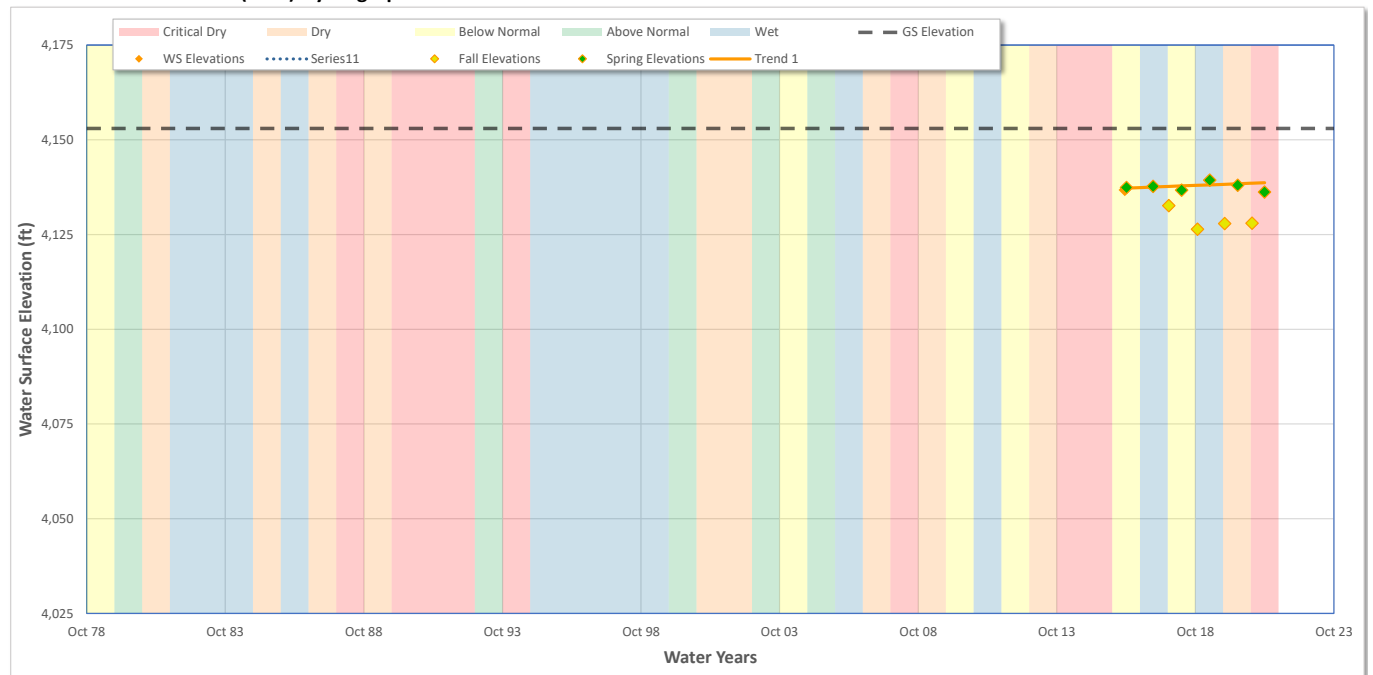

# Groundwater Level Report


Date: 8/17/2021

Well Information	
Well ID	051537_ACWA-3
Well Name	ACWA-3
State Number	39N08E28A001M
WCR Number	0951365
Site Code	411938N1210478W001
Well Location	
County	Modoc
Basin	Big Valley
Hydrologic Region	Sacramento River
Station Organization	Lassen County Department of Planning and Building Services
Well Type Information	
Well Use	Irrigation
Completion Type	Single Well

Well Coordinates/Geometry		
Location	Lat:	41.1938
	Long:	-121.0478
Well Depth	720.00 ft	
Ground Surface Elevation	4159.00 ft	
Ref. Point Elevation	4159.83 ft	
Screen Depth Range	60 to 720 ft	
Screen Elevation Range	4075 to 3415 ft	
Well Period of Record		
Period-of-Record	2016..2021	
WS Elev-Range	Min:	4135.9 ft
	Max	4150.6 ft

Trend Analysis		
Seasonal Data Method	Max/Min	
Show Trend 1	Spring Data	
Date Range (Optional)	Start WY:	1979
	End WY:	2021
Extend Trend Line	No	
Trend Results	Slope	0.821 ft/yr
Show Trend 2	None	
Date Range (Optional)	Start WY:	
	End WY:	
Extend Trend Line	Yes	
Trend Results	Slope	-


## Water Surface Elevation (WSE) Hydrograph

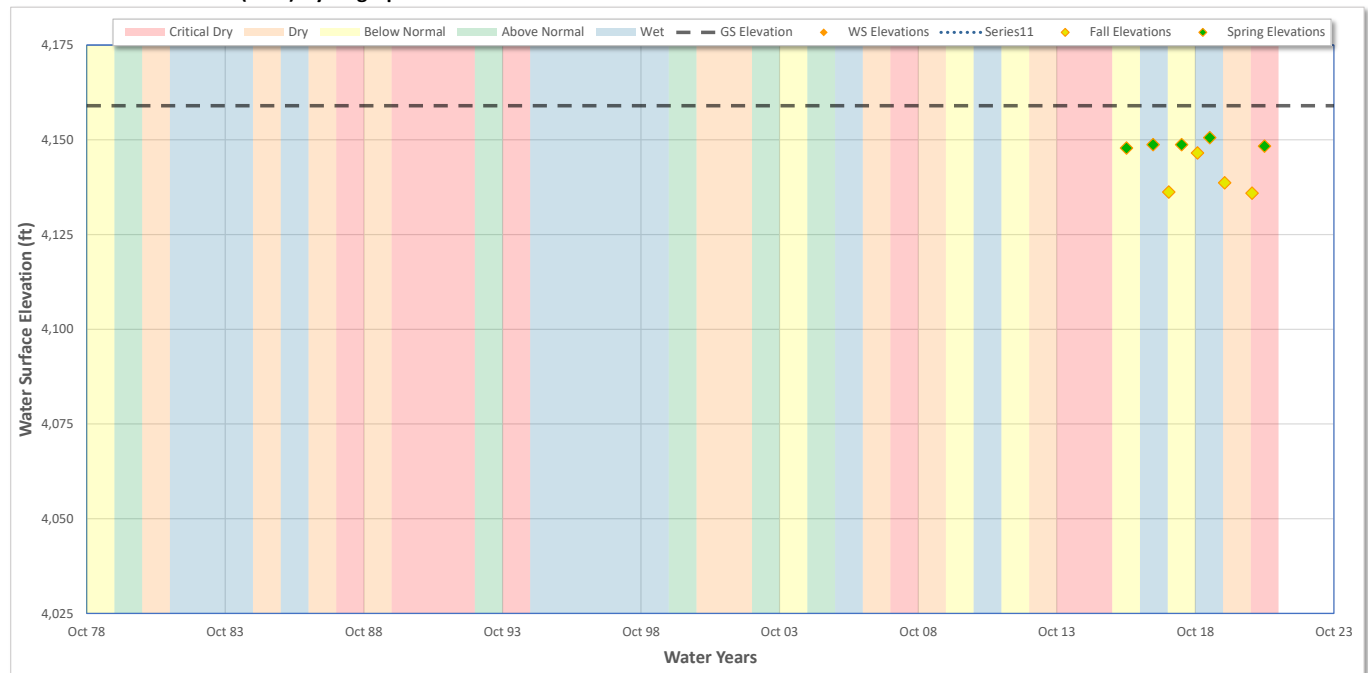

## **Appendix 5B   Groundwater Elevation Contours 1983 to 2018**


---



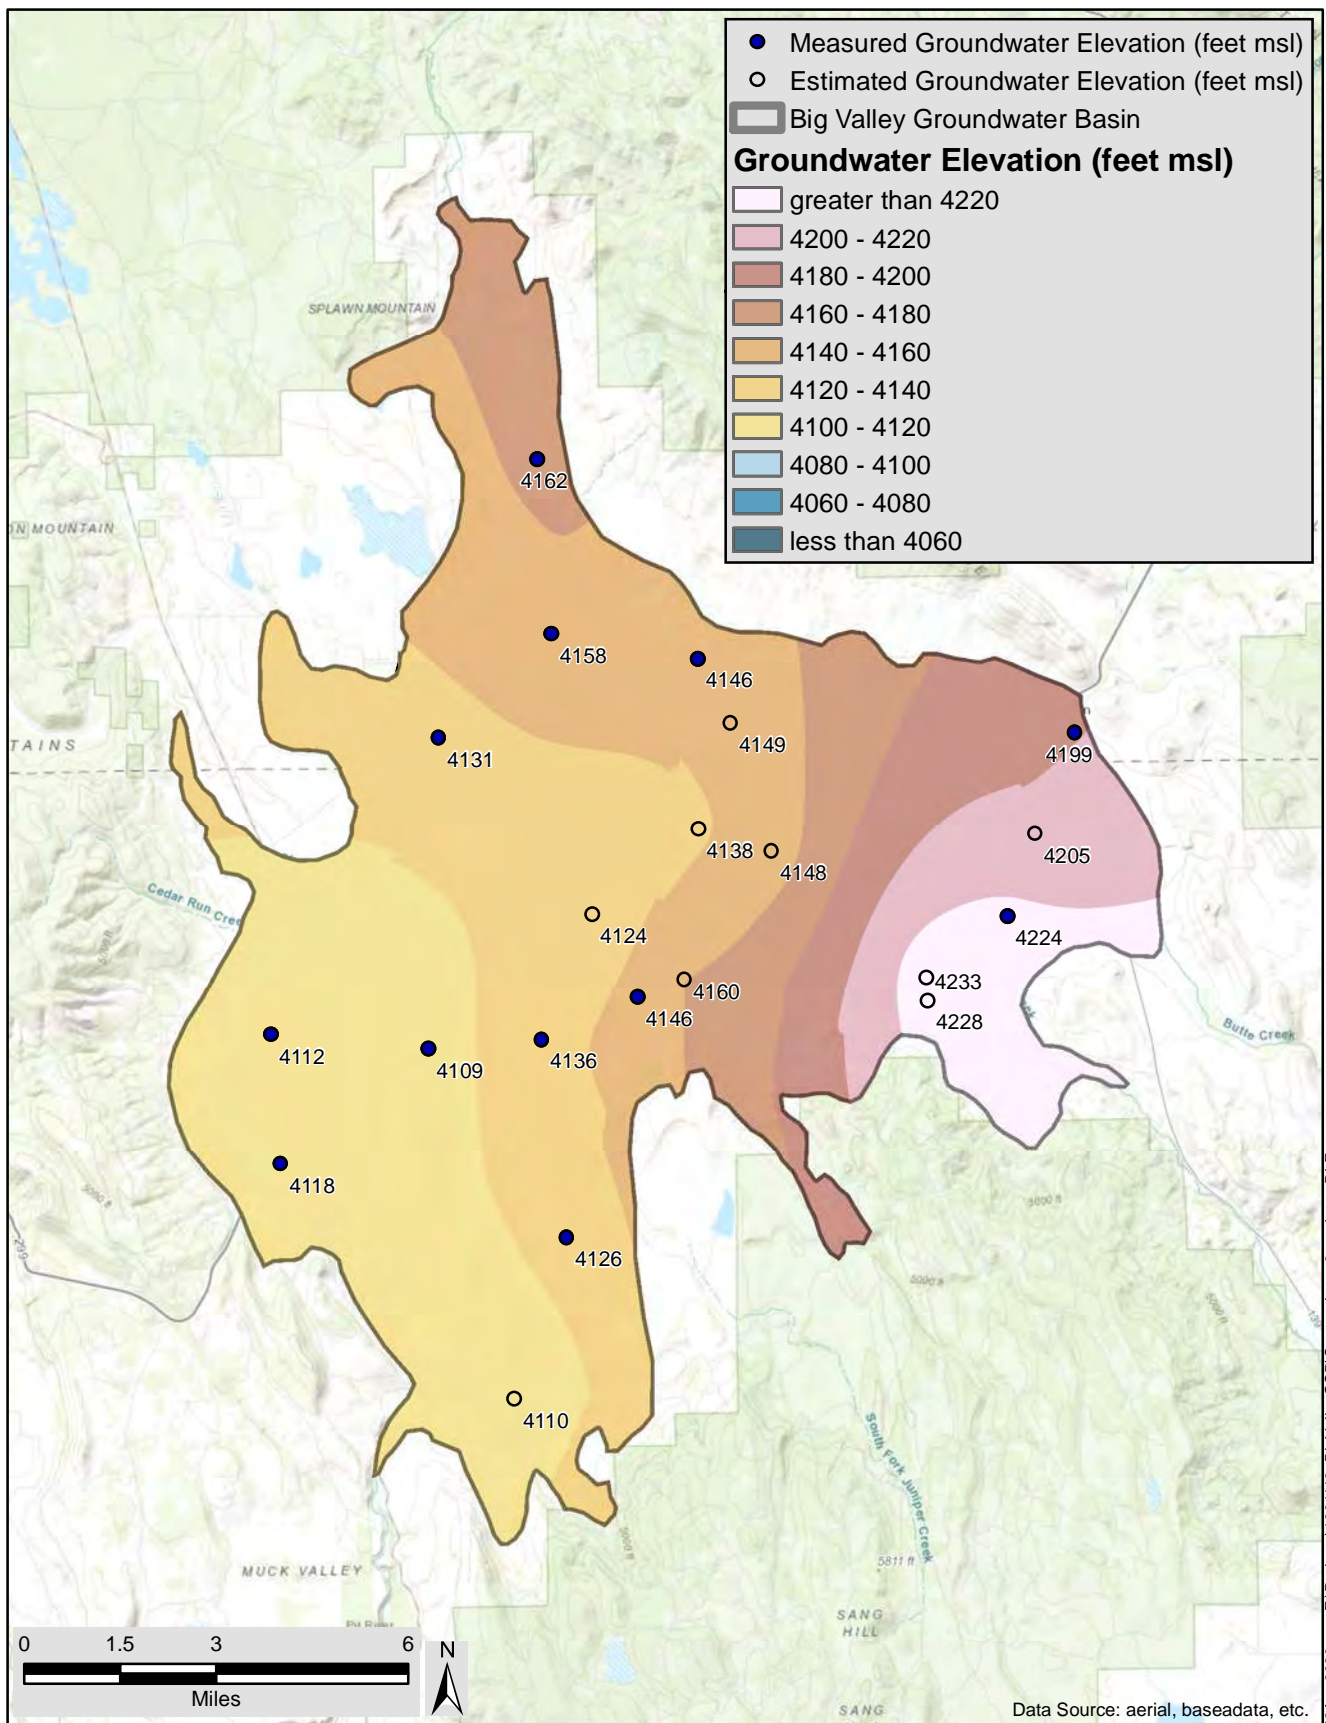

Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020


Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Spring 1983		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE

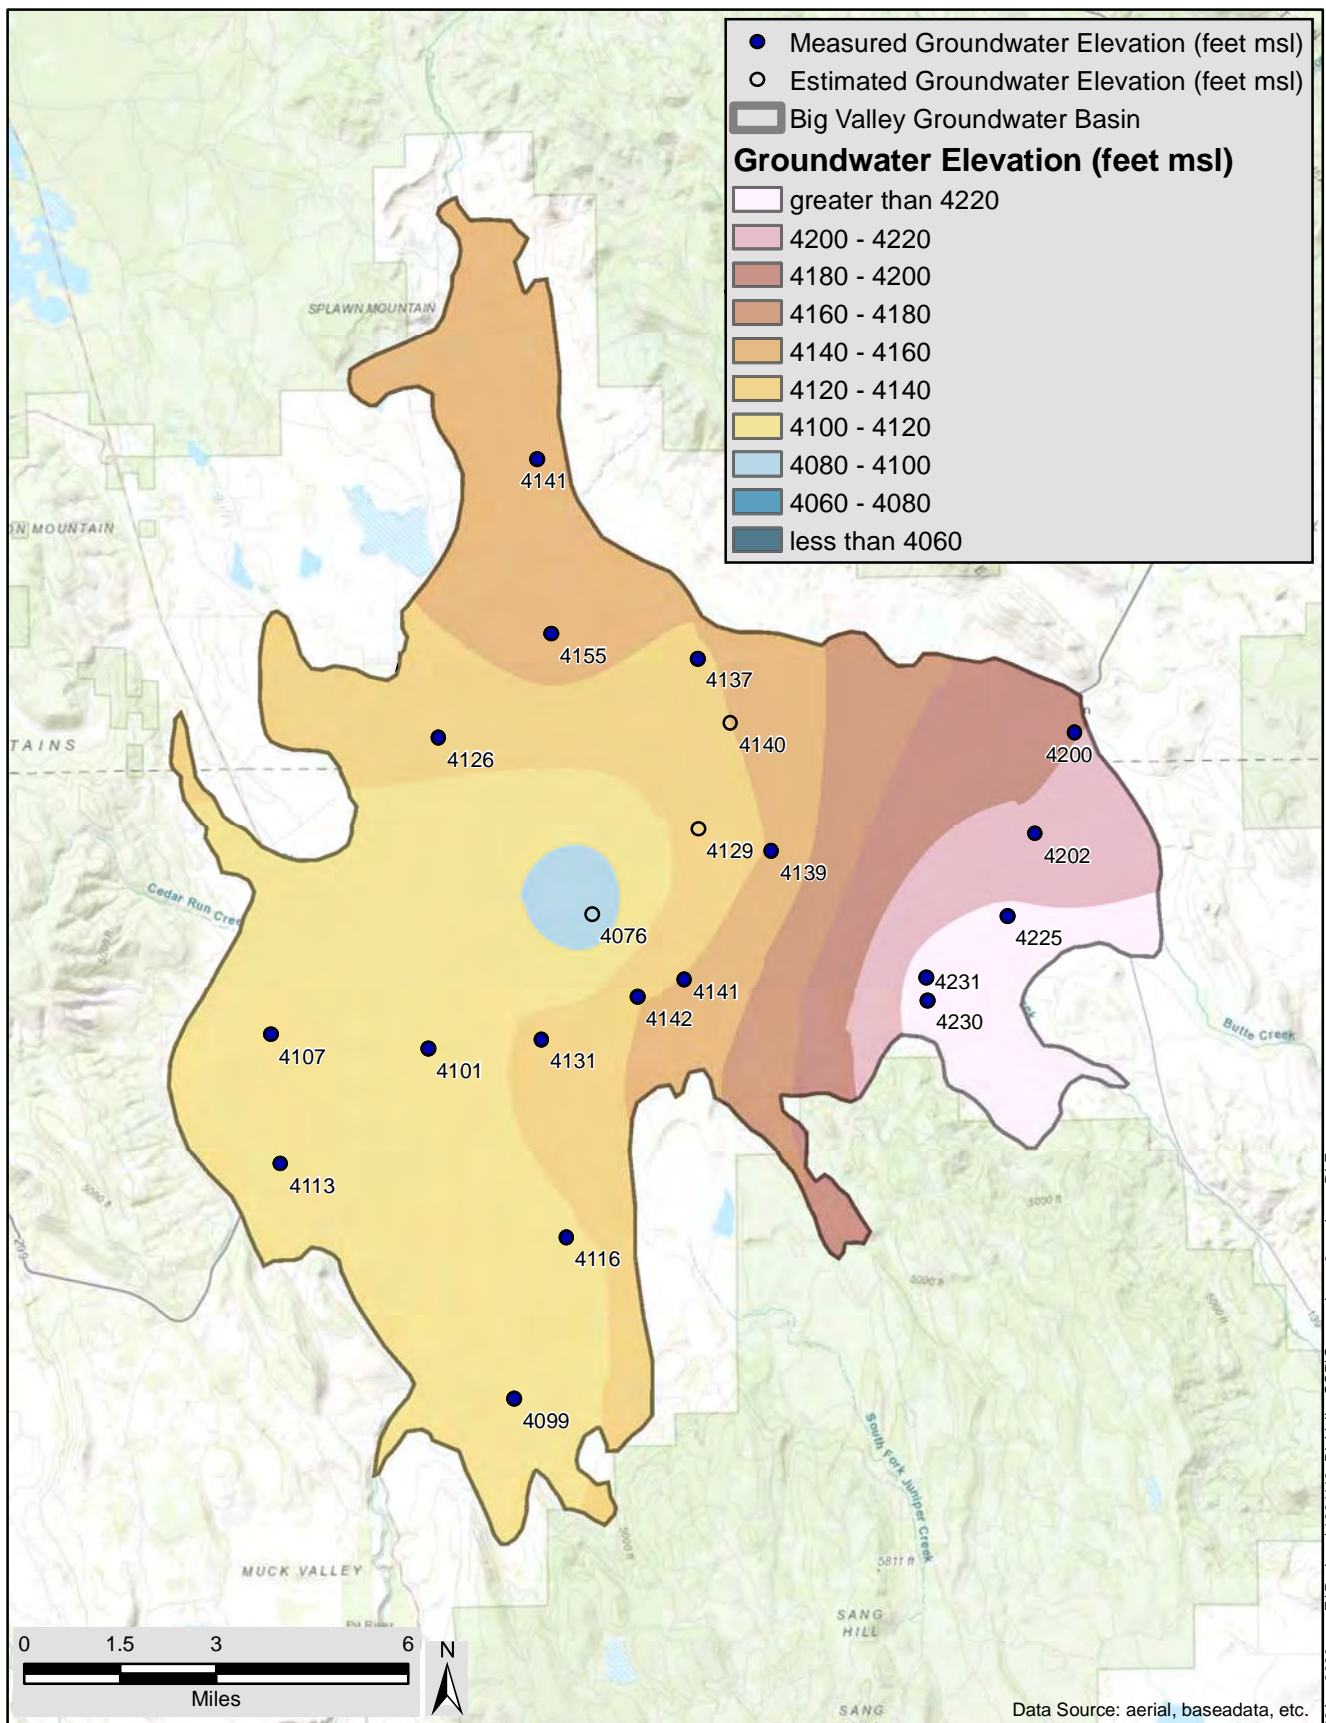

Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020

Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Fall 1983		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE



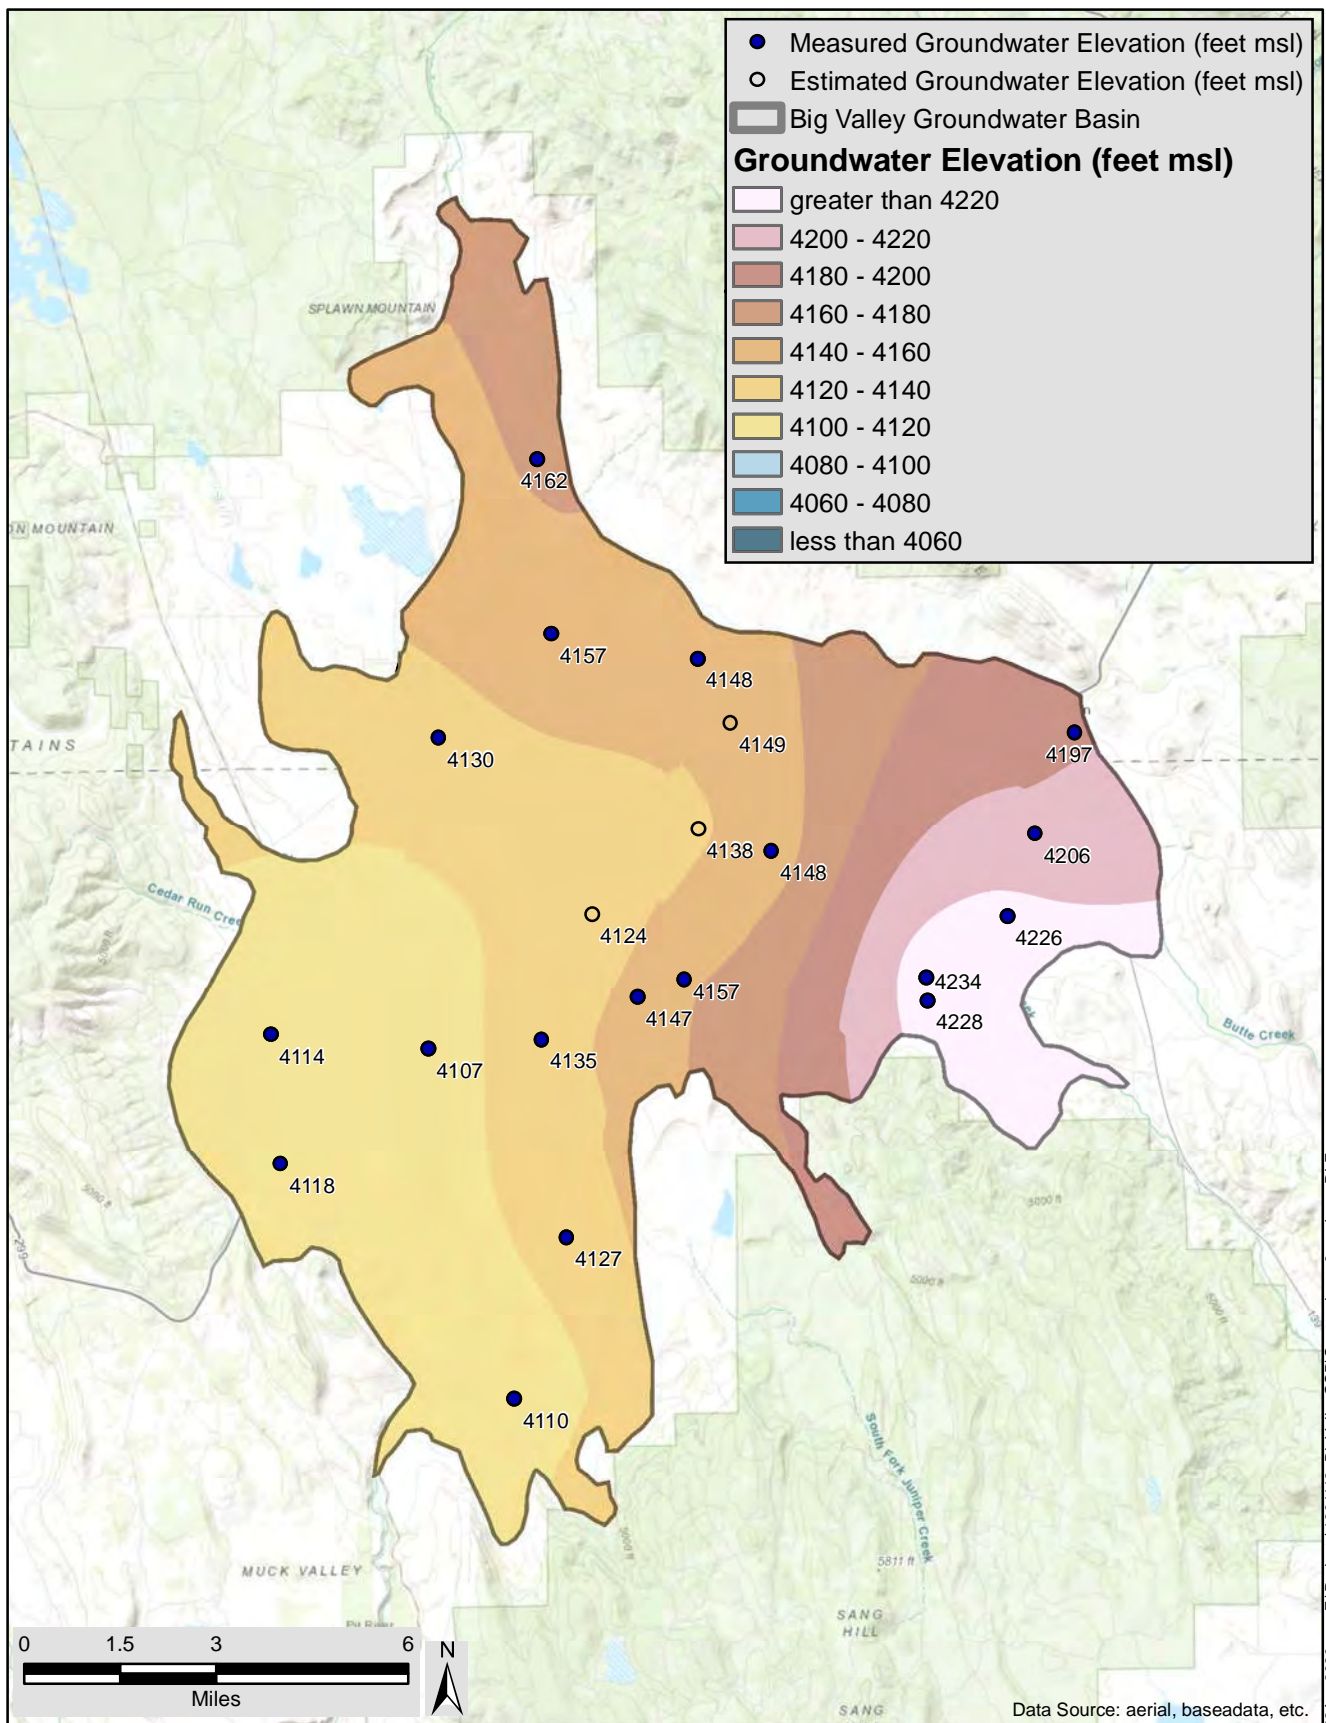


Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020

Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Spring 1984		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE






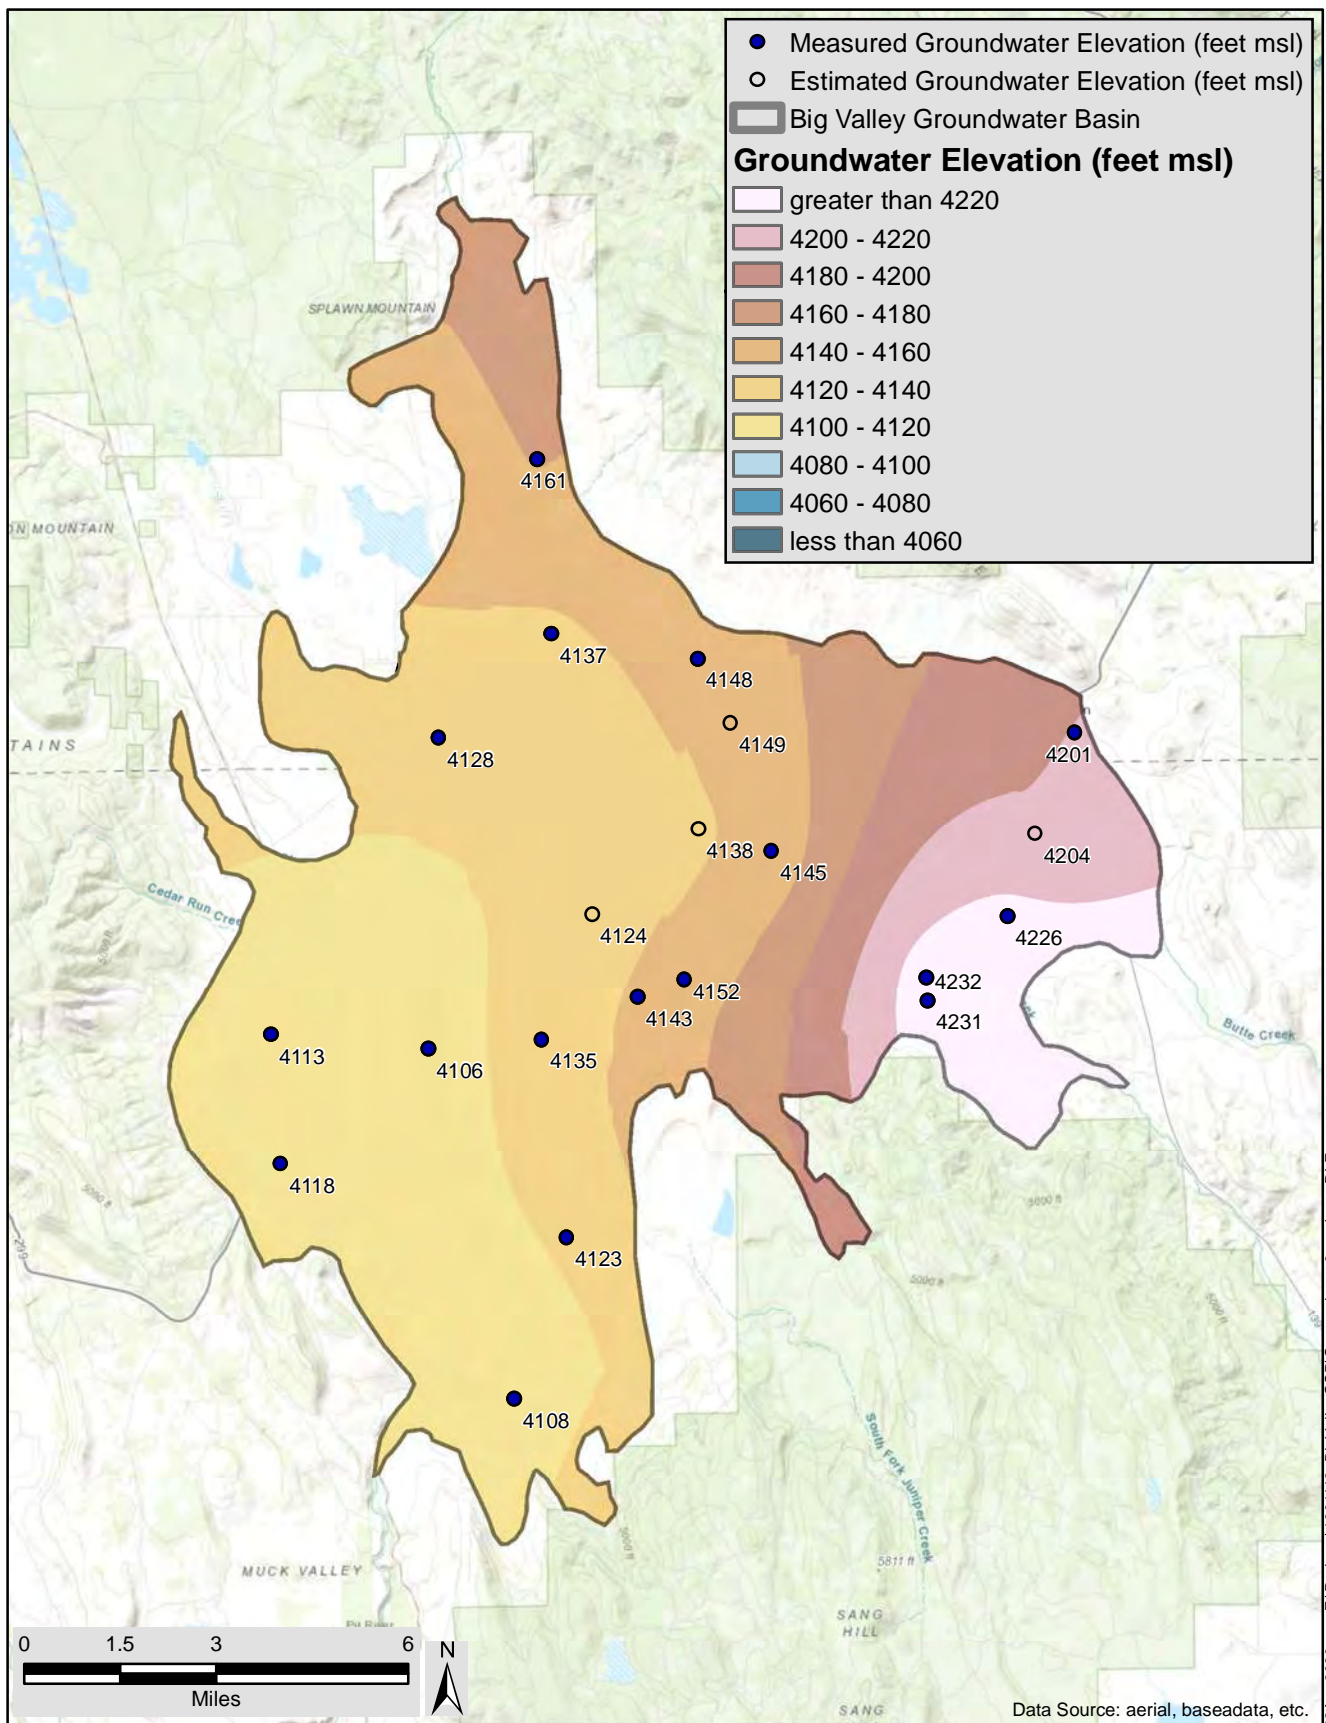

Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020


Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Spring 1985		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE

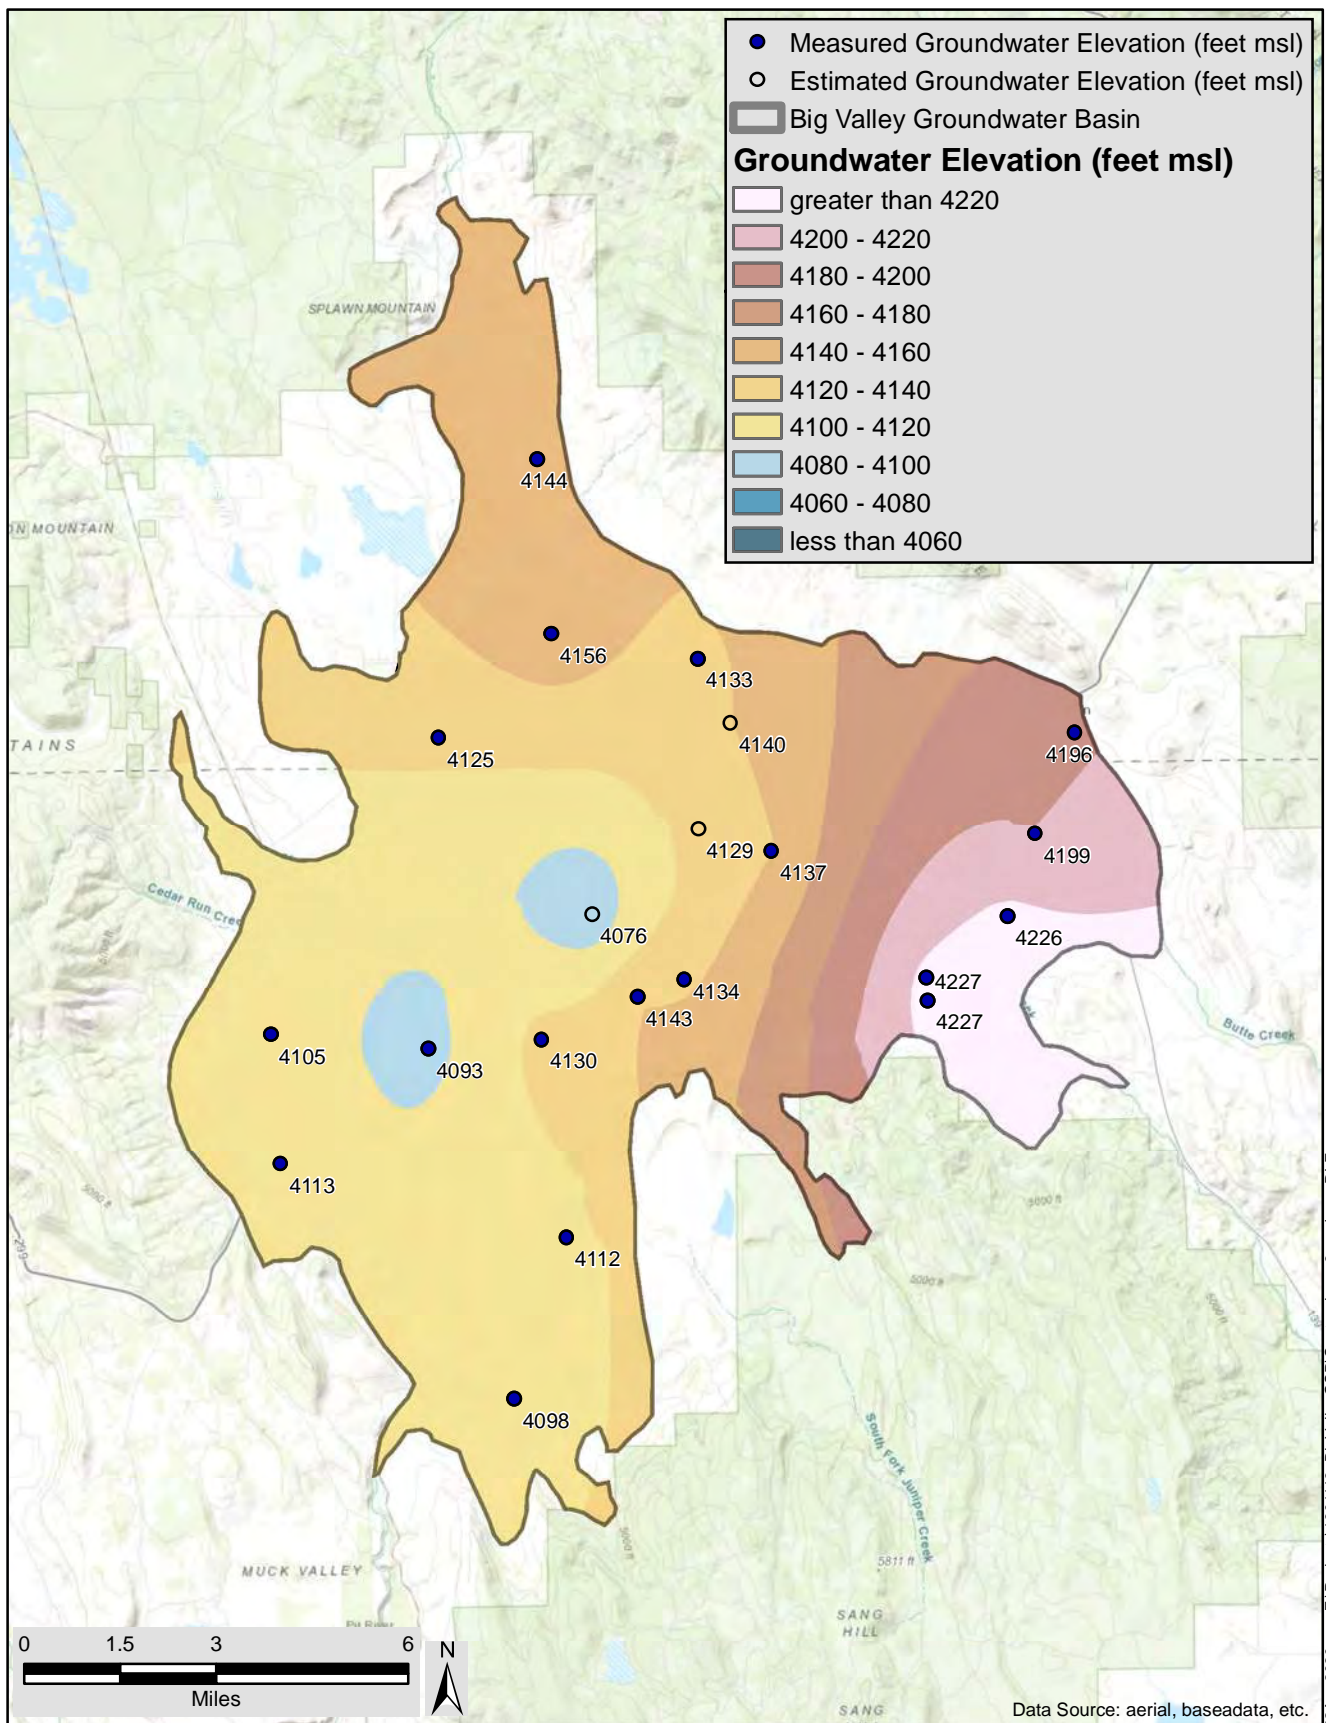

Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020


Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Fall 1985		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE



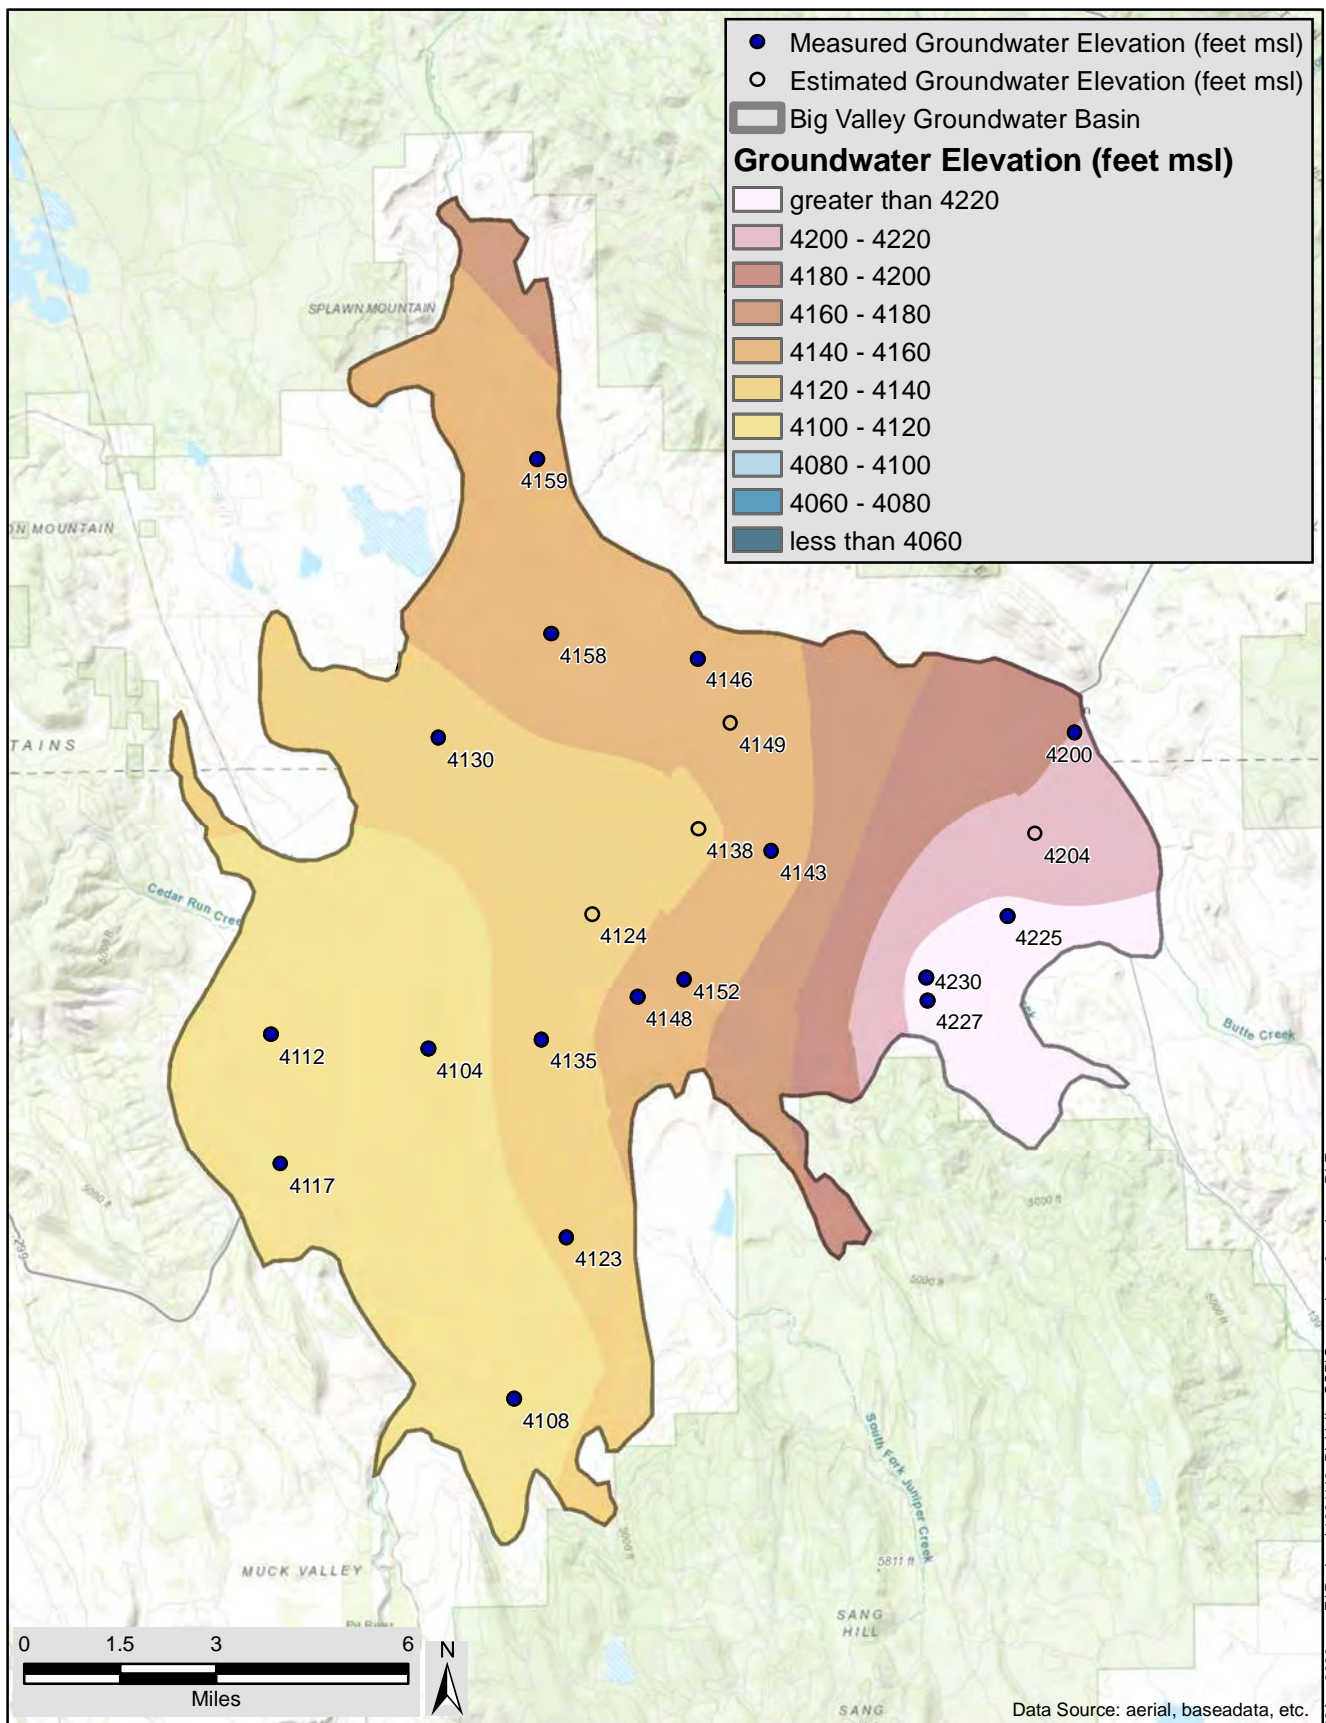

Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020


Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Spring 1986		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE

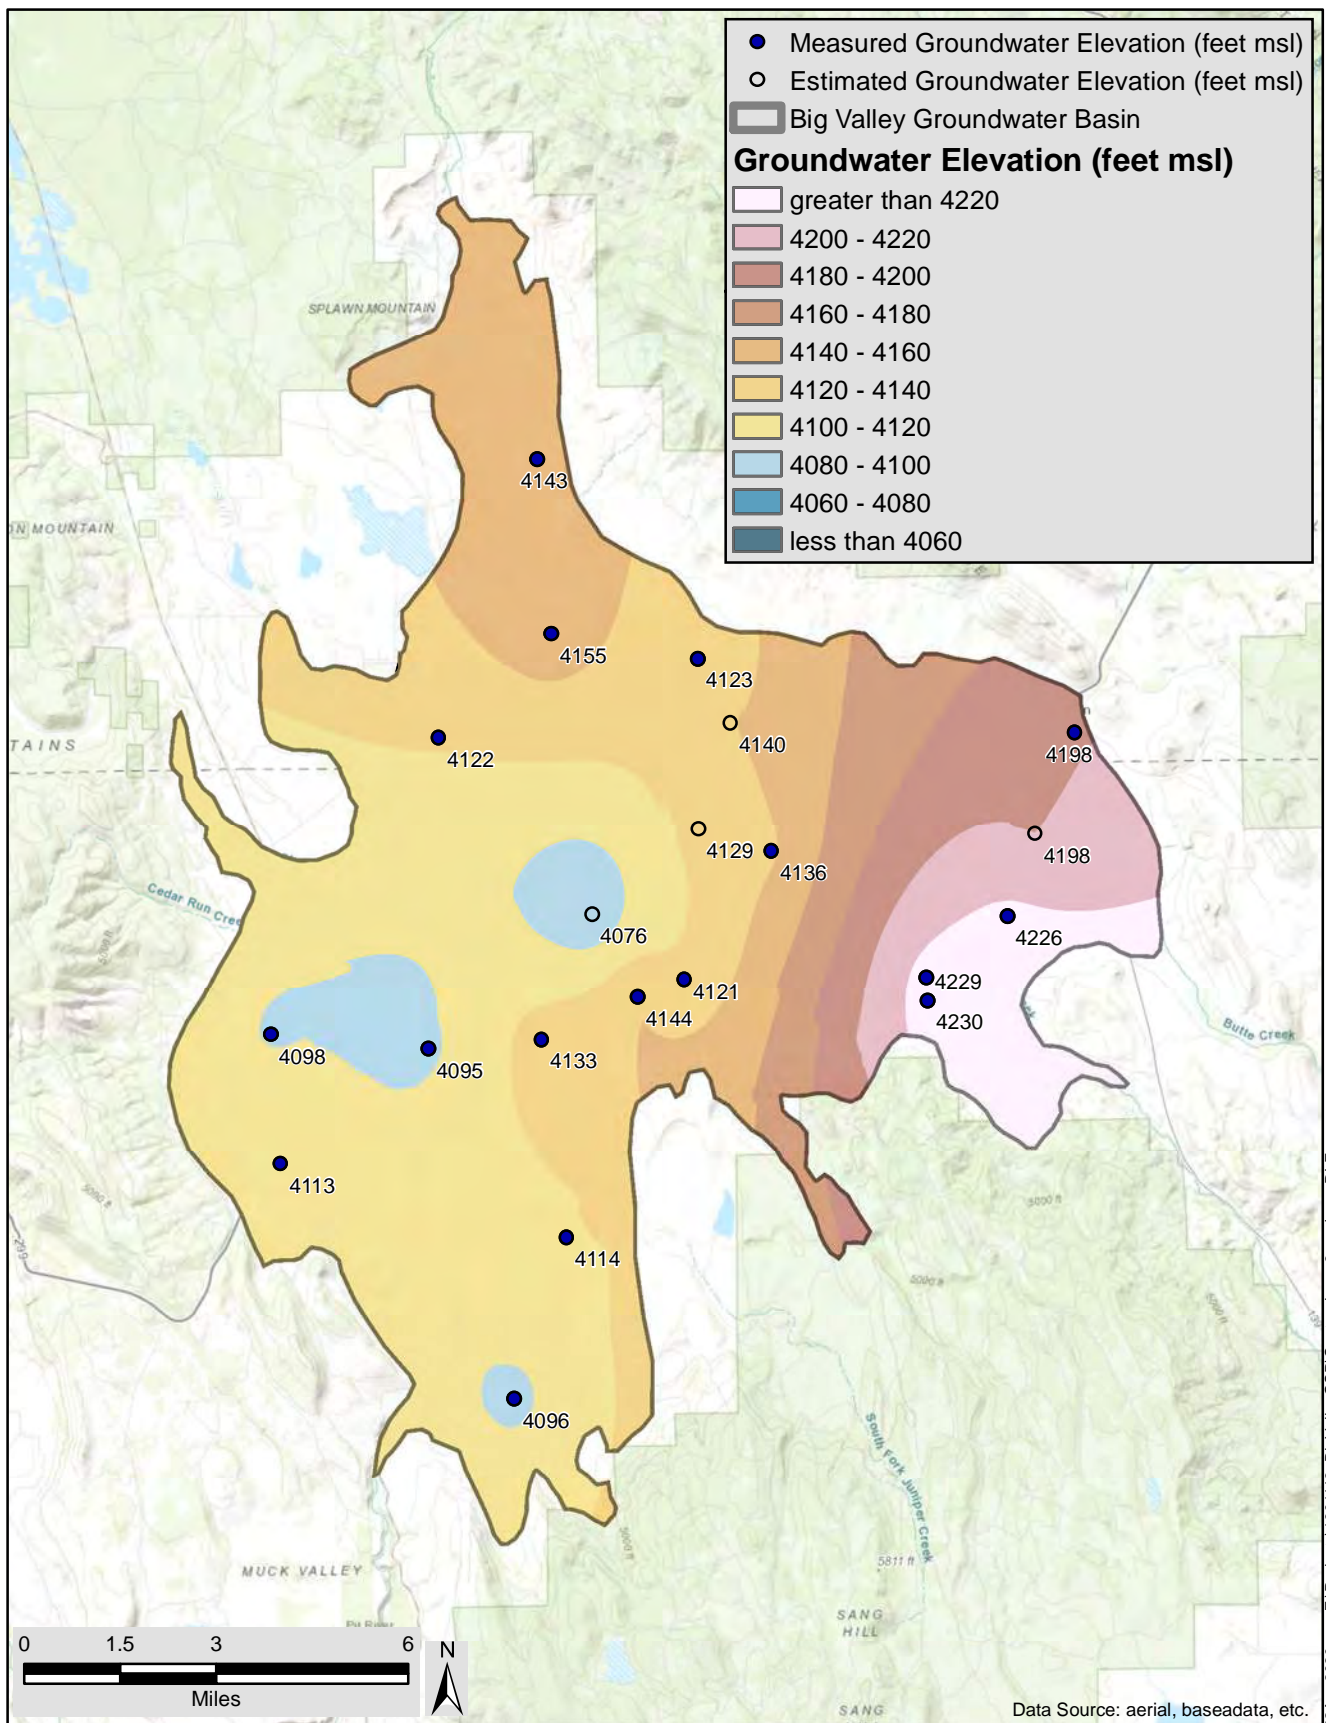


Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020

Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Fall 1986		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE



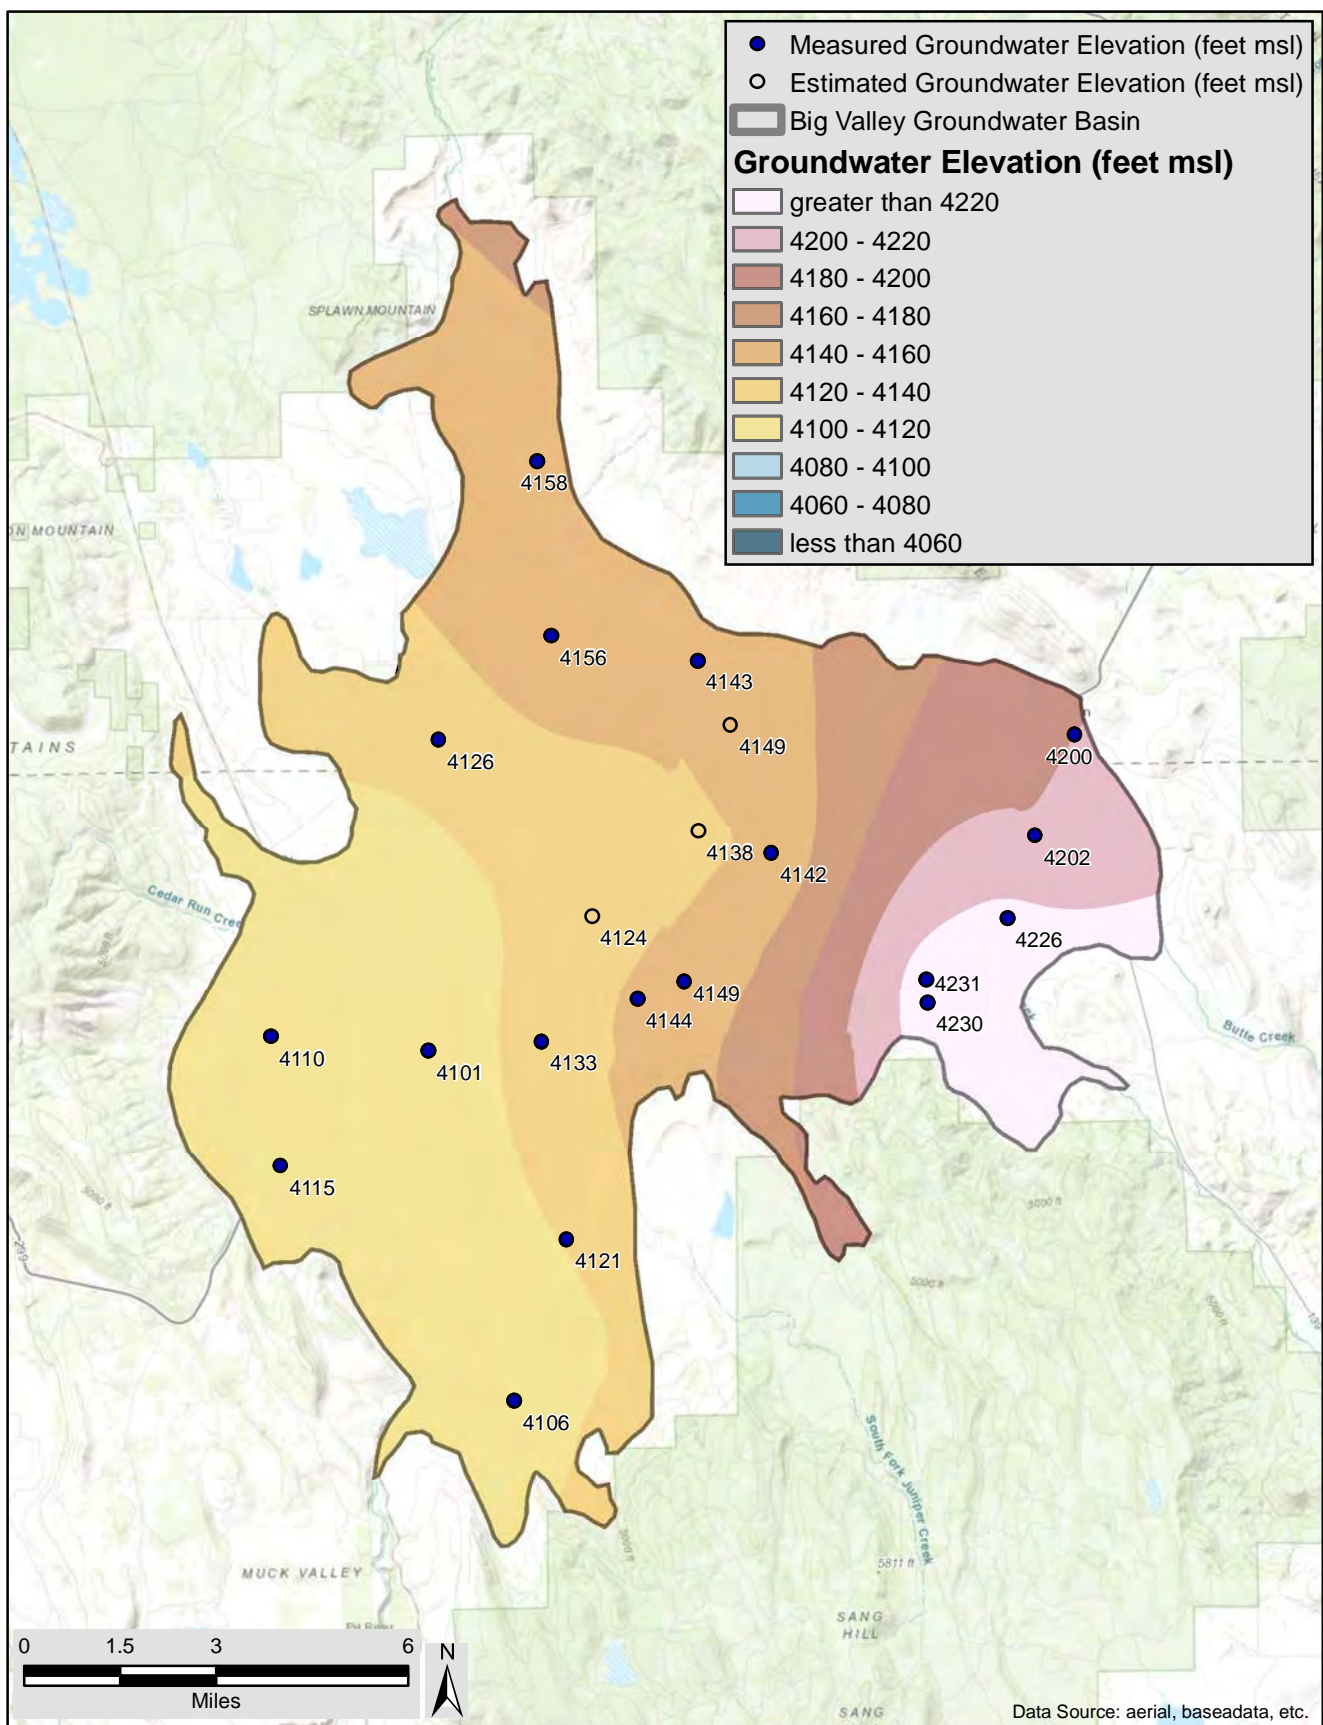

Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Spring 1987		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE

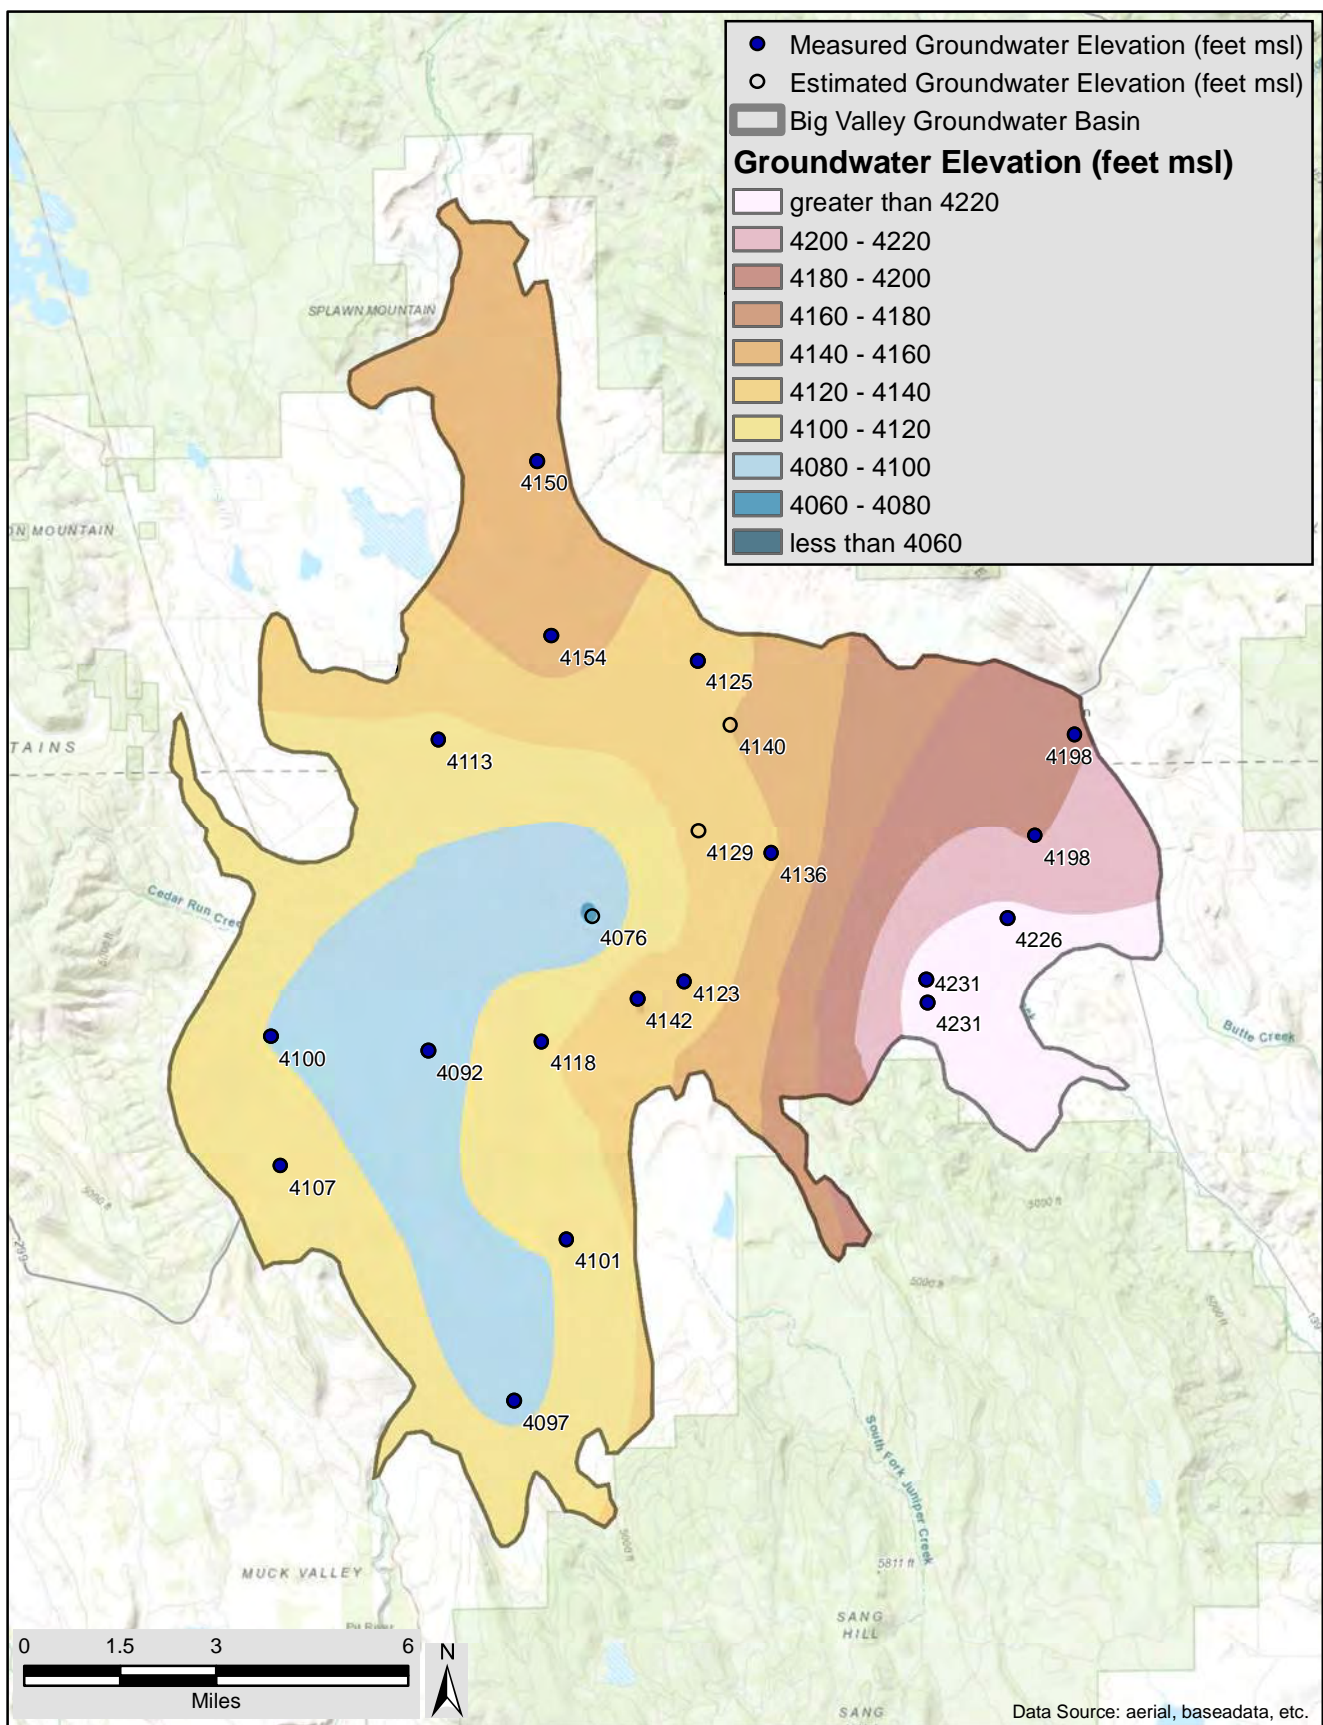

Big Valley Basin Groundwater Sustainability Plan  
Modoc and Lassen Counties, California

Big Valley Groundwater Basin GSAs




Groundwater Elevations  
Fall 1987

AUGUST 2020

**DRAFT**


FIGURE



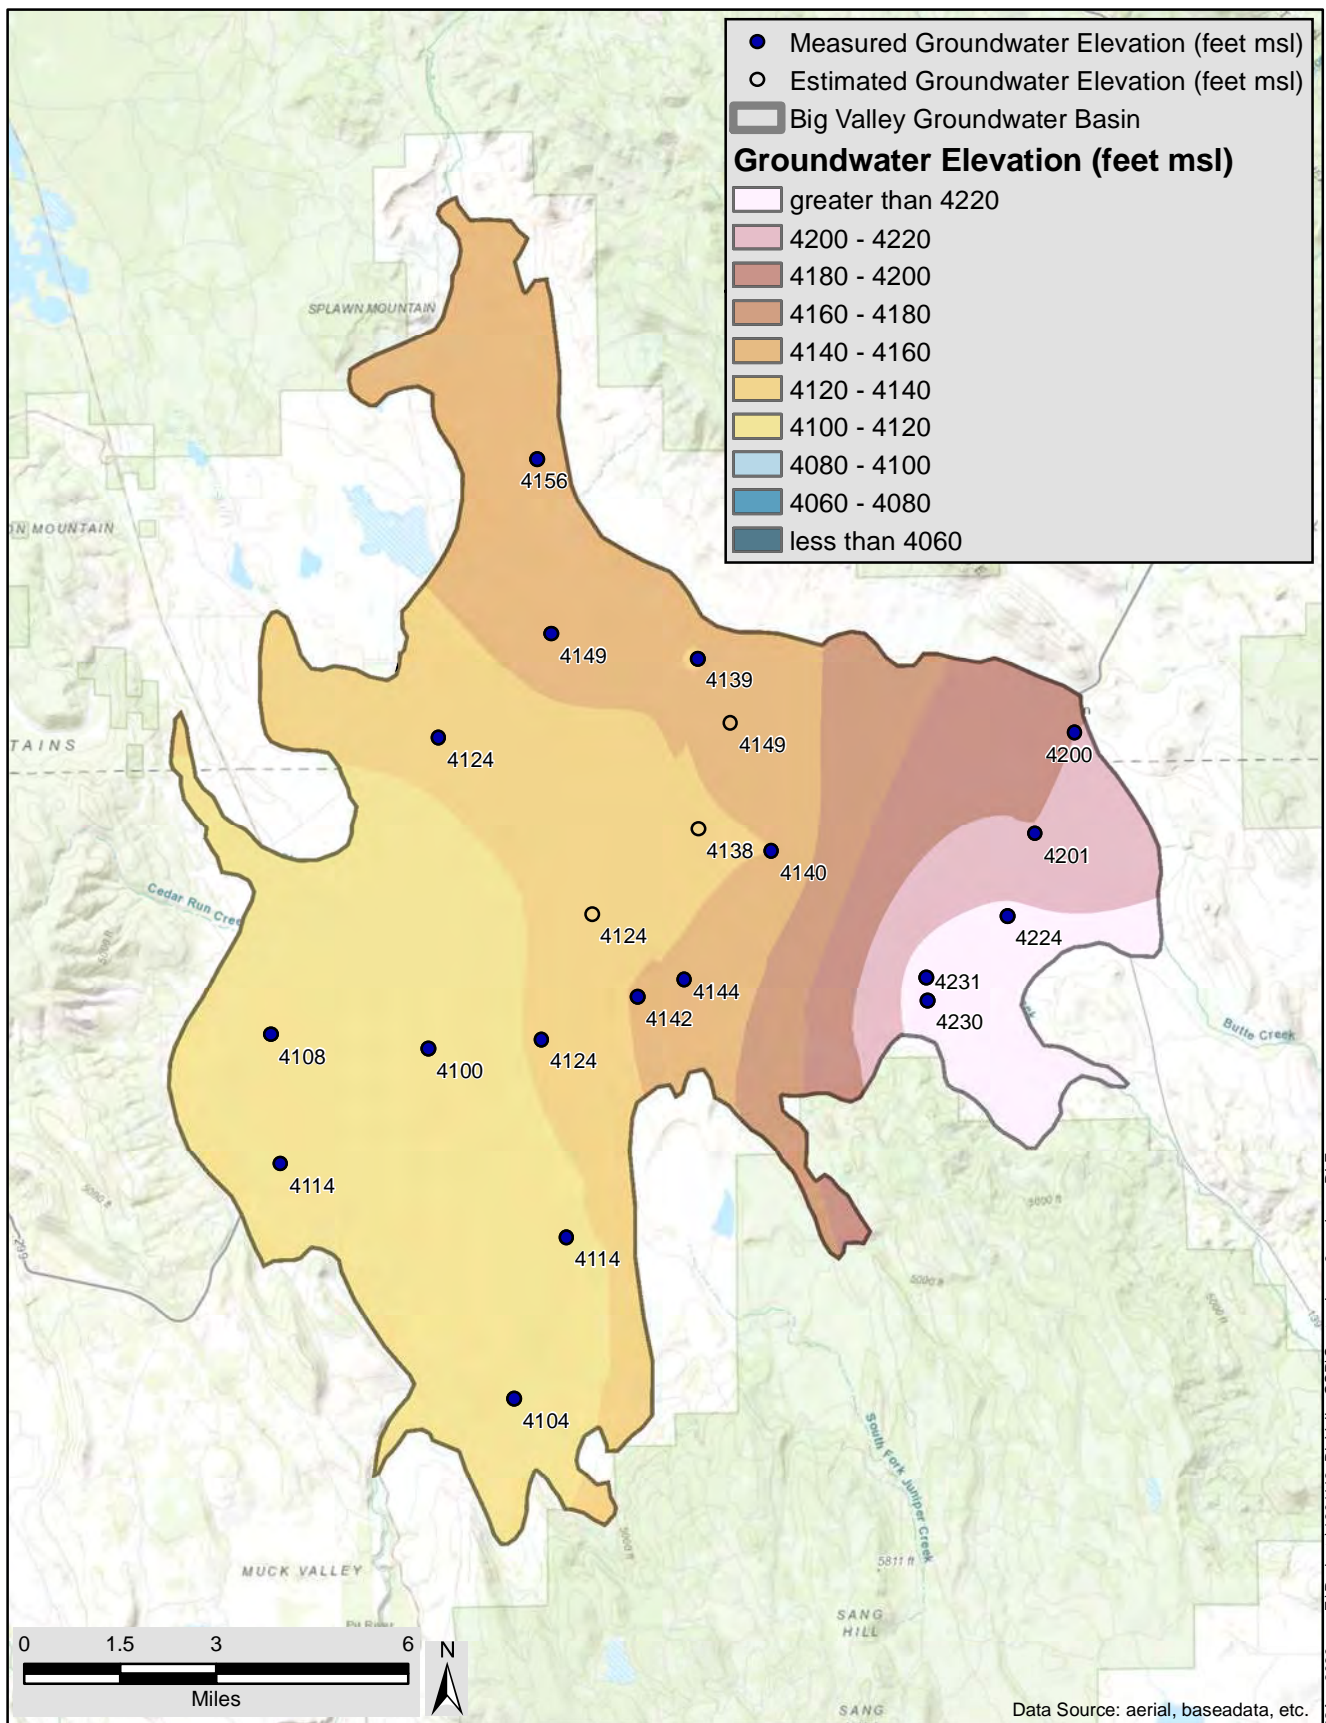

Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020


Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Spring 1988		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE

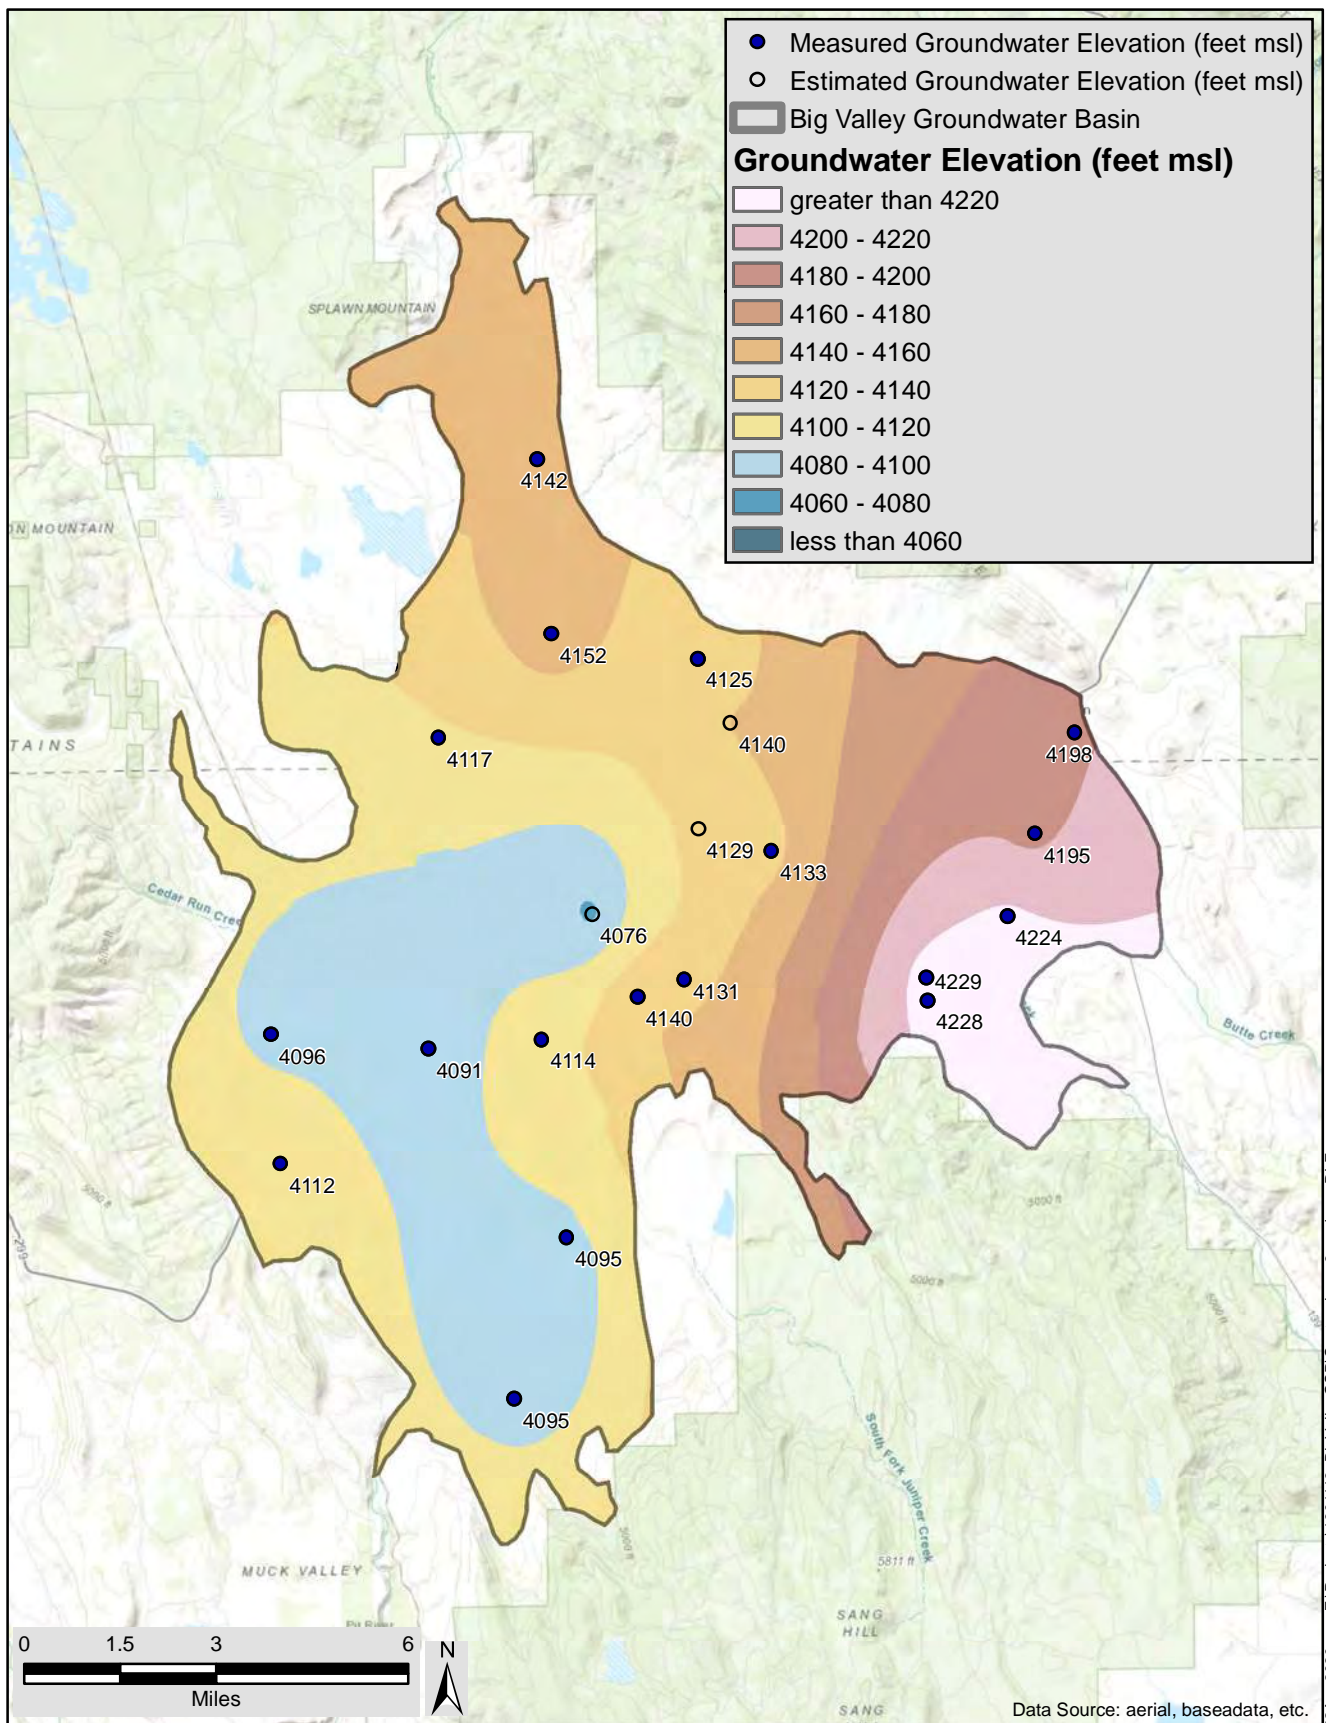

Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020


Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Fall 1988		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE



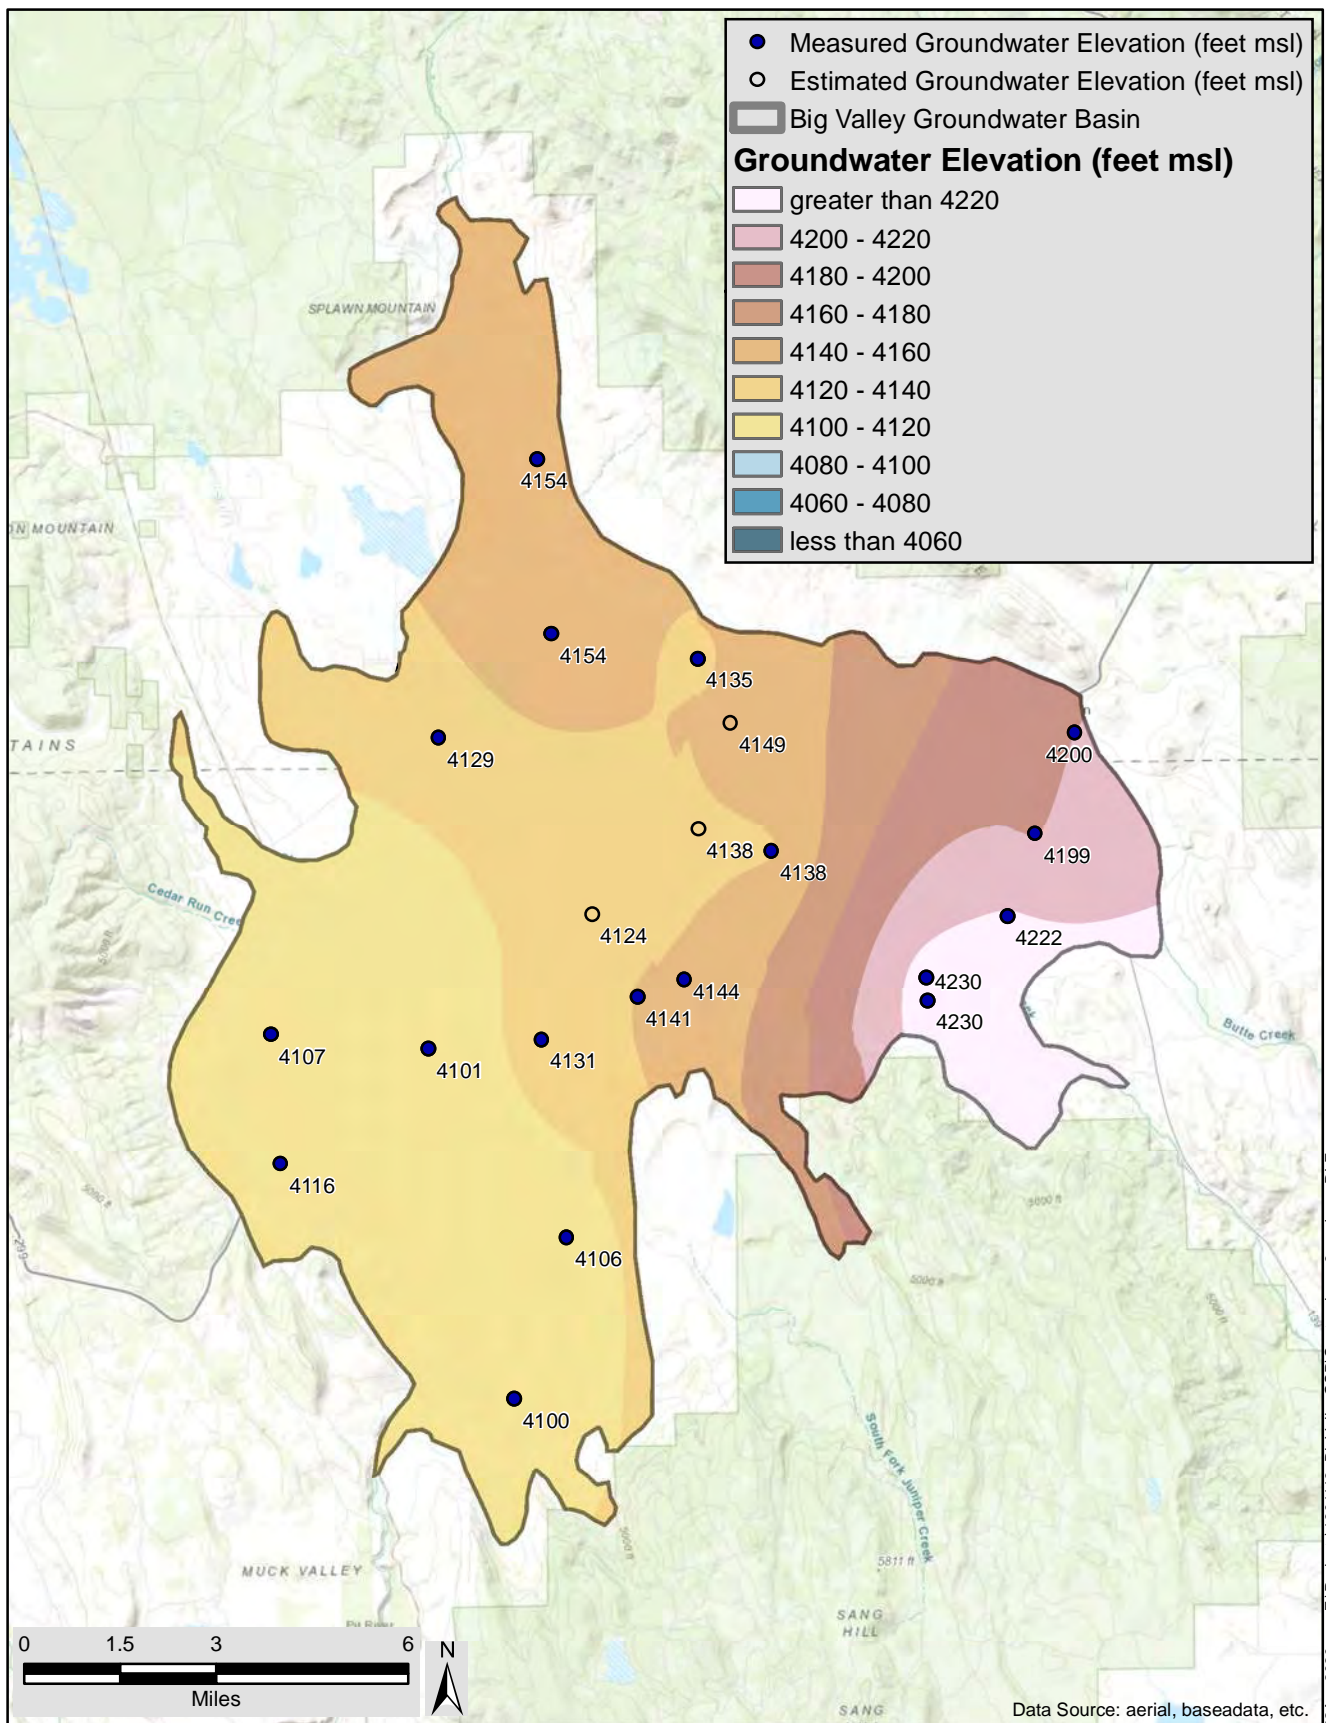


Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020

Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Spring 1989		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE

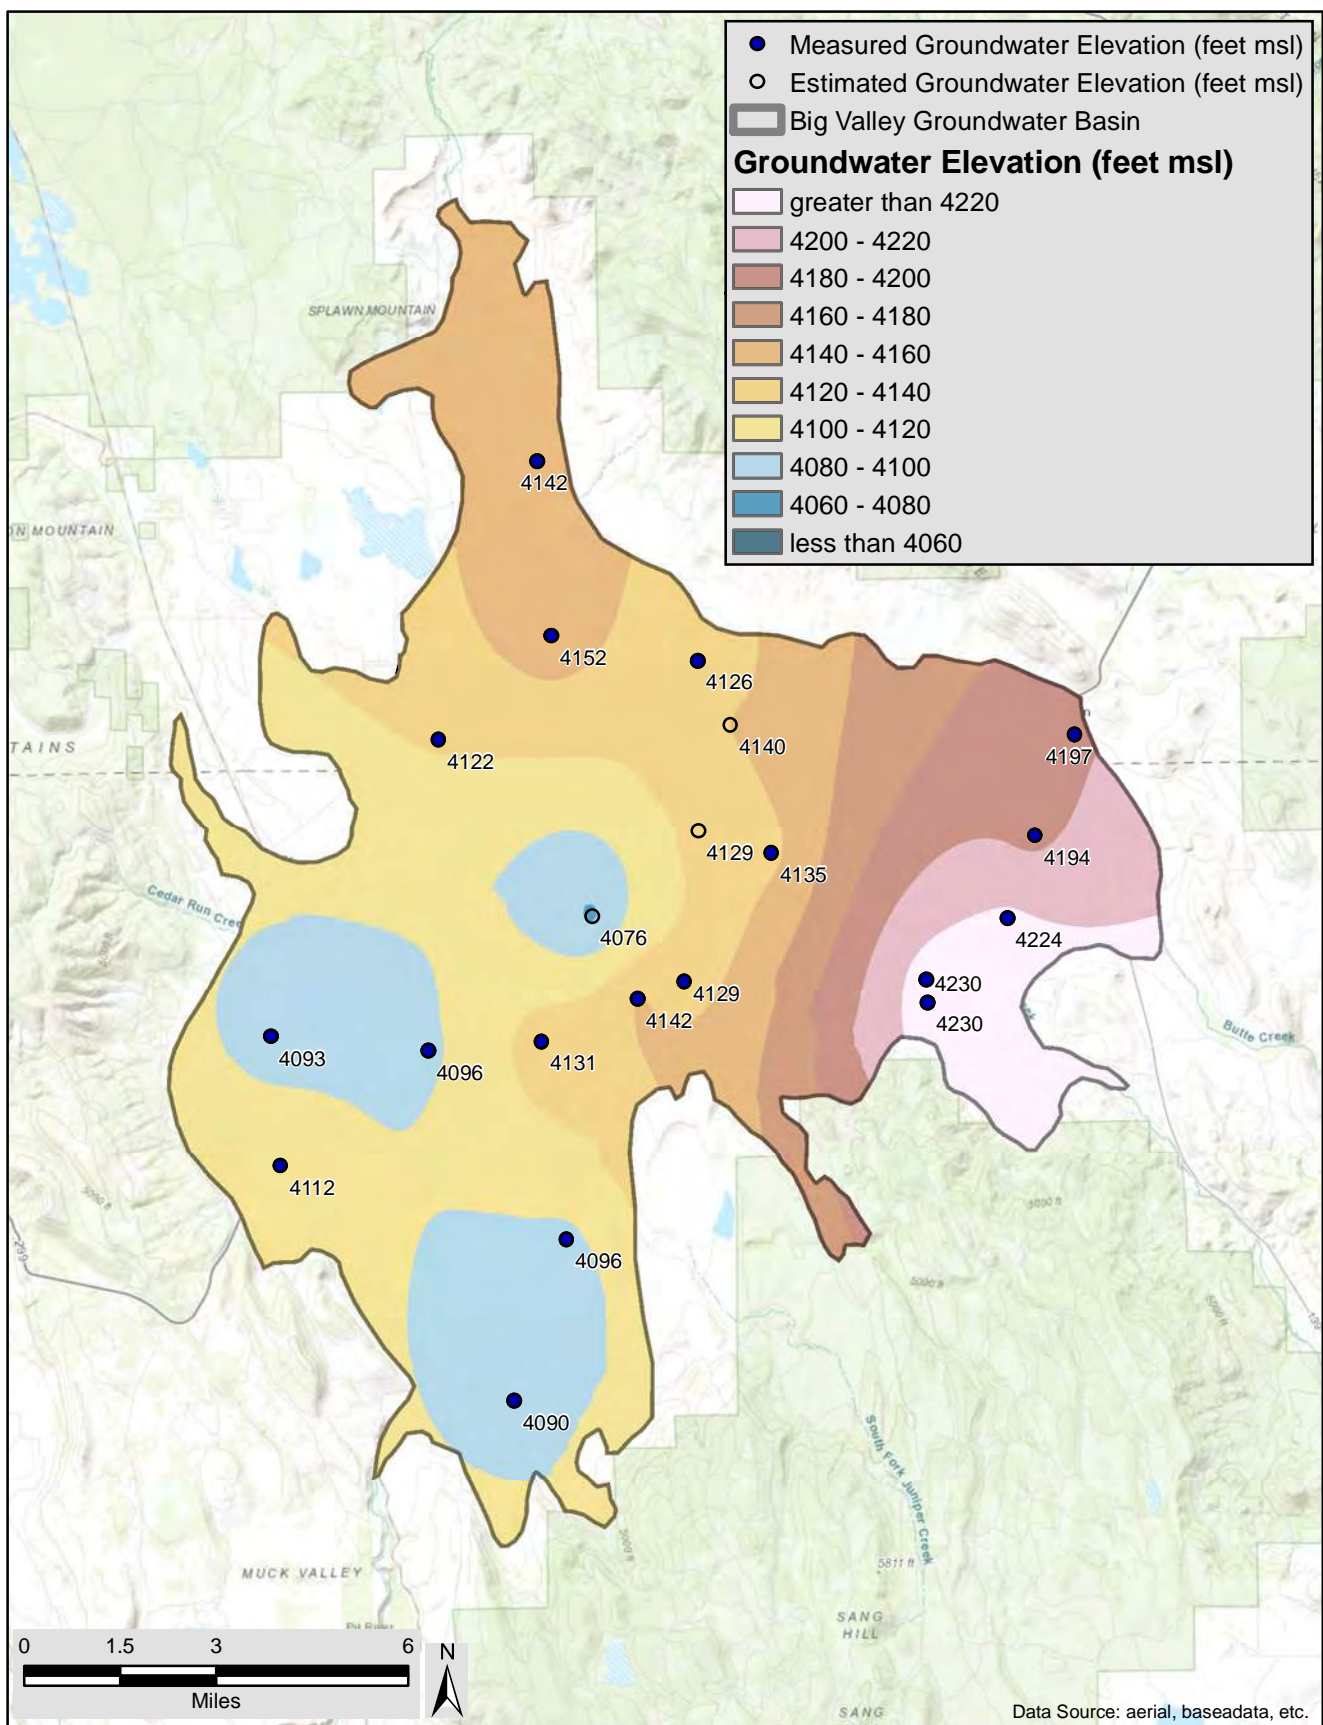


Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Fall 1989		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE



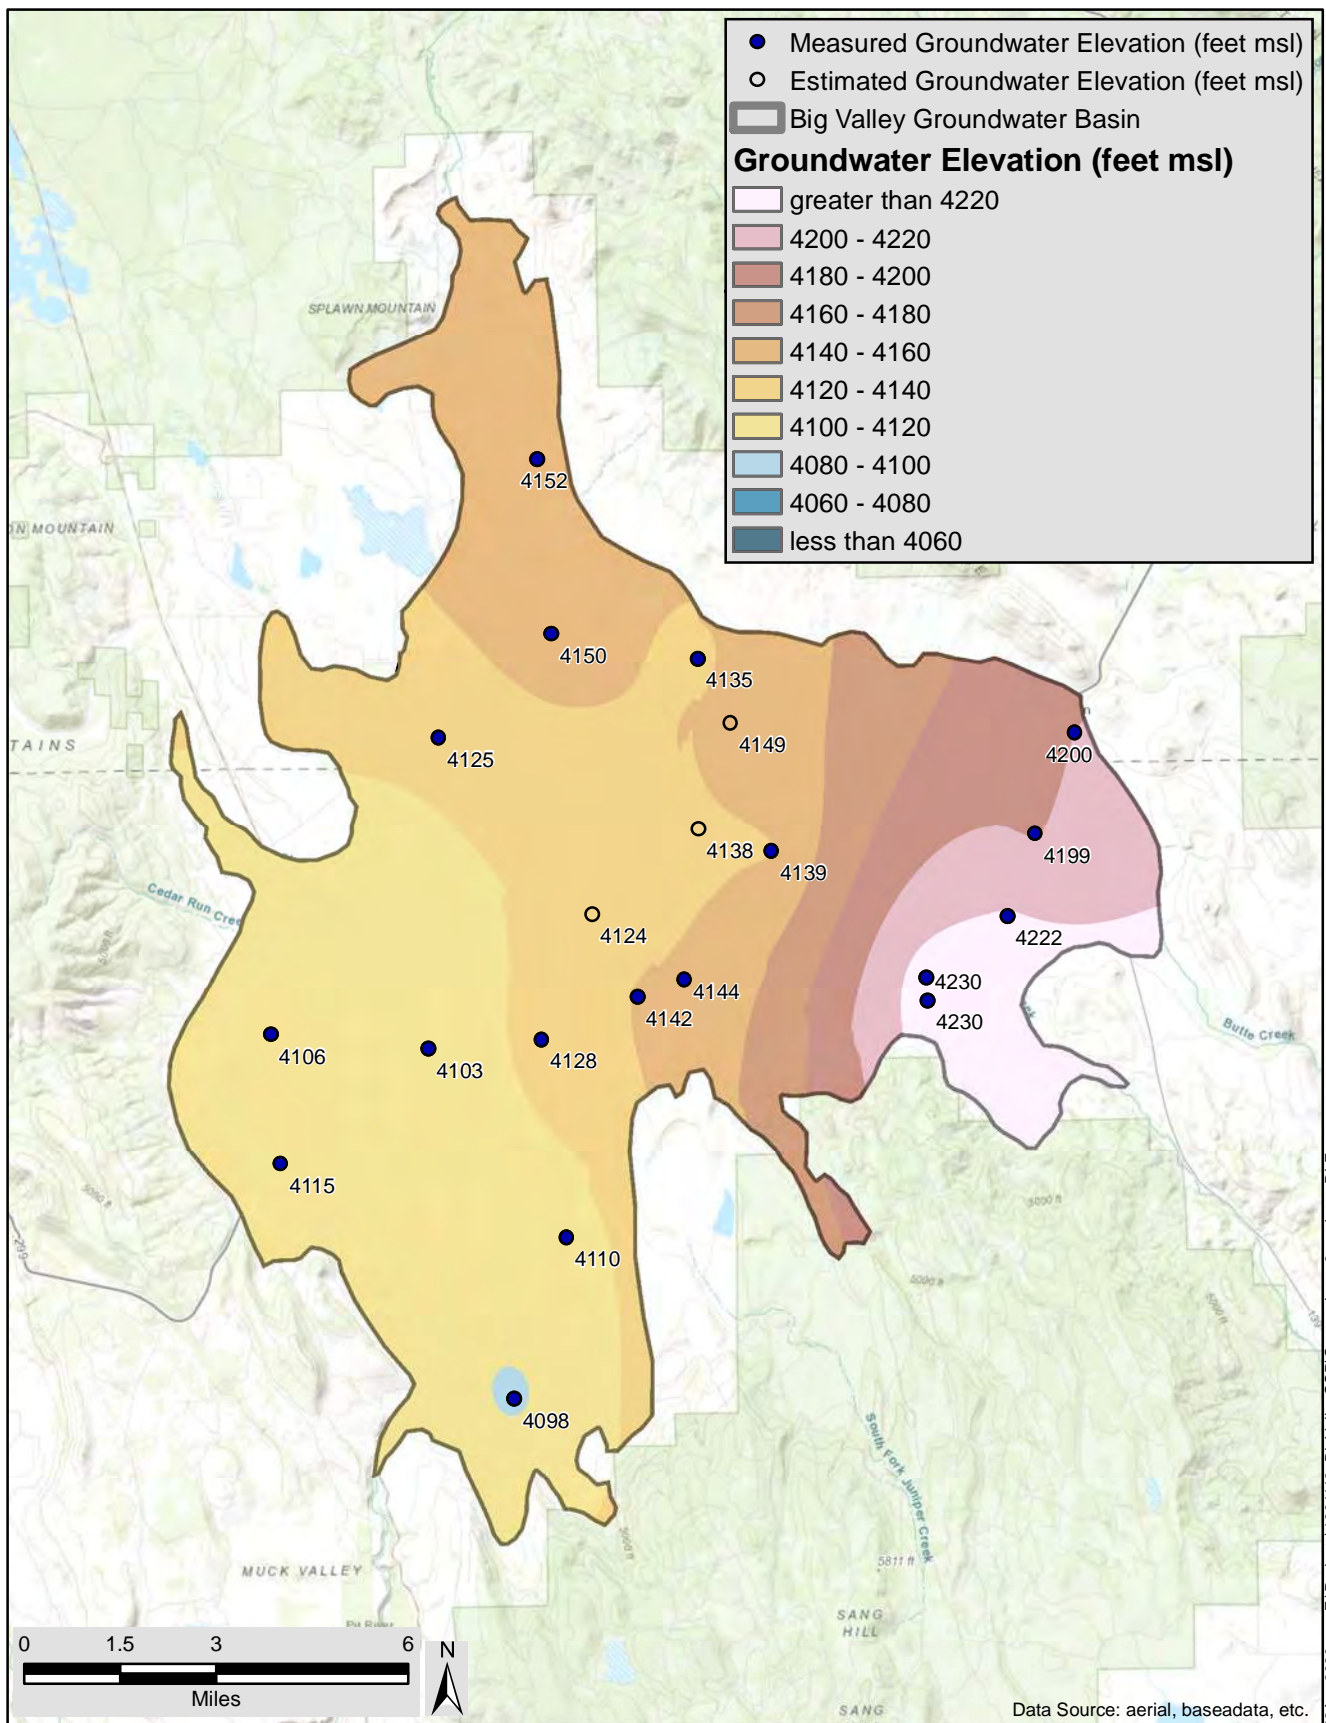

Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020


Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Spring 1990		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE

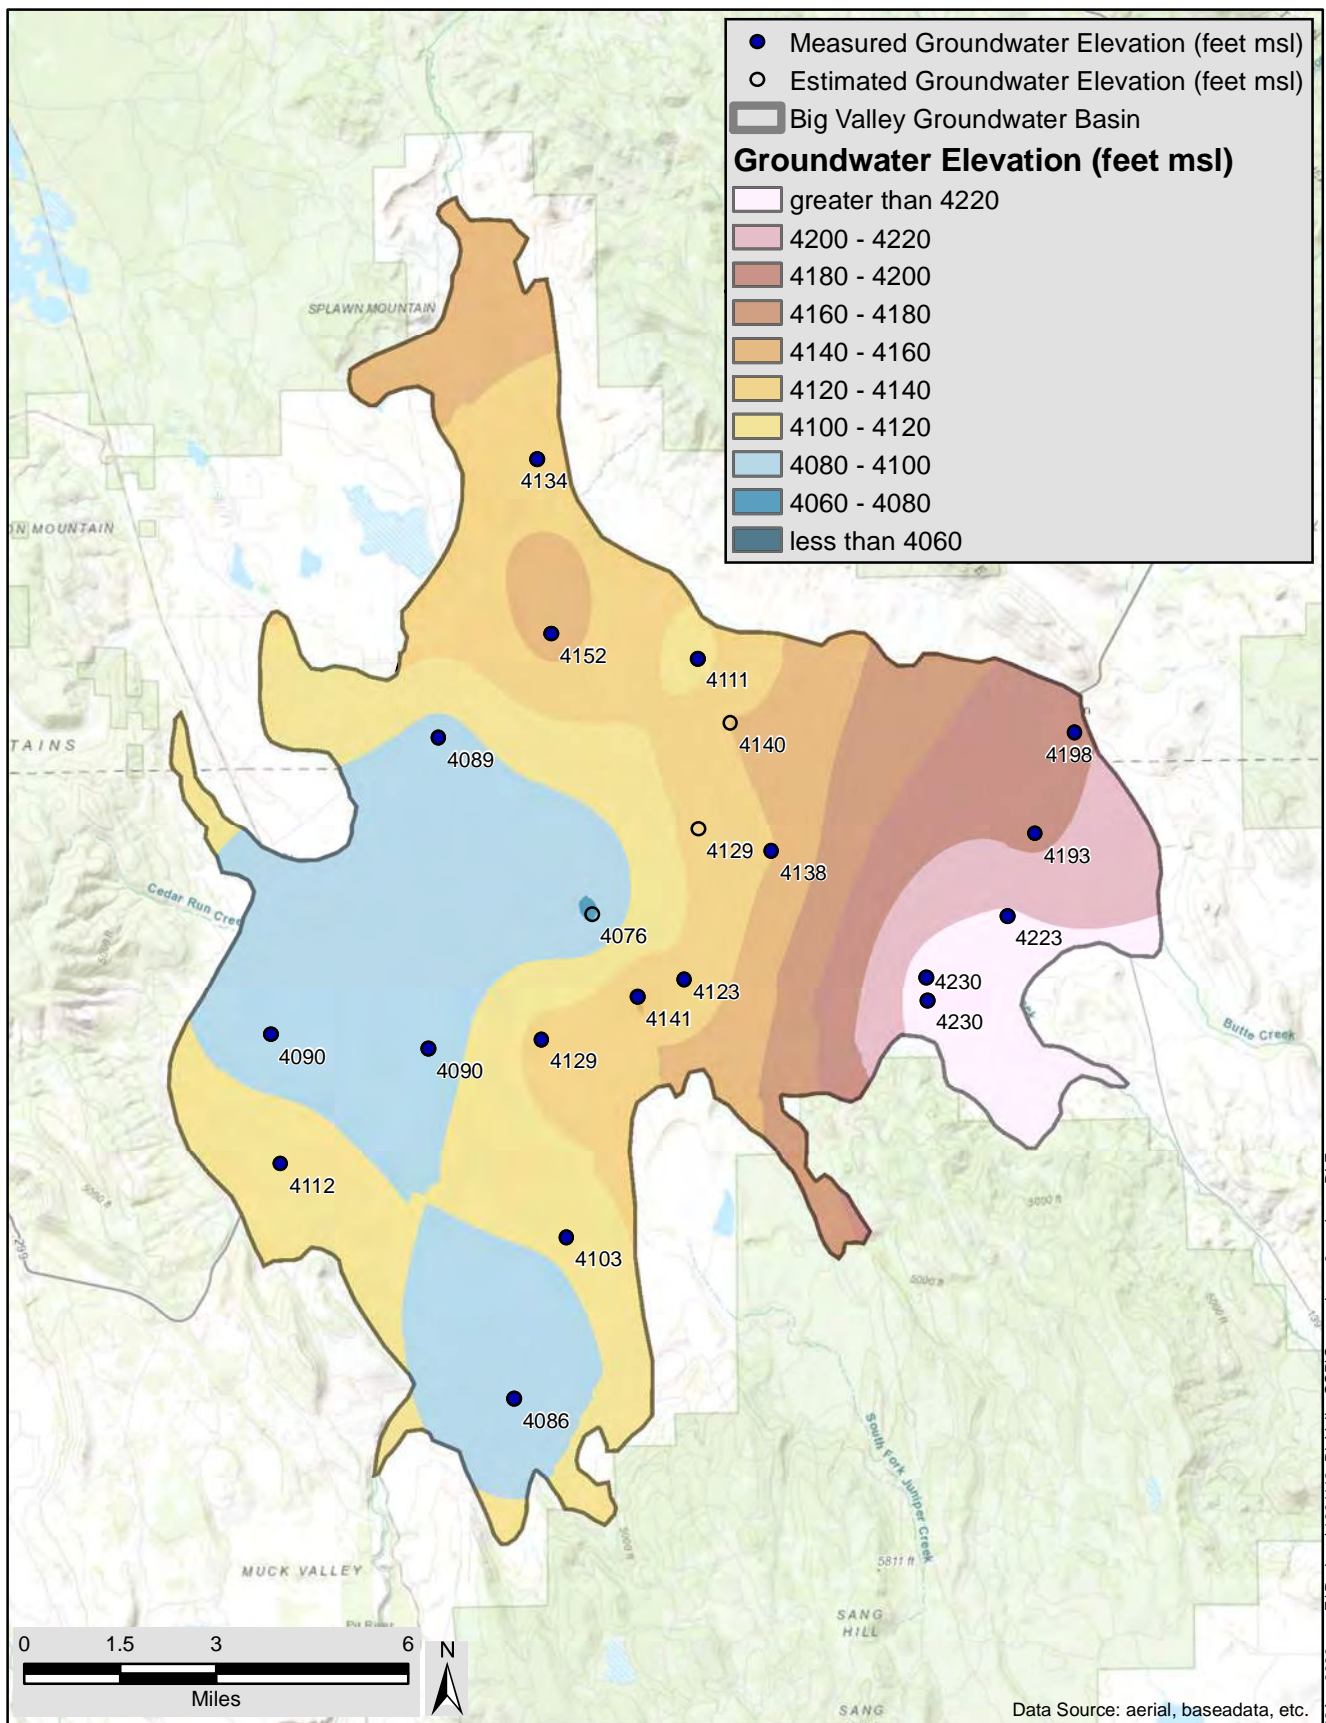

Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020

Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Fall 1990		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE



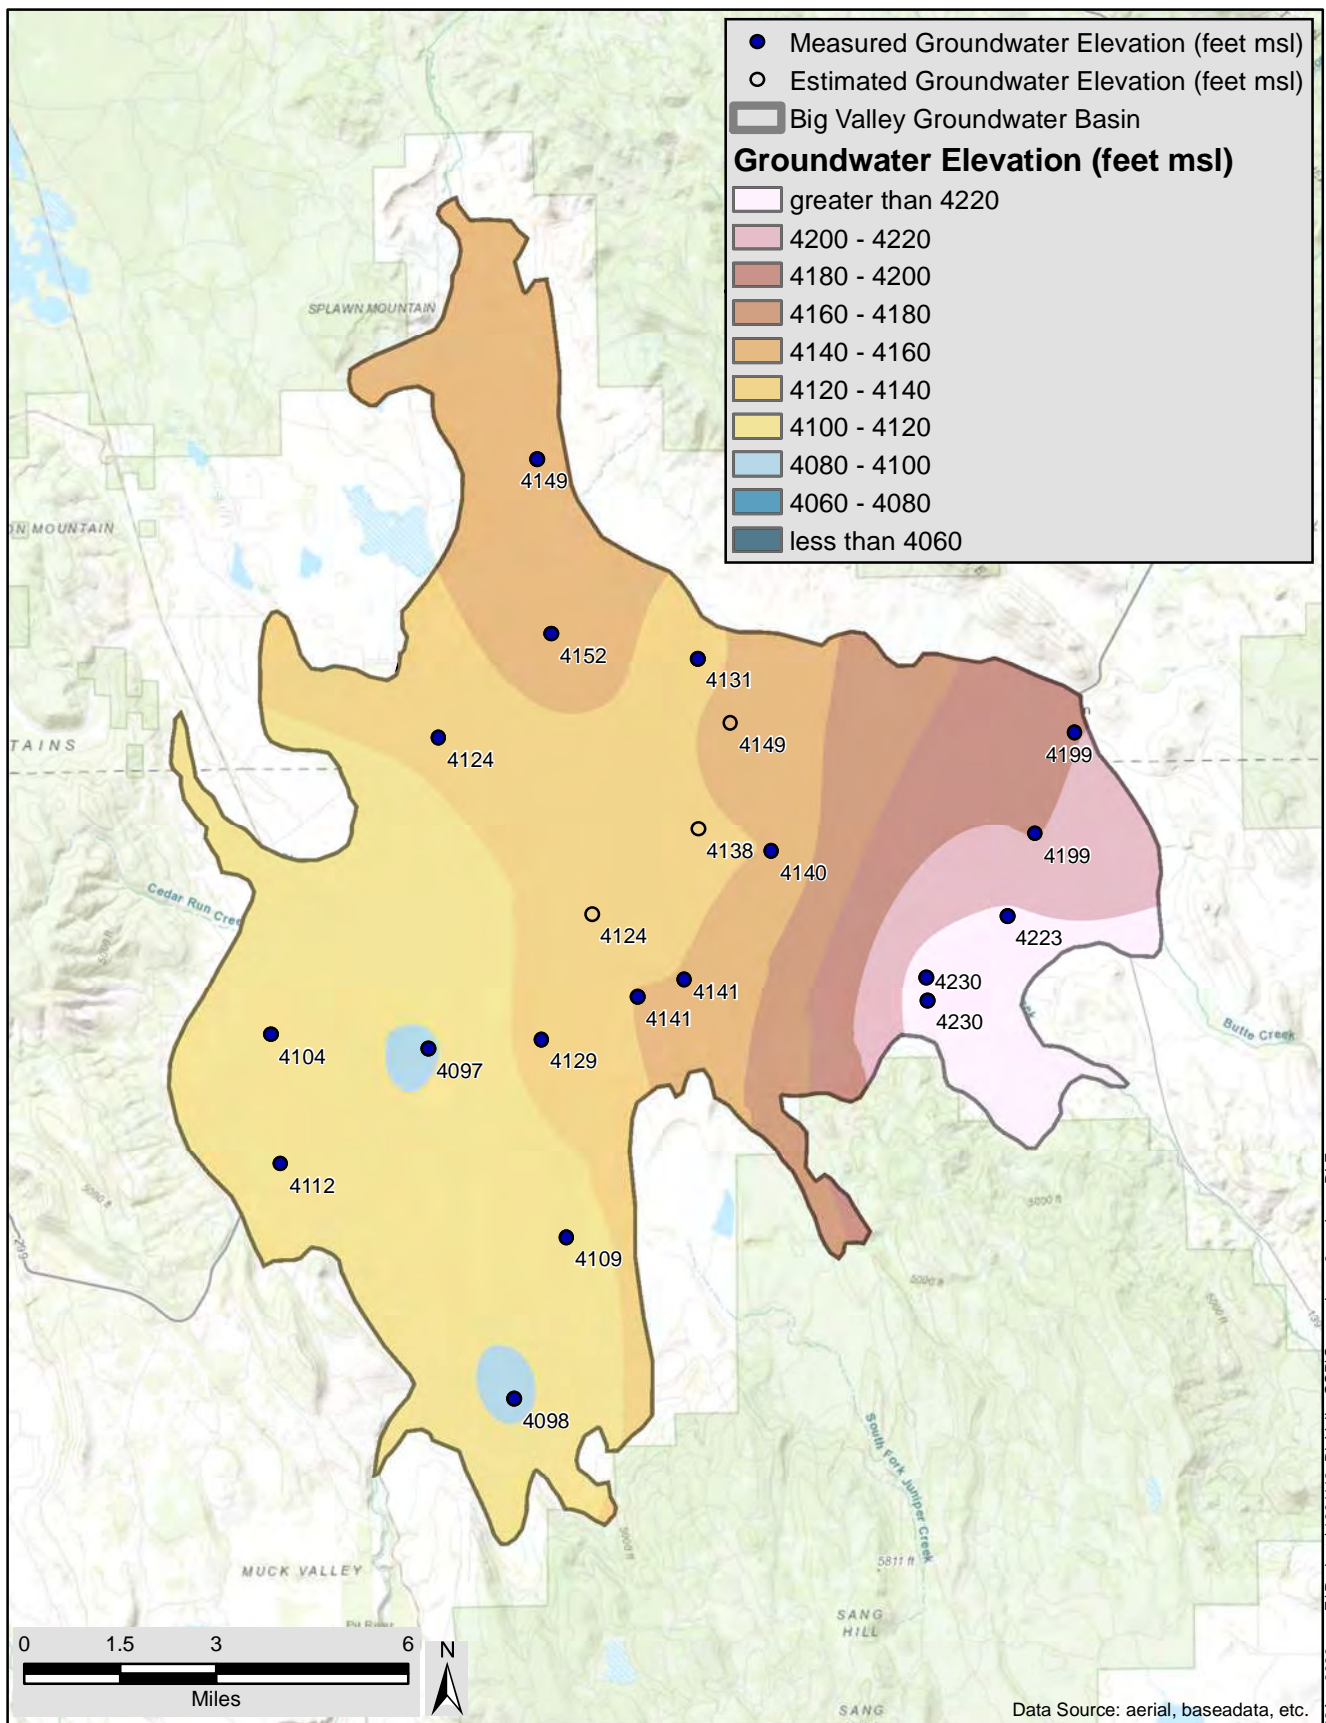


Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020

Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Spring 1991		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE





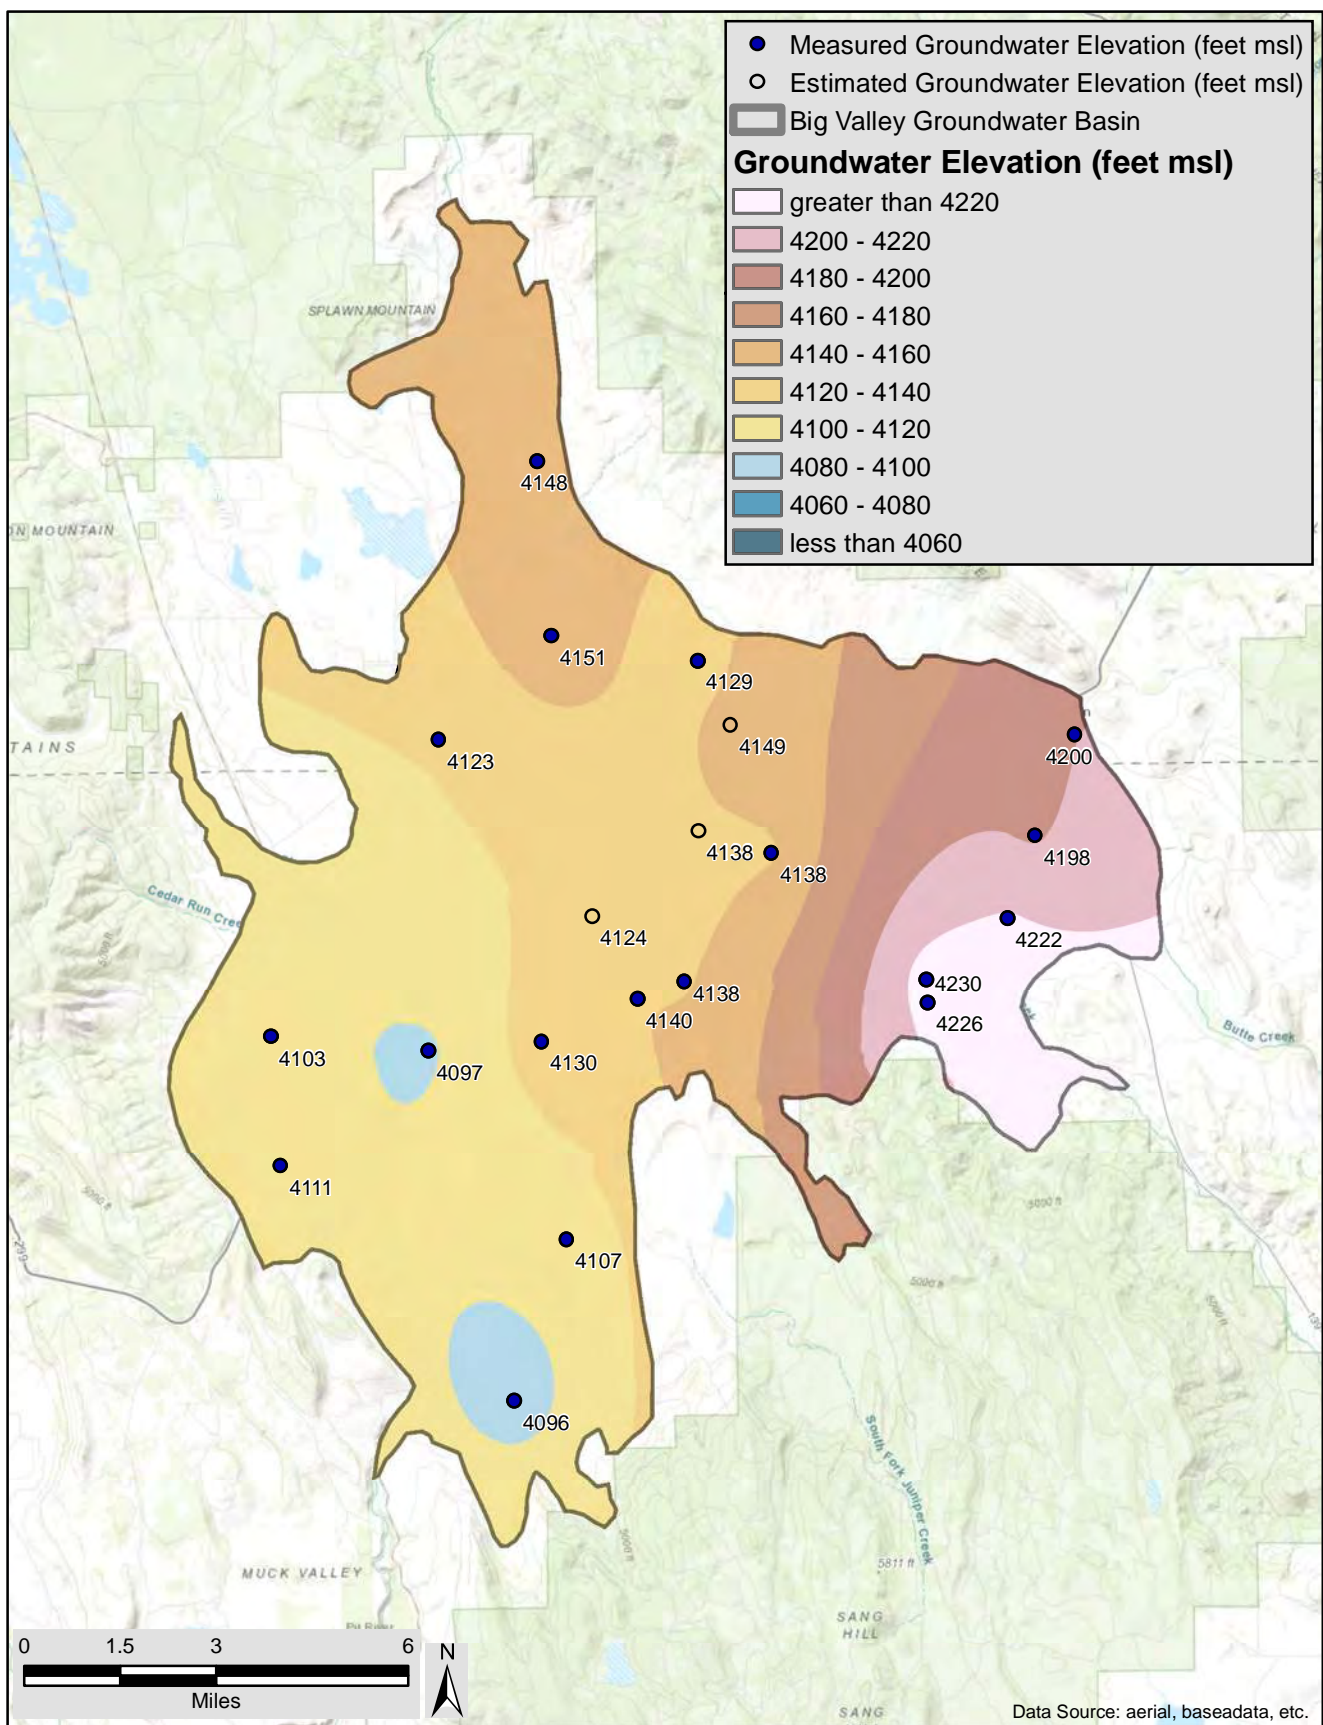

Big Valley Basin Groundwater Sustainability Plan  
Modoc and Lassen Counties, California

Big Valley Groundwater Basin GSAs



Groundwater Elevations  
Spring 1992


AUGUST 2020

**DRAFT**

FIGURE






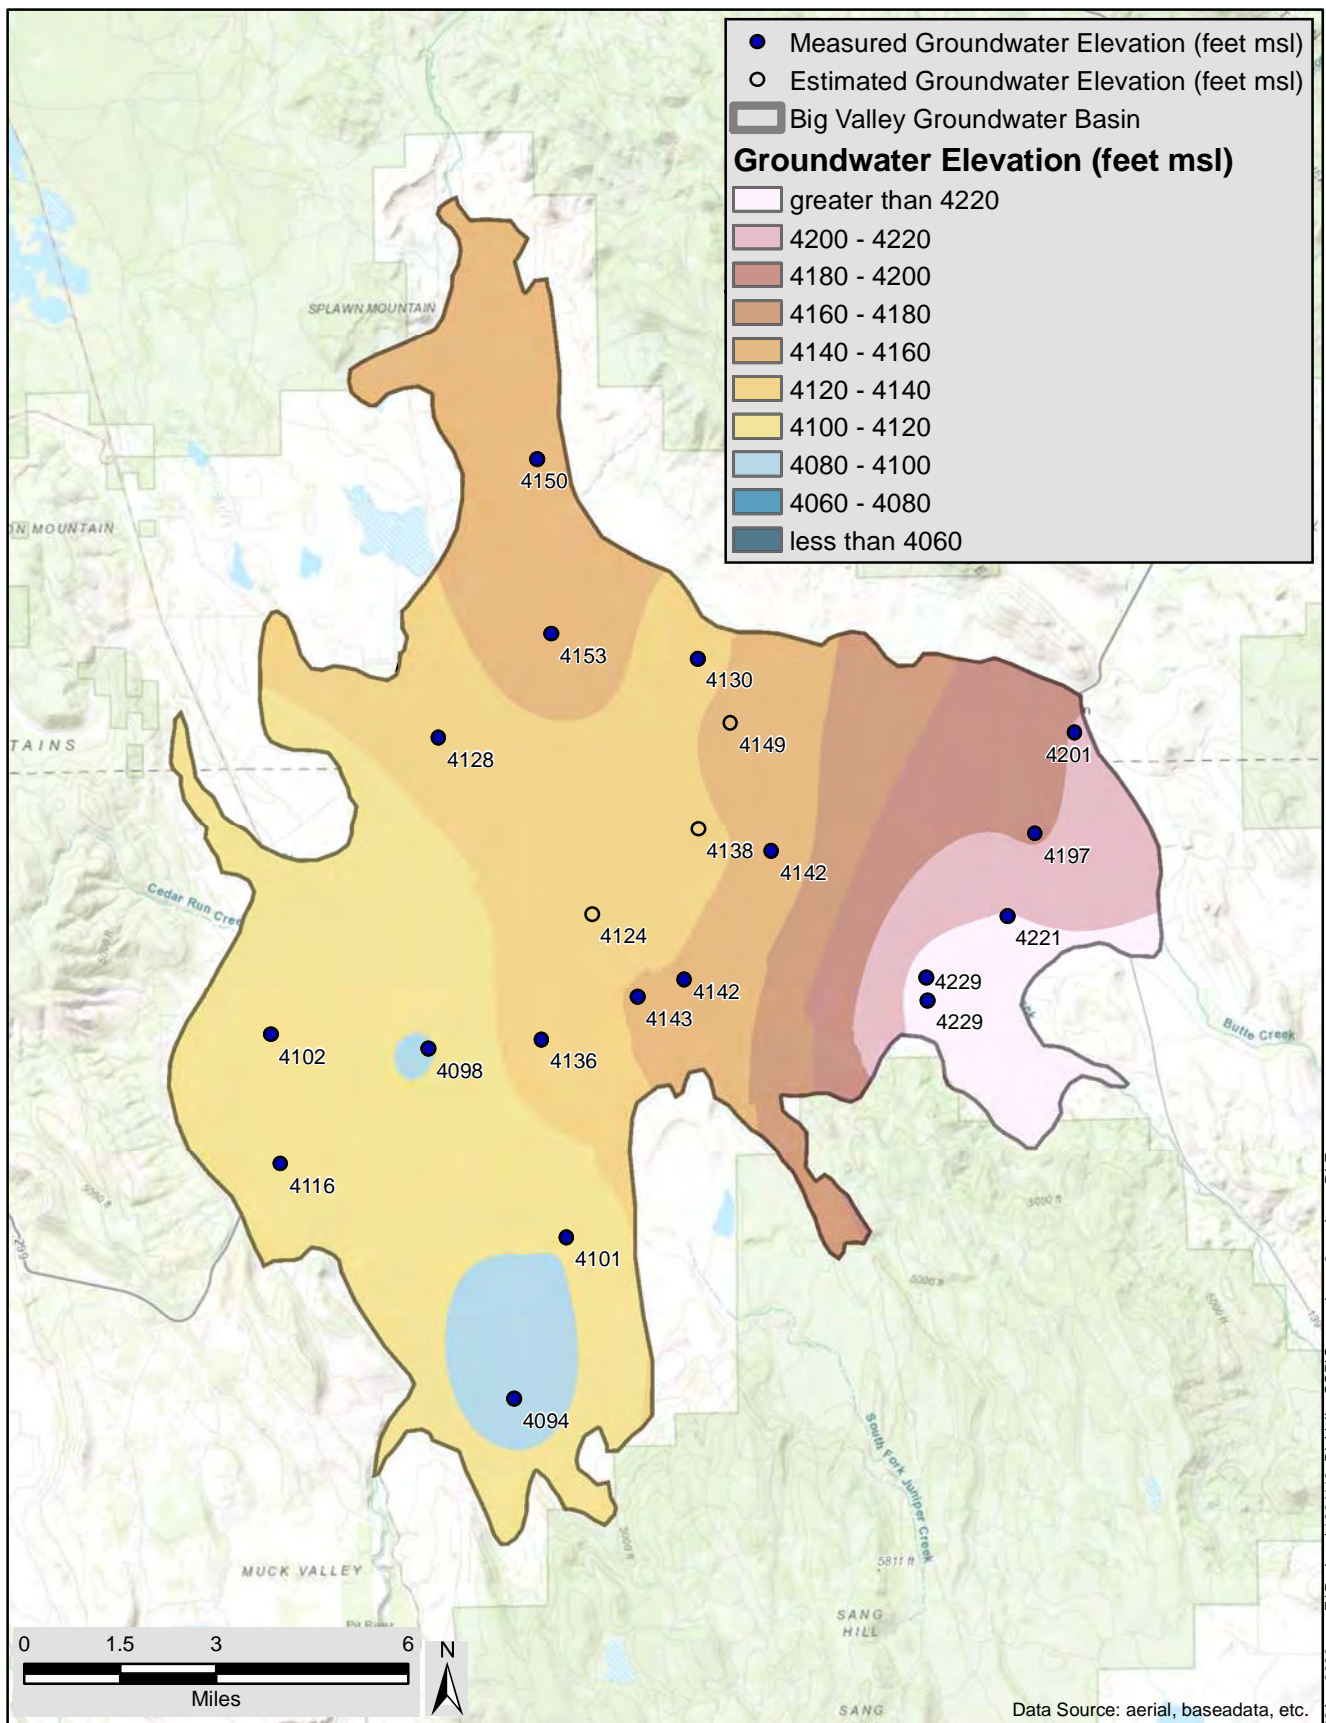

Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020


Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Spring 1993	
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT

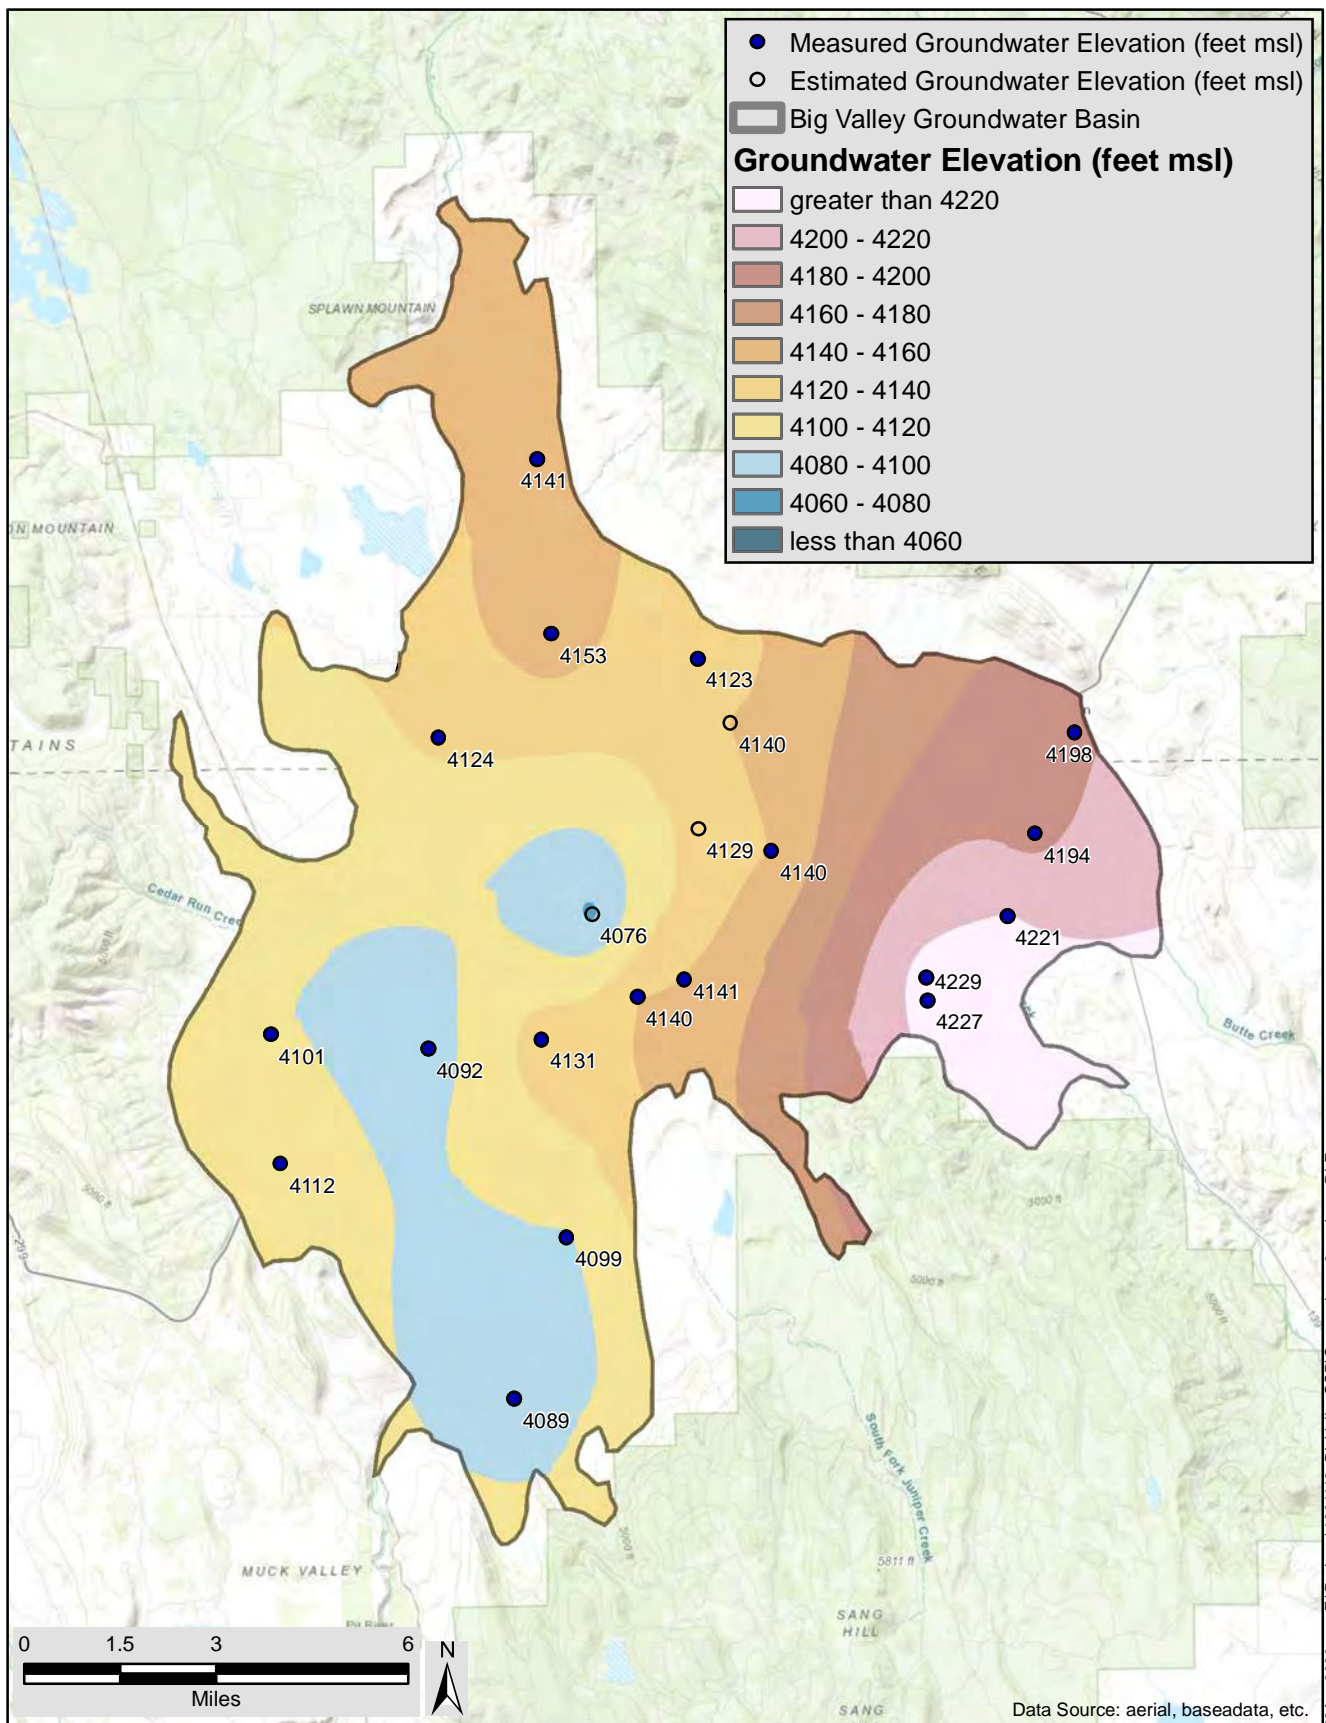

Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020

Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Fall 1993		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE



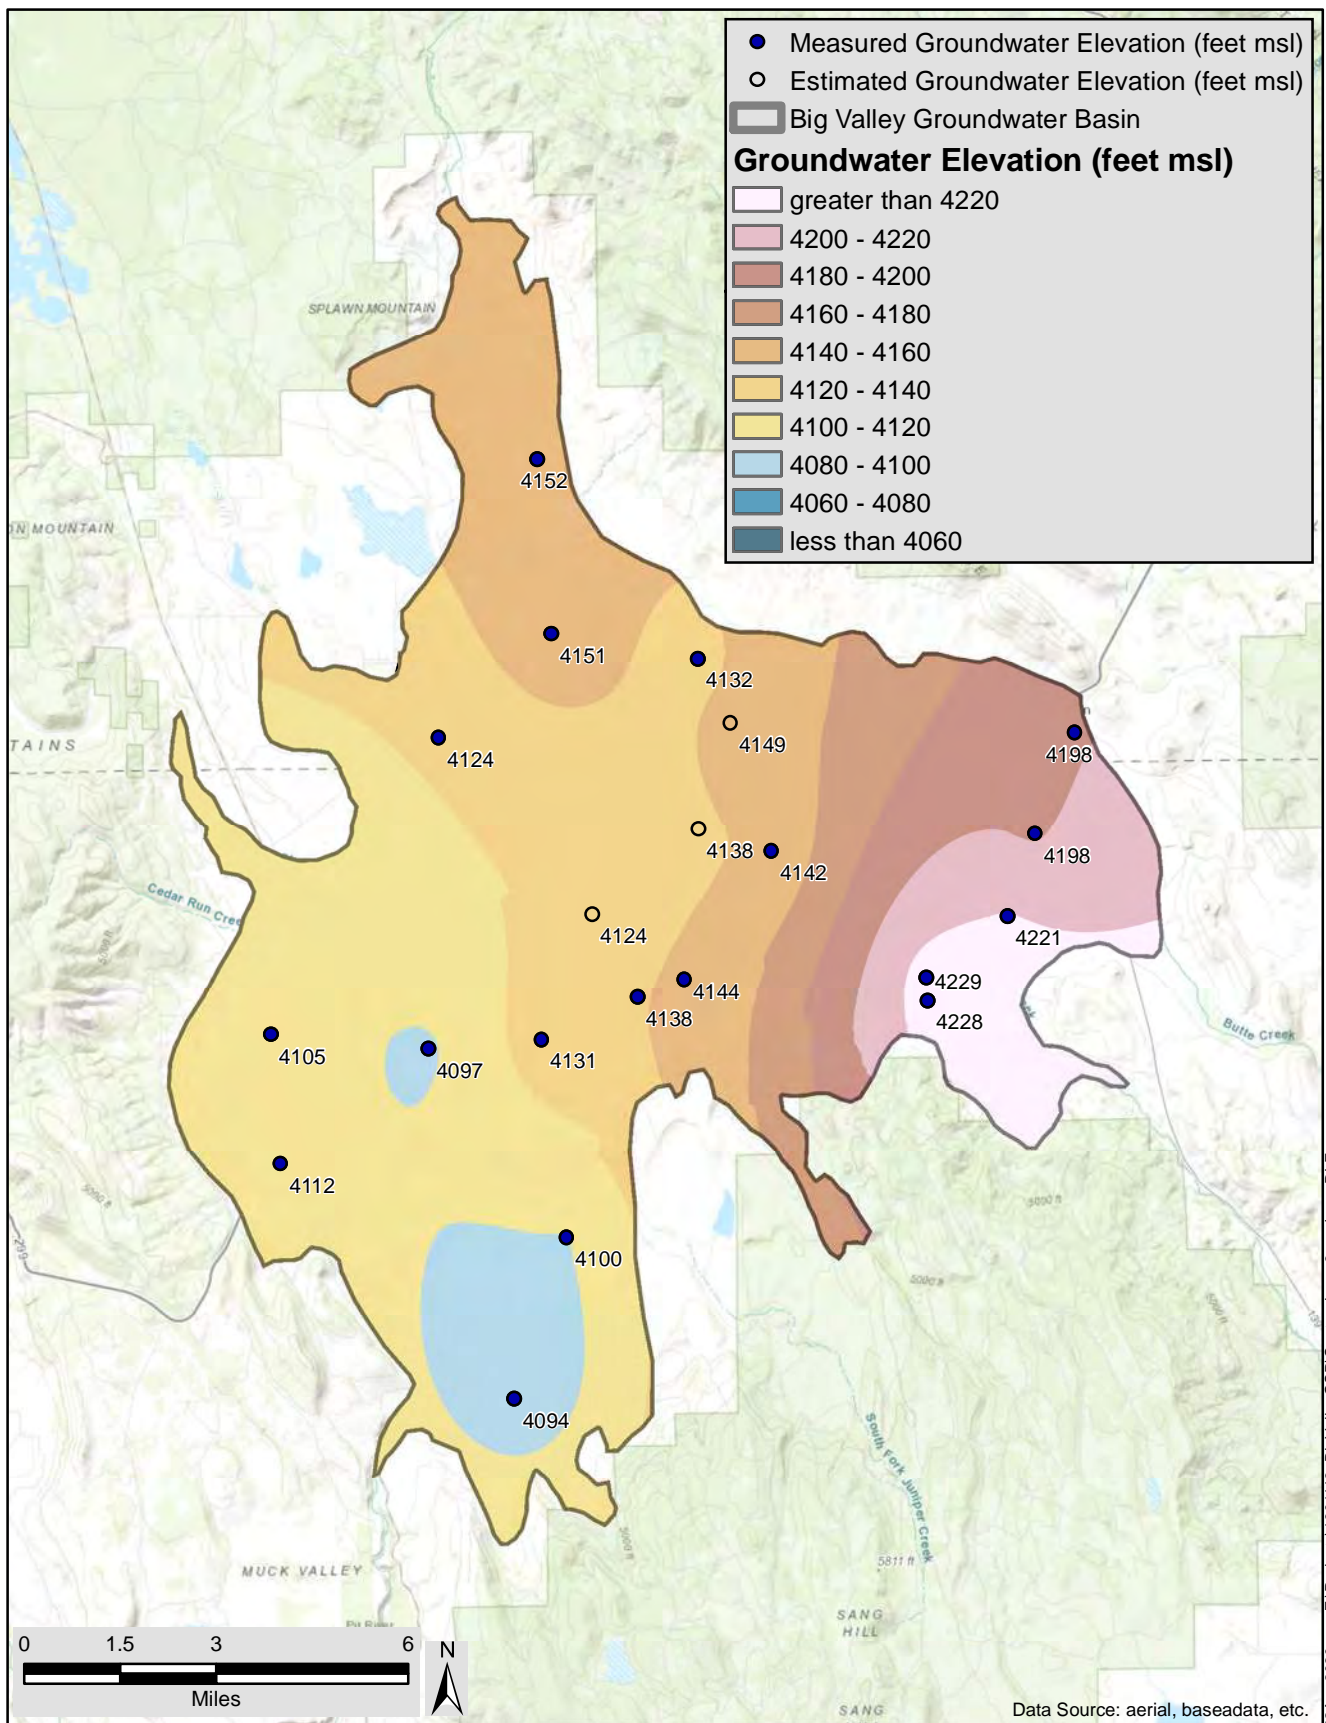


Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020

Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Spring 1994		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE






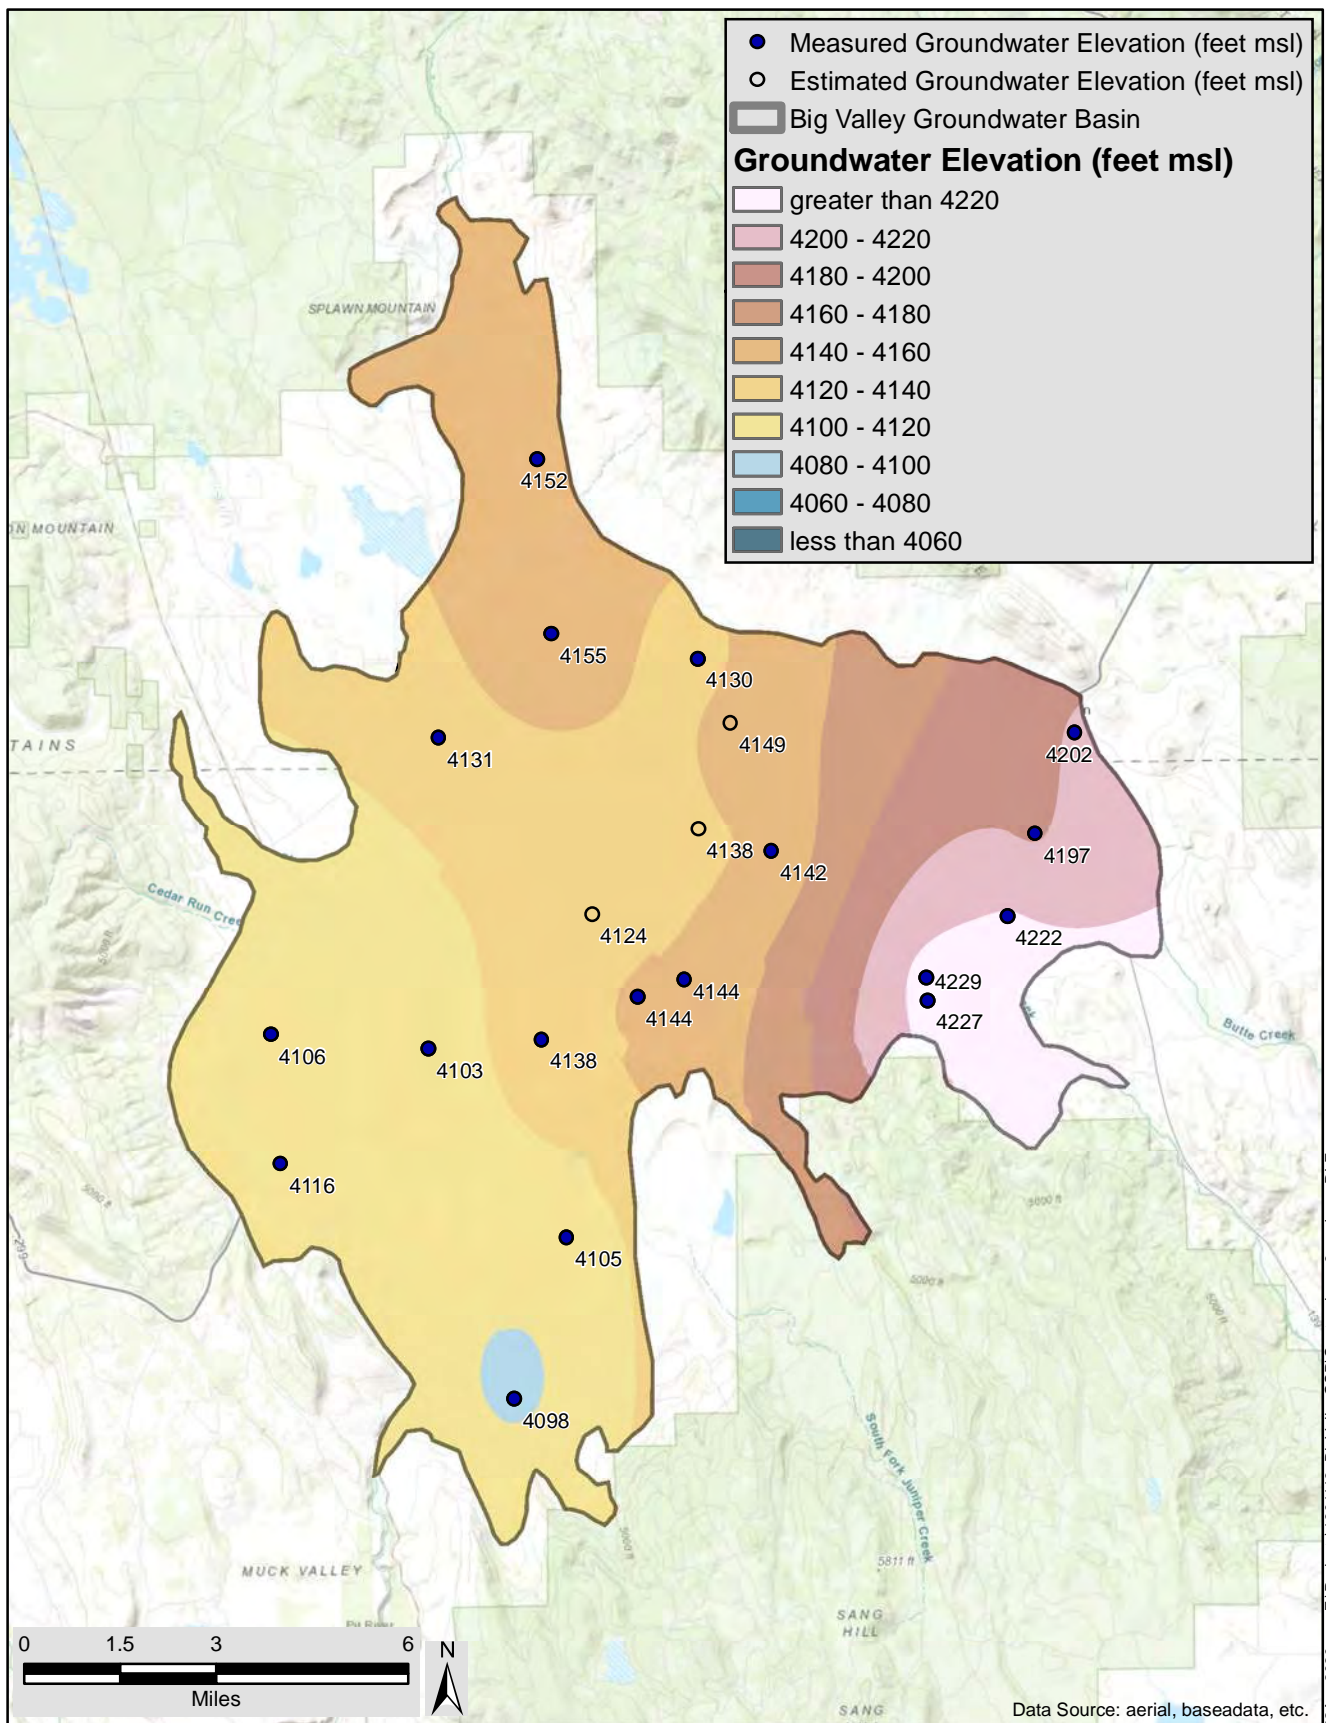

Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020


Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Spring 1995		
Big Valley Groundwater Basin GSAs		AUGUST 2020	<b>DRAFT</b>	FIGURE

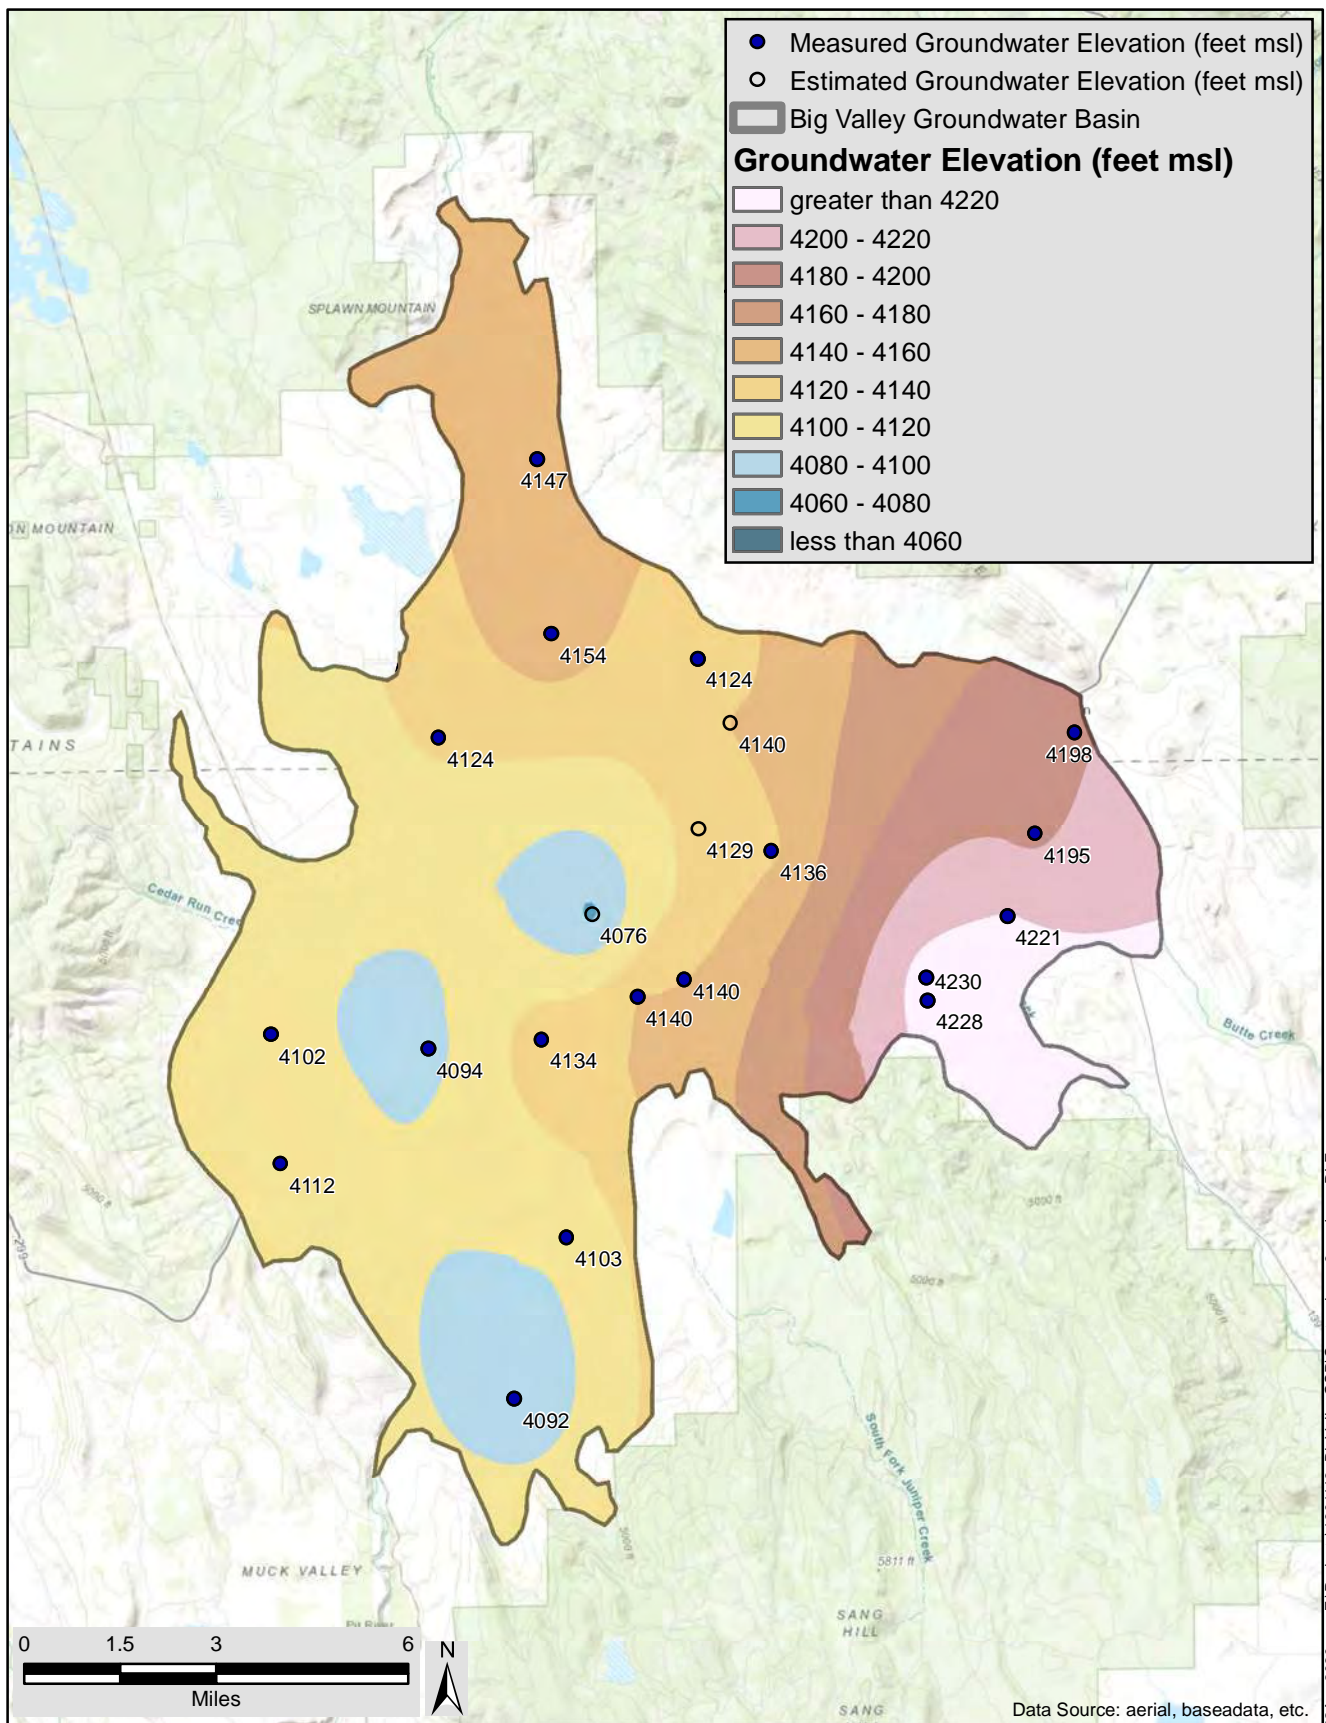

Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020


Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Fall 1995		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE



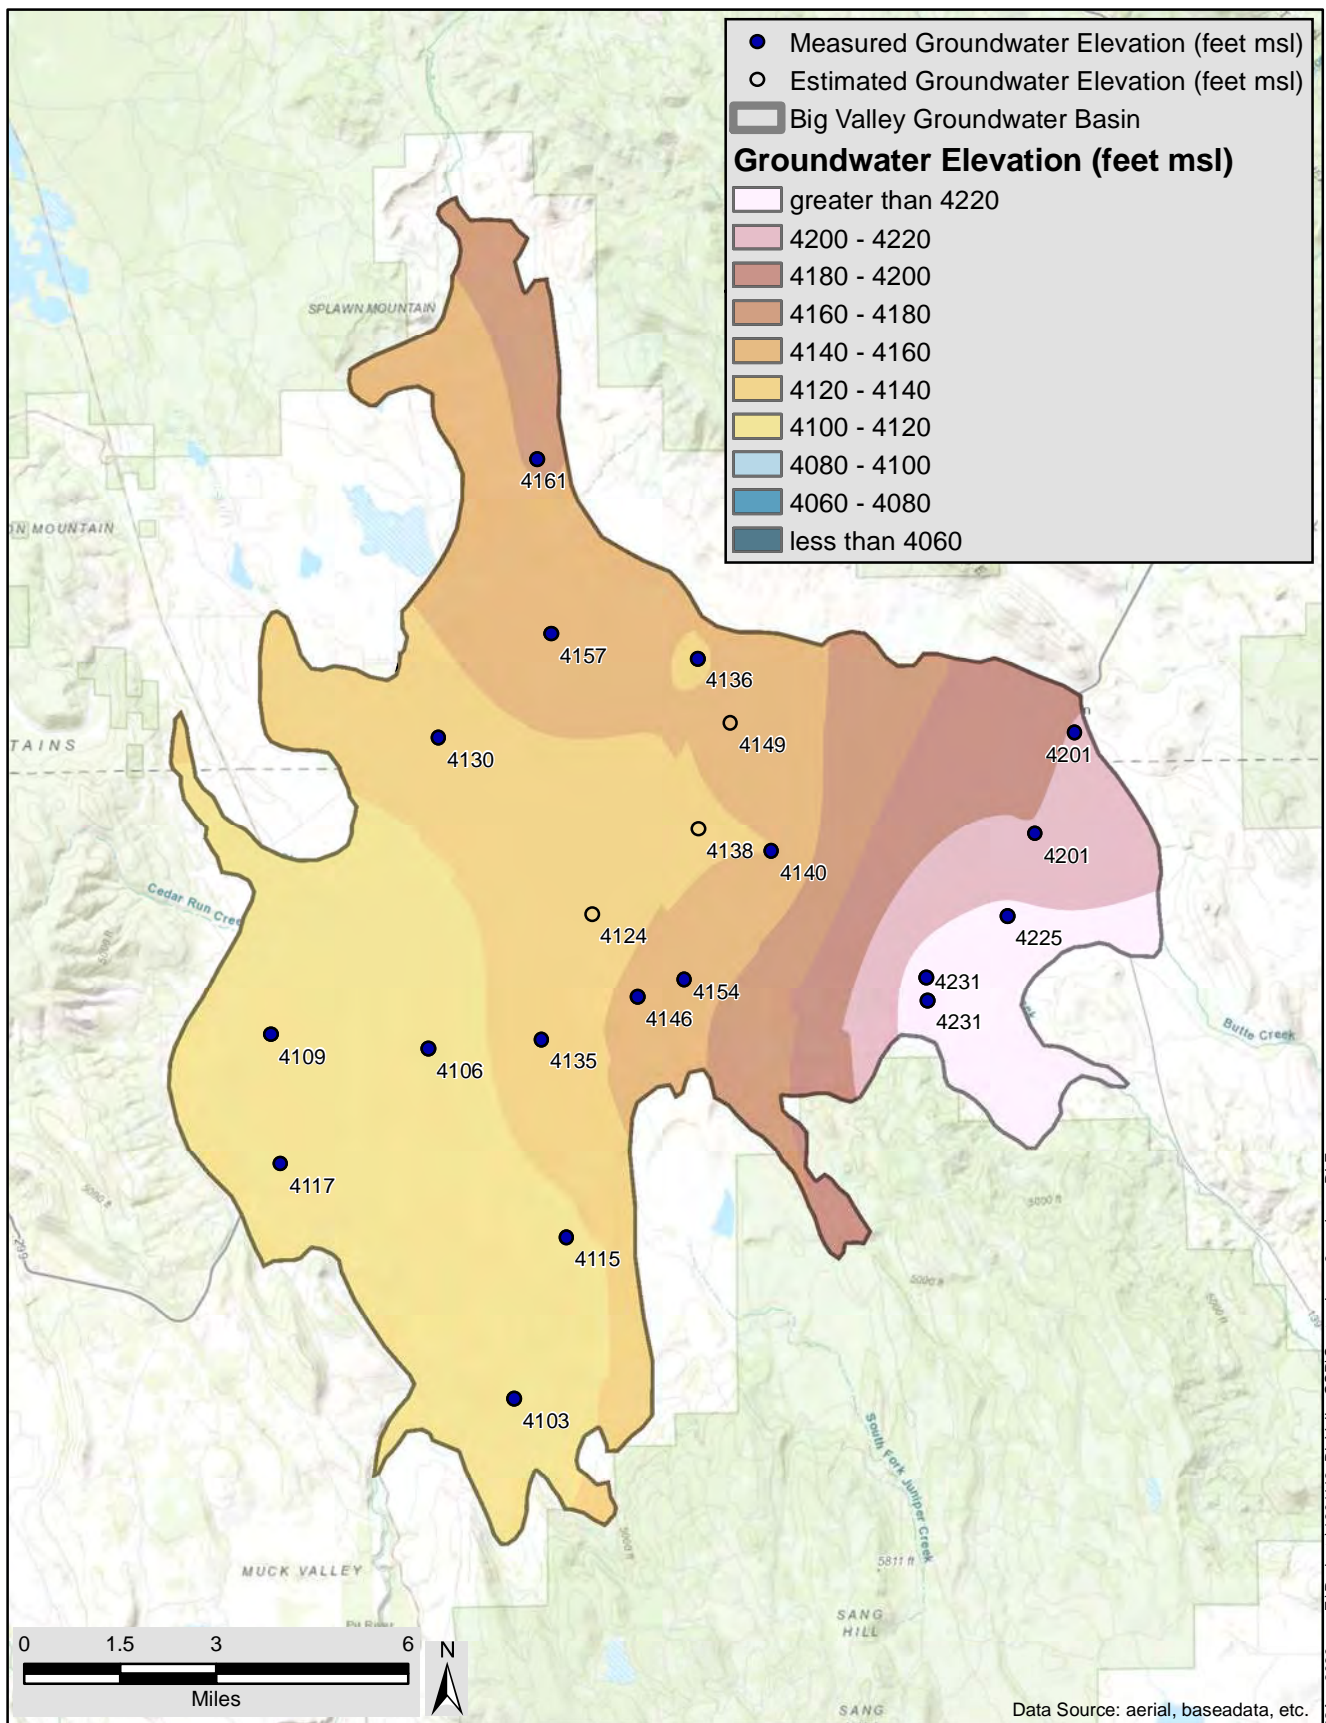

Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020


Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Spring 1996		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE

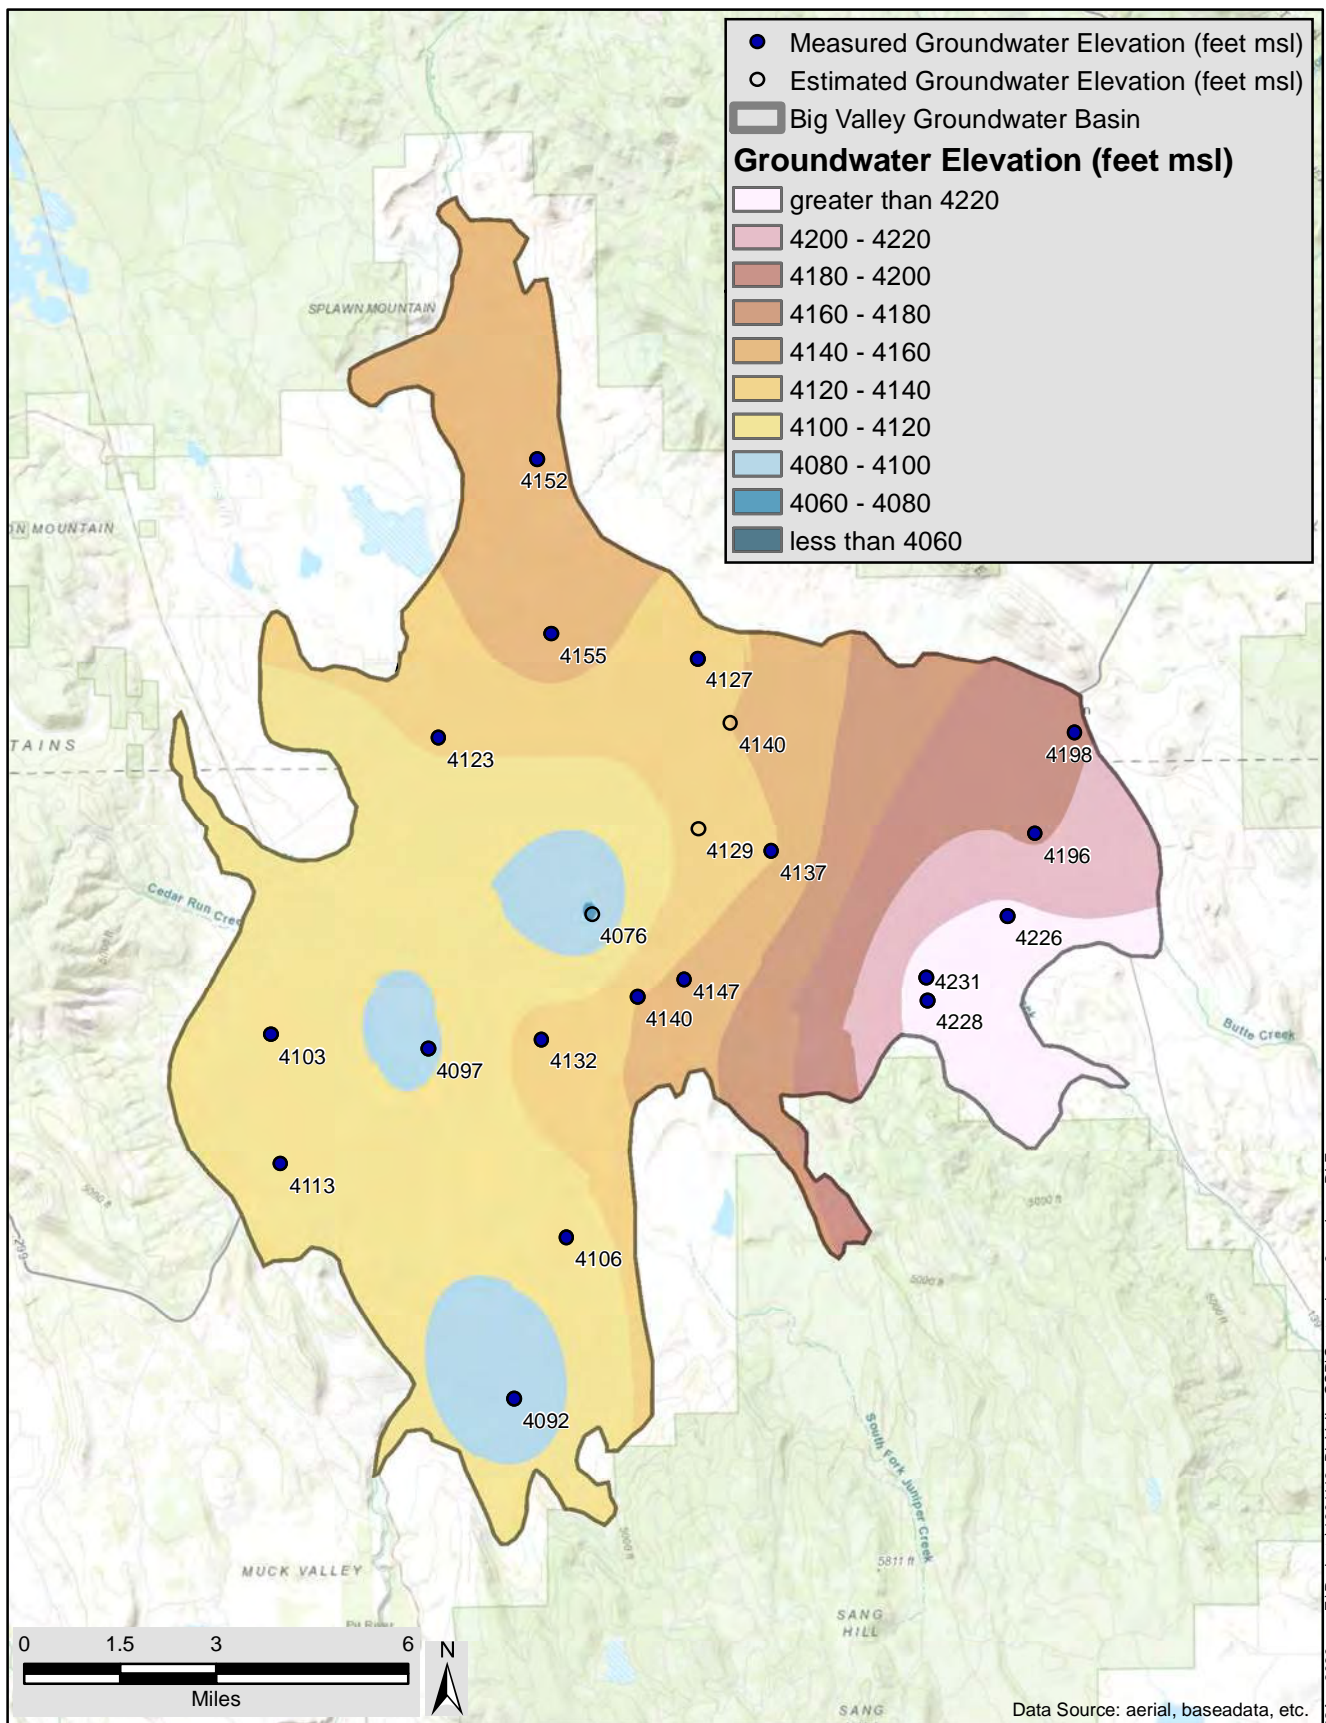

Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020


Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Fall 1996		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE



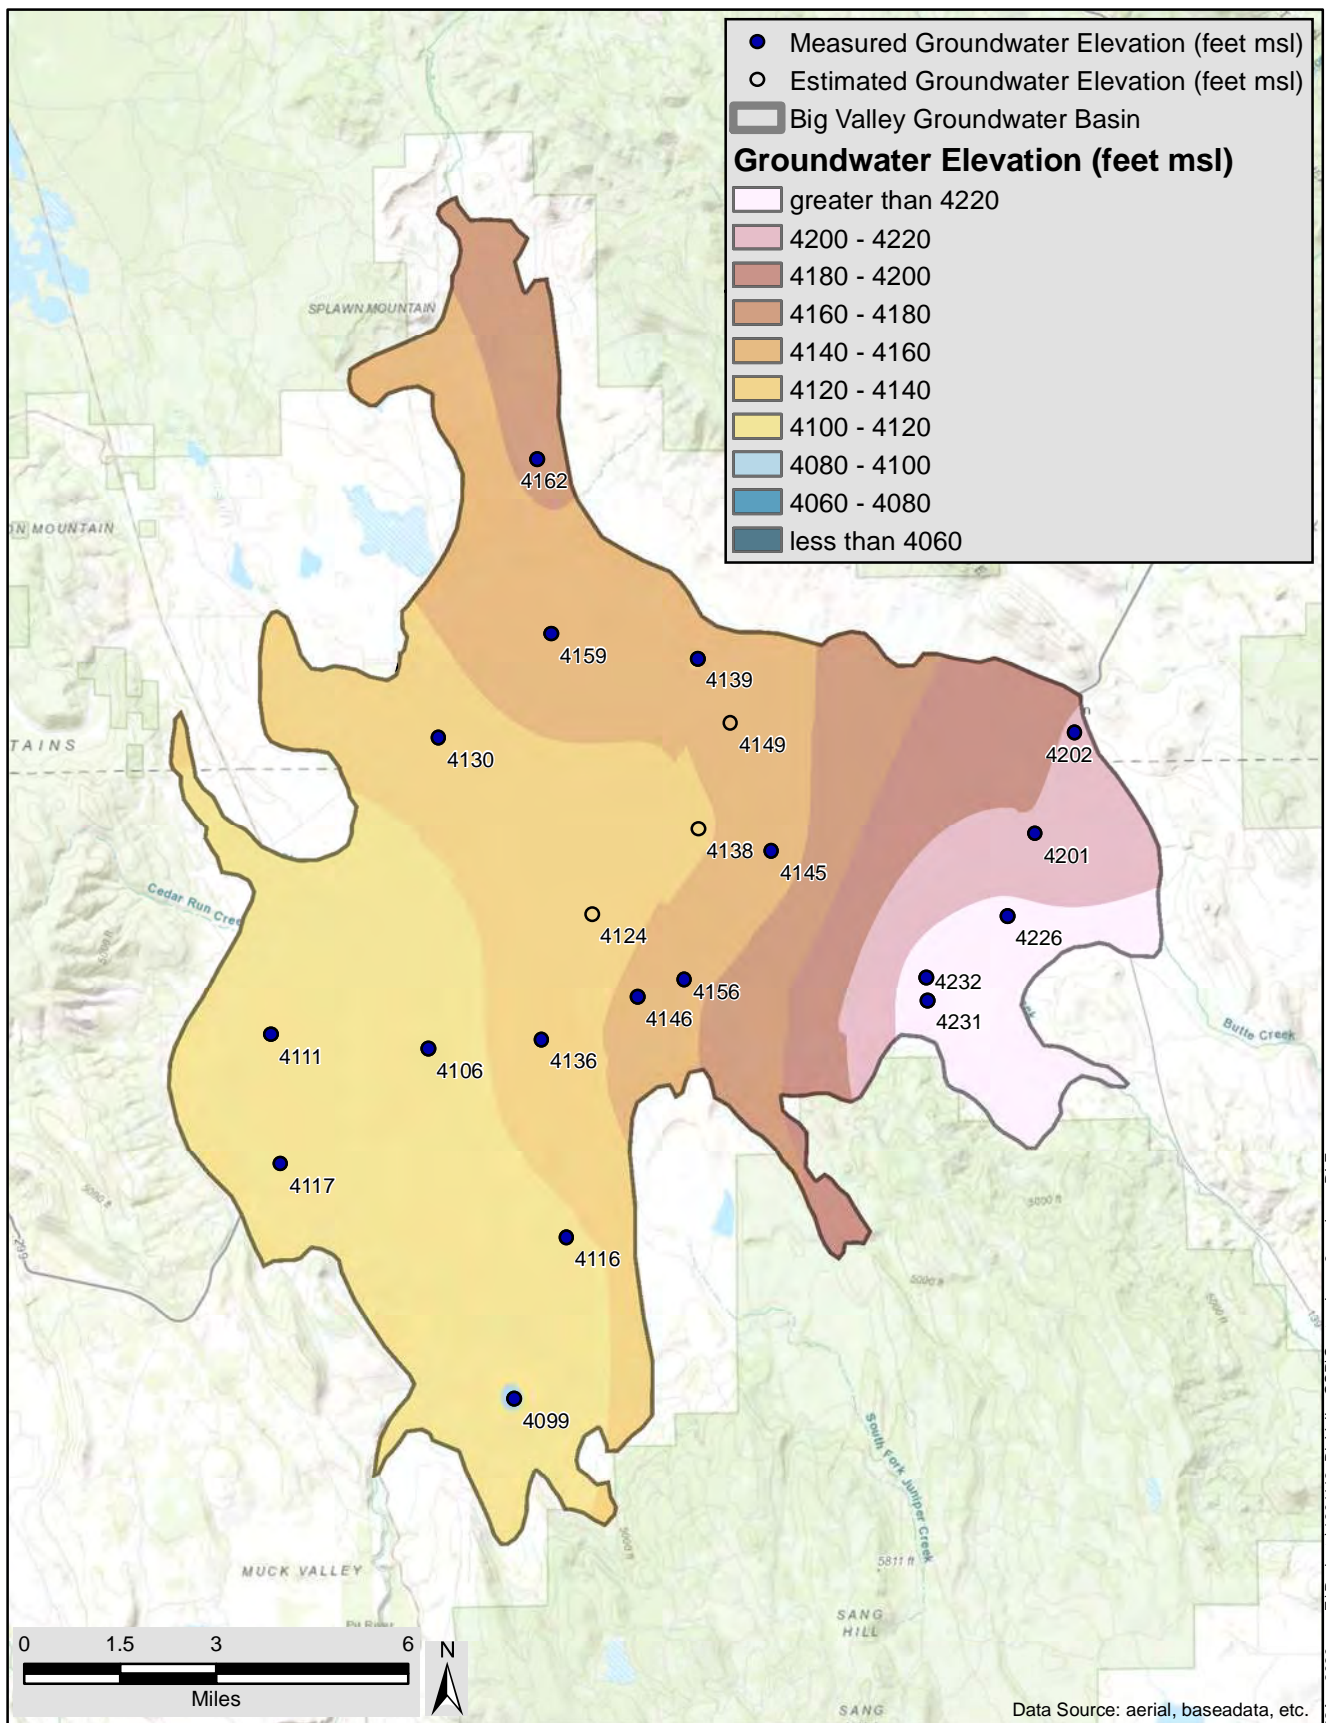

Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020


Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Spring 1997		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE

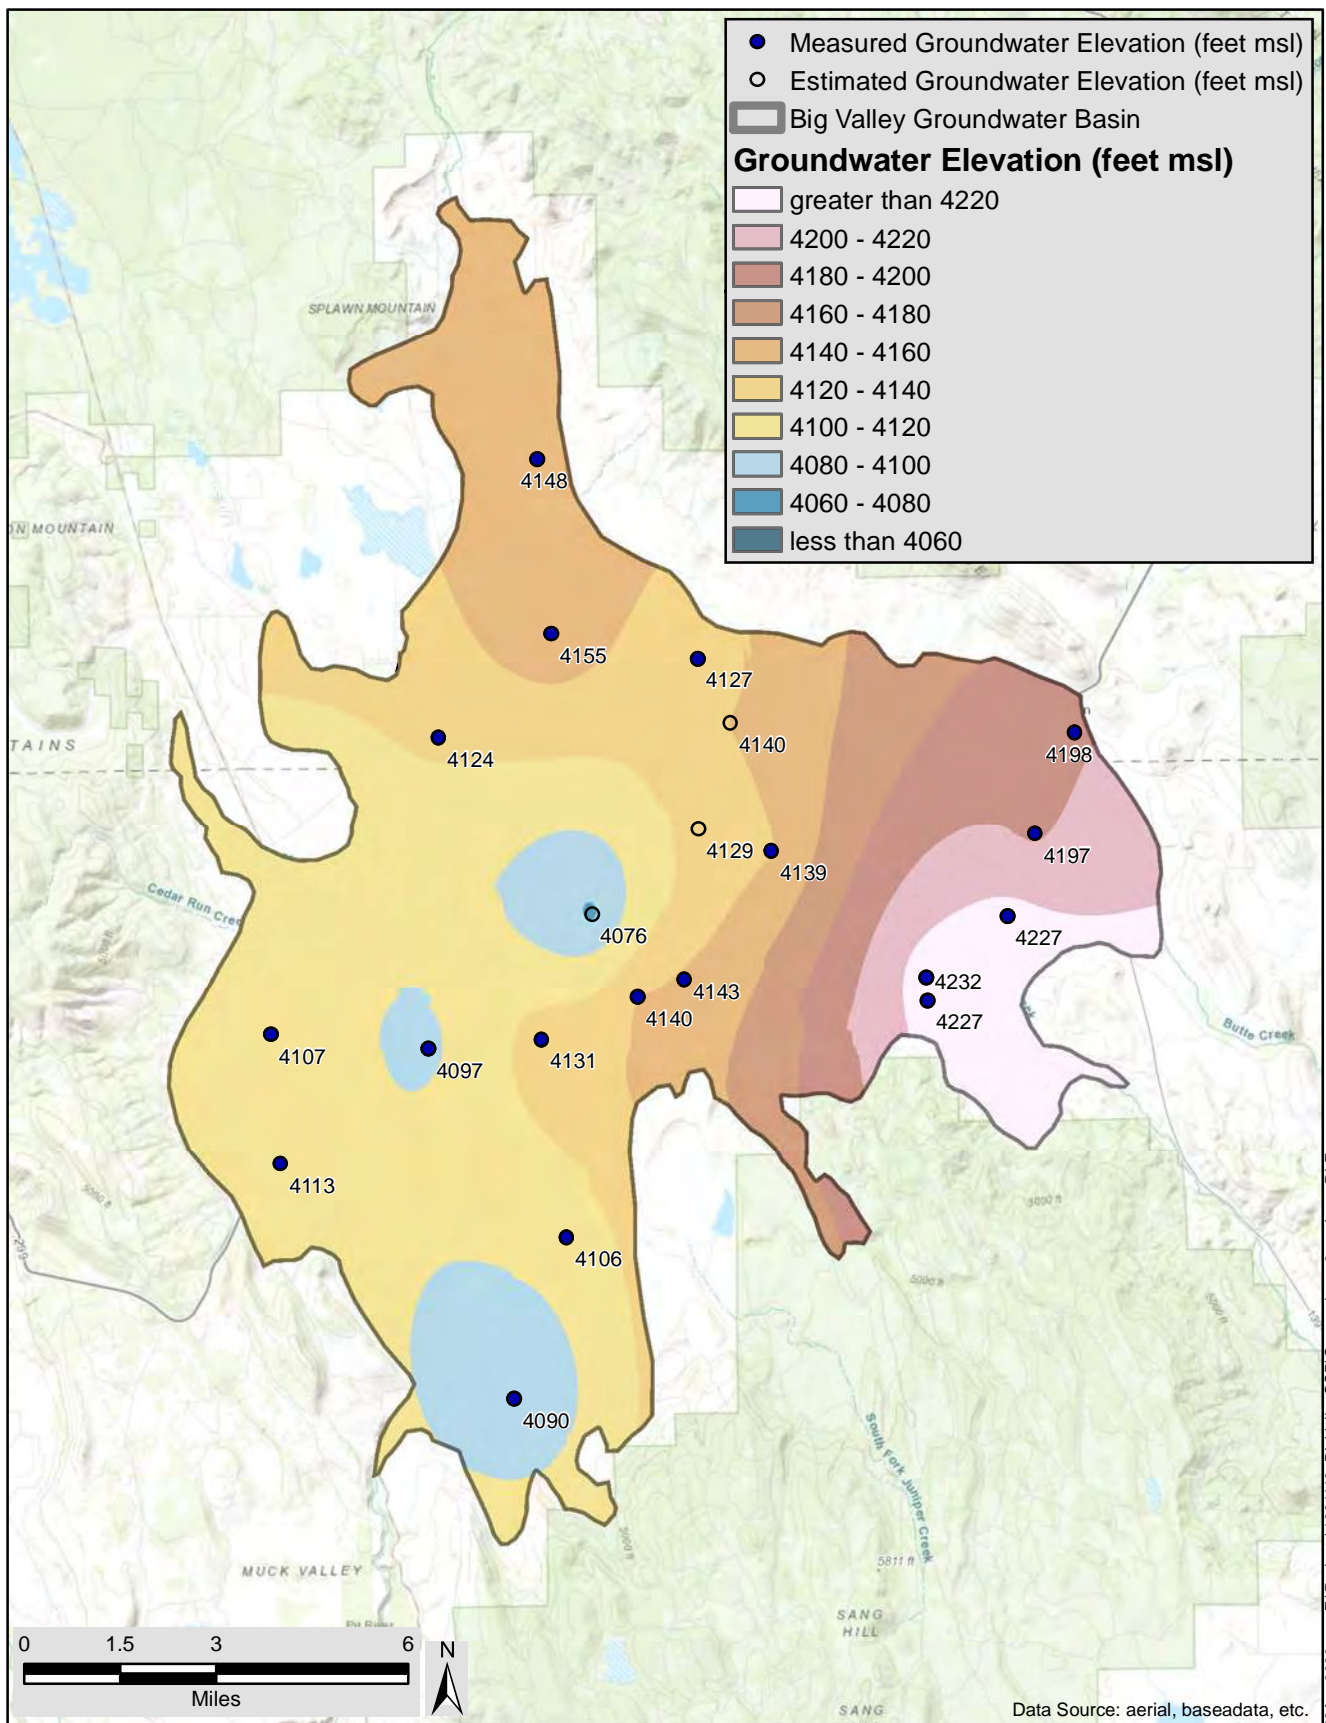

Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020

Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Fall 1997		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE



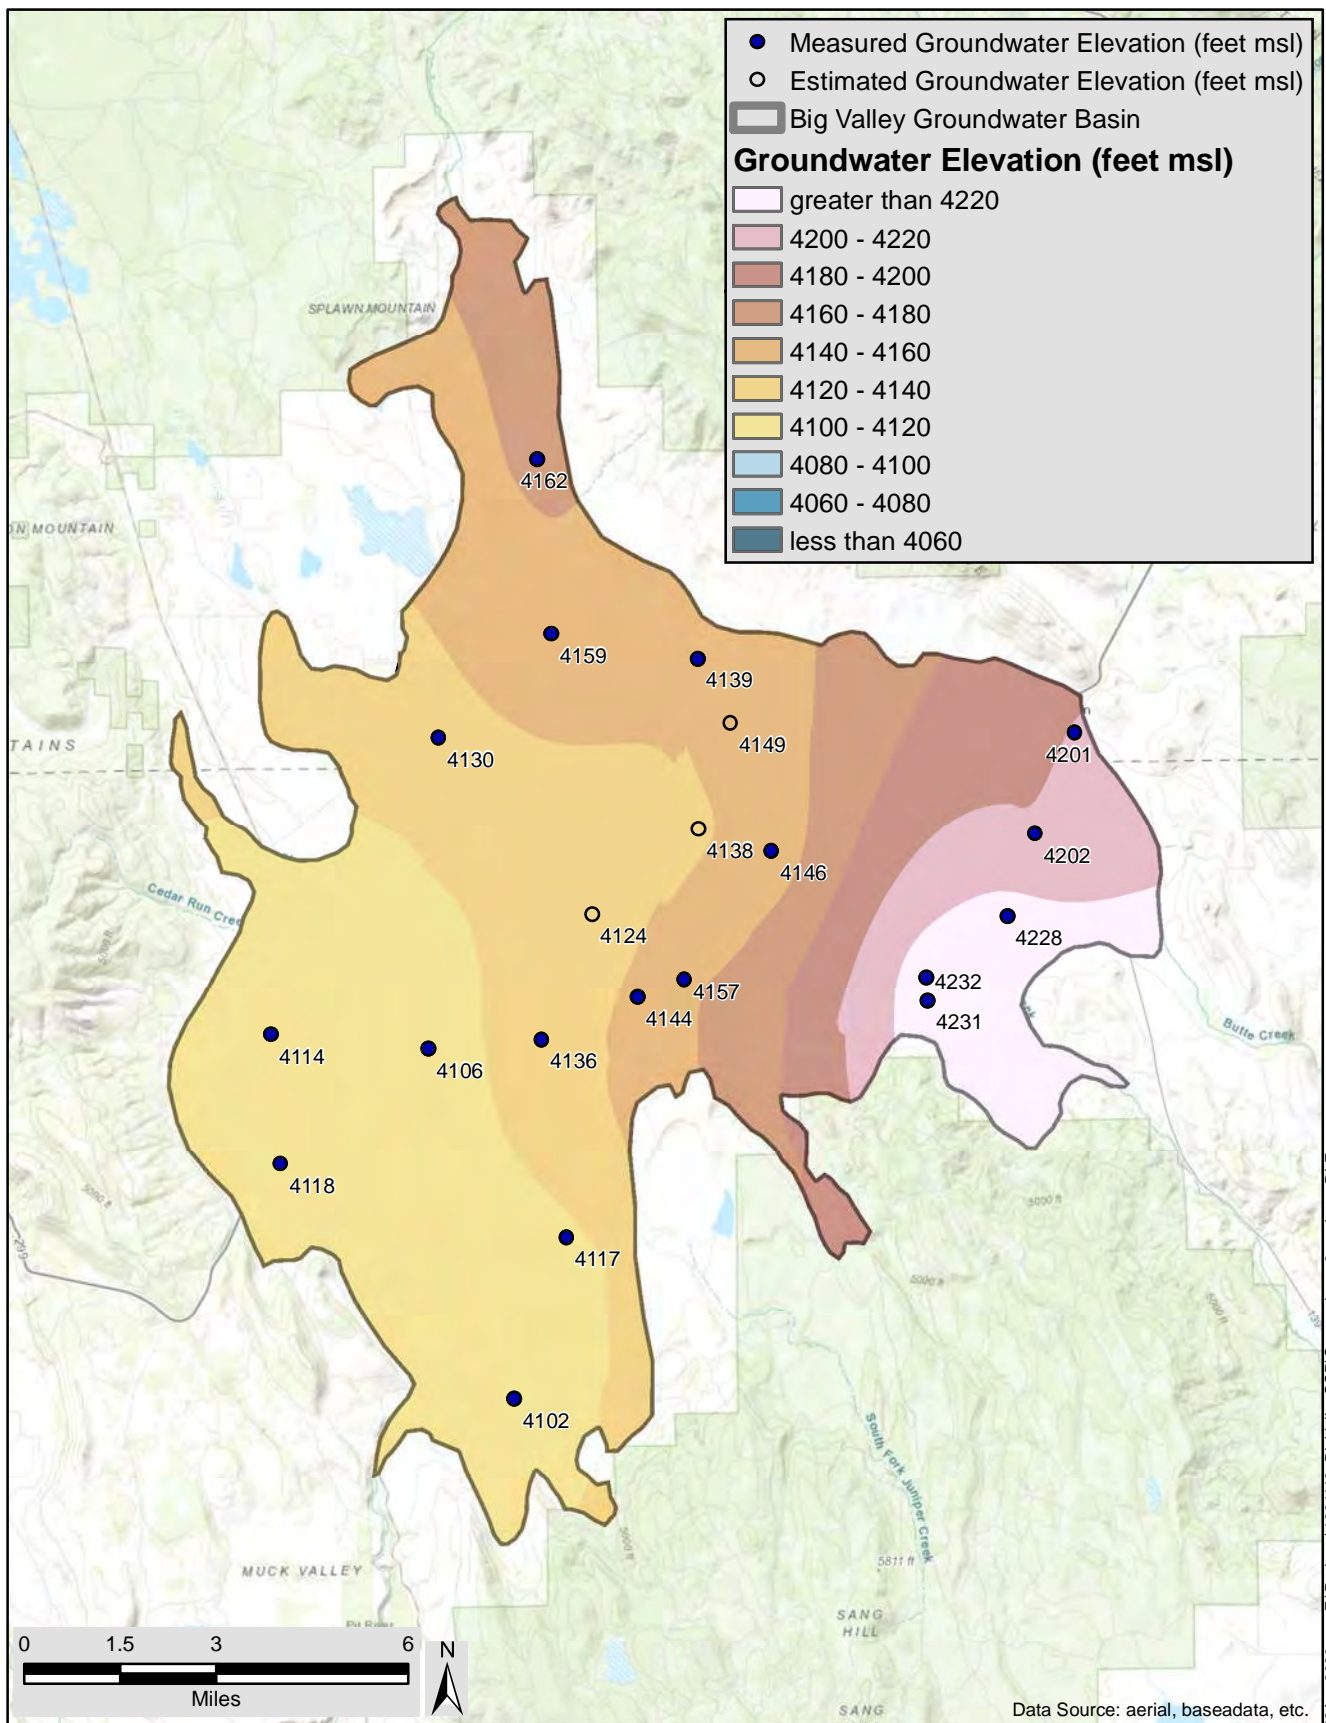


Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020

Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Spring 1998		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE






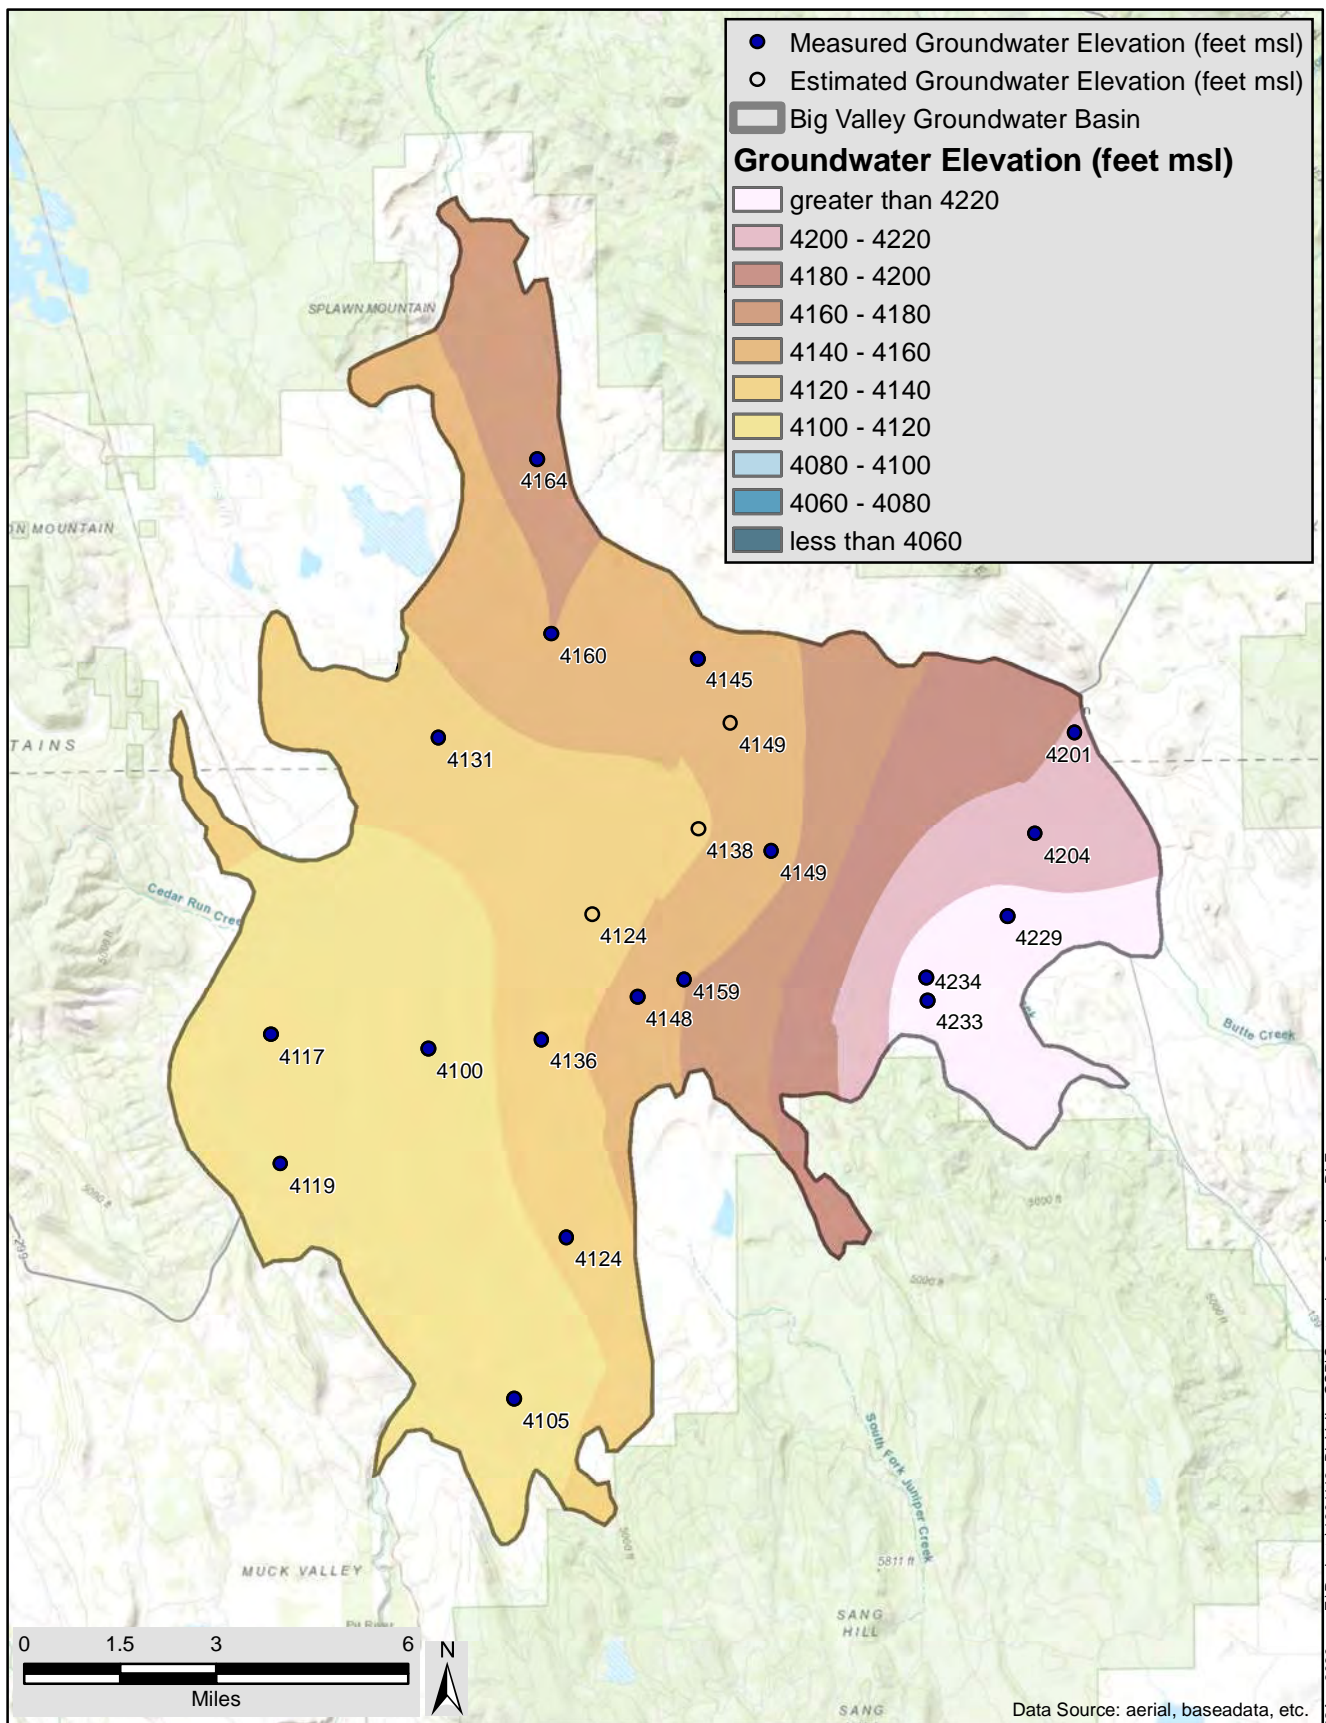


Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020

Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Spring 1999		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE

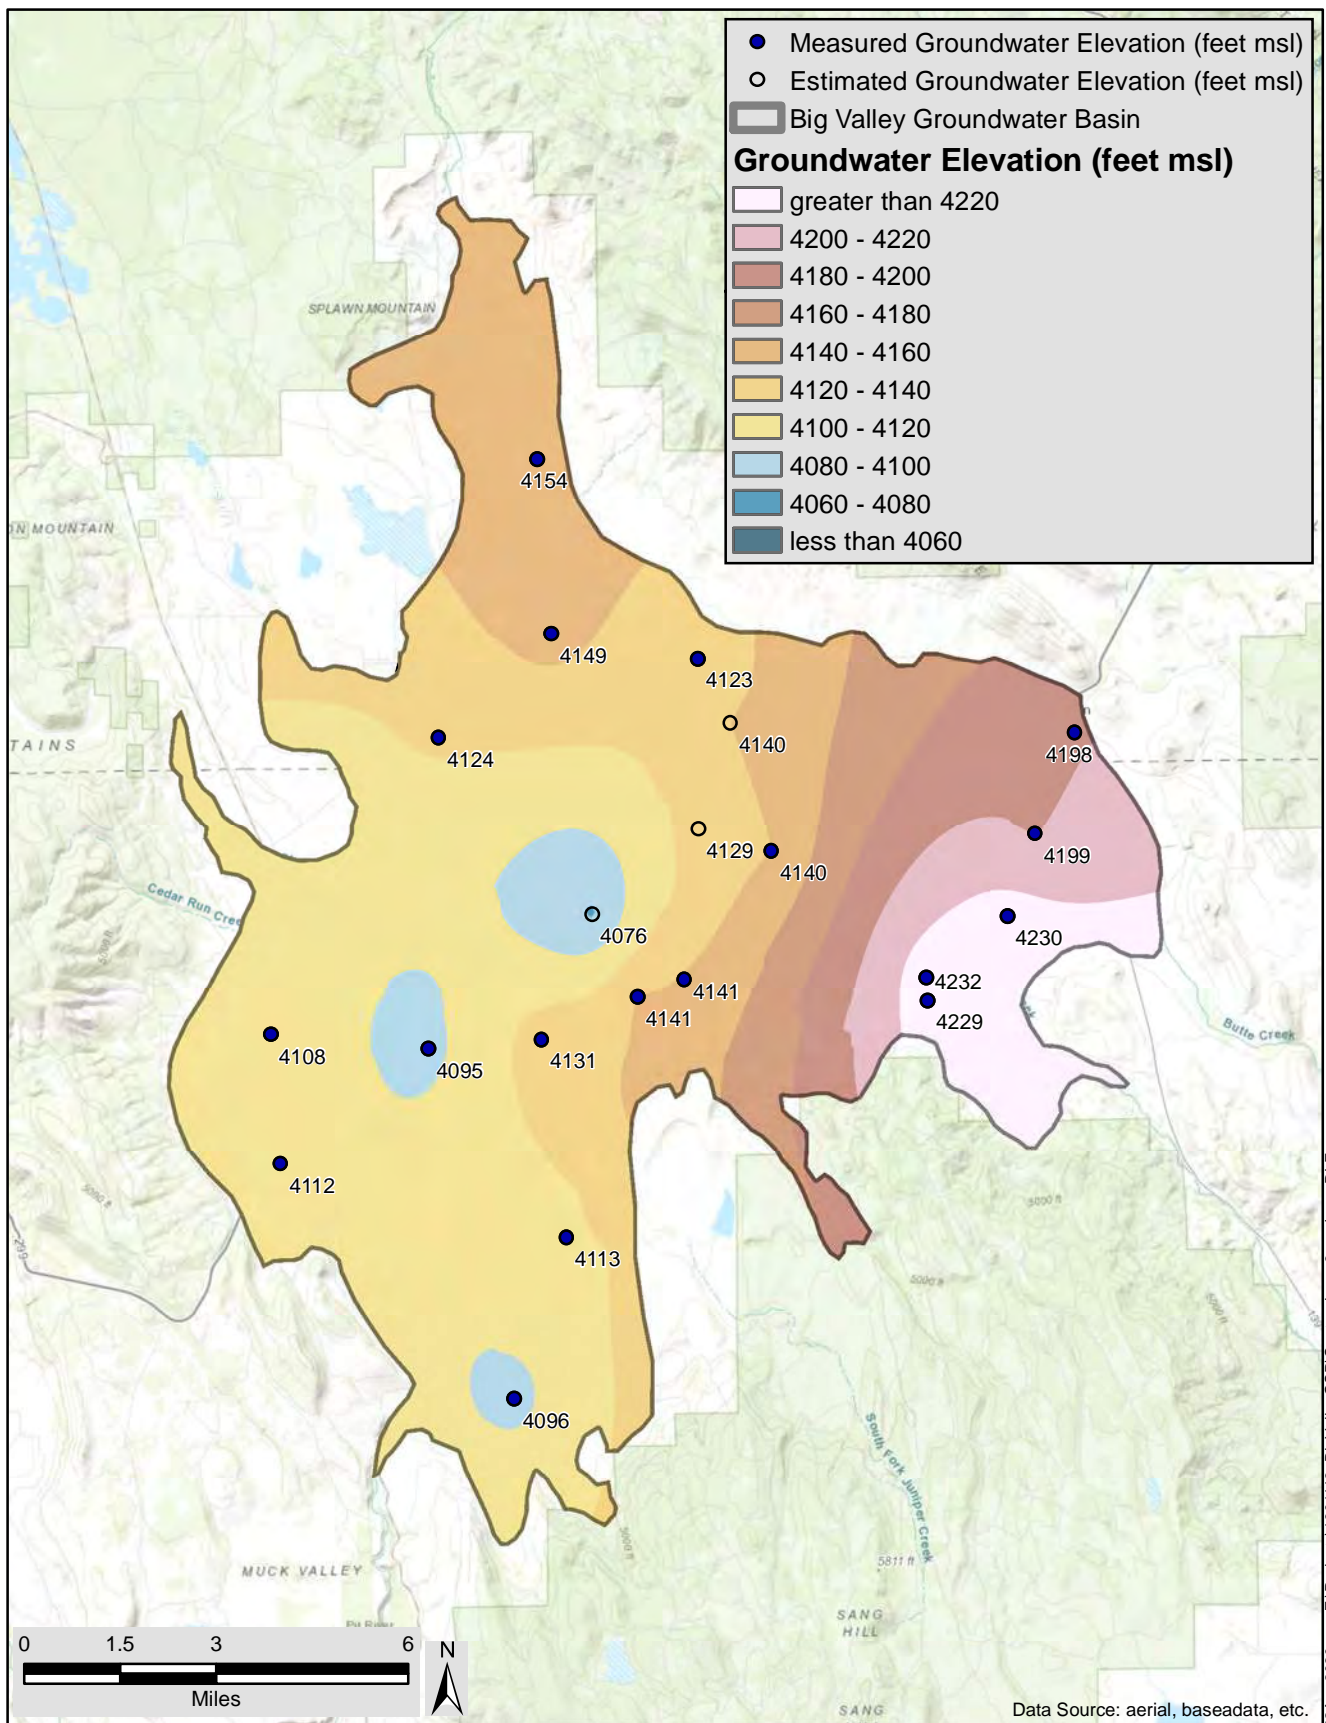


Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Fall 1999		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE



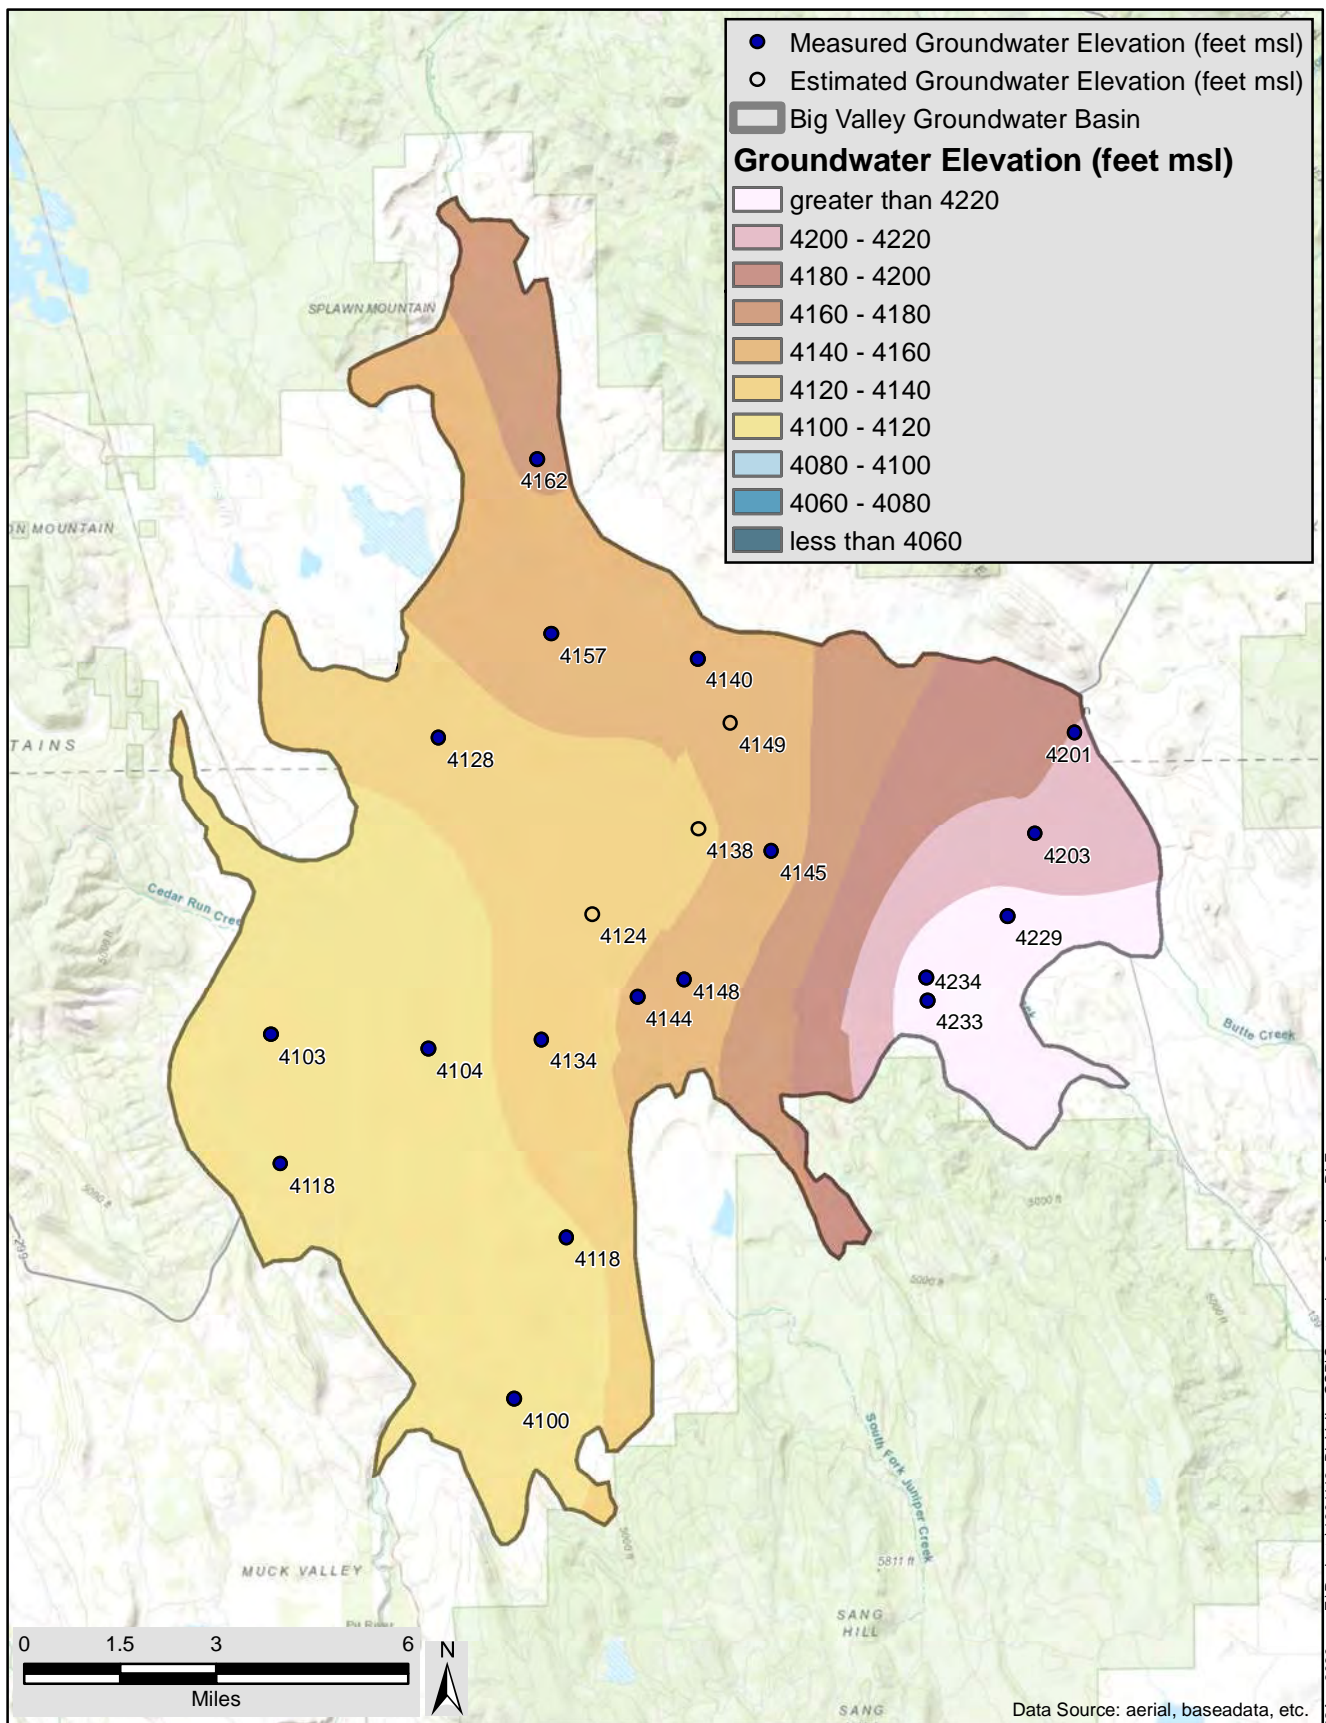

Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020


Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Spring 2000		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE

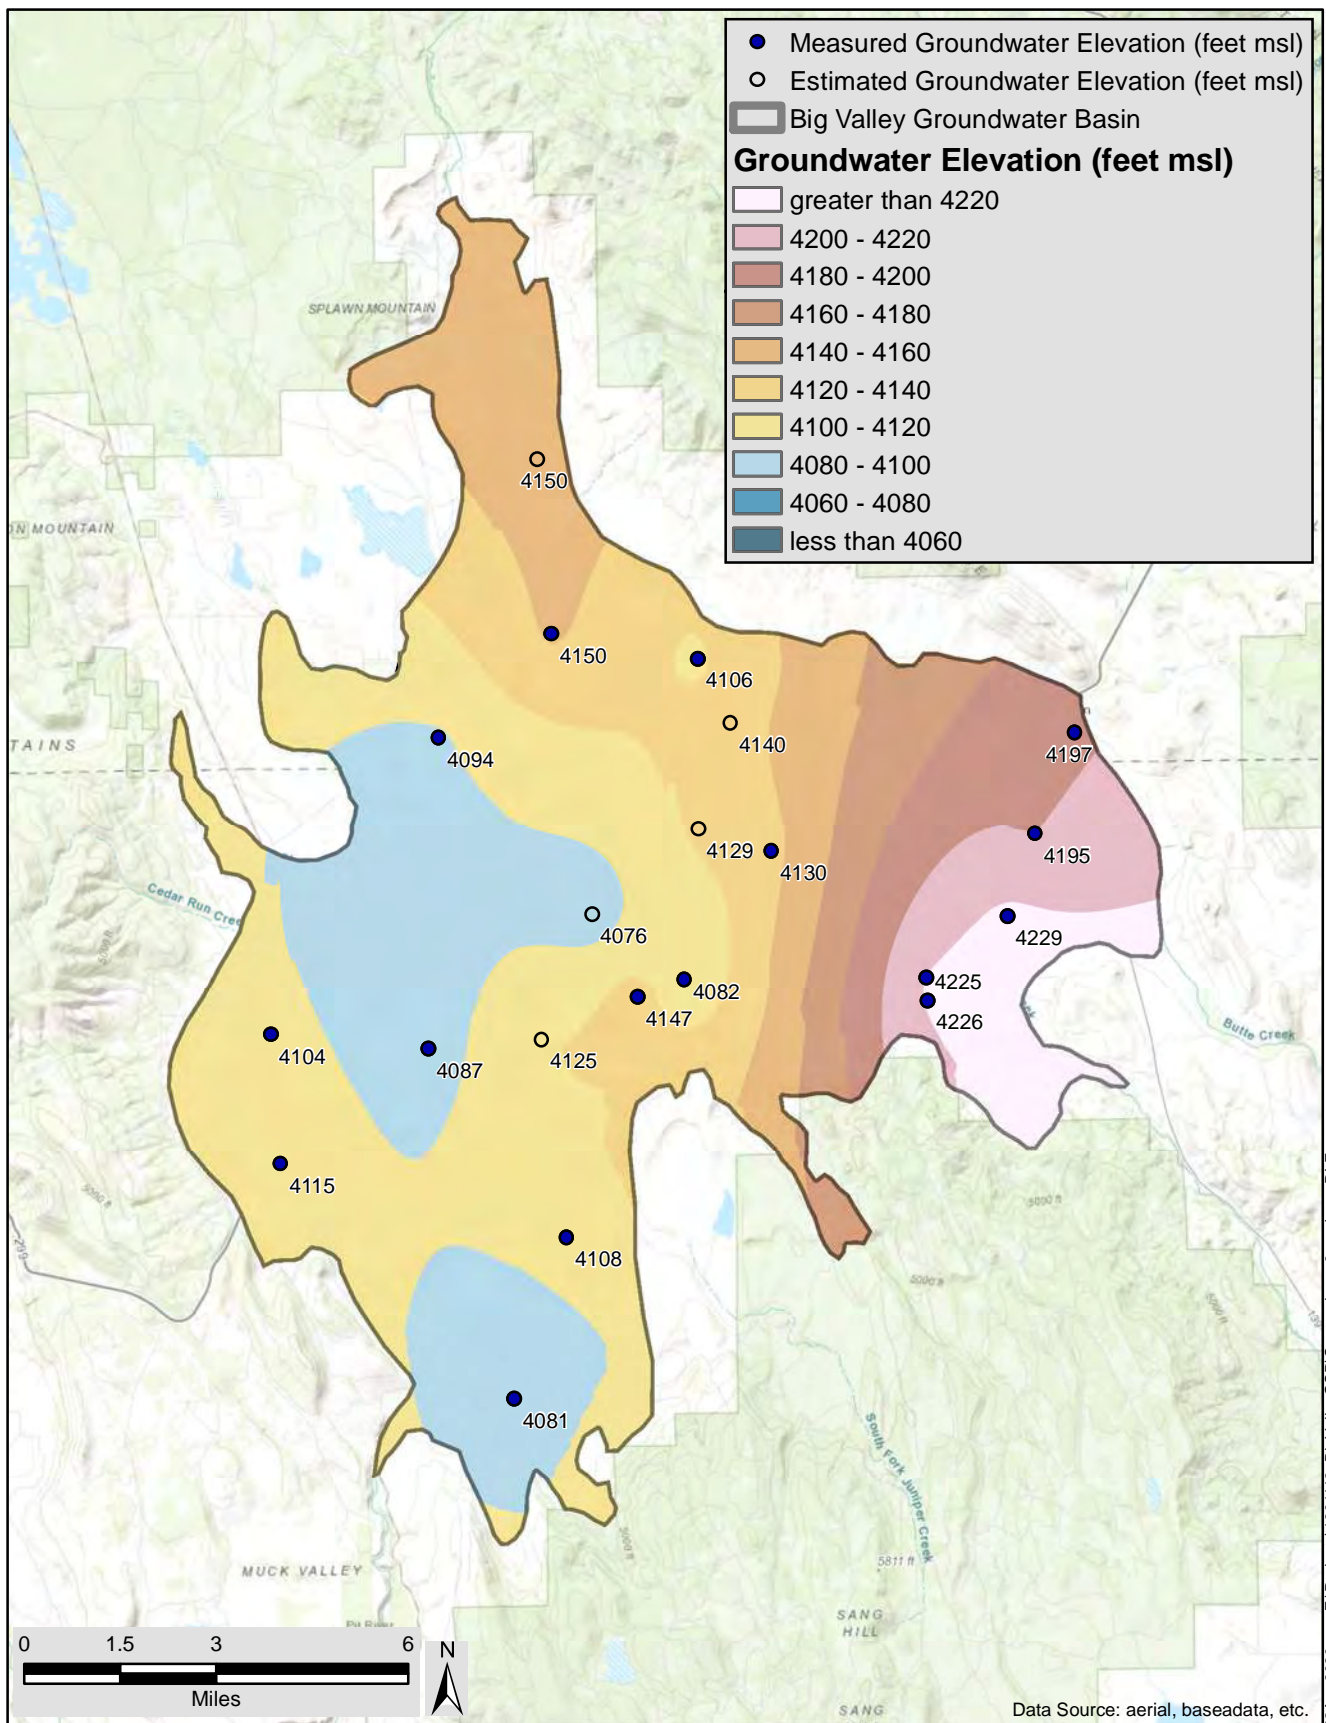

Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020

Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Fall 2000		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE



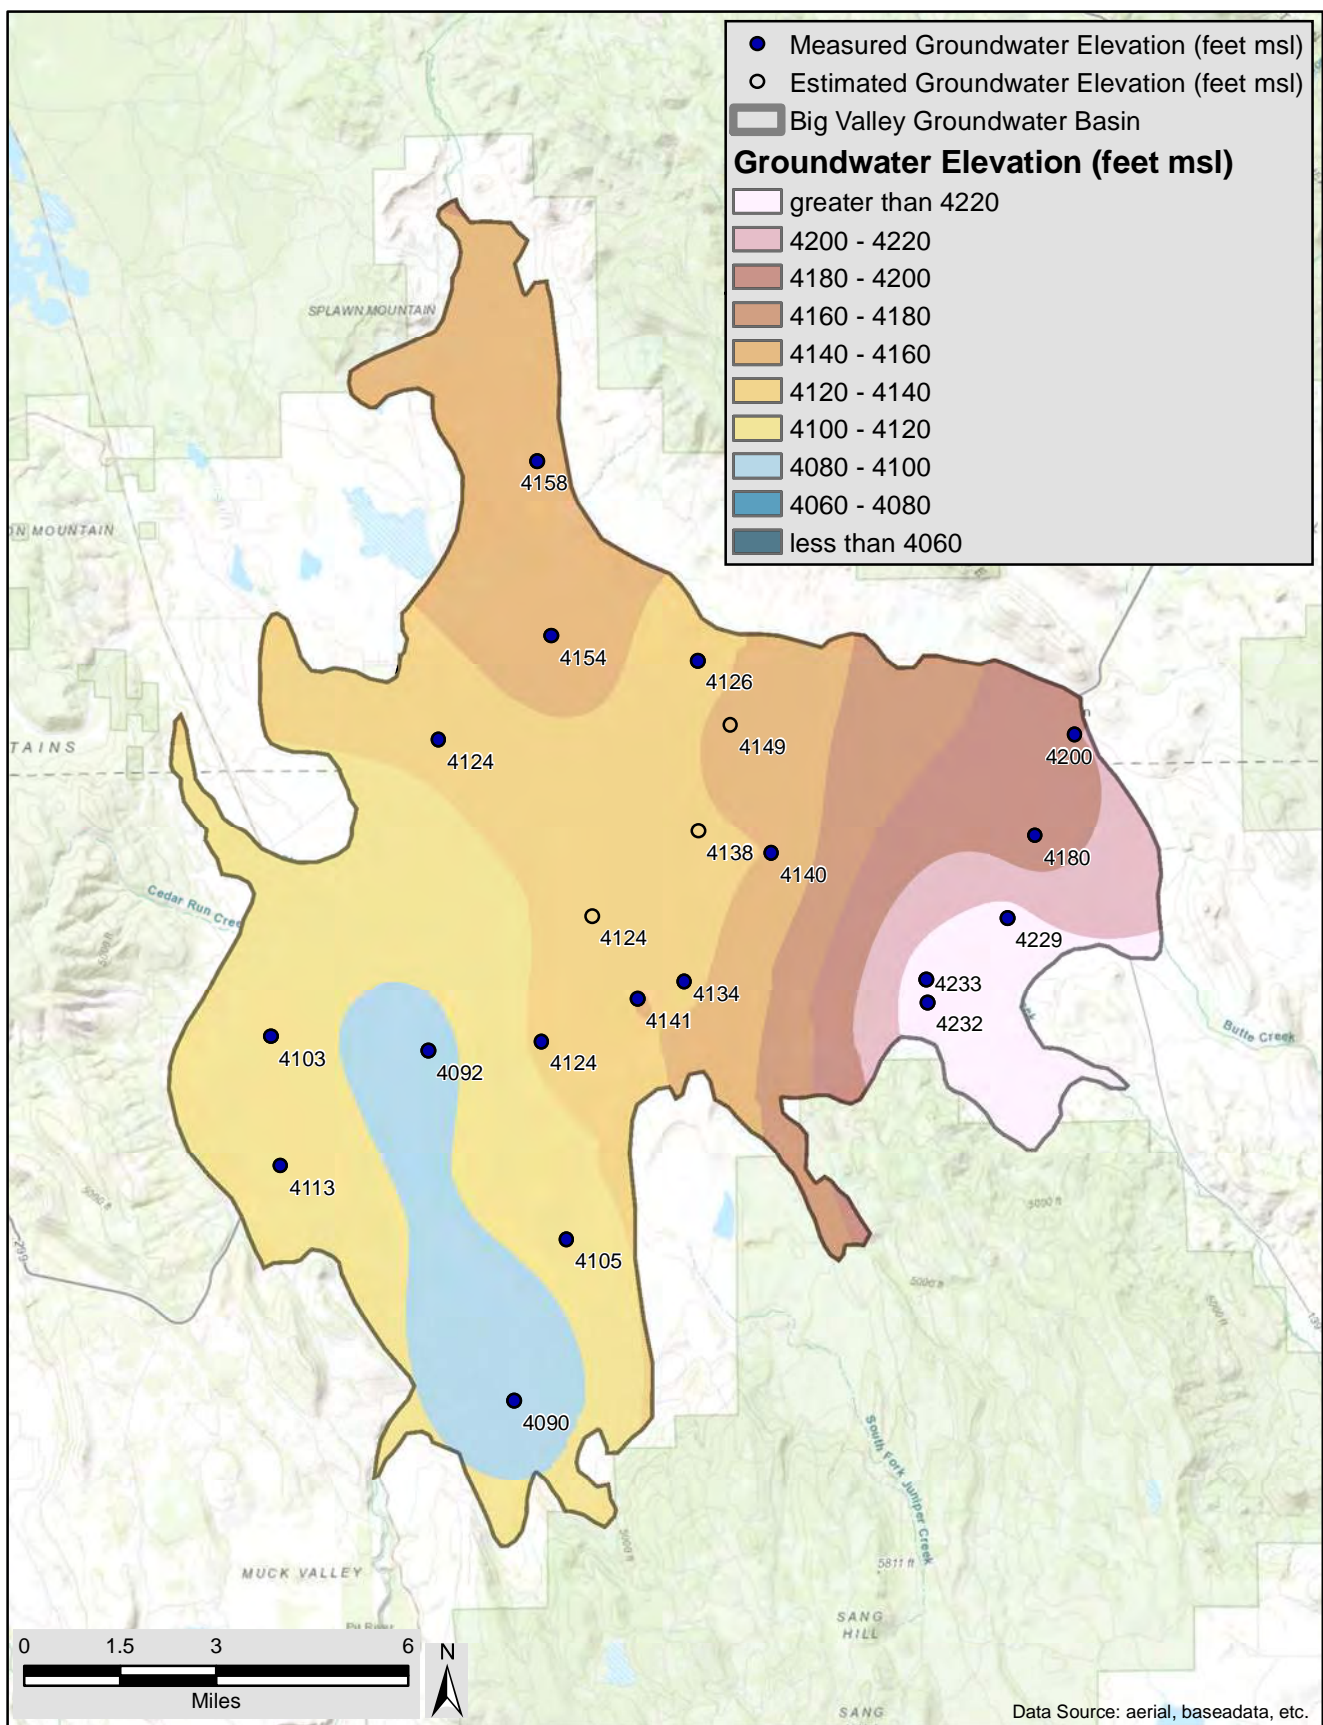

Big Valley Basin Groundwater Sustainability Plan  
Modoc and Lassen Counties, California

Big Valley Groundwater Basin GSAs




Groundwater Elevations  
Spring 2001

AUGUST 2020

**DRAFT**


FIGURE

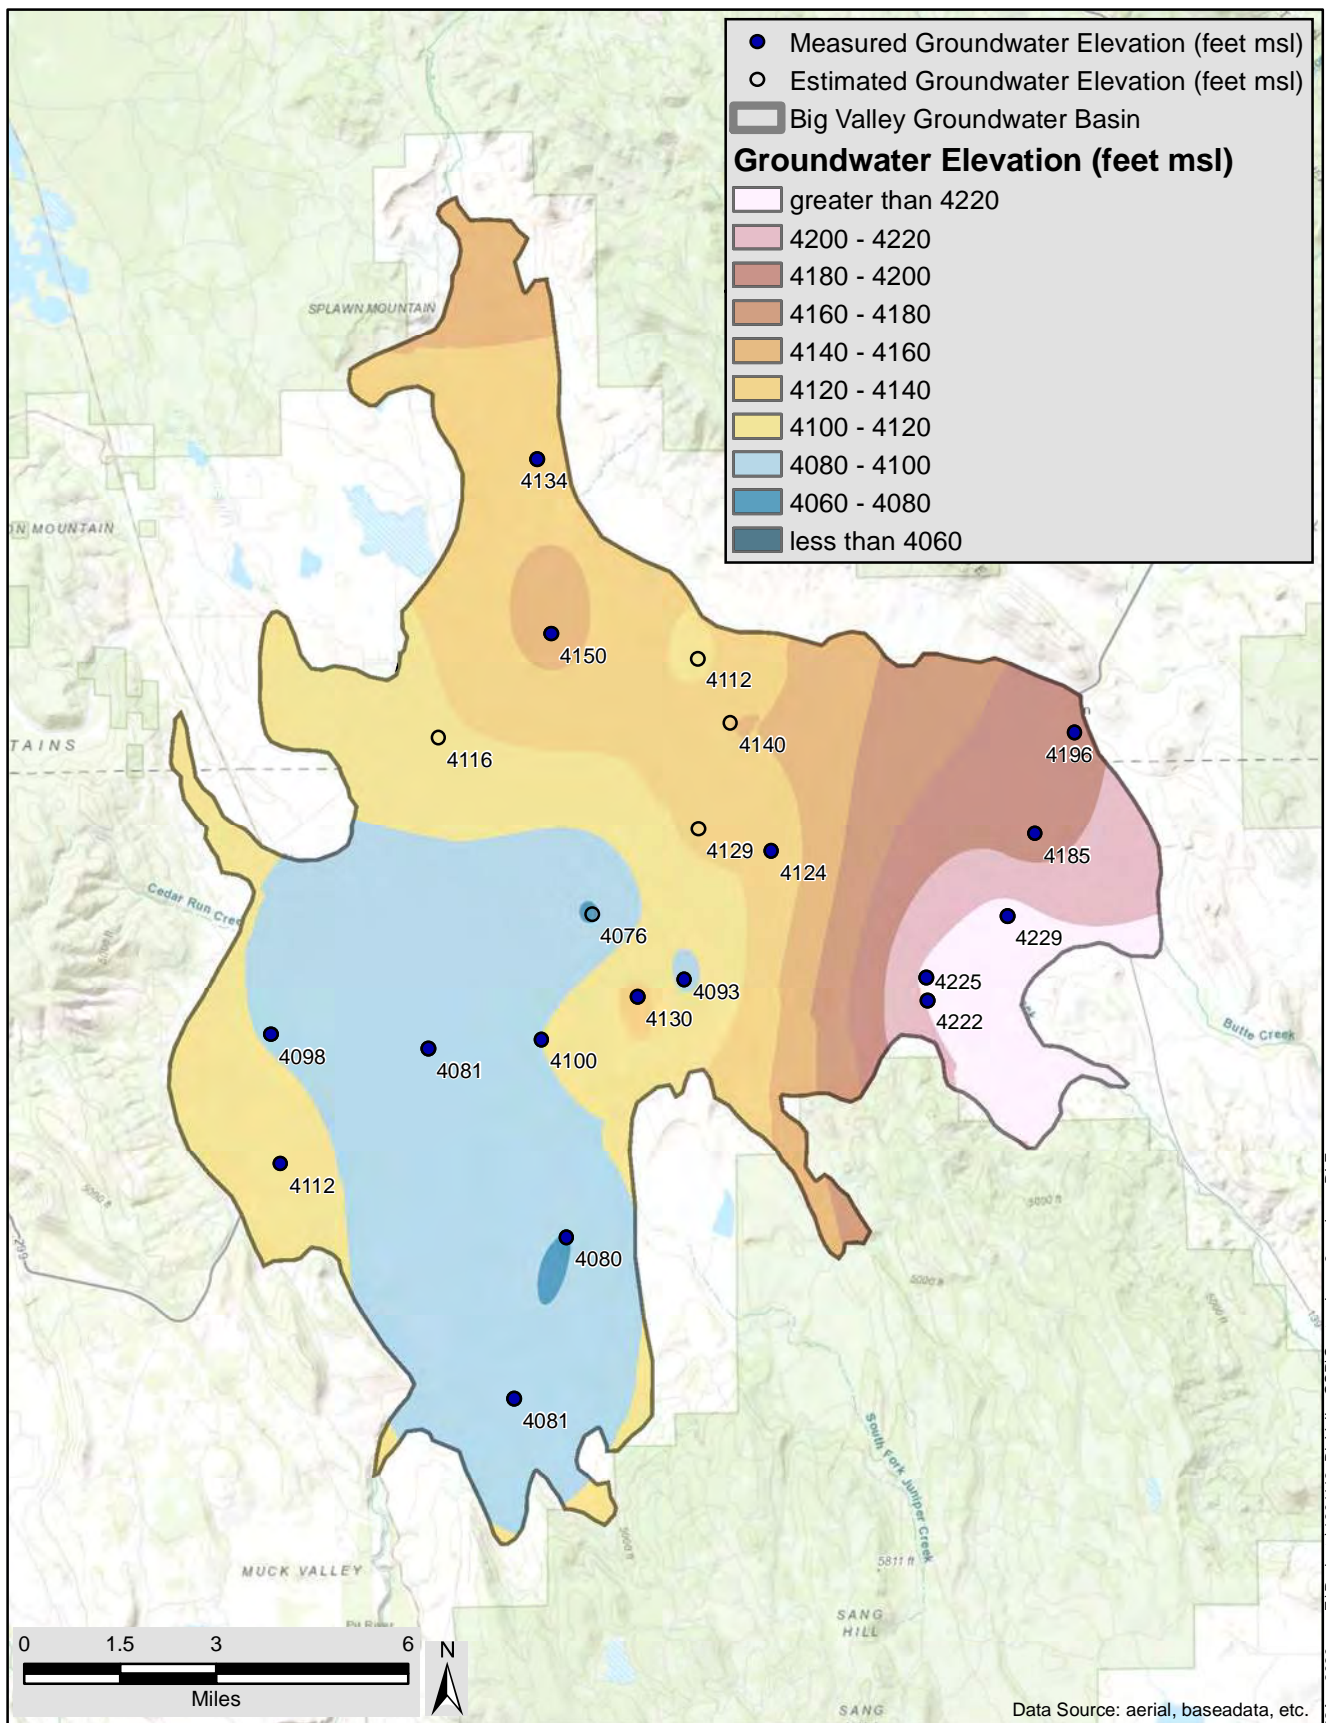

Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020

Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Fall 2001		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE



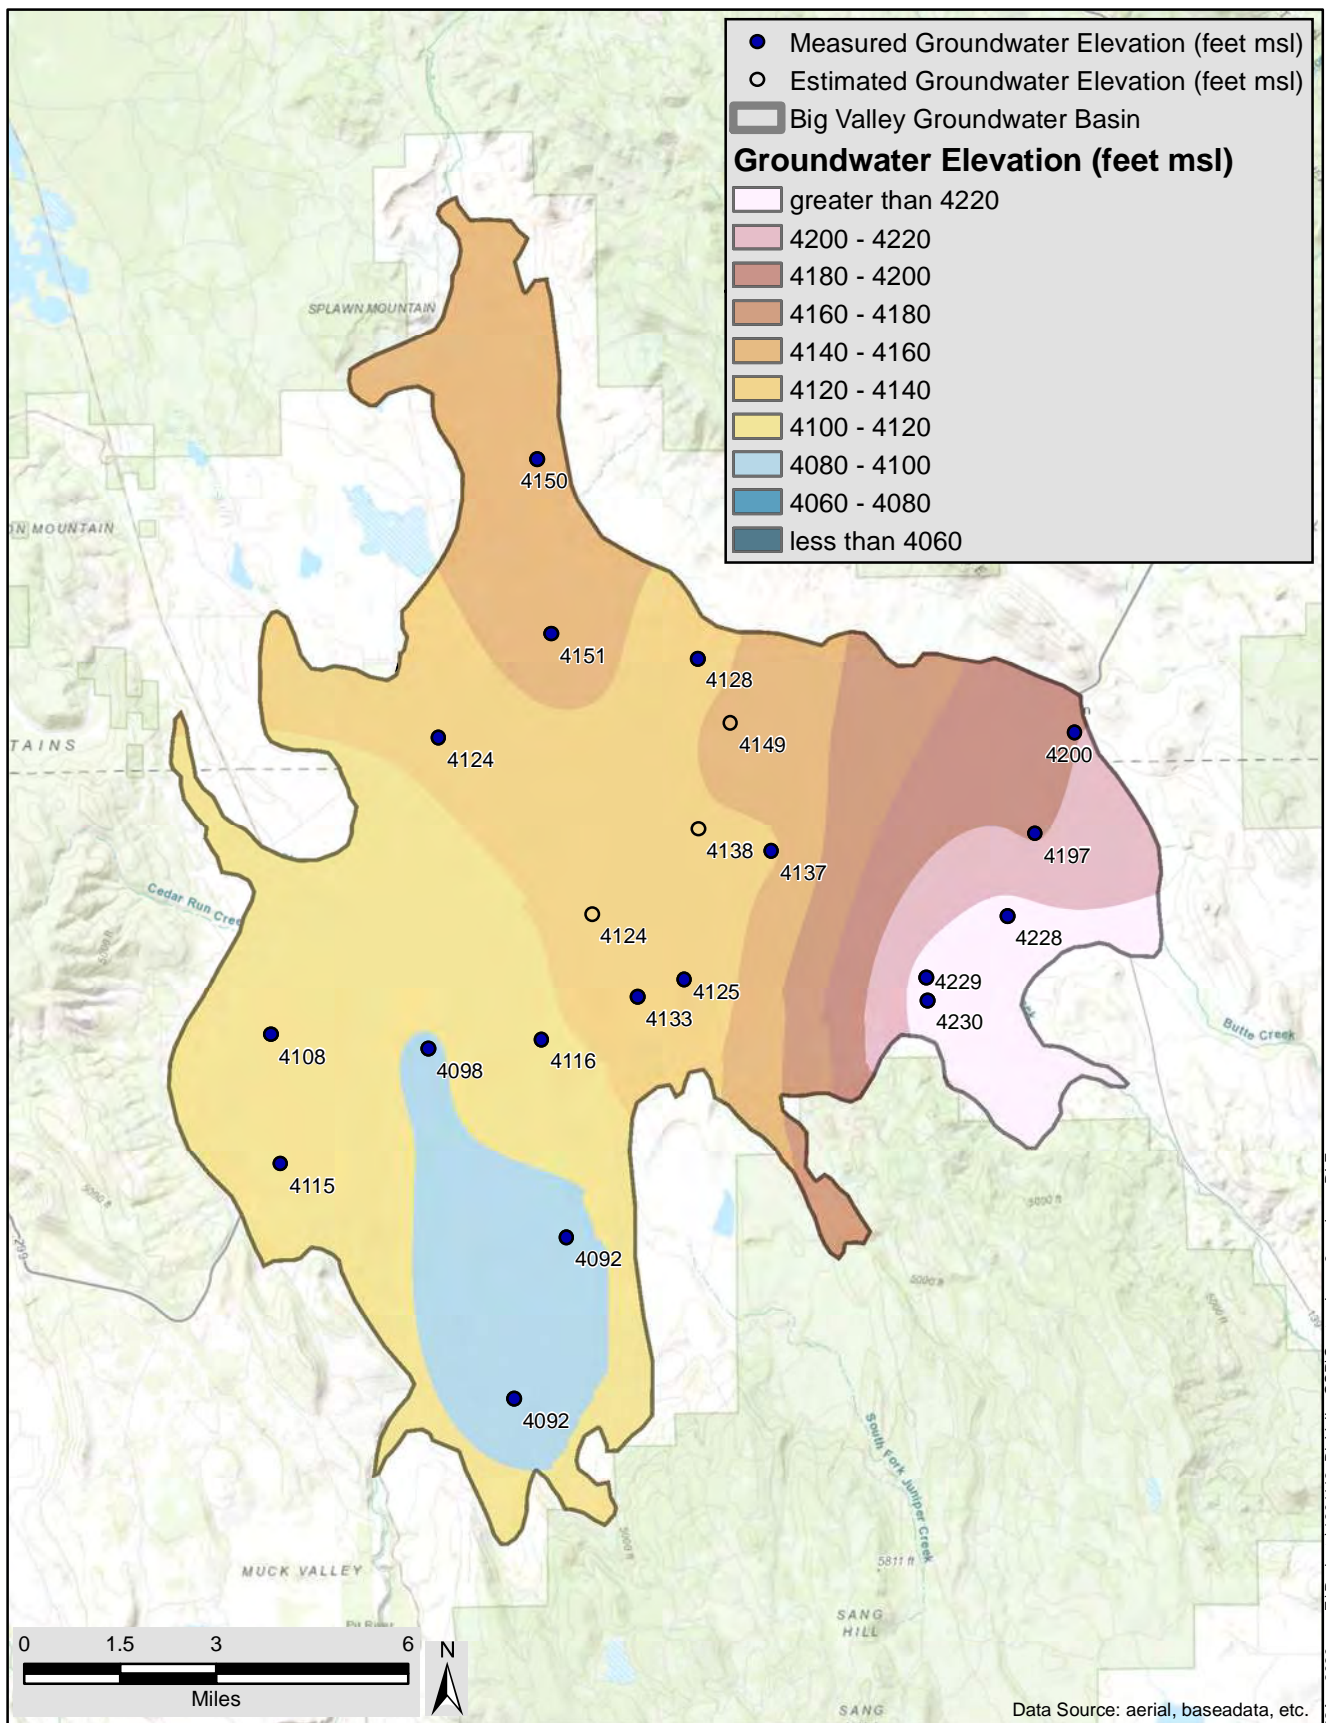


Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020

Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Spring 2002		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE






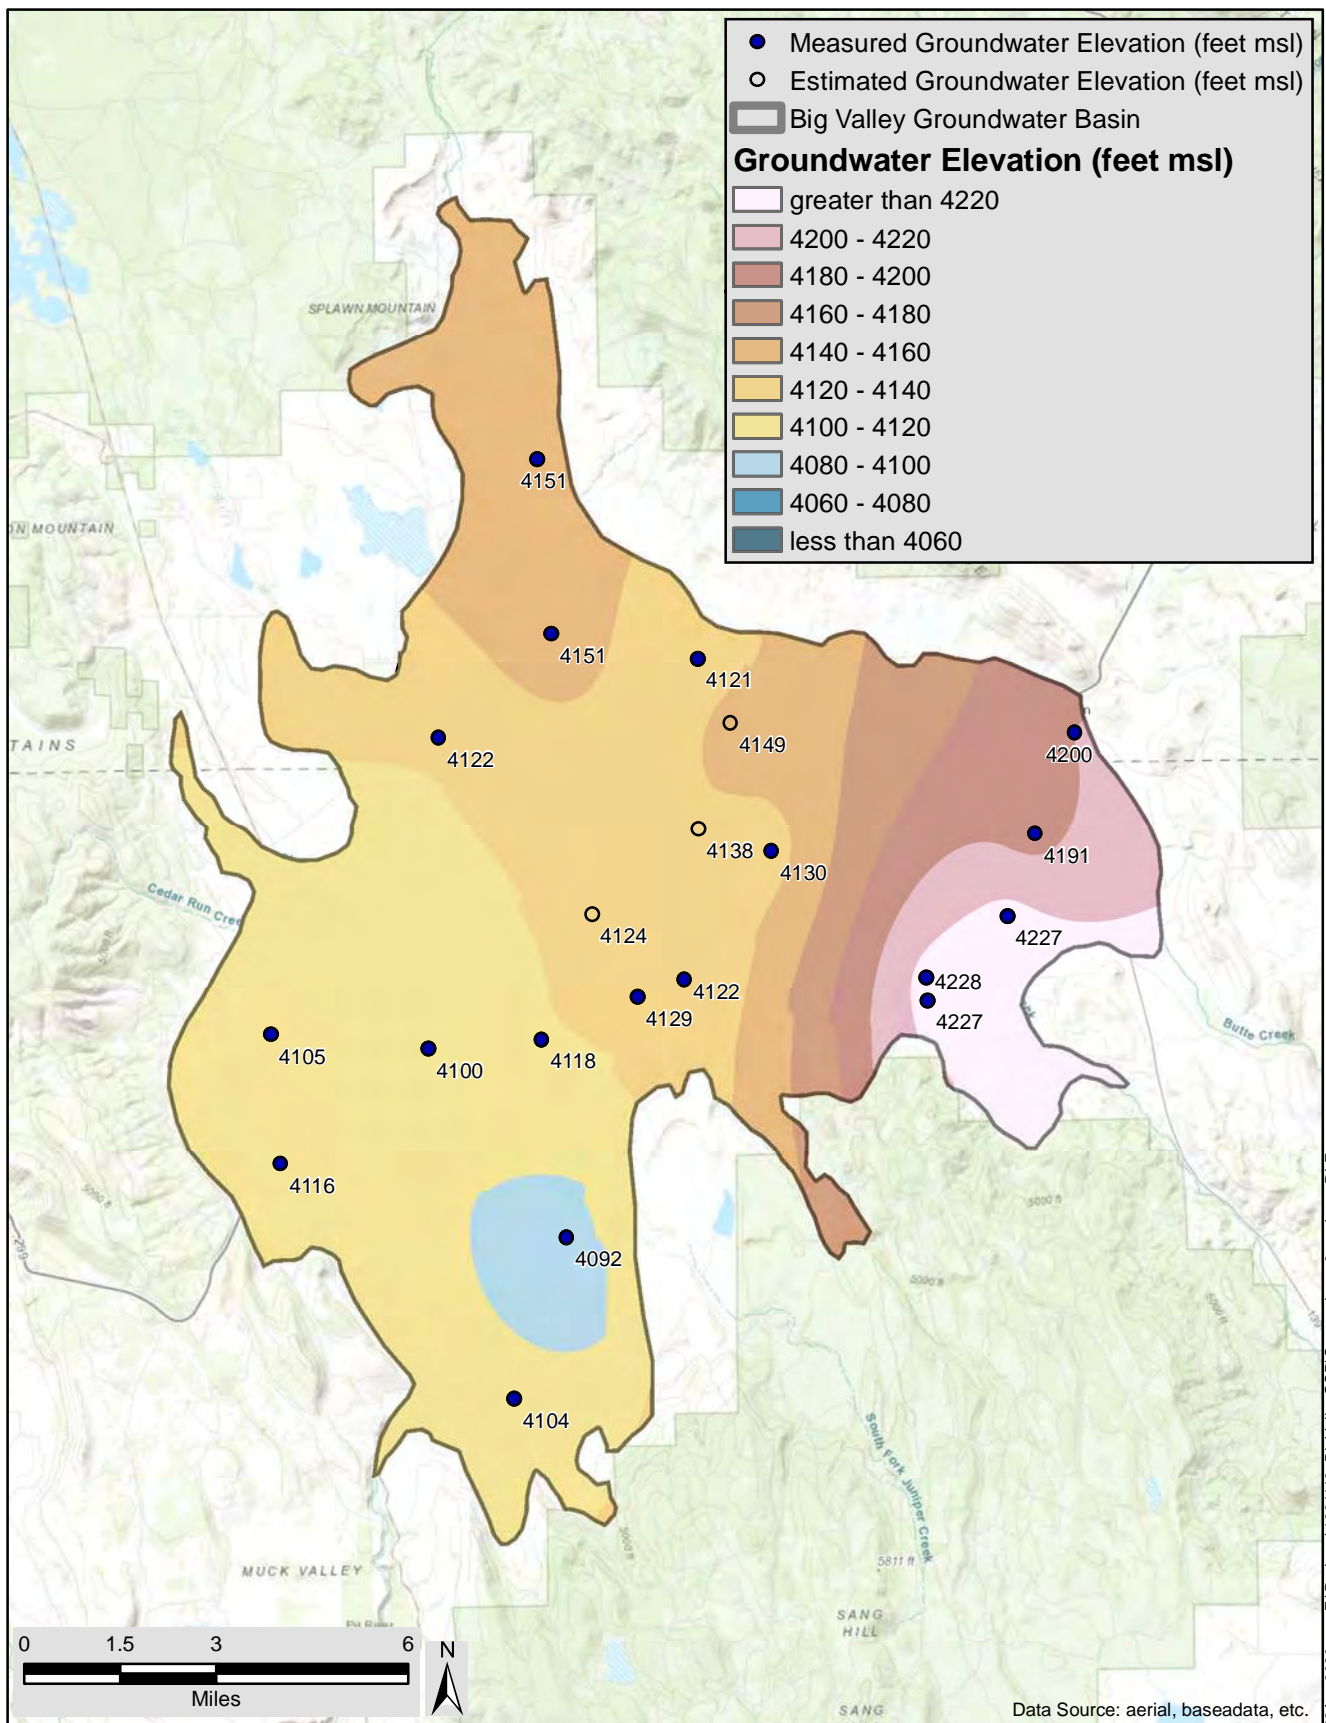

Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020

Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Spring 2003		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE

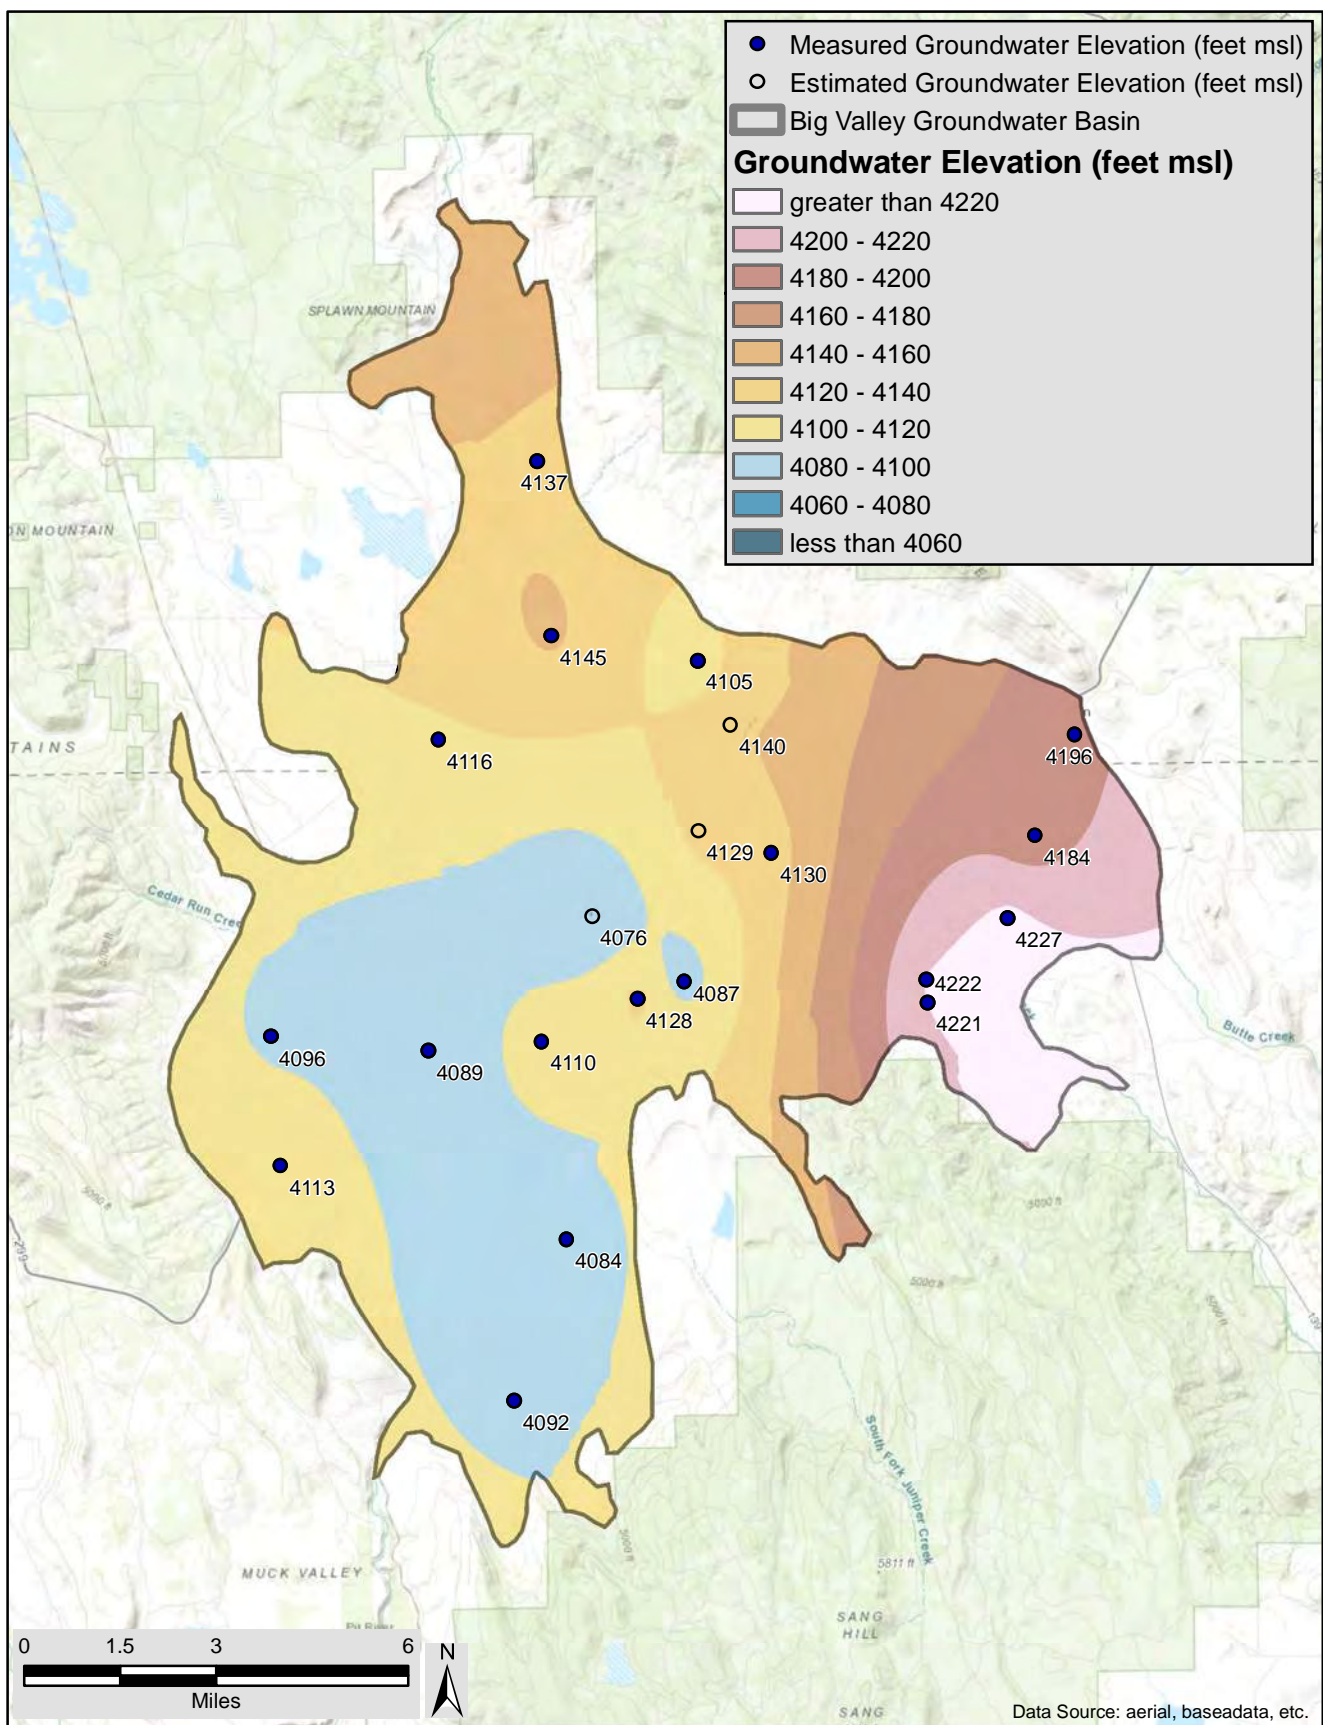

Big Valley Basin Groundwater Sustainability Plan  
Modoc and Lassen Counties, California

Big Valley Groundwater Basin GSAs




Groundwater Elevations  
Fall 2003

AUGUST 2020

**DRAFT**


FIGURE



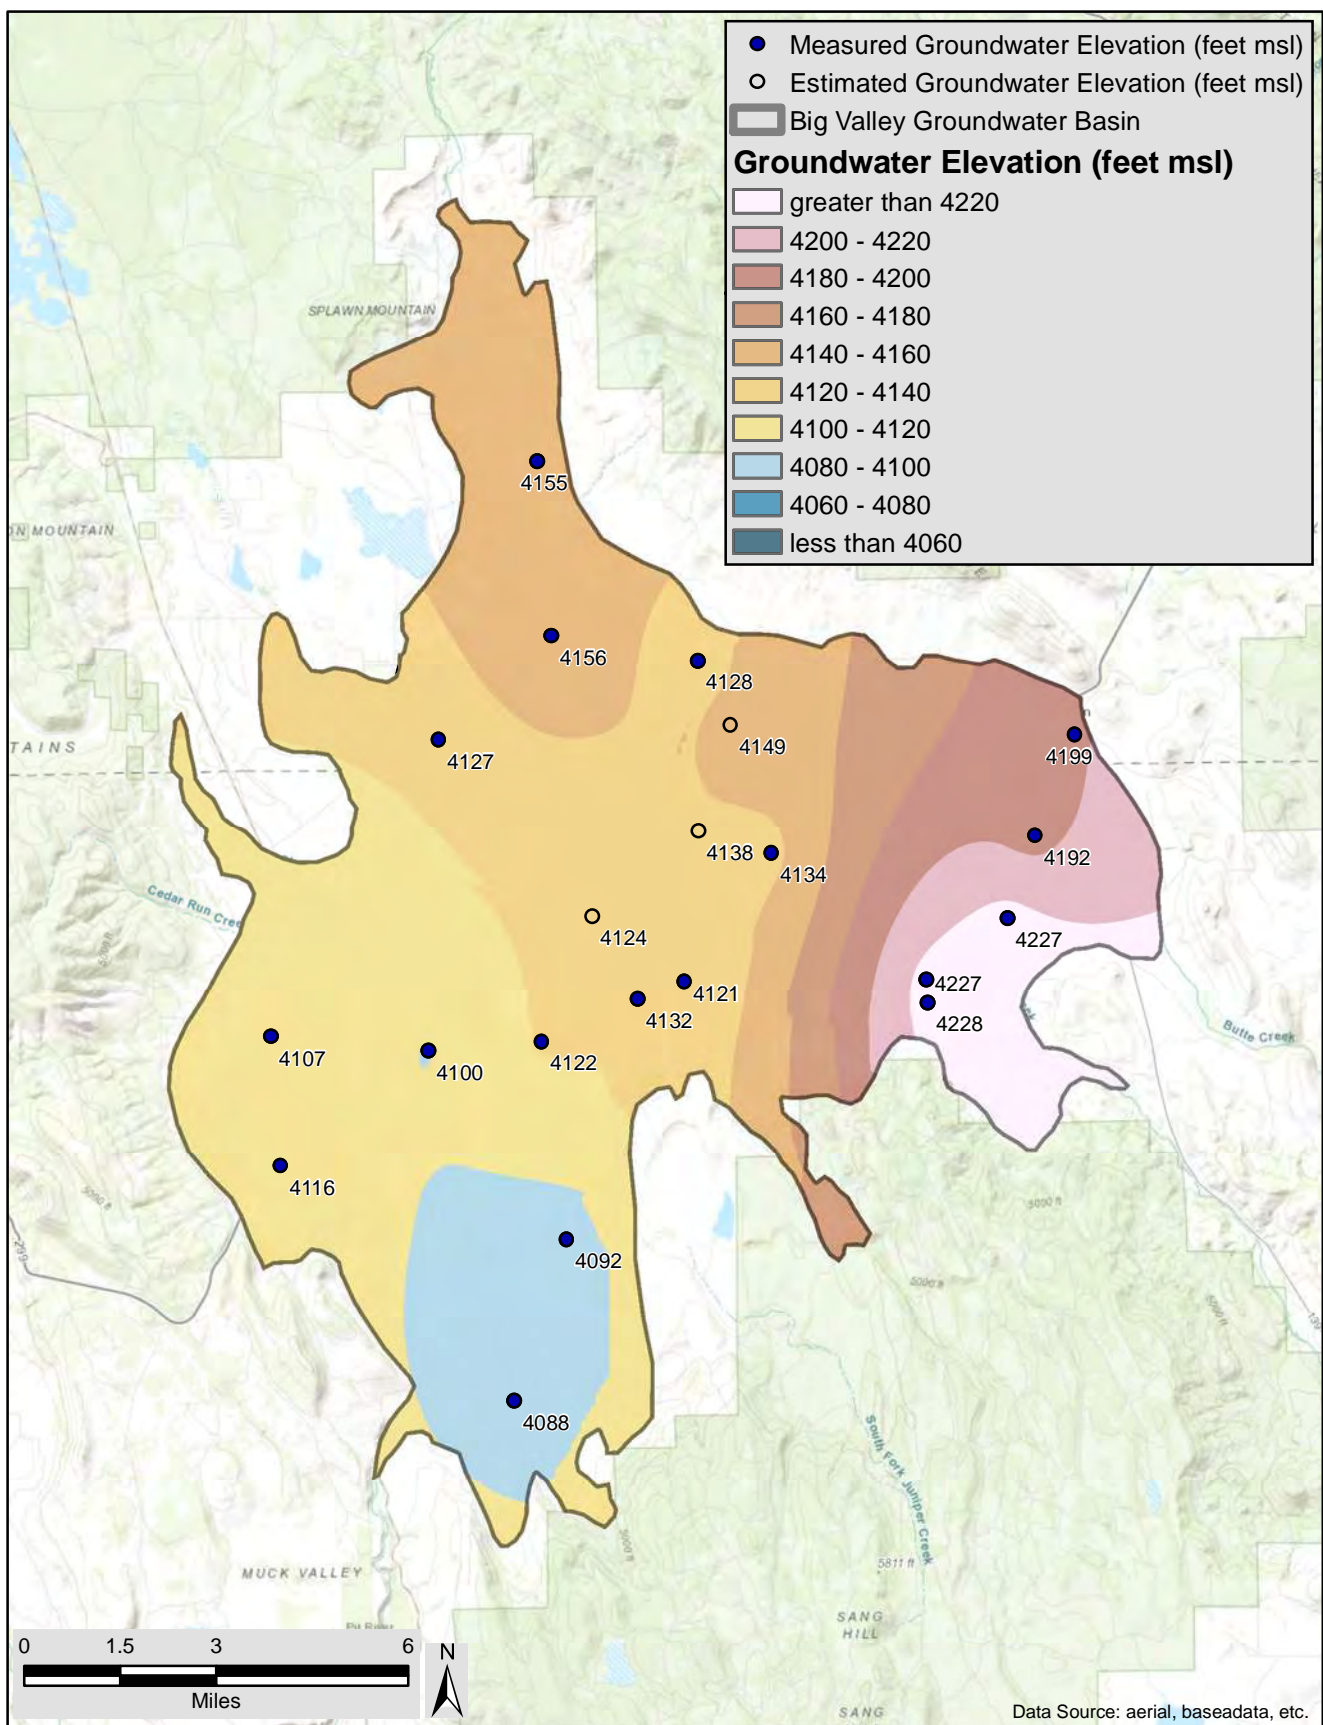

Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020


Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Spring 2004		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE

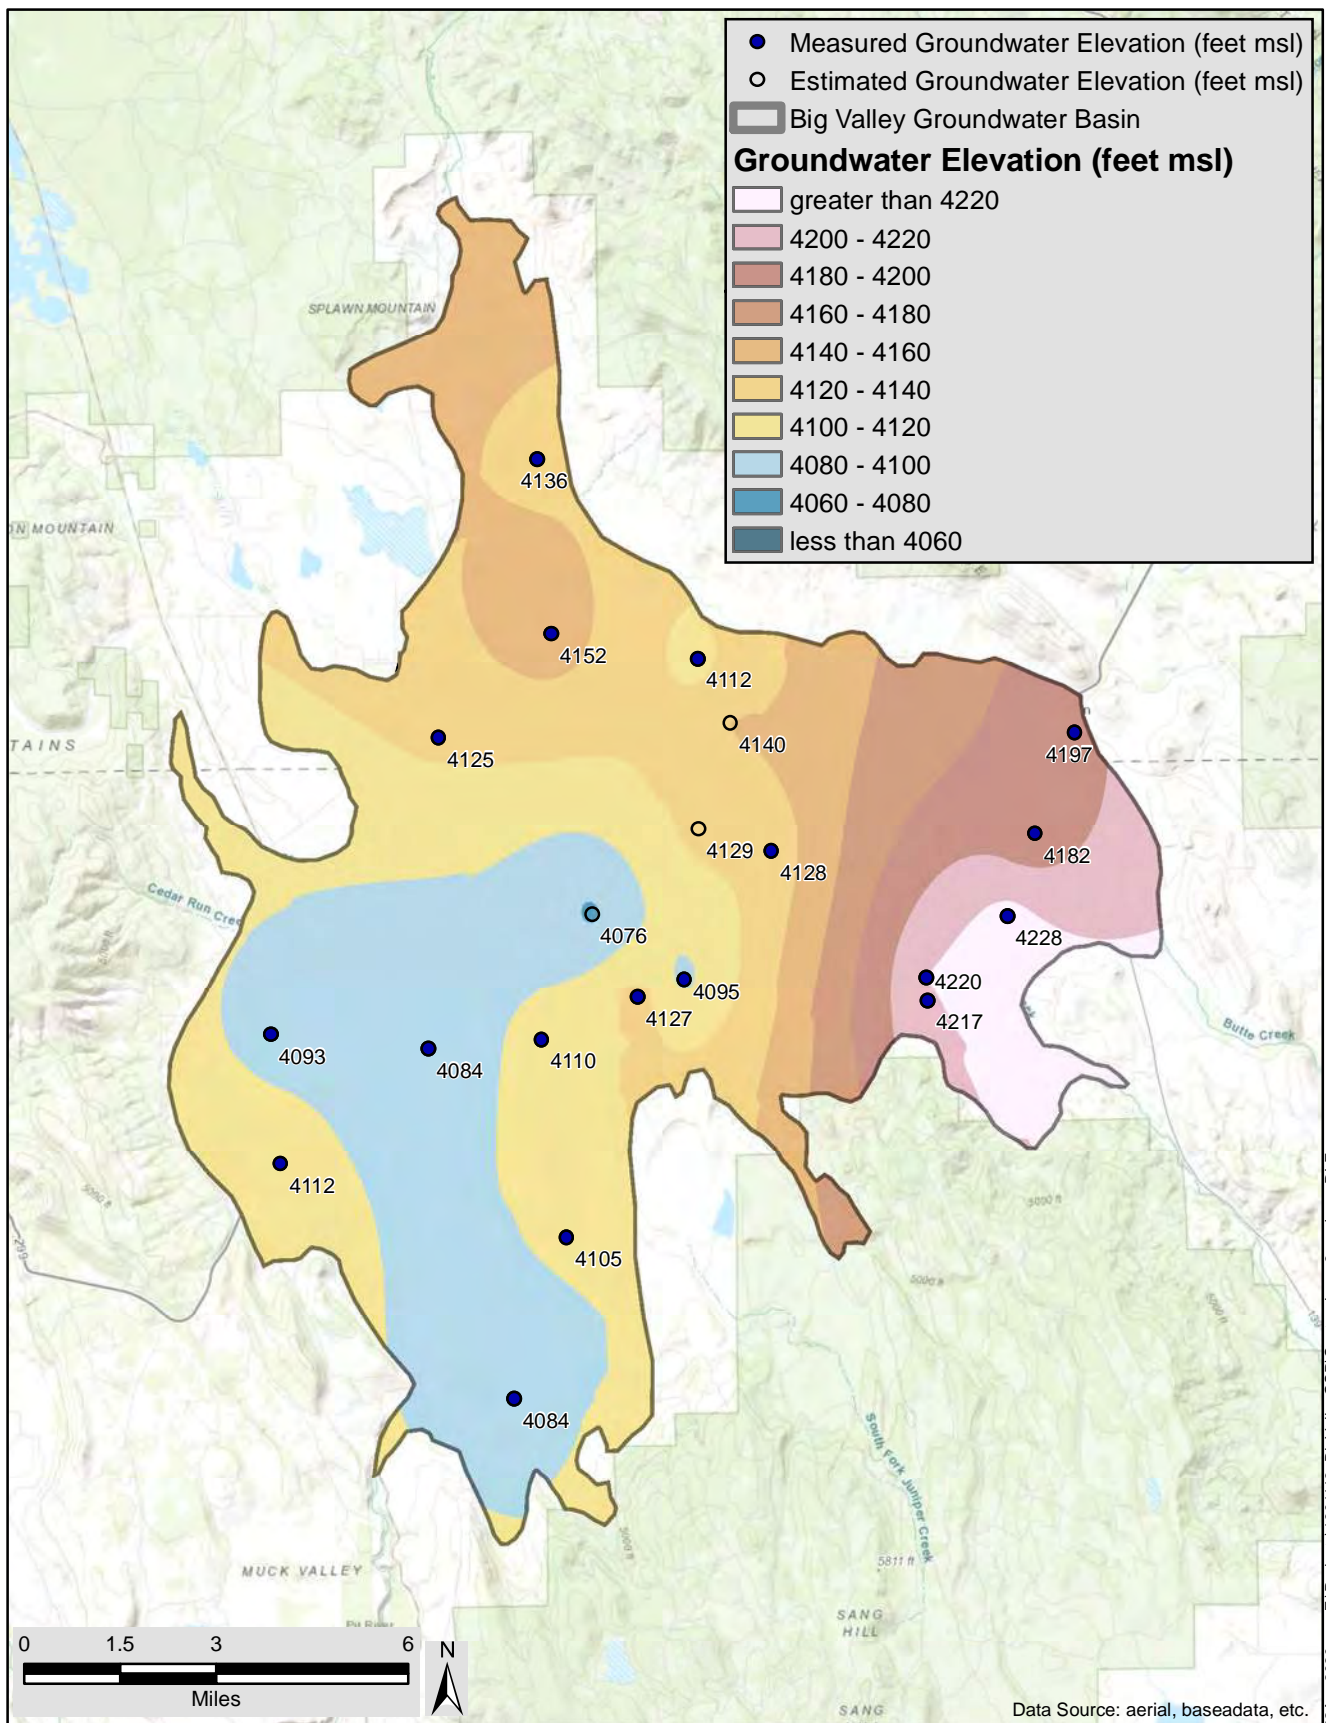

Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020


Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Fall 2004		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE



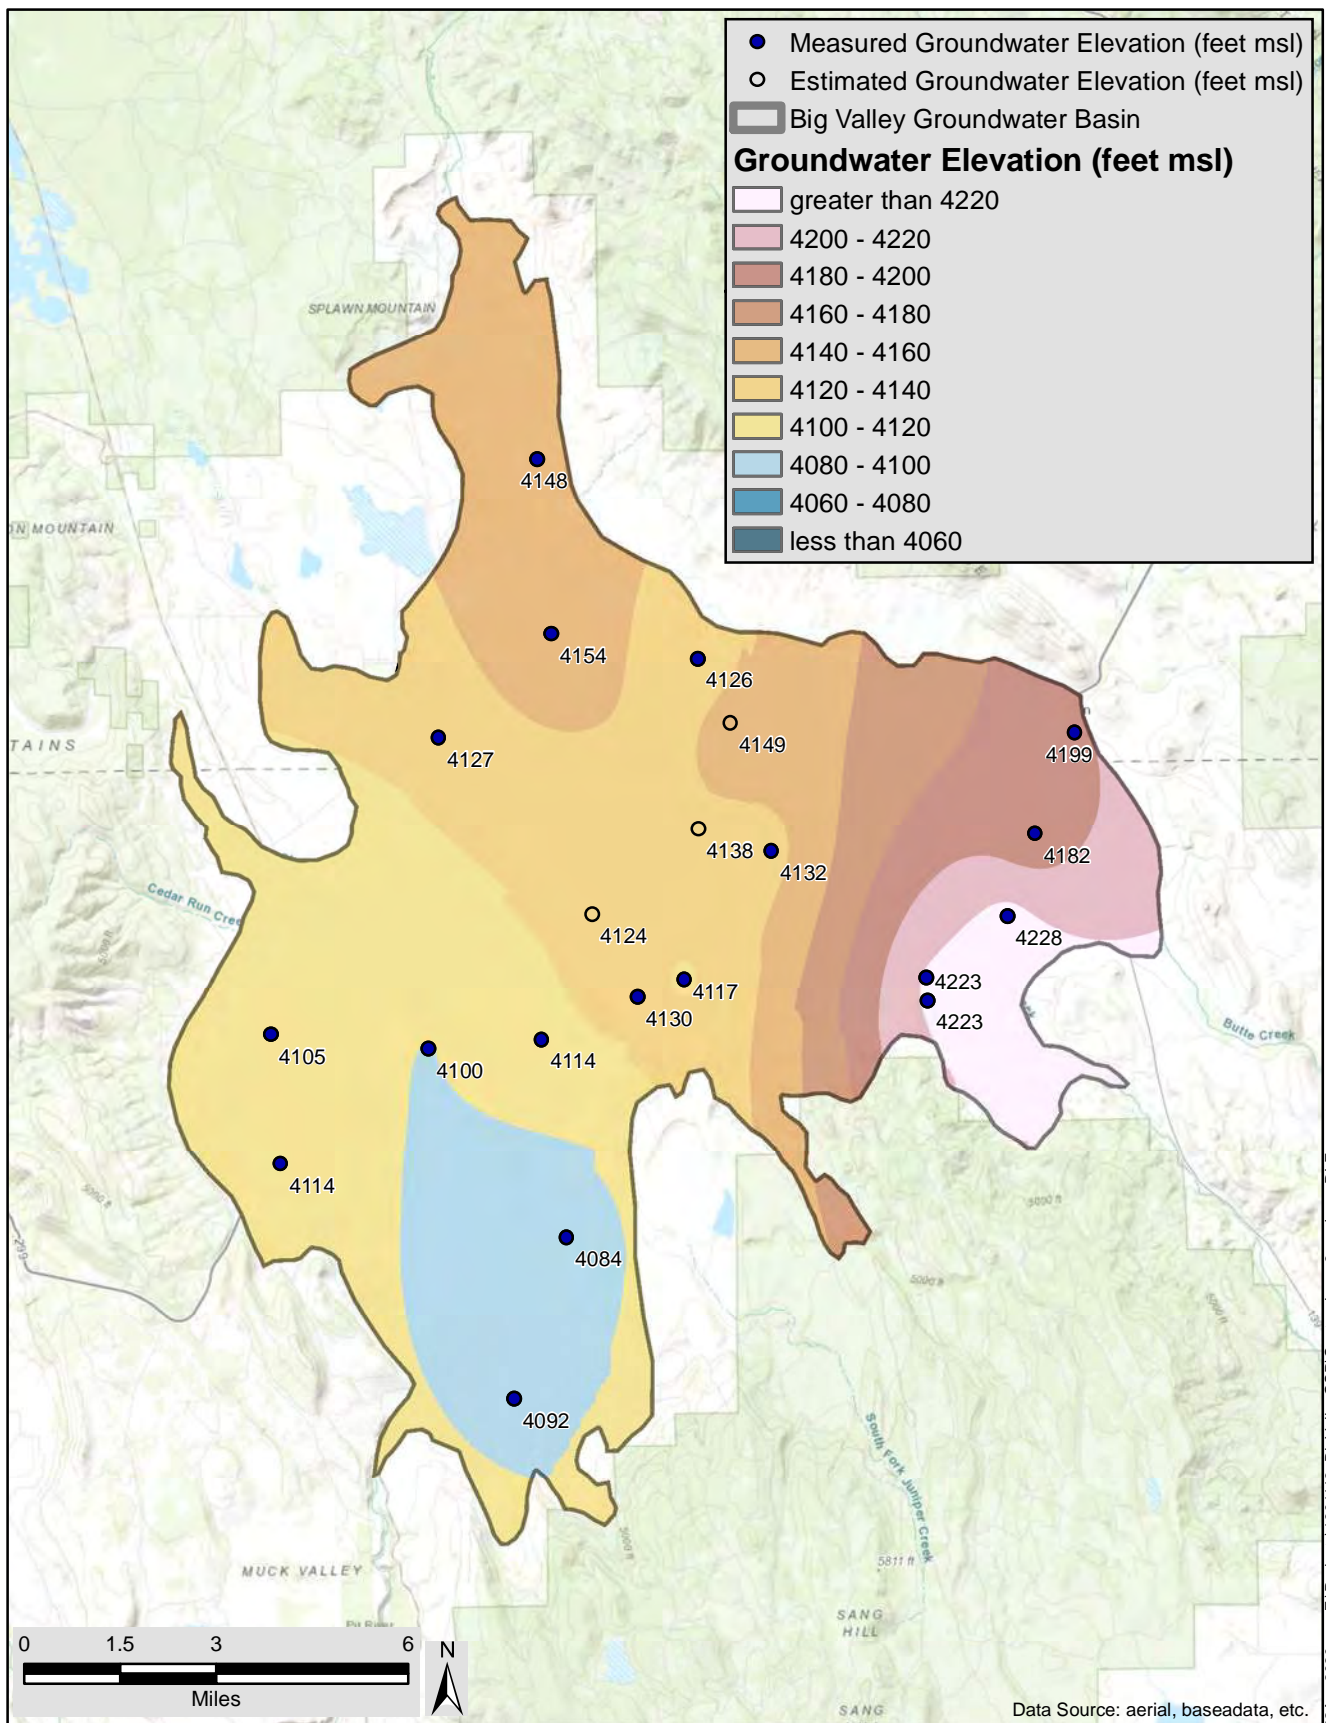

Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020


Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Spring 2005		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE

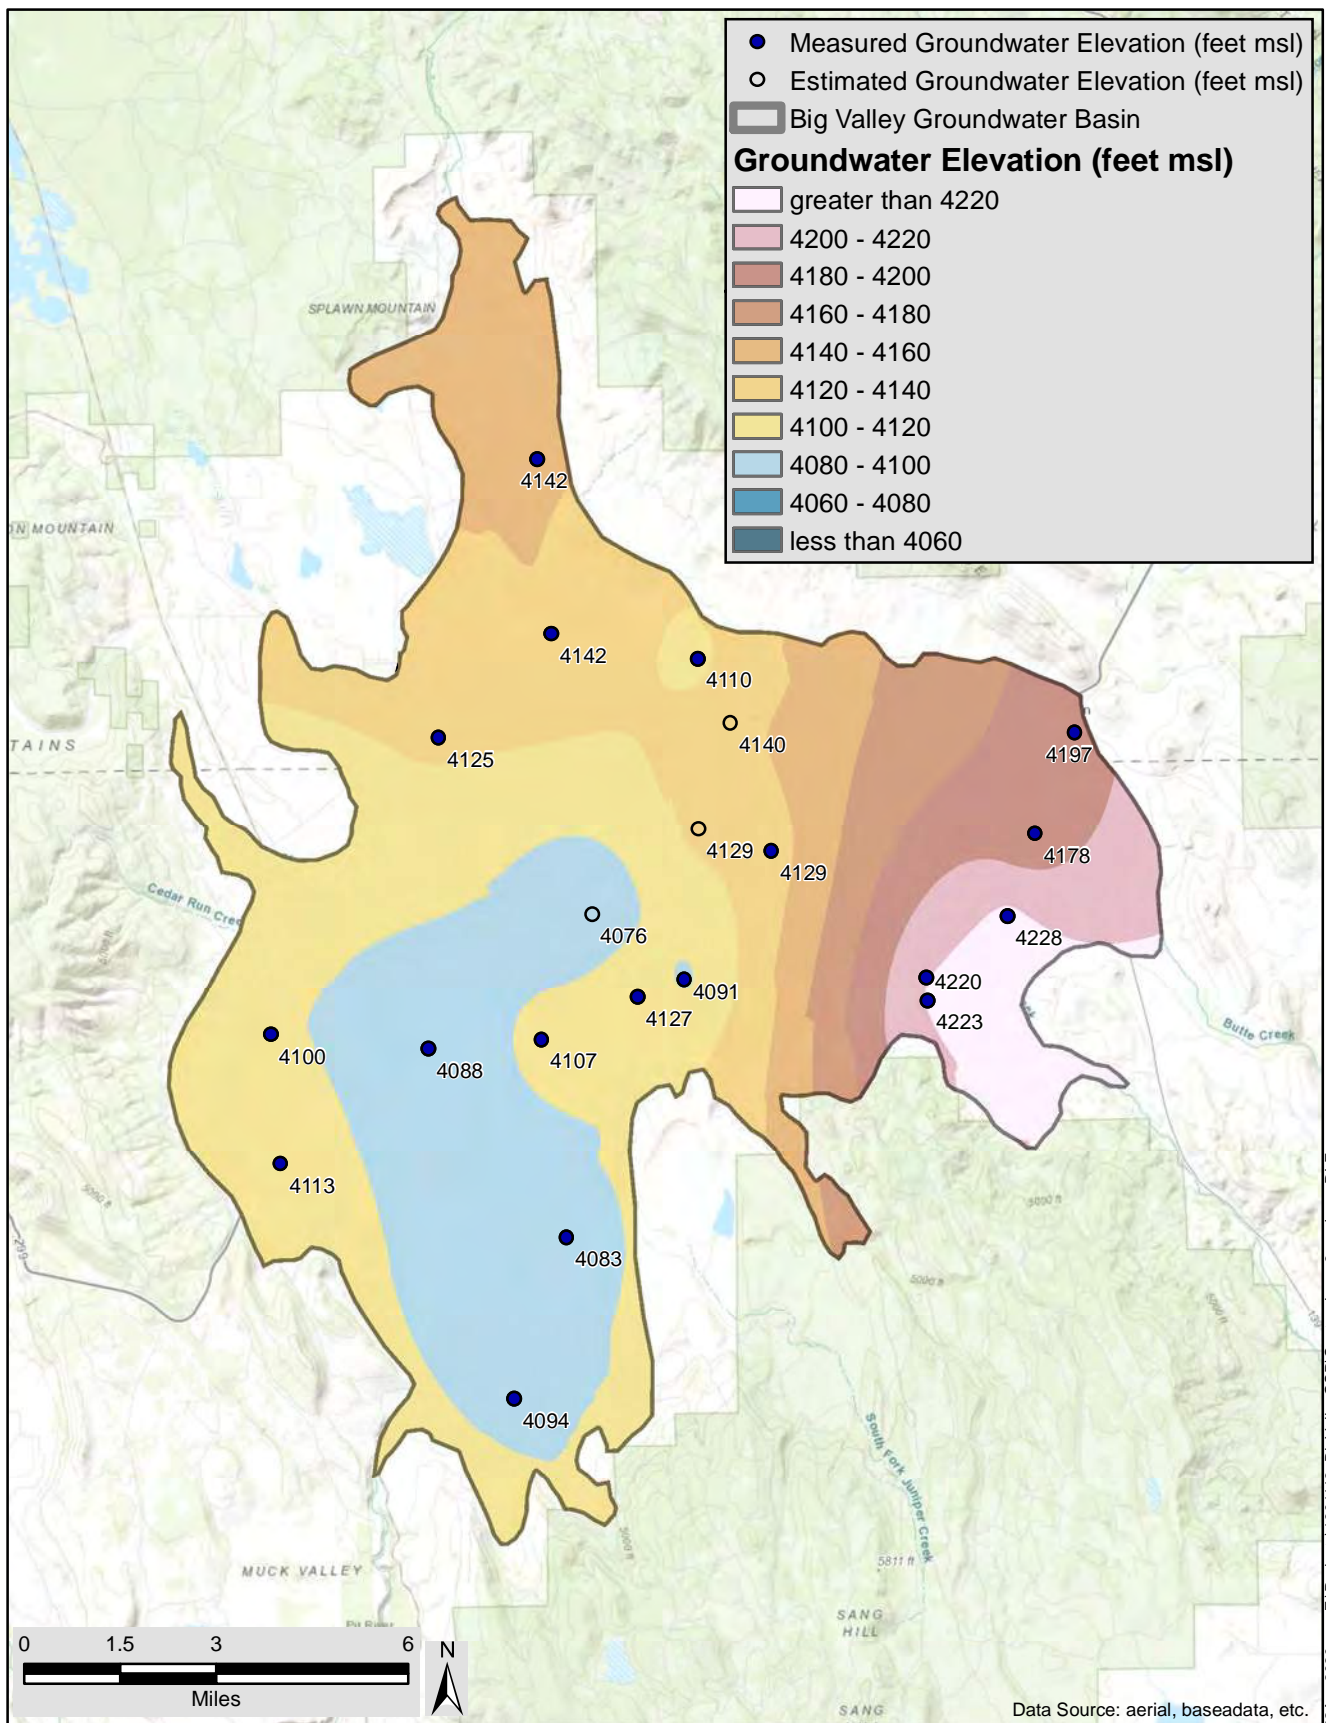

Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020


Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Fall 2005		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE



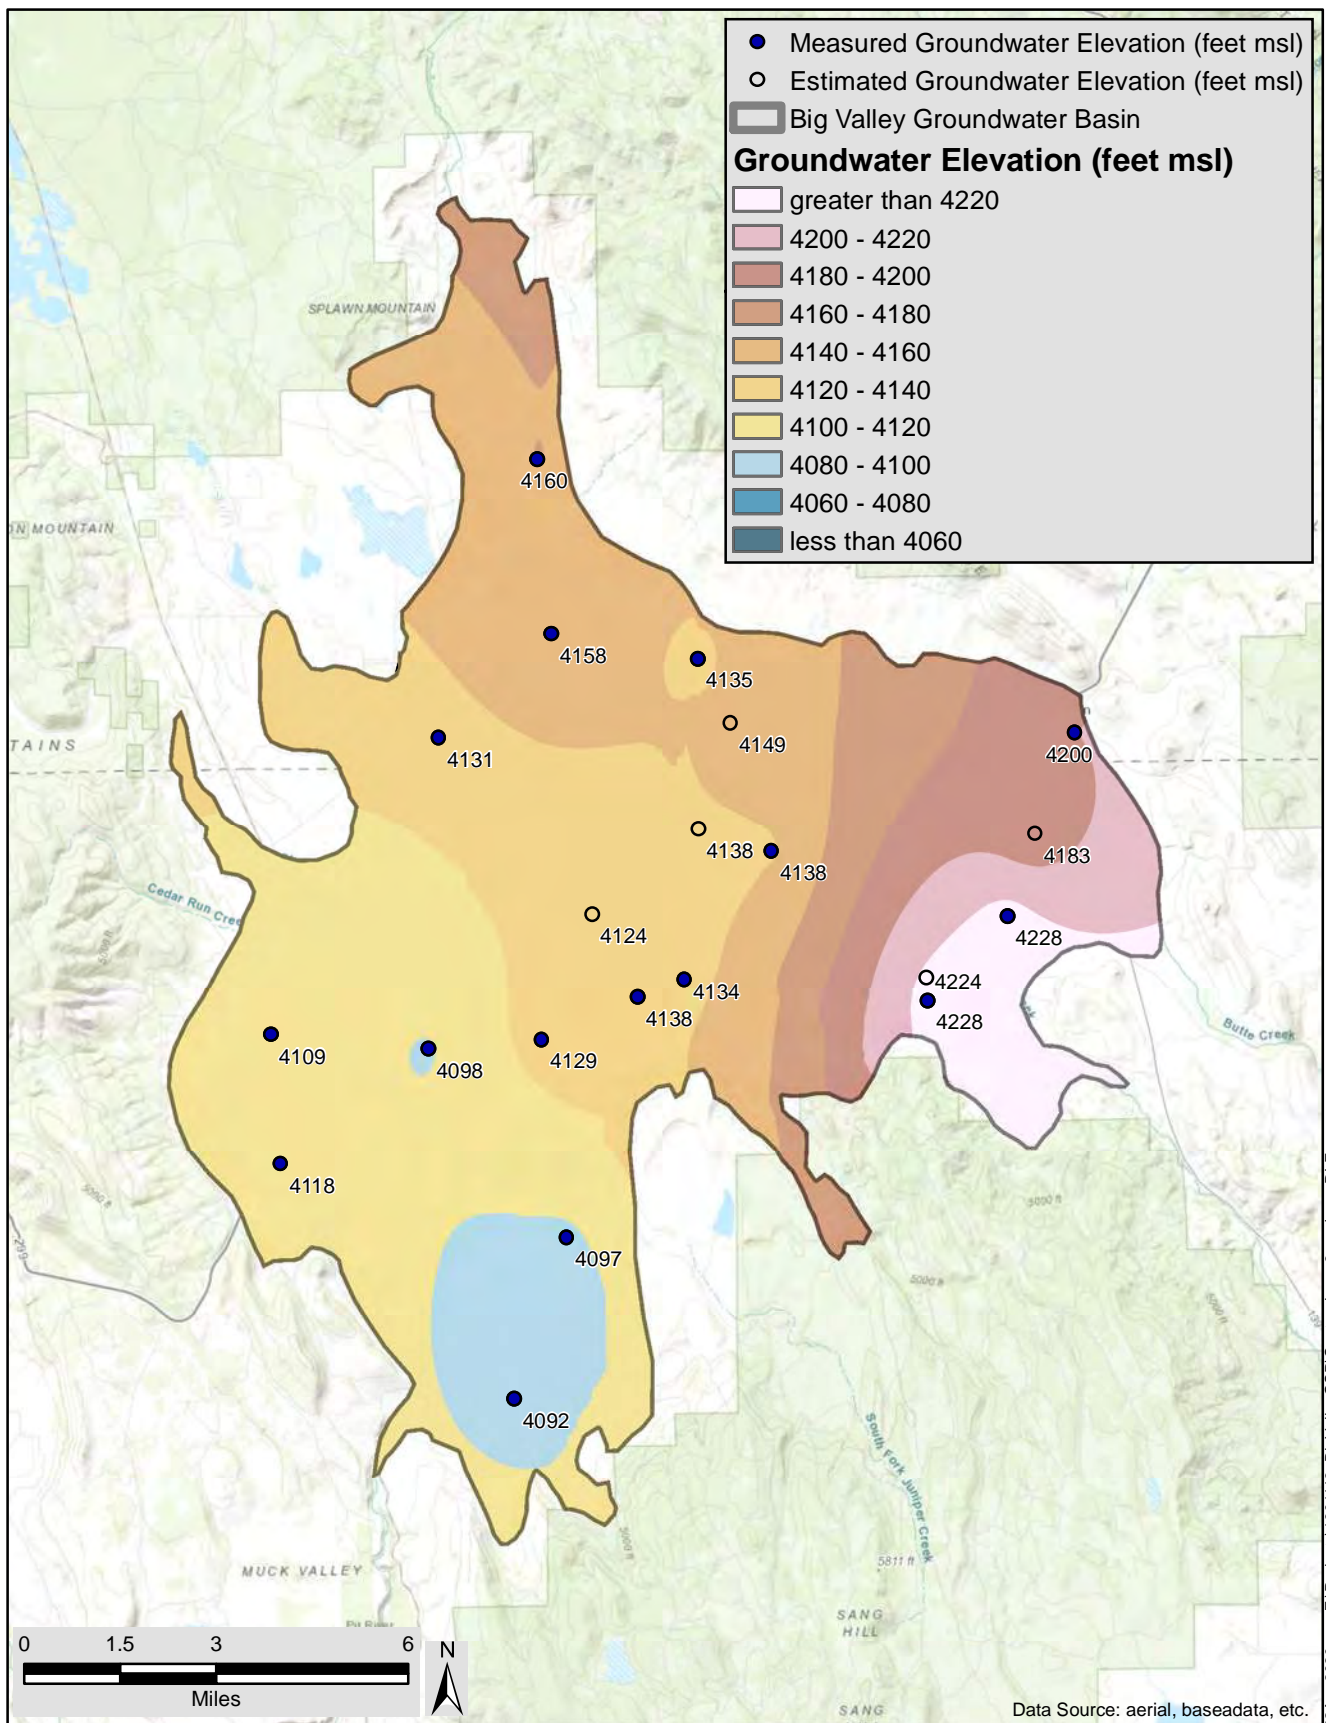

Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020


Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Spring 2006		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE

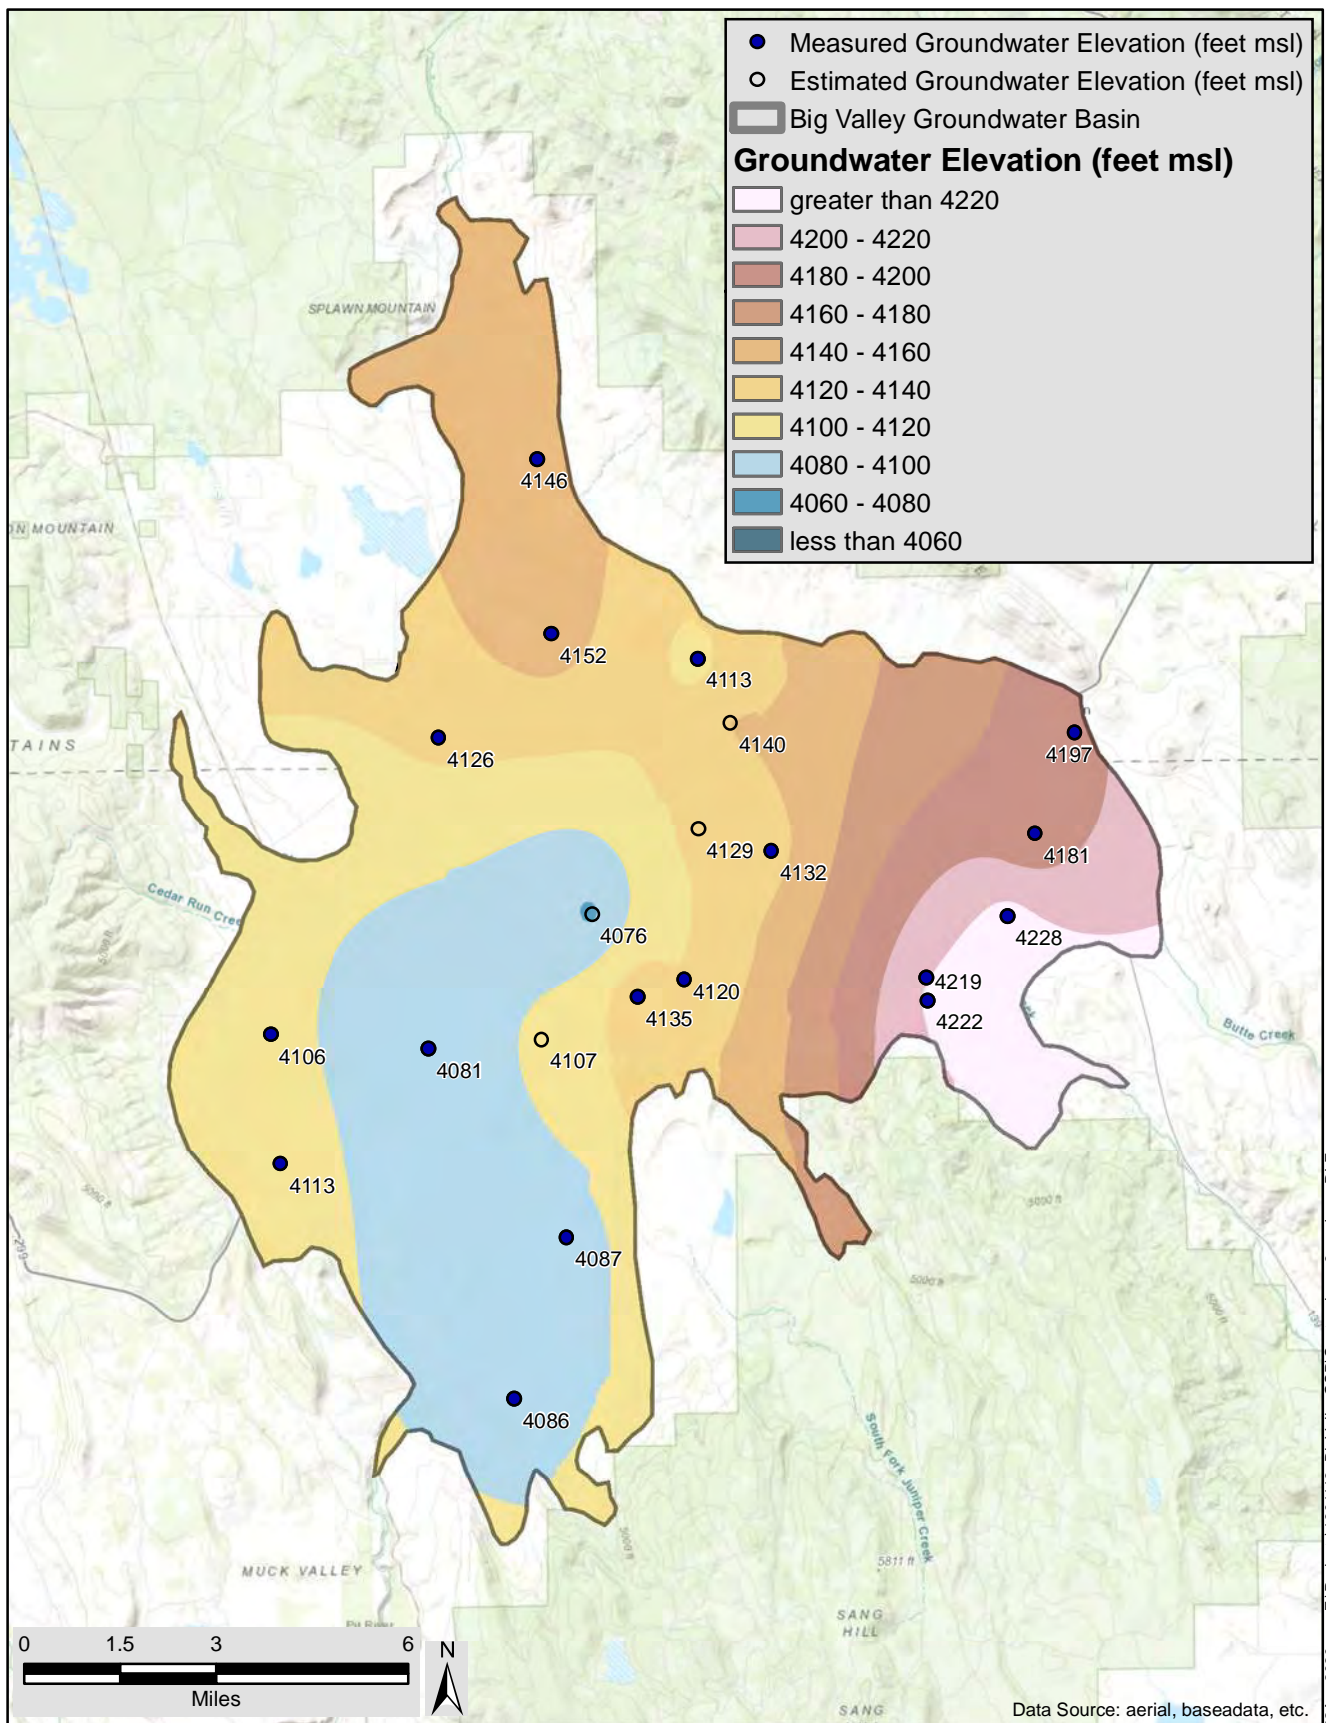

Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020


Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Fall 2006		
Big Valley Groundwater Basin GSAs		AUGUST 2020	<b>DRAFT</b>	FIGURE



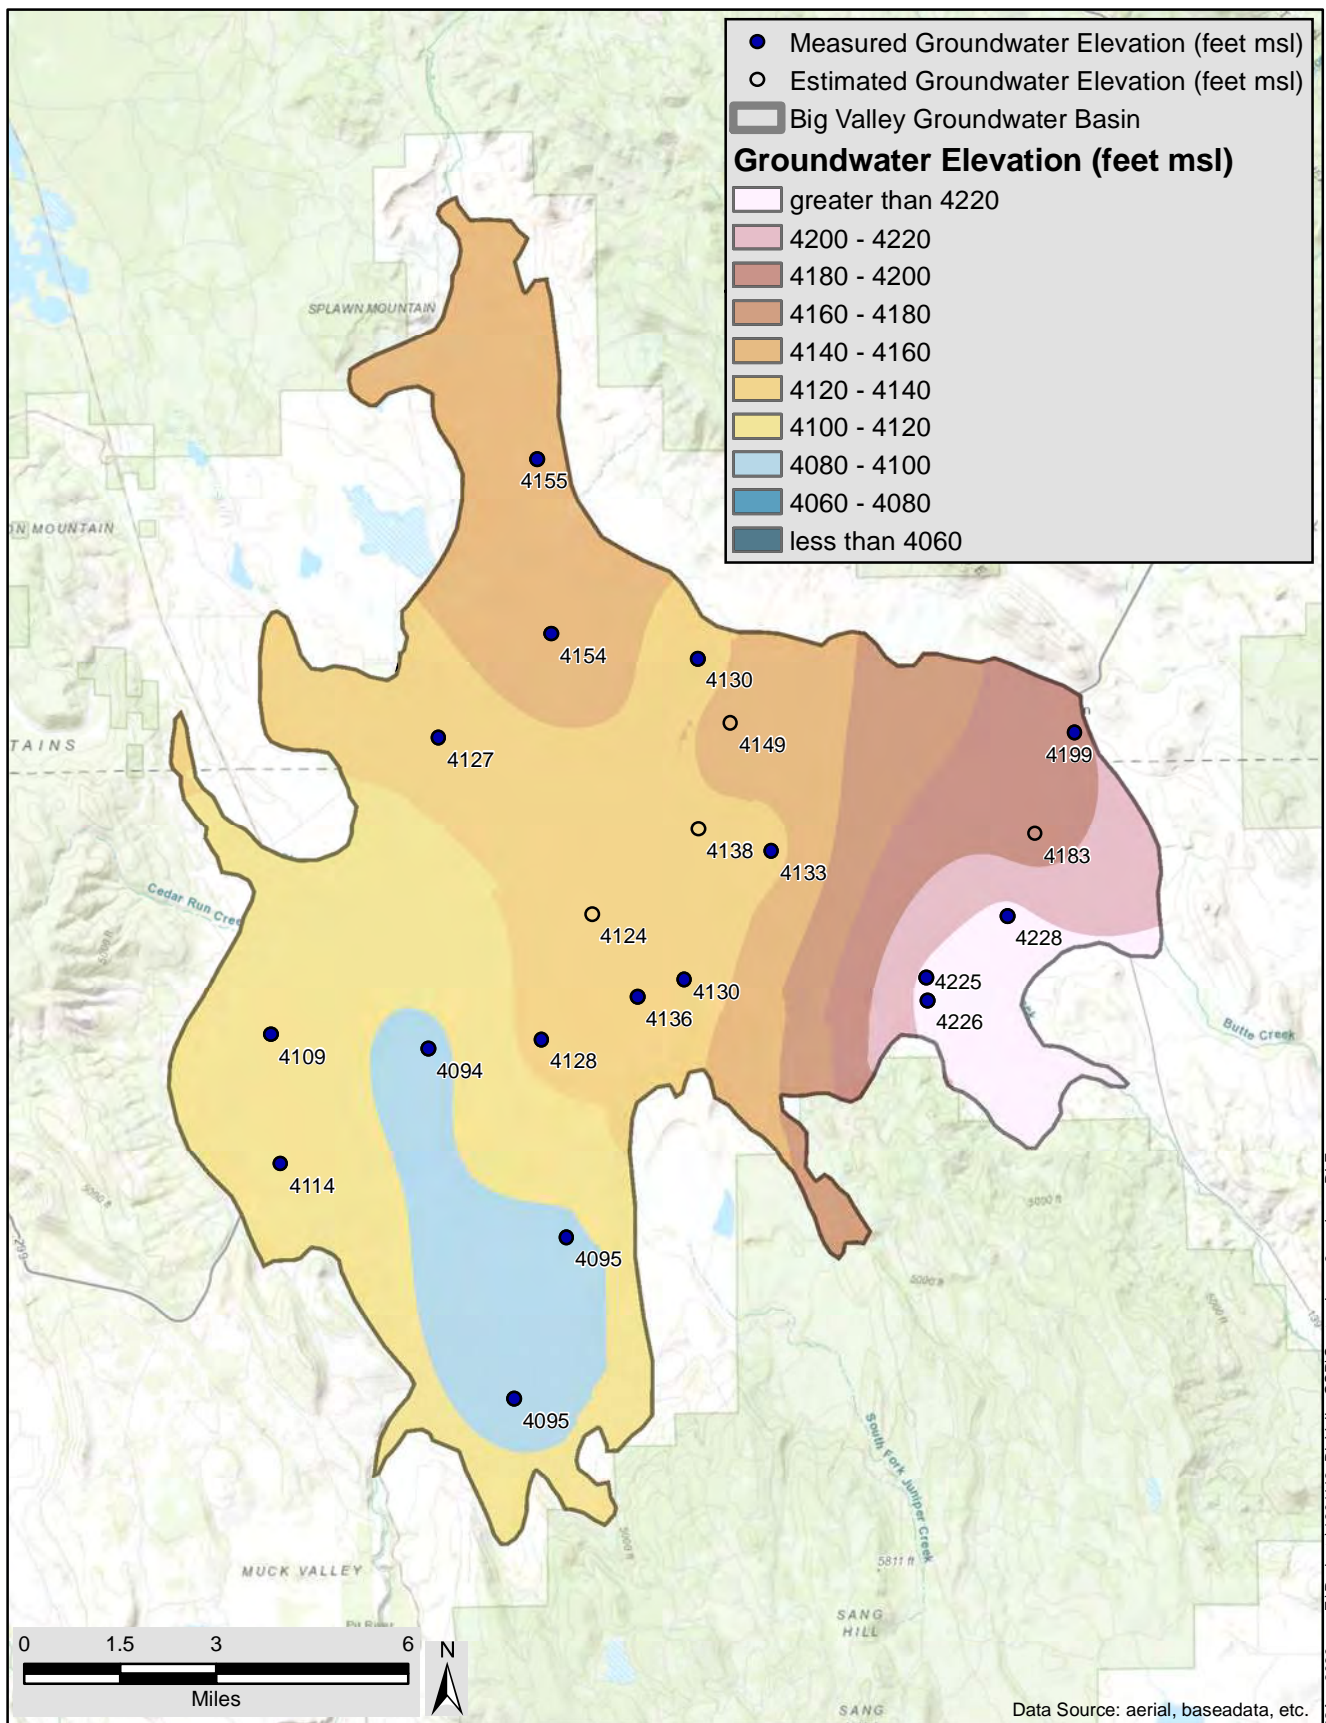

Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020

Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Spring 2007		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE

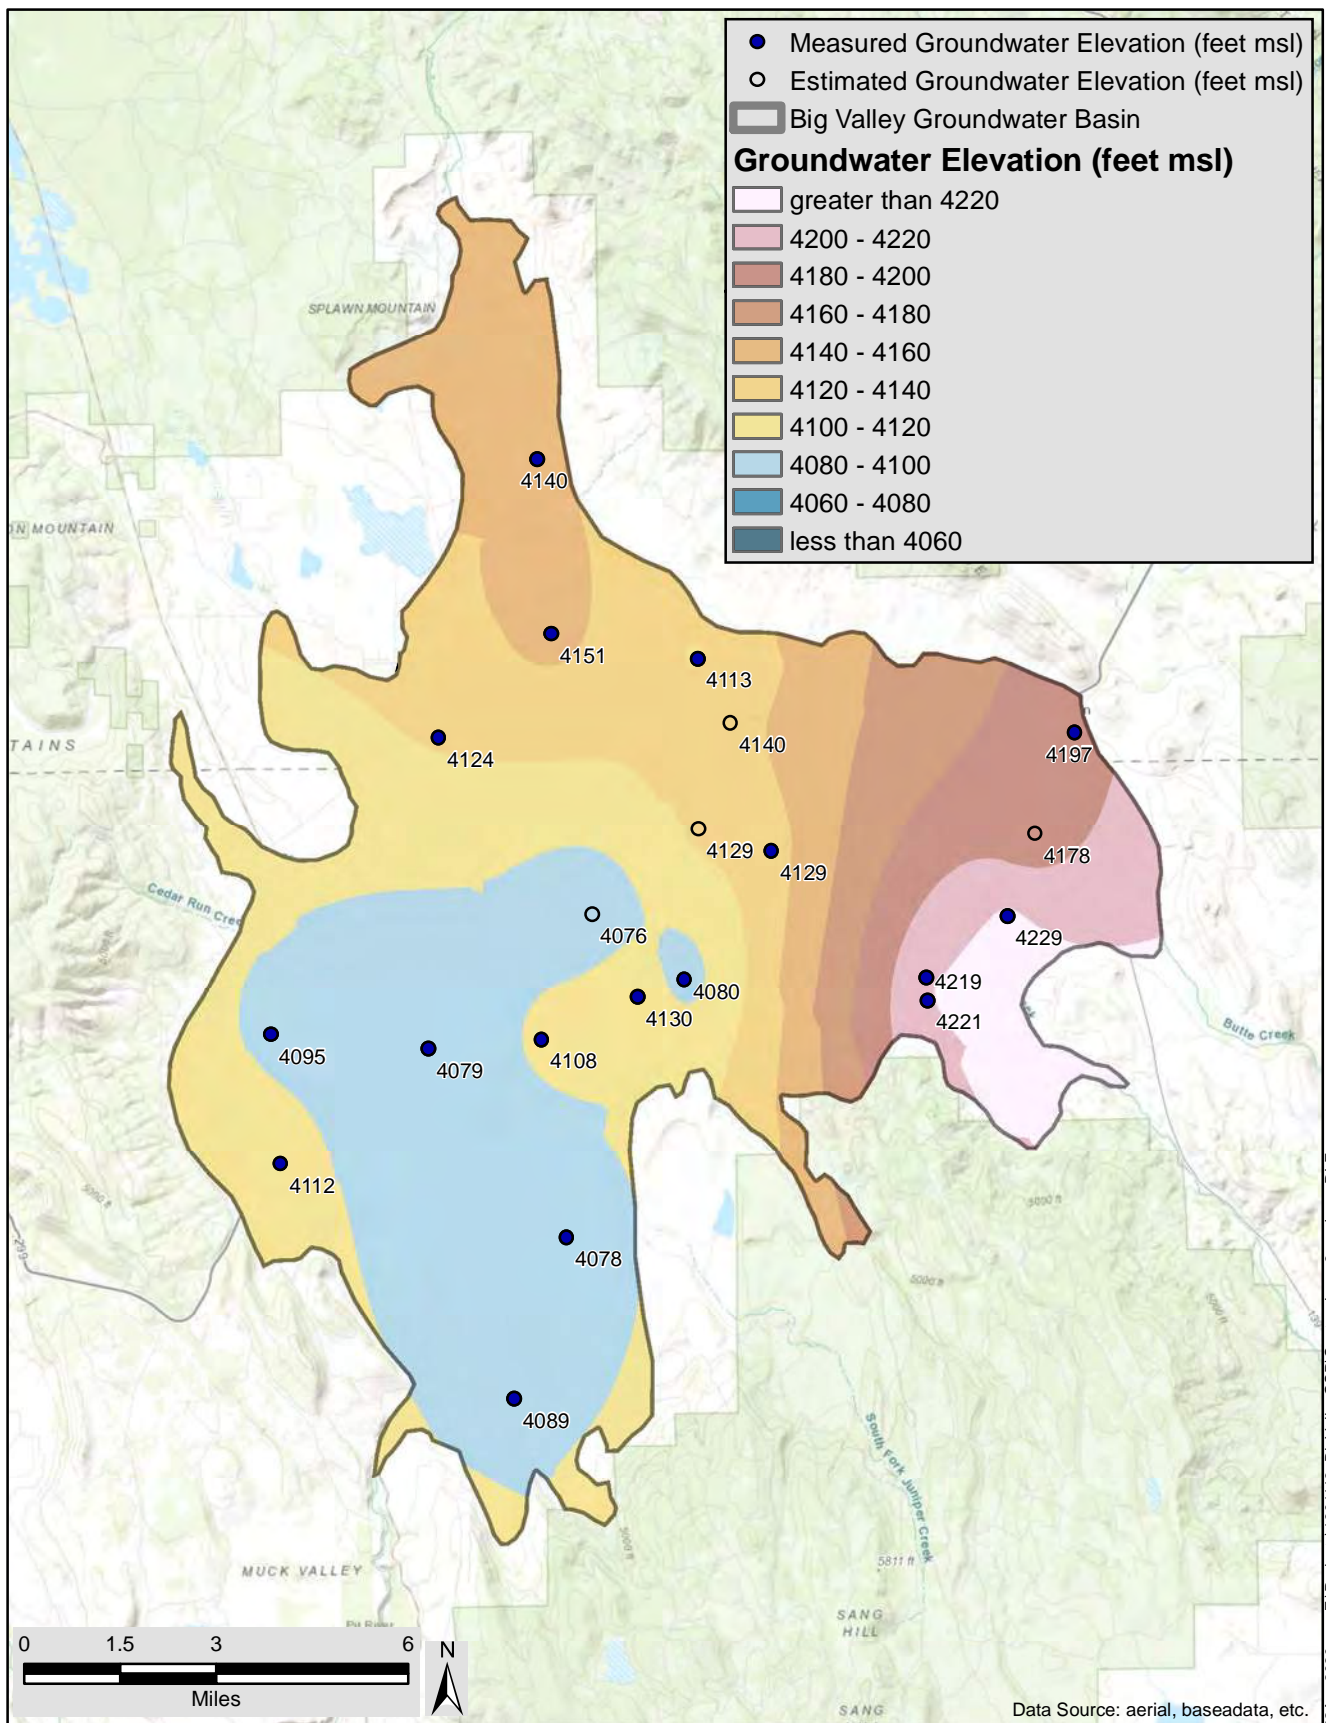


Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020

Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Fall 2007		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE






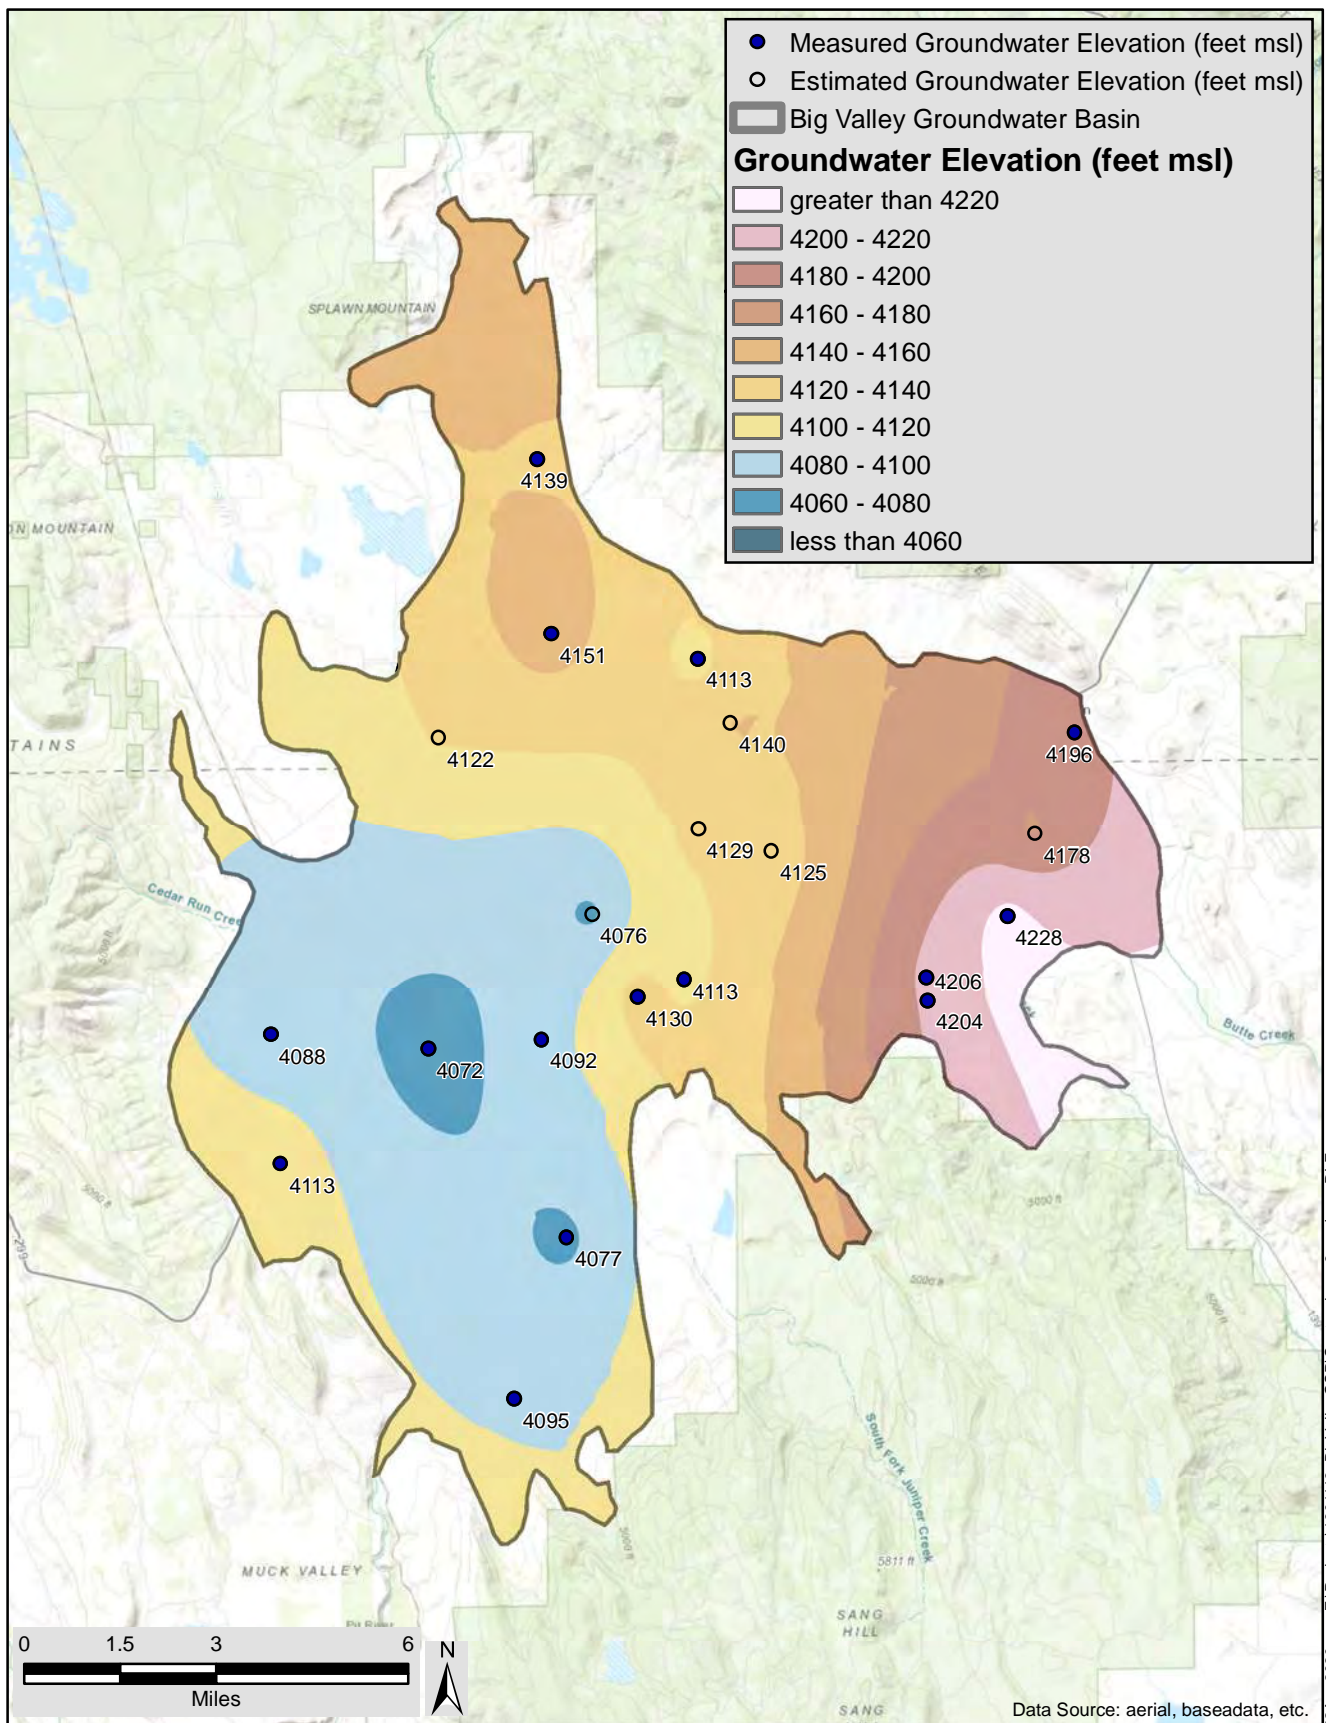

Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020

Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Fall 2008		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE



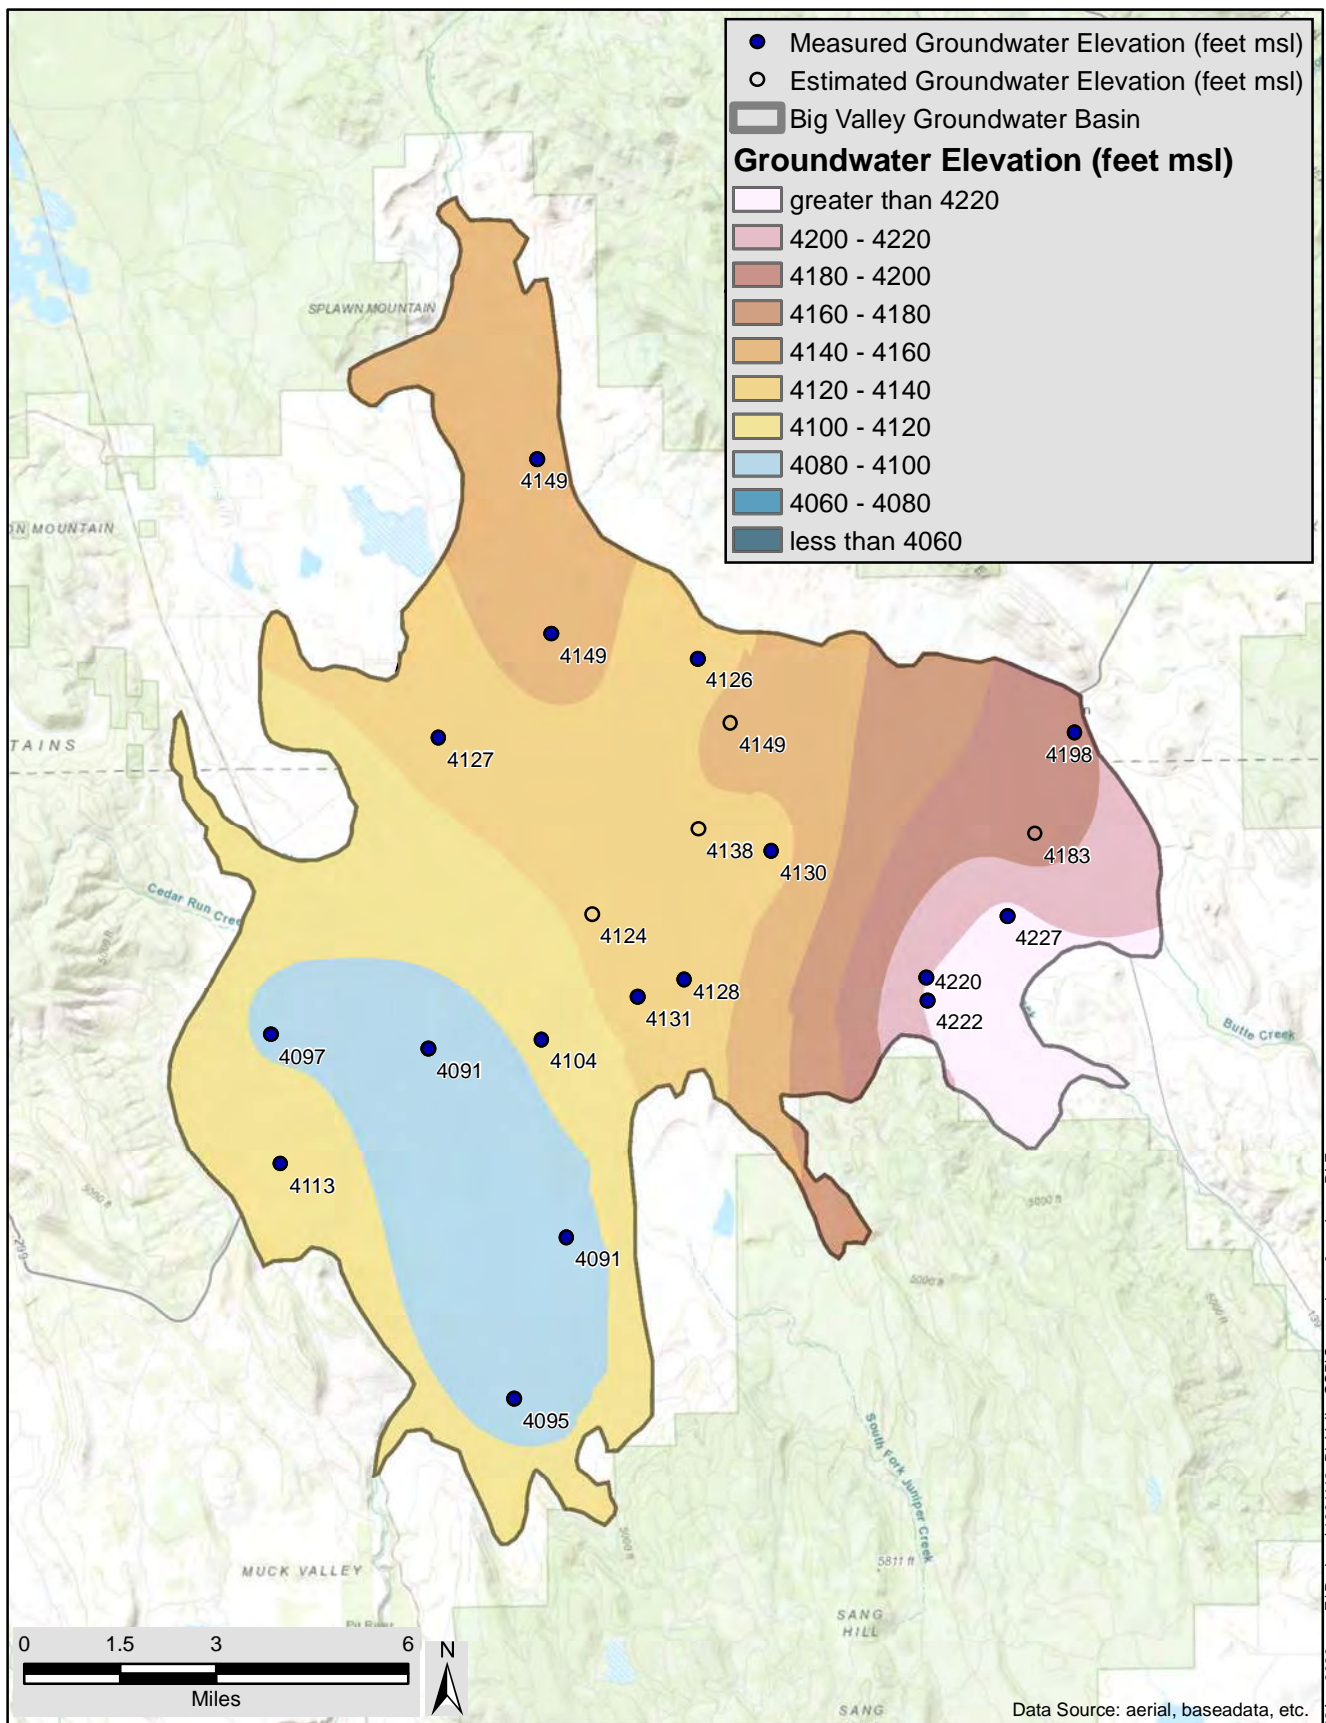

Big Valley Basin Groundwater Sustainability Plan  
Modoc and Lassen Counties, California

Big Valley Groundwater Basin GSAs




Groundwater Elevations  
Spring 2009

AUGUST 2020

**DRAFT**

FIGURE

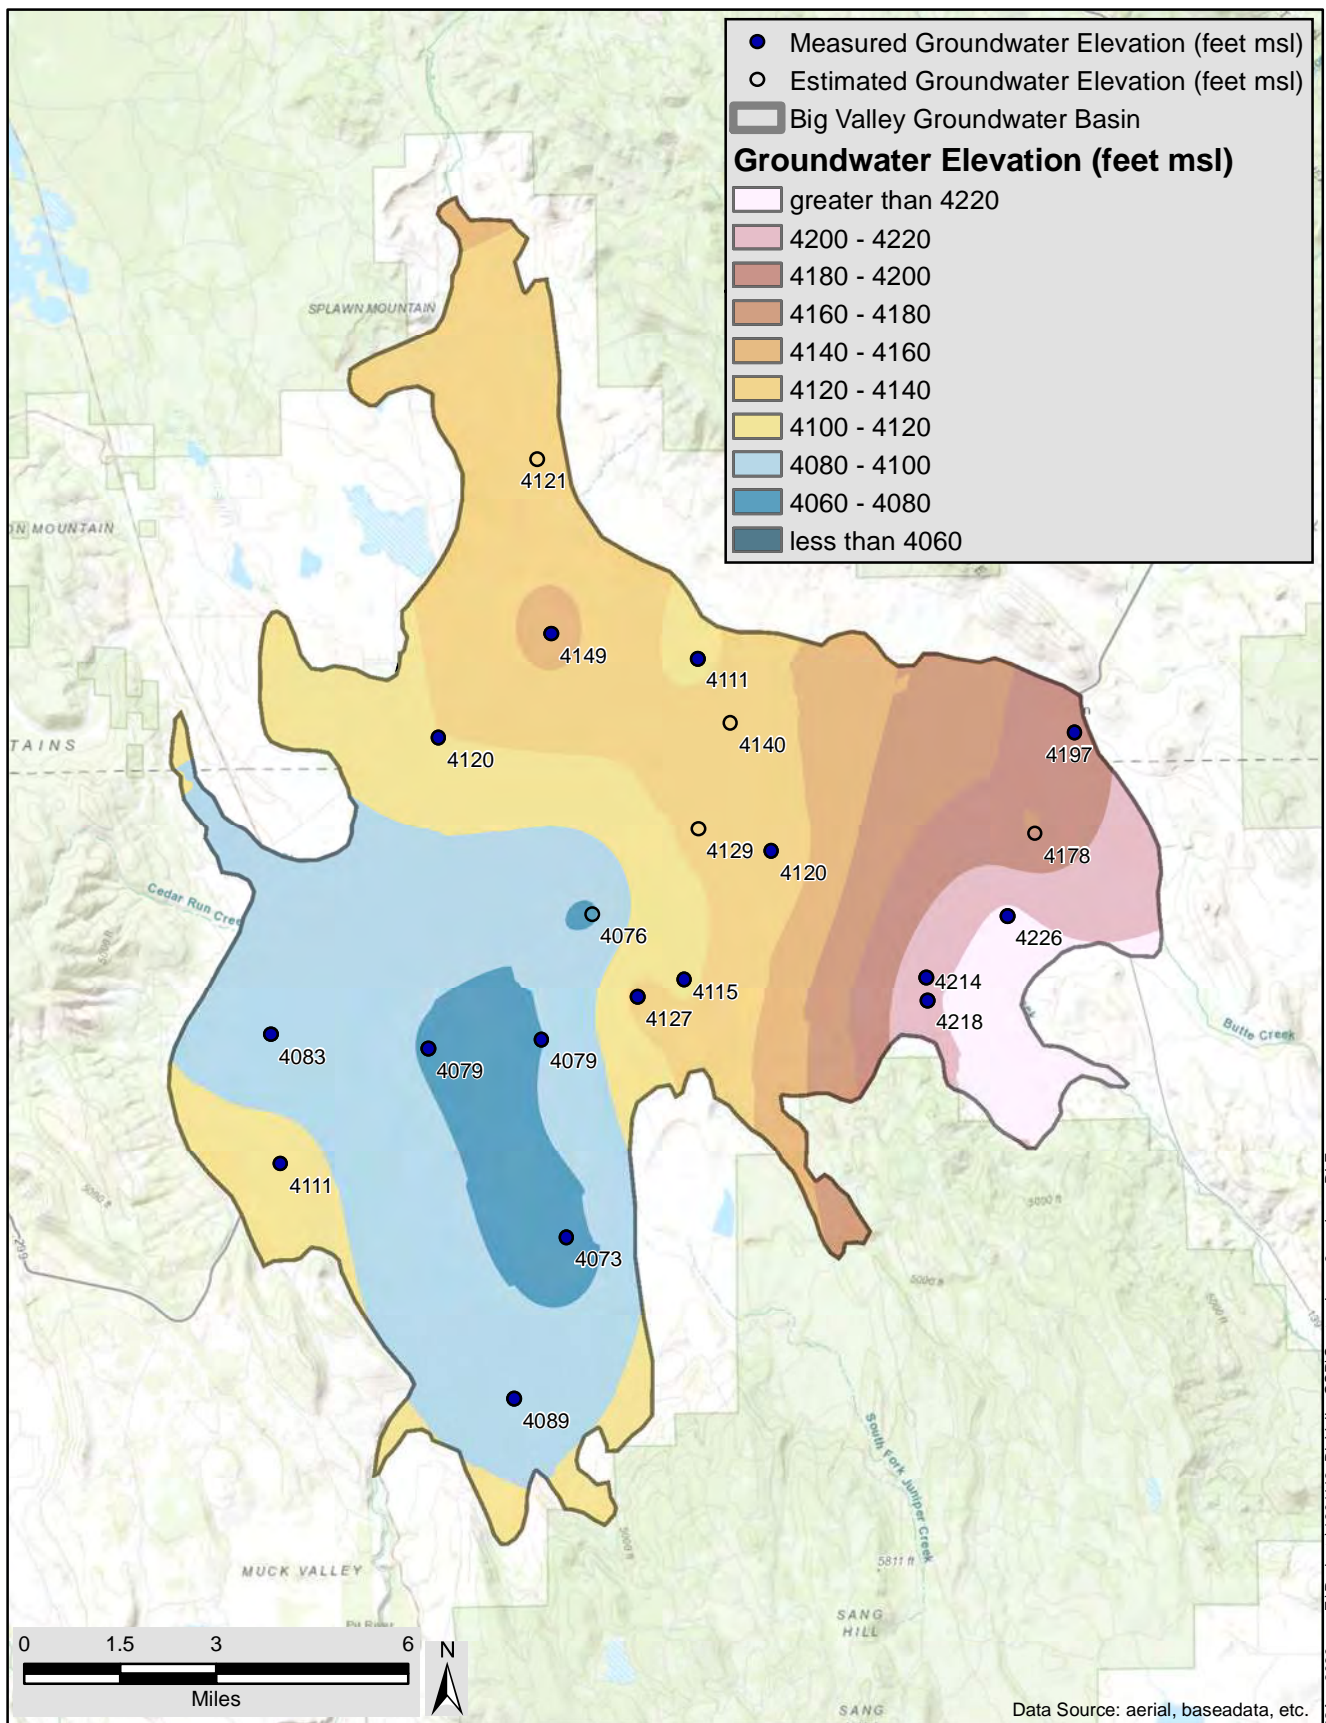

Big Valley Basin Groundwater Sustainability Plan  
Modoc and Lassen Counties, California

Big Valley Groundwater Basin GSAs




Groundwater Elevations  
Fall 2009

AUGUST 2020

**DRAFT**


FIGURE



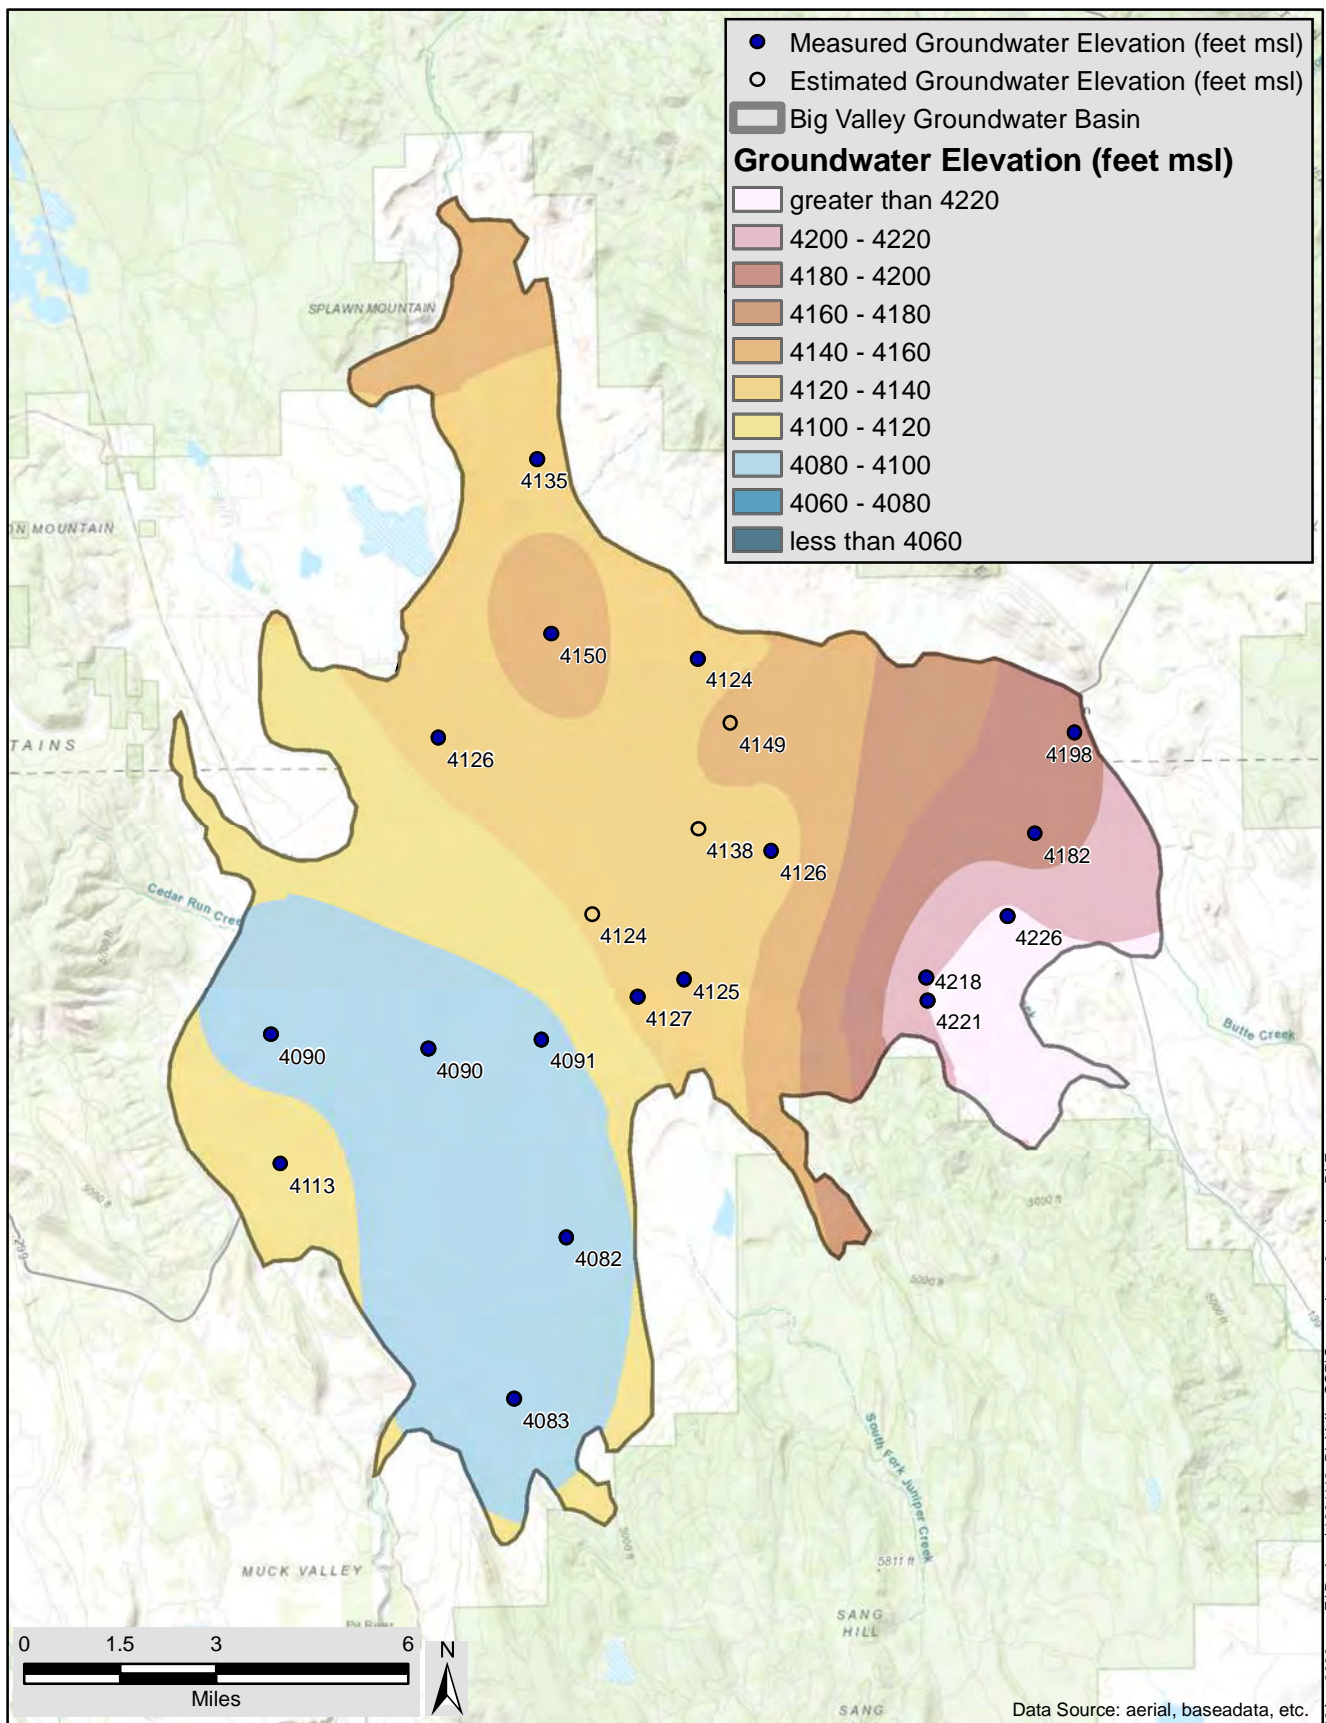

Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020


Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Spring 2010		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE

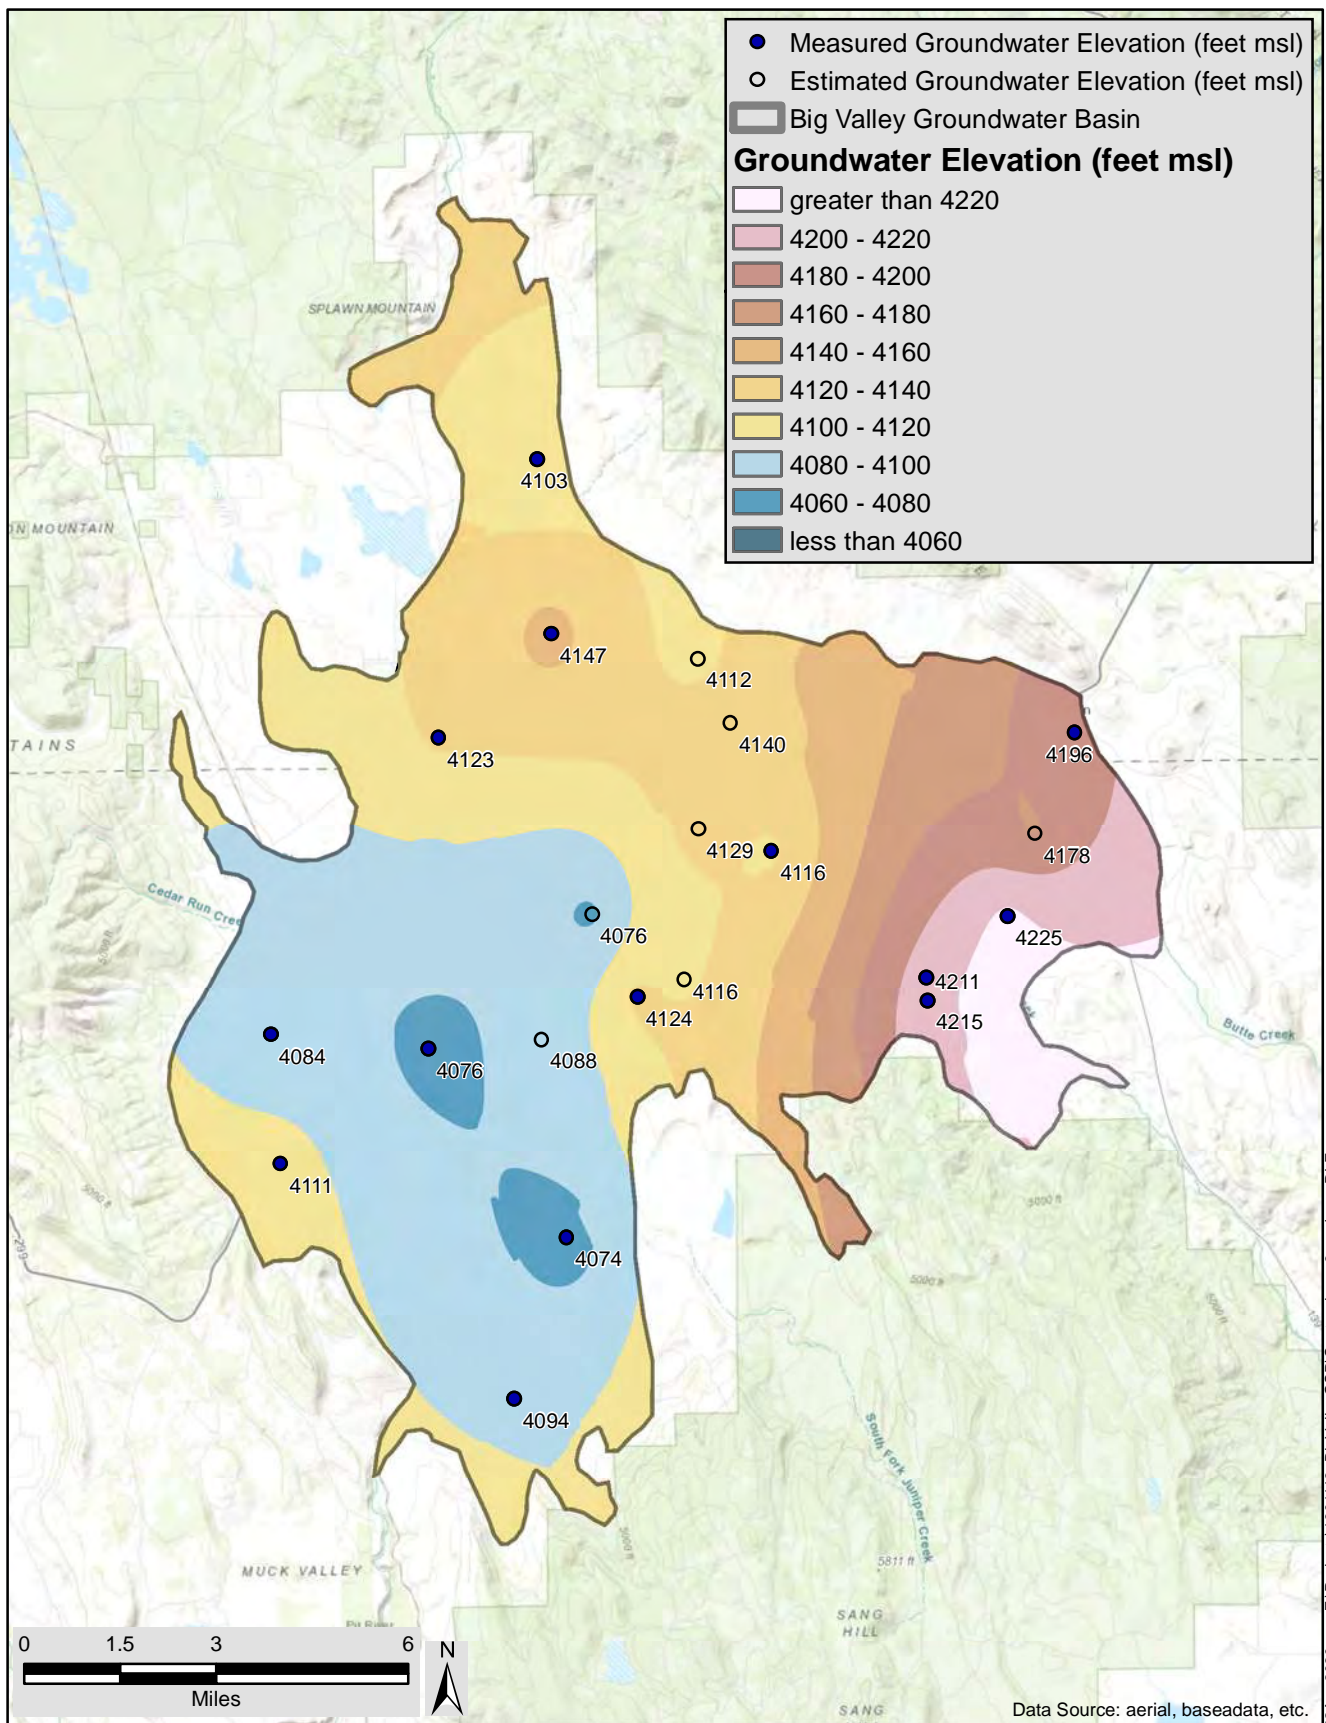

Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020


Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Fall 2010		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE



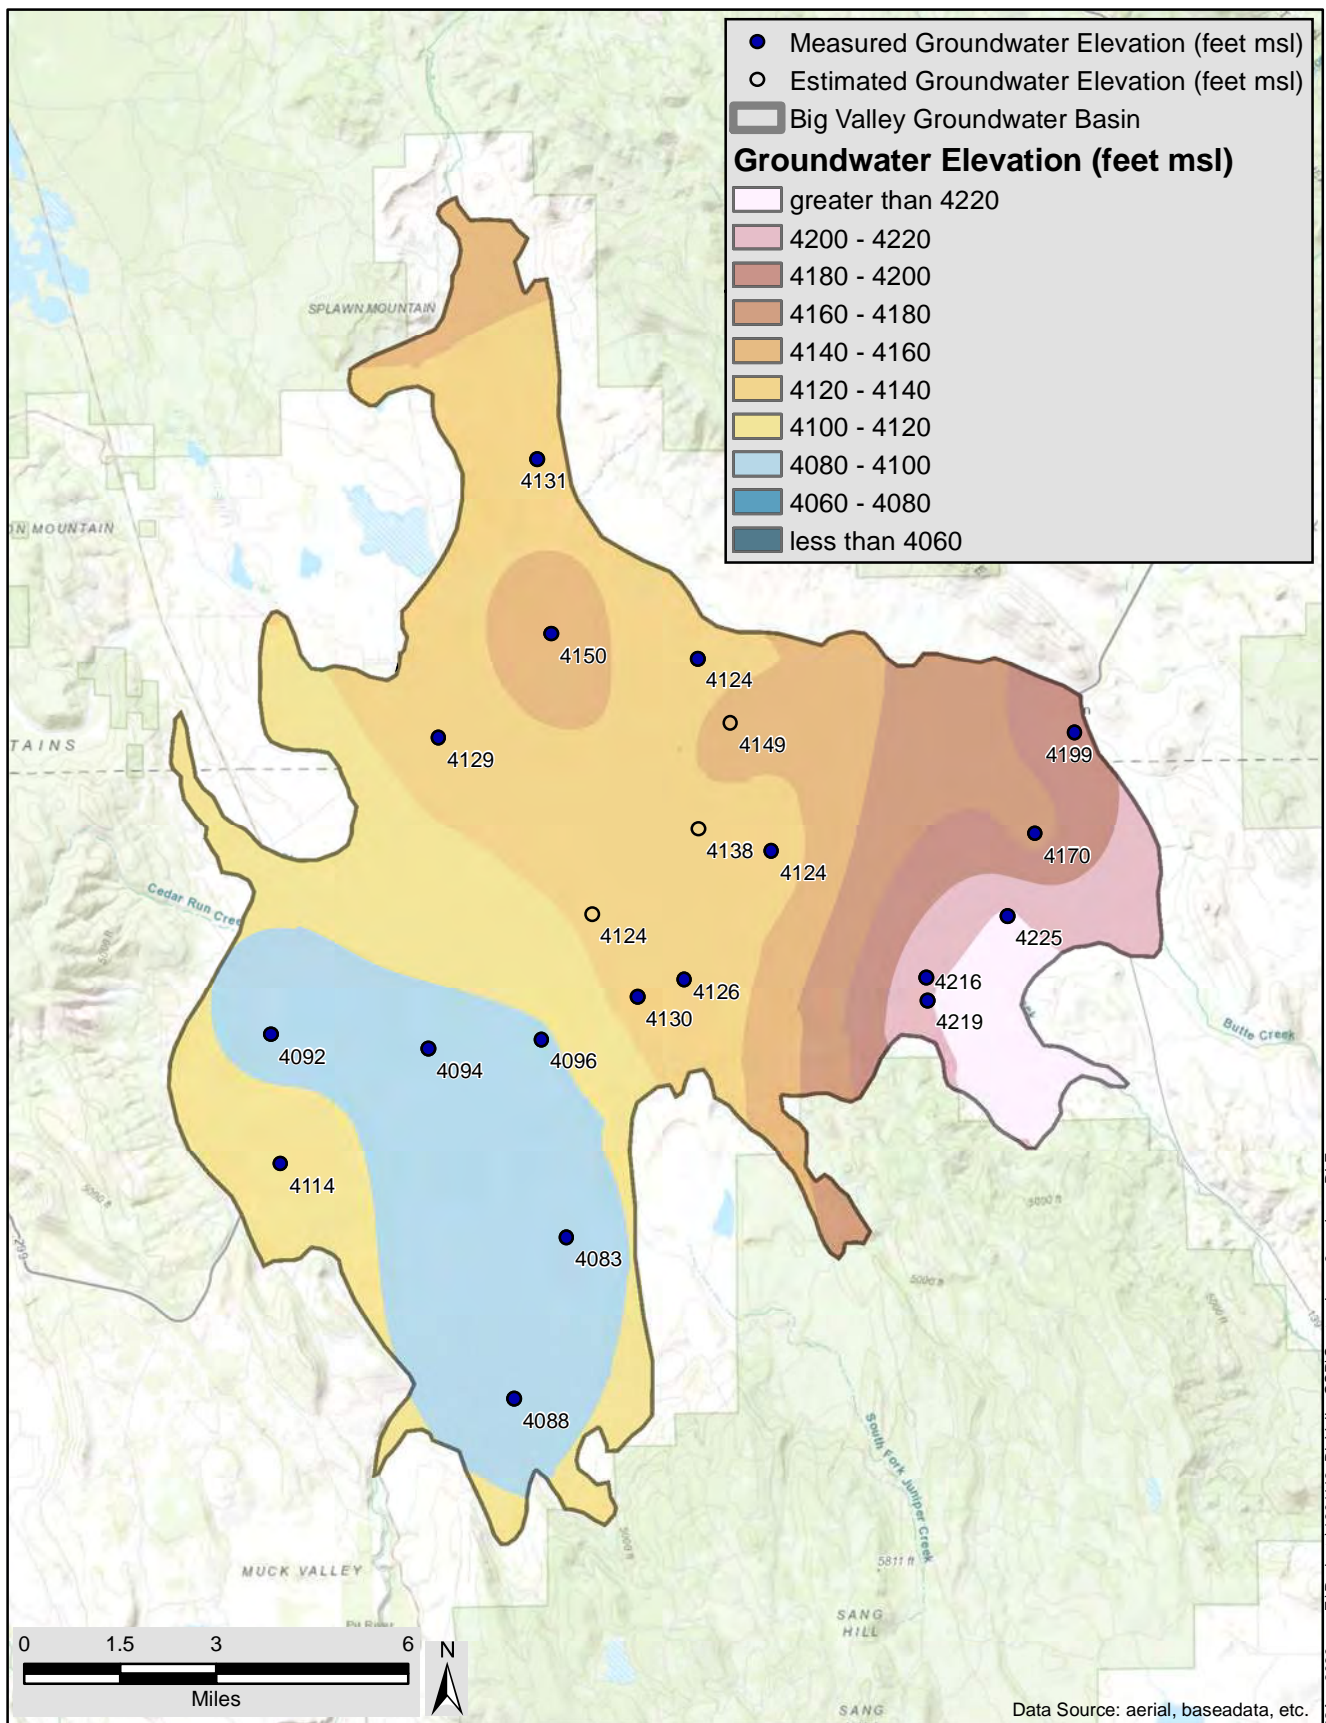


Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020

Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Spring 2011		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE

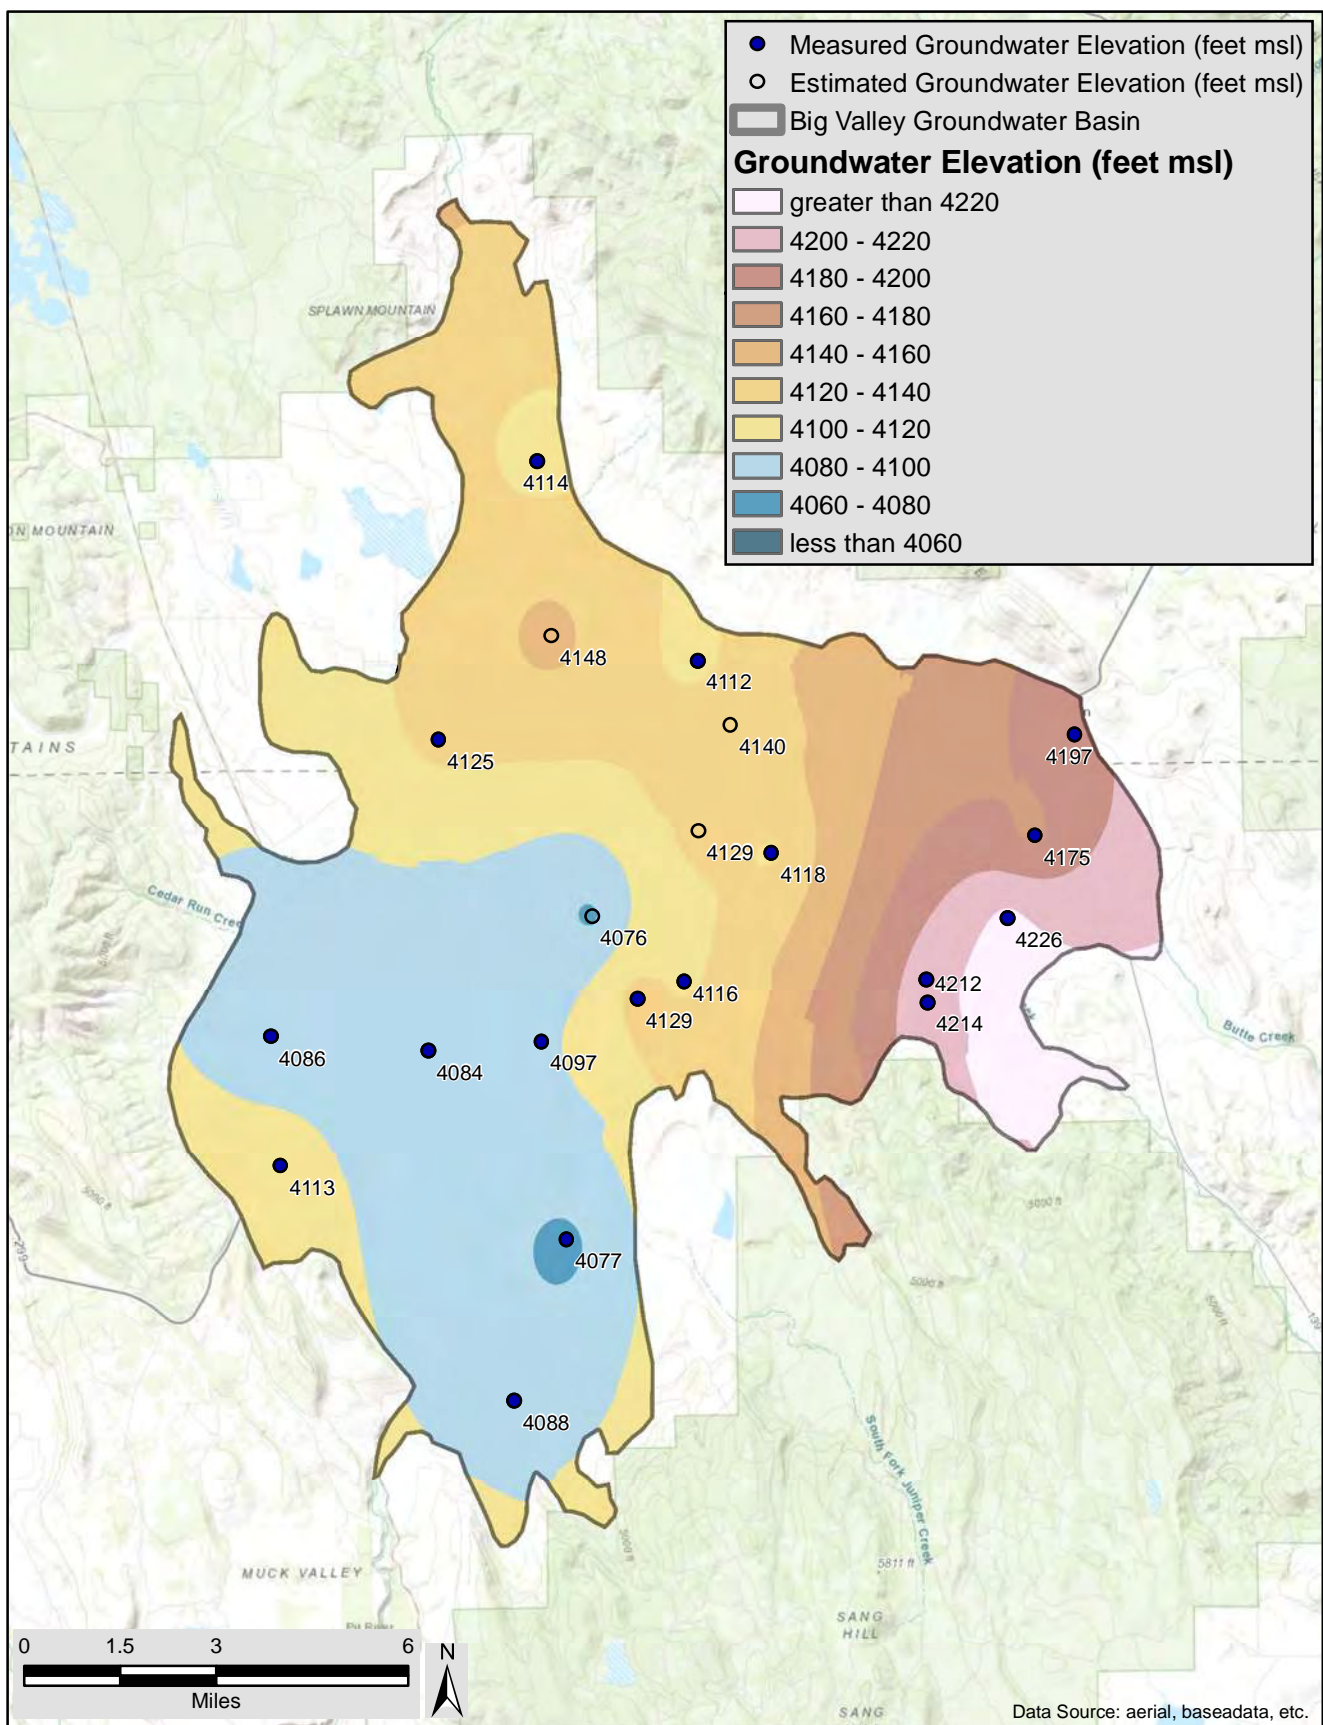


Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Fall 2011		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE



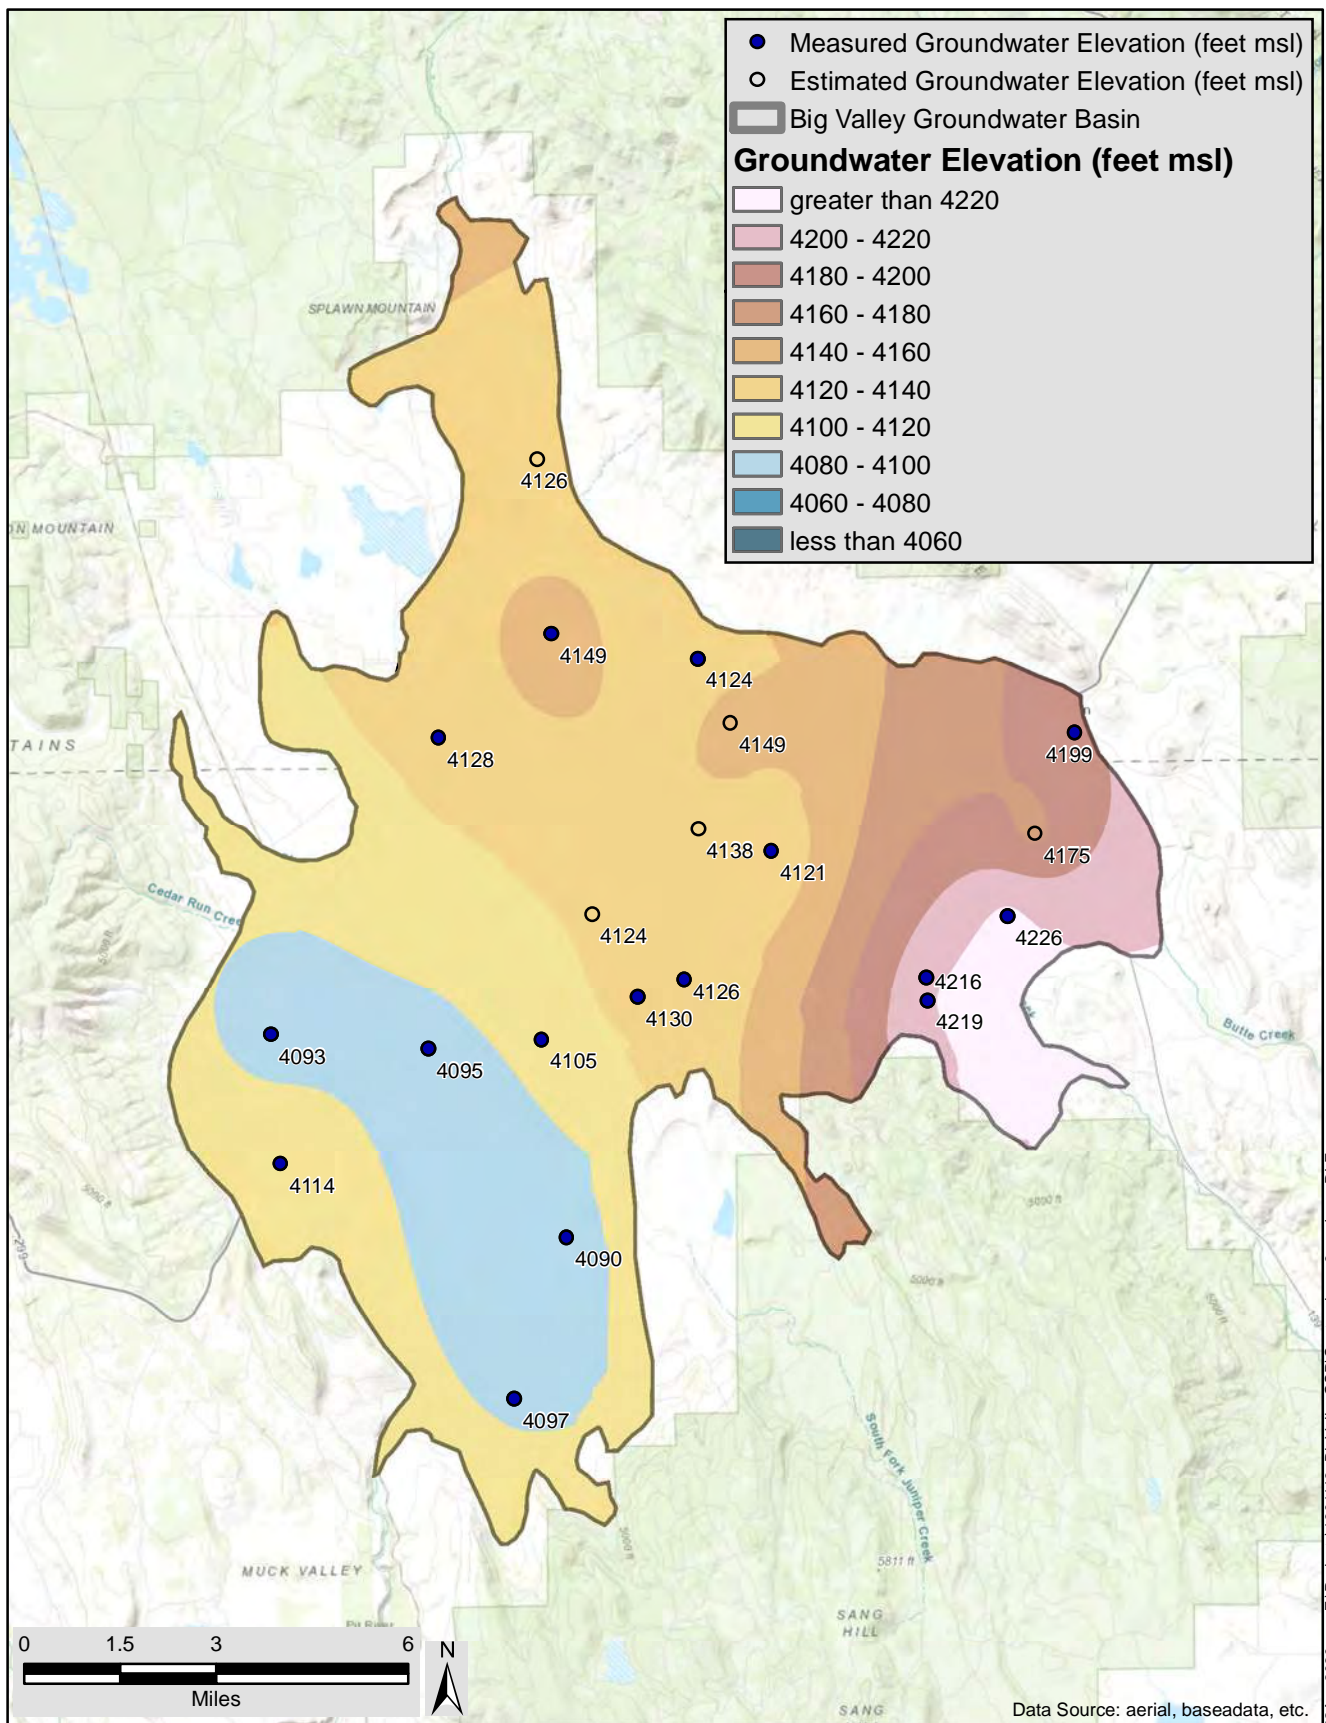

Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020


Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Spring 2012	
Big Valley Groundwater Basin GSAs	GEI Consultants	AUGUST 2020	DRAFT

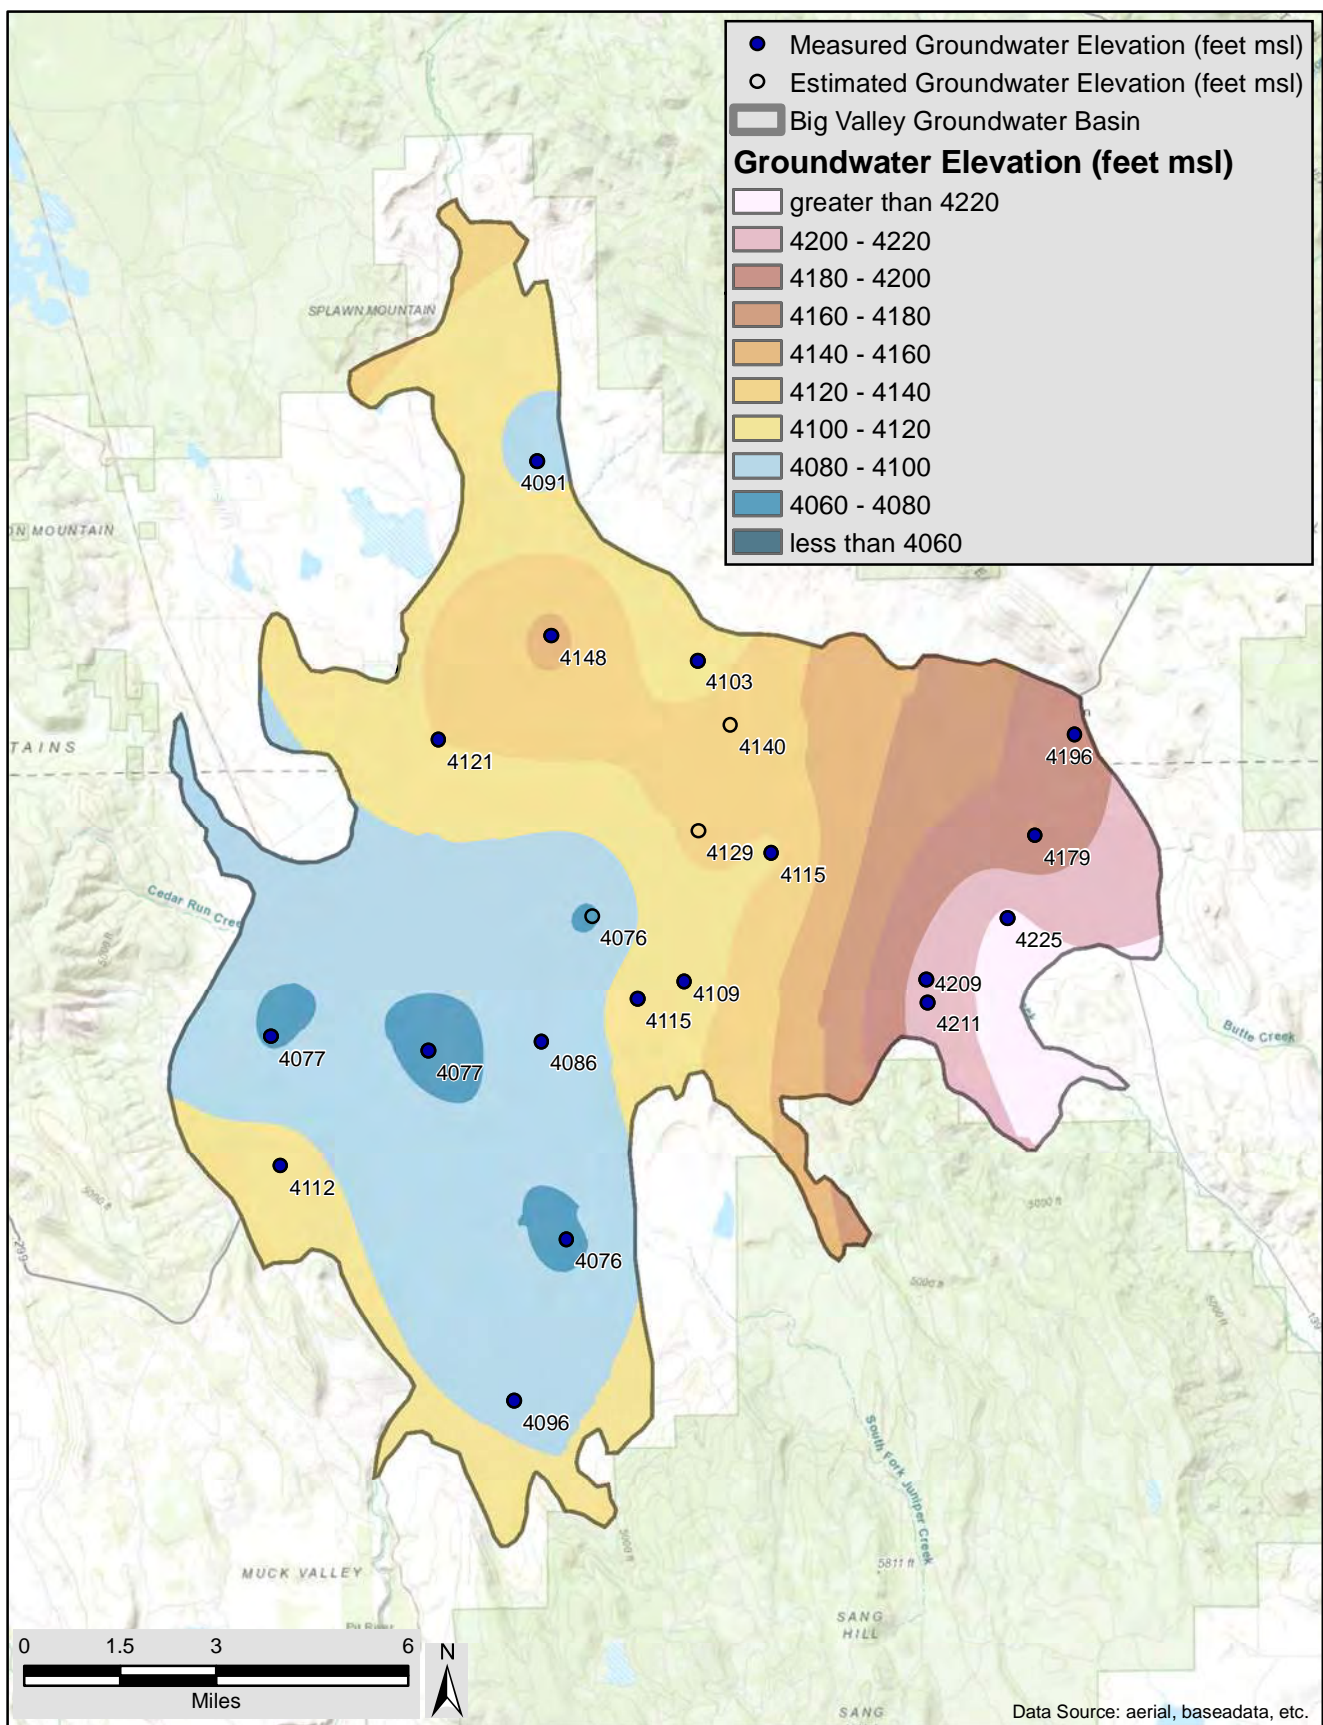

Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020


Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Fall 2012		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE



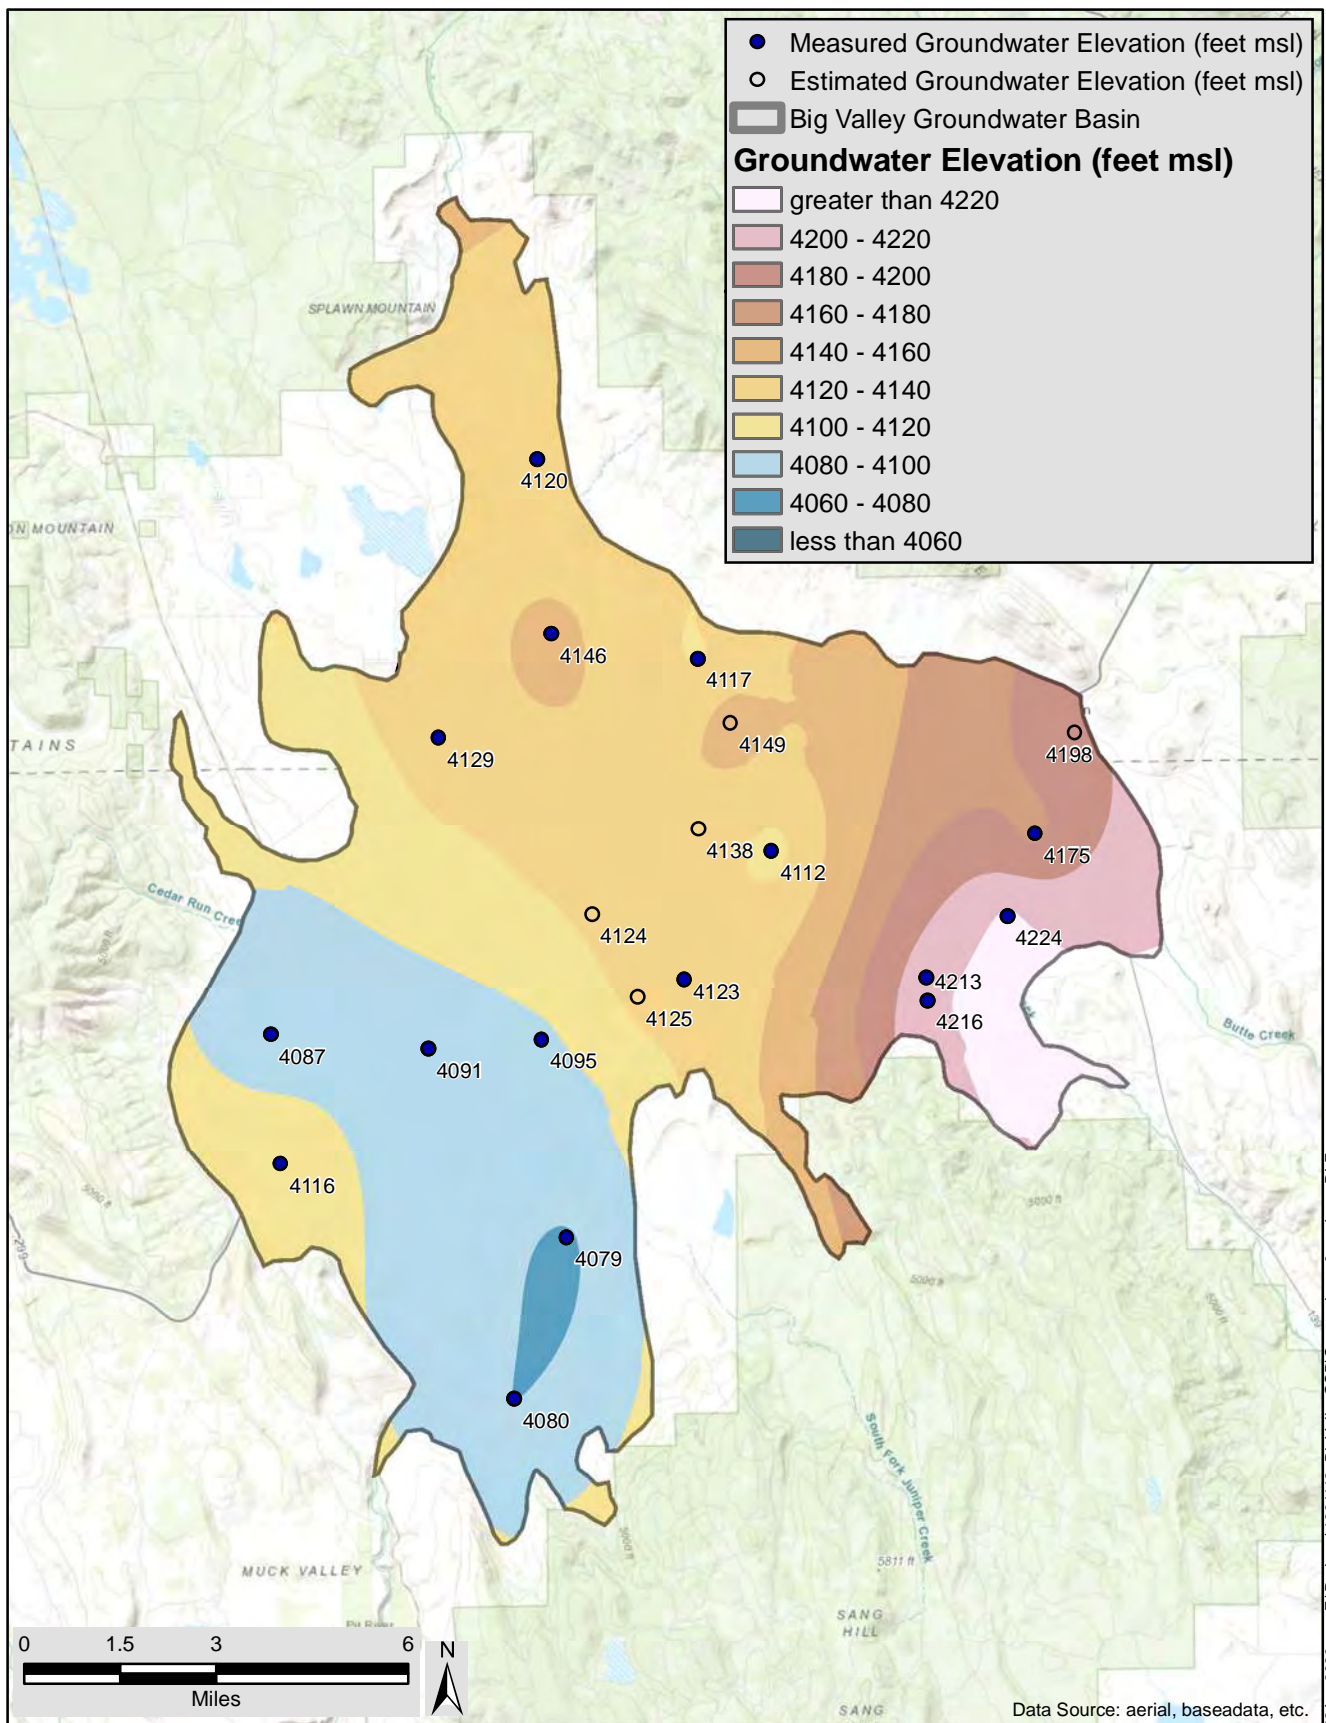

Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF  
 22Aug2020


Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Spring 2013	
Big Valley Groundwater Basin GSAs	GEI Consultants	AUGUST 2020	DRAFT

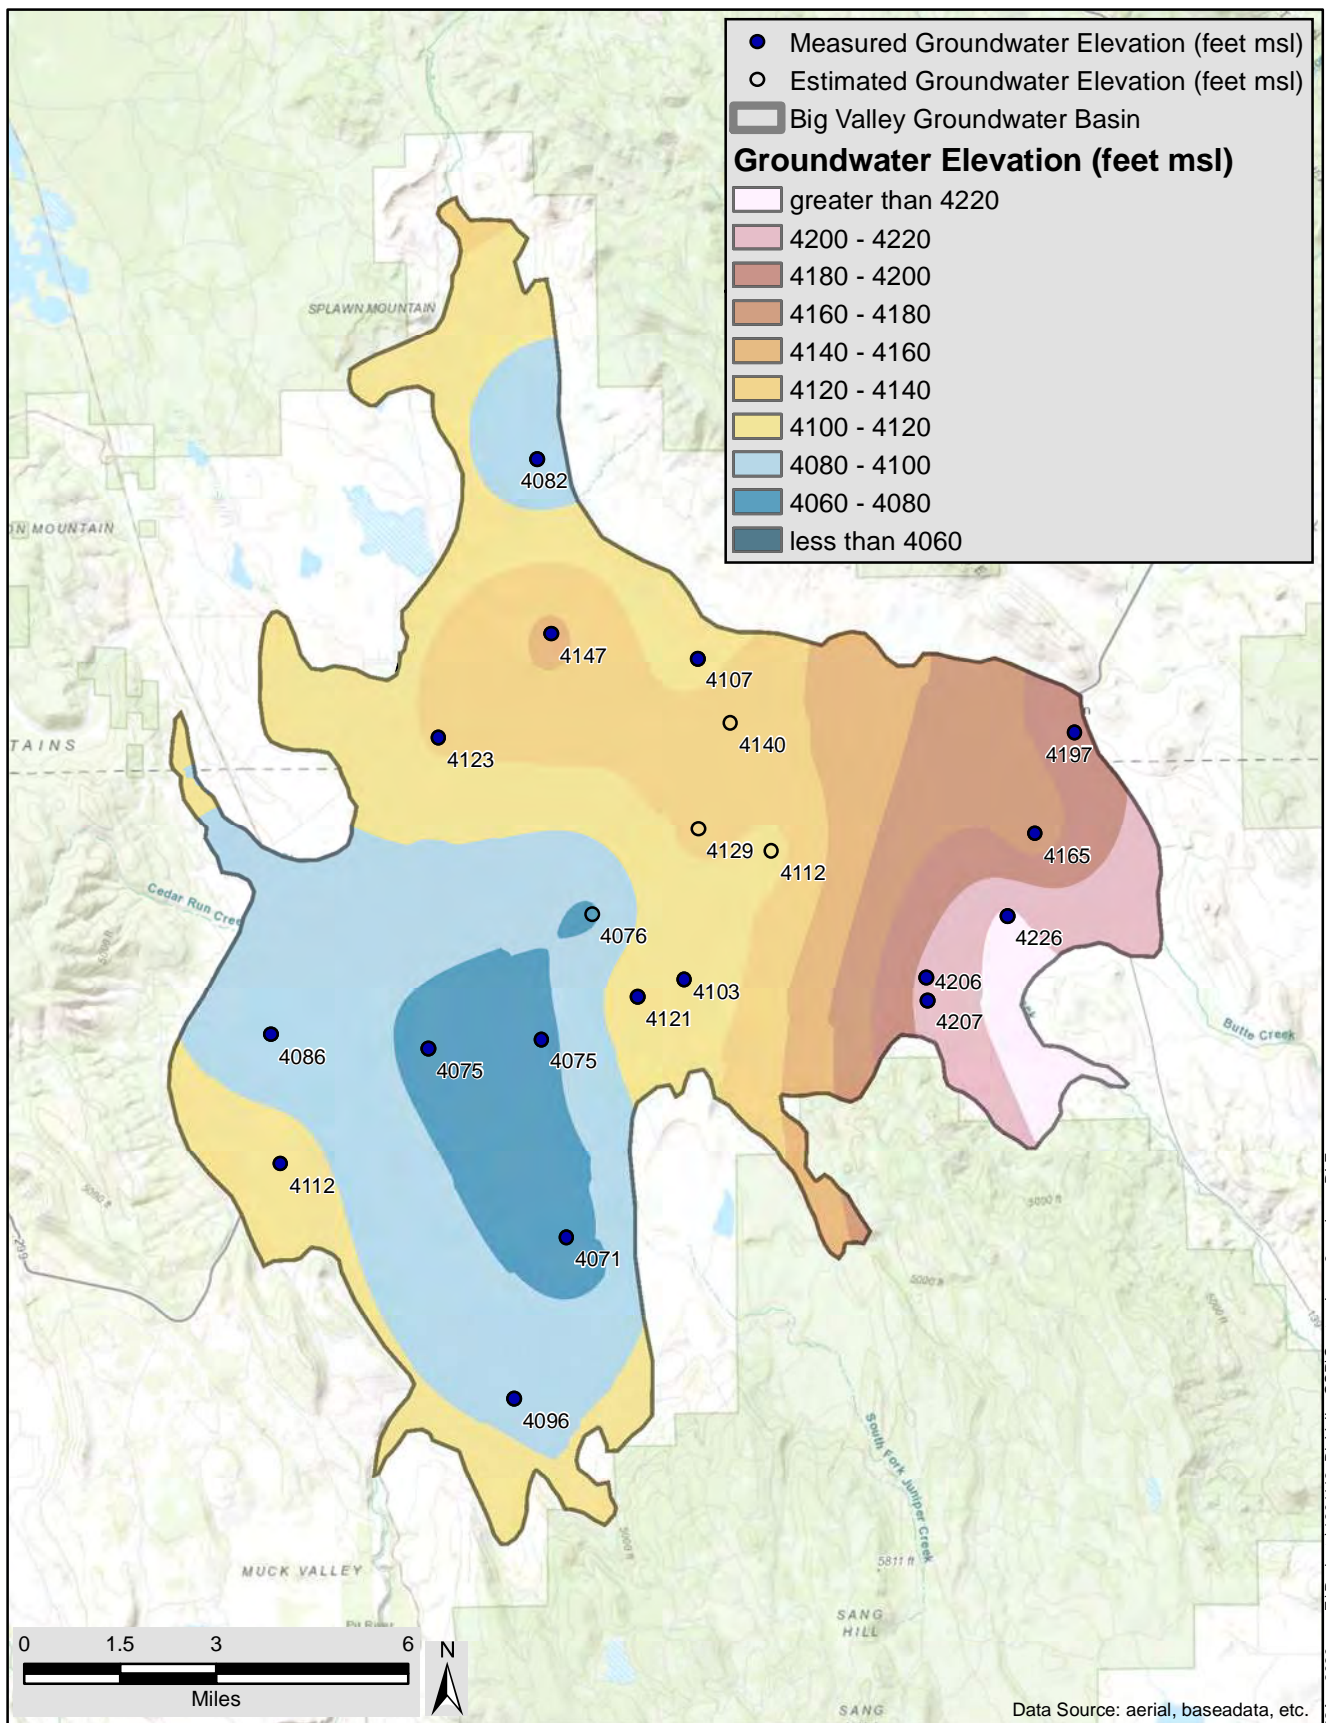

Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020


Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Fall 2013		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE



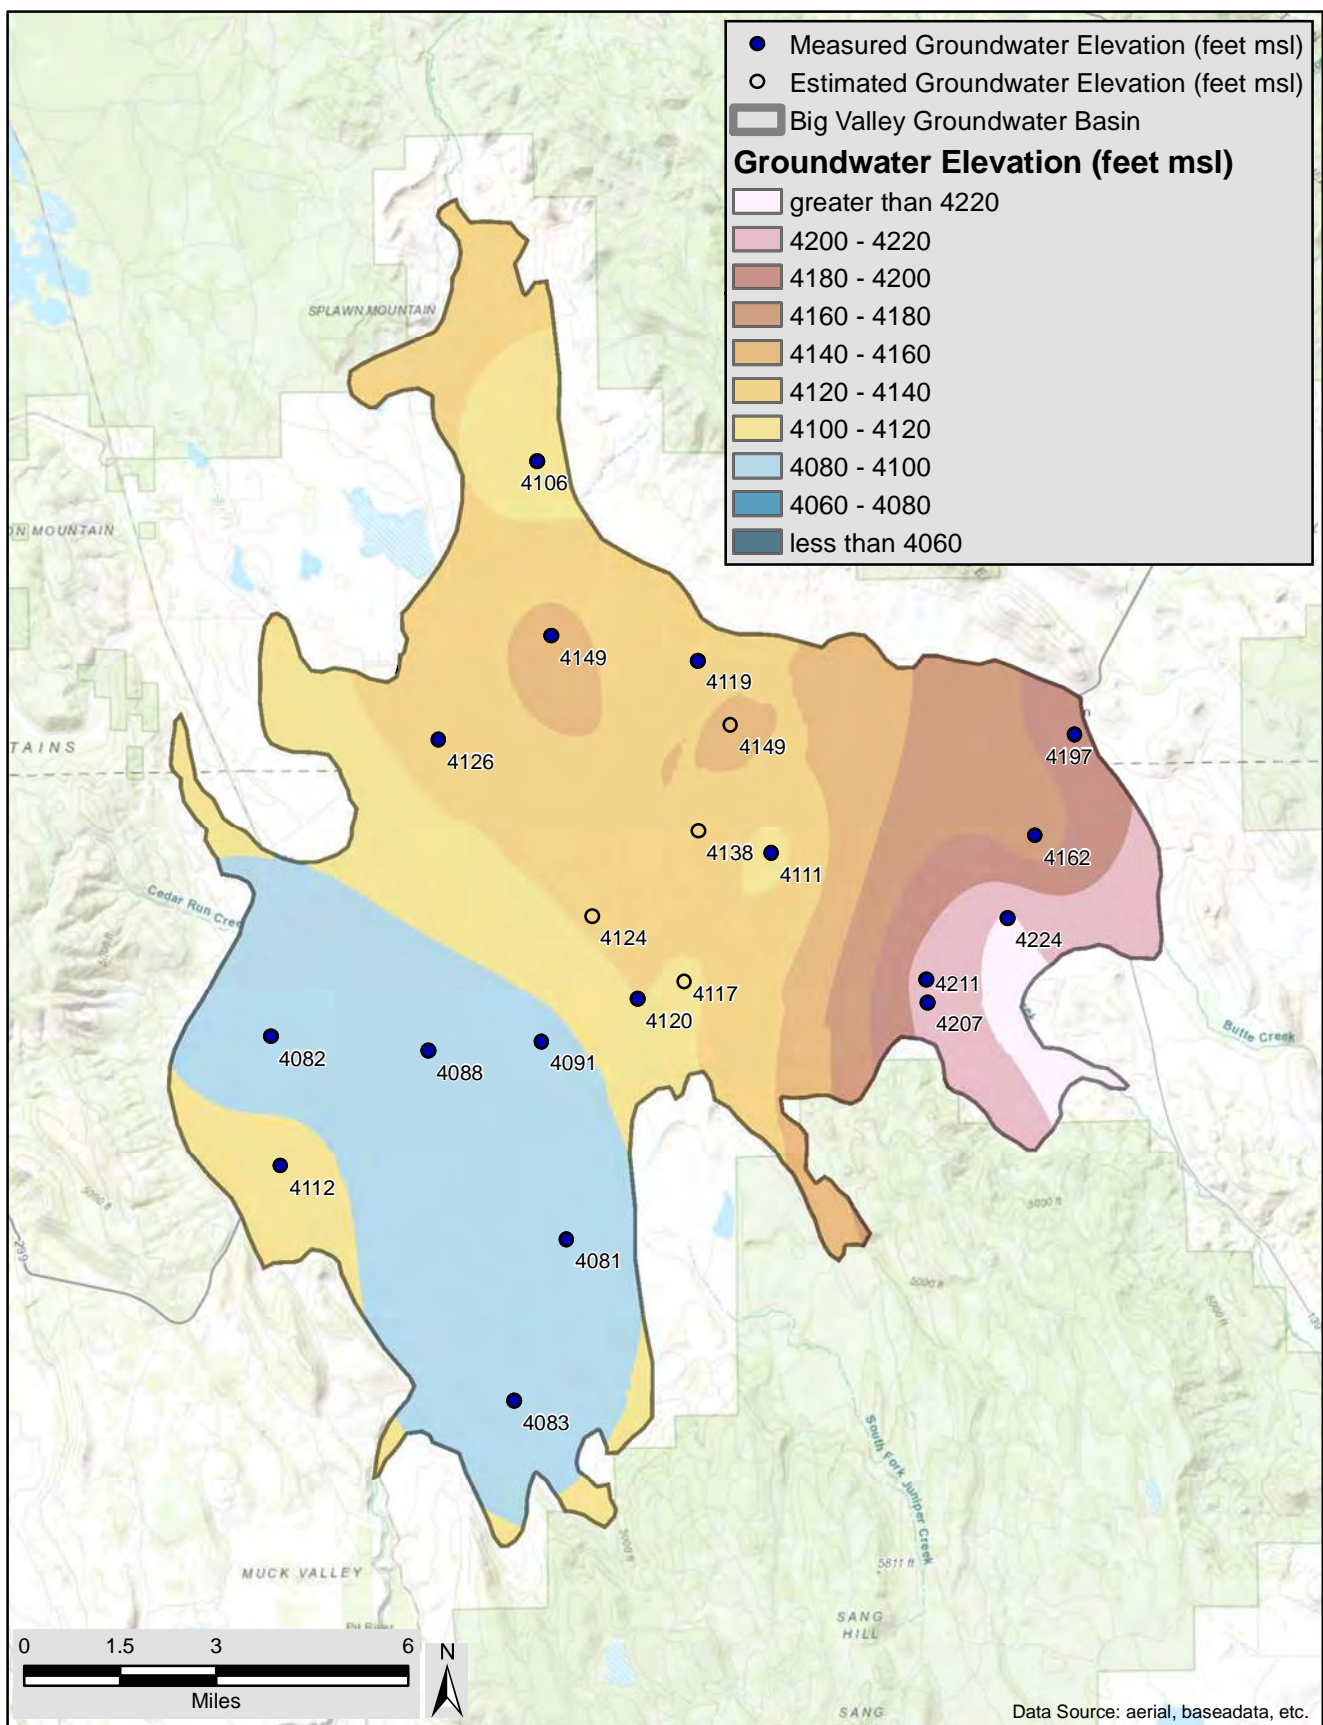

Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020


Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Spring 2014		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE

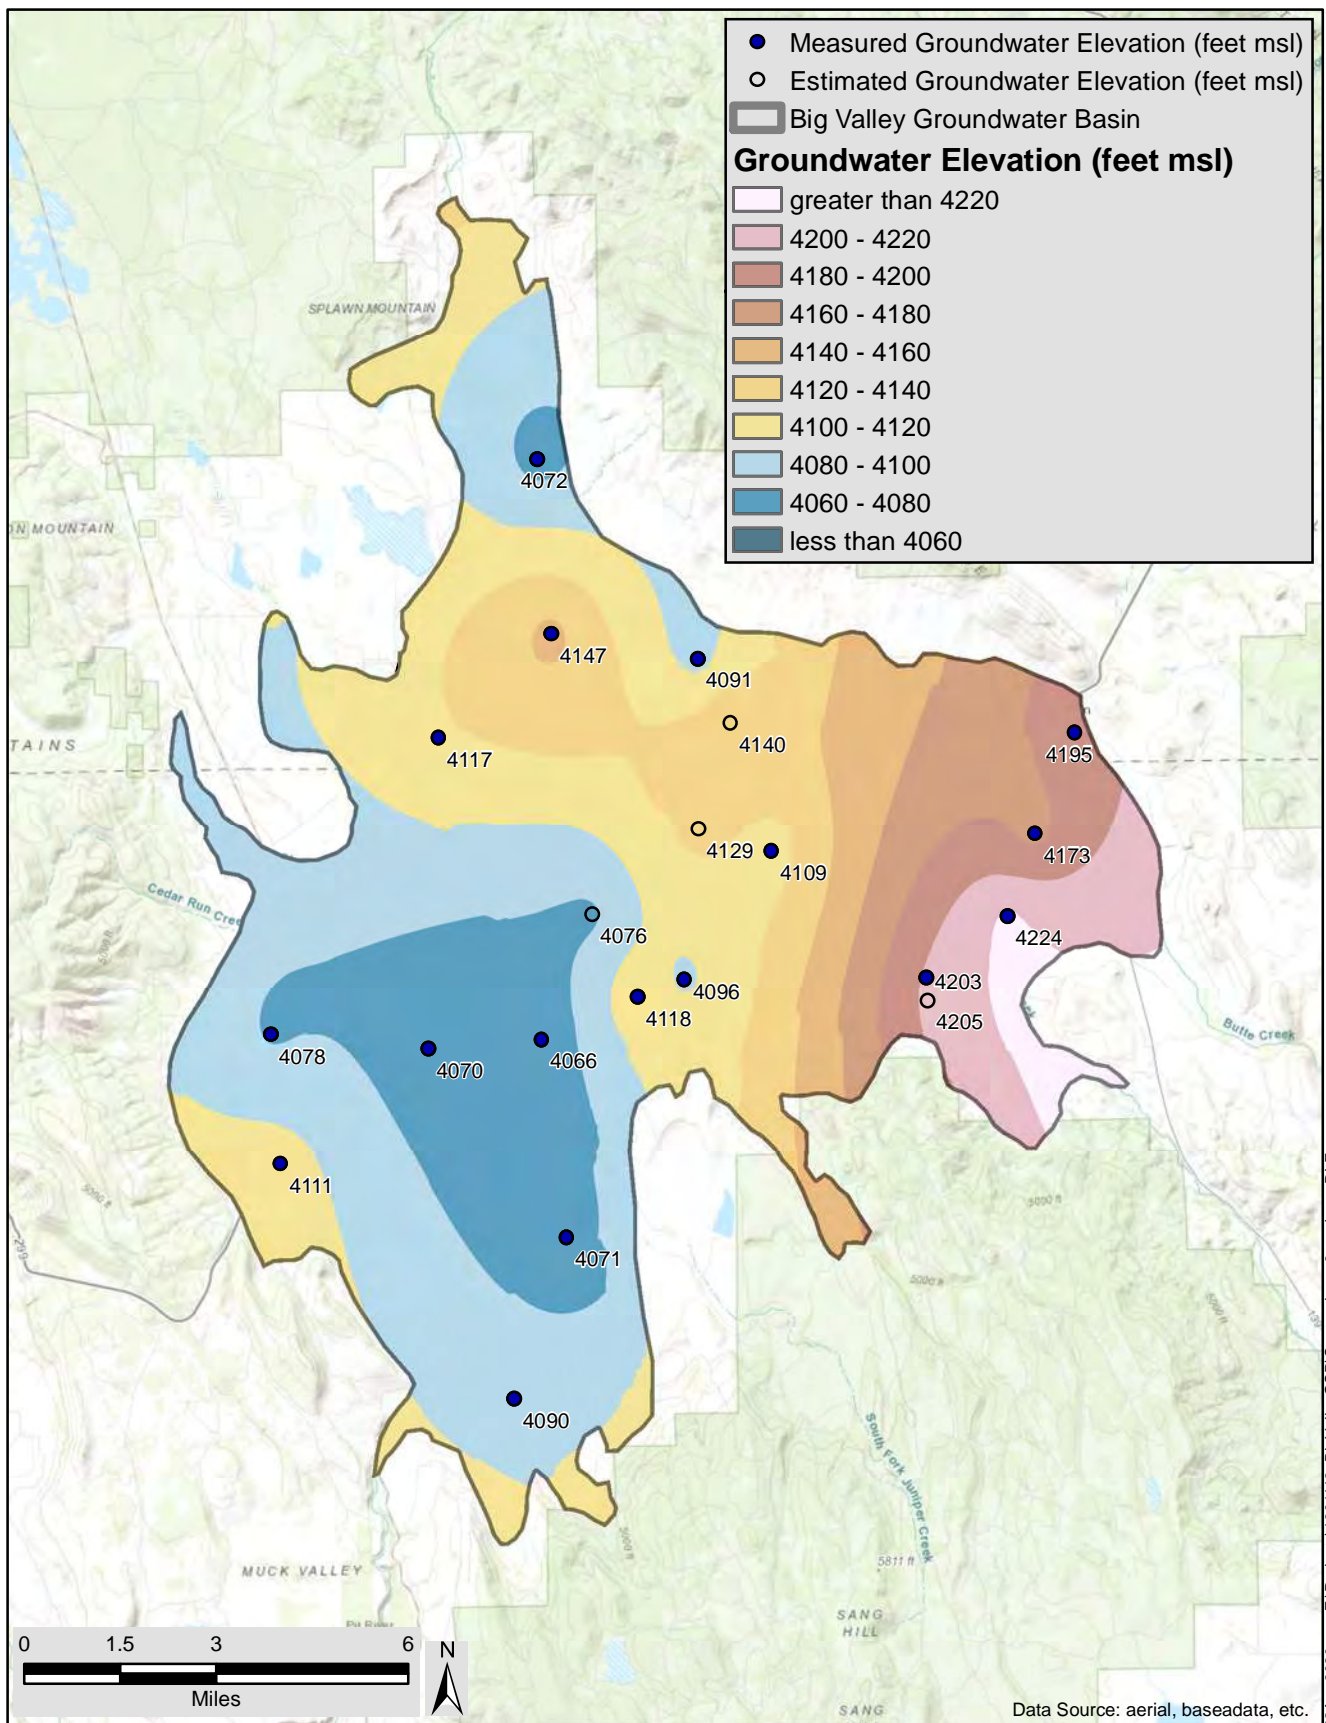

Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020


Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Fall 2014		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE



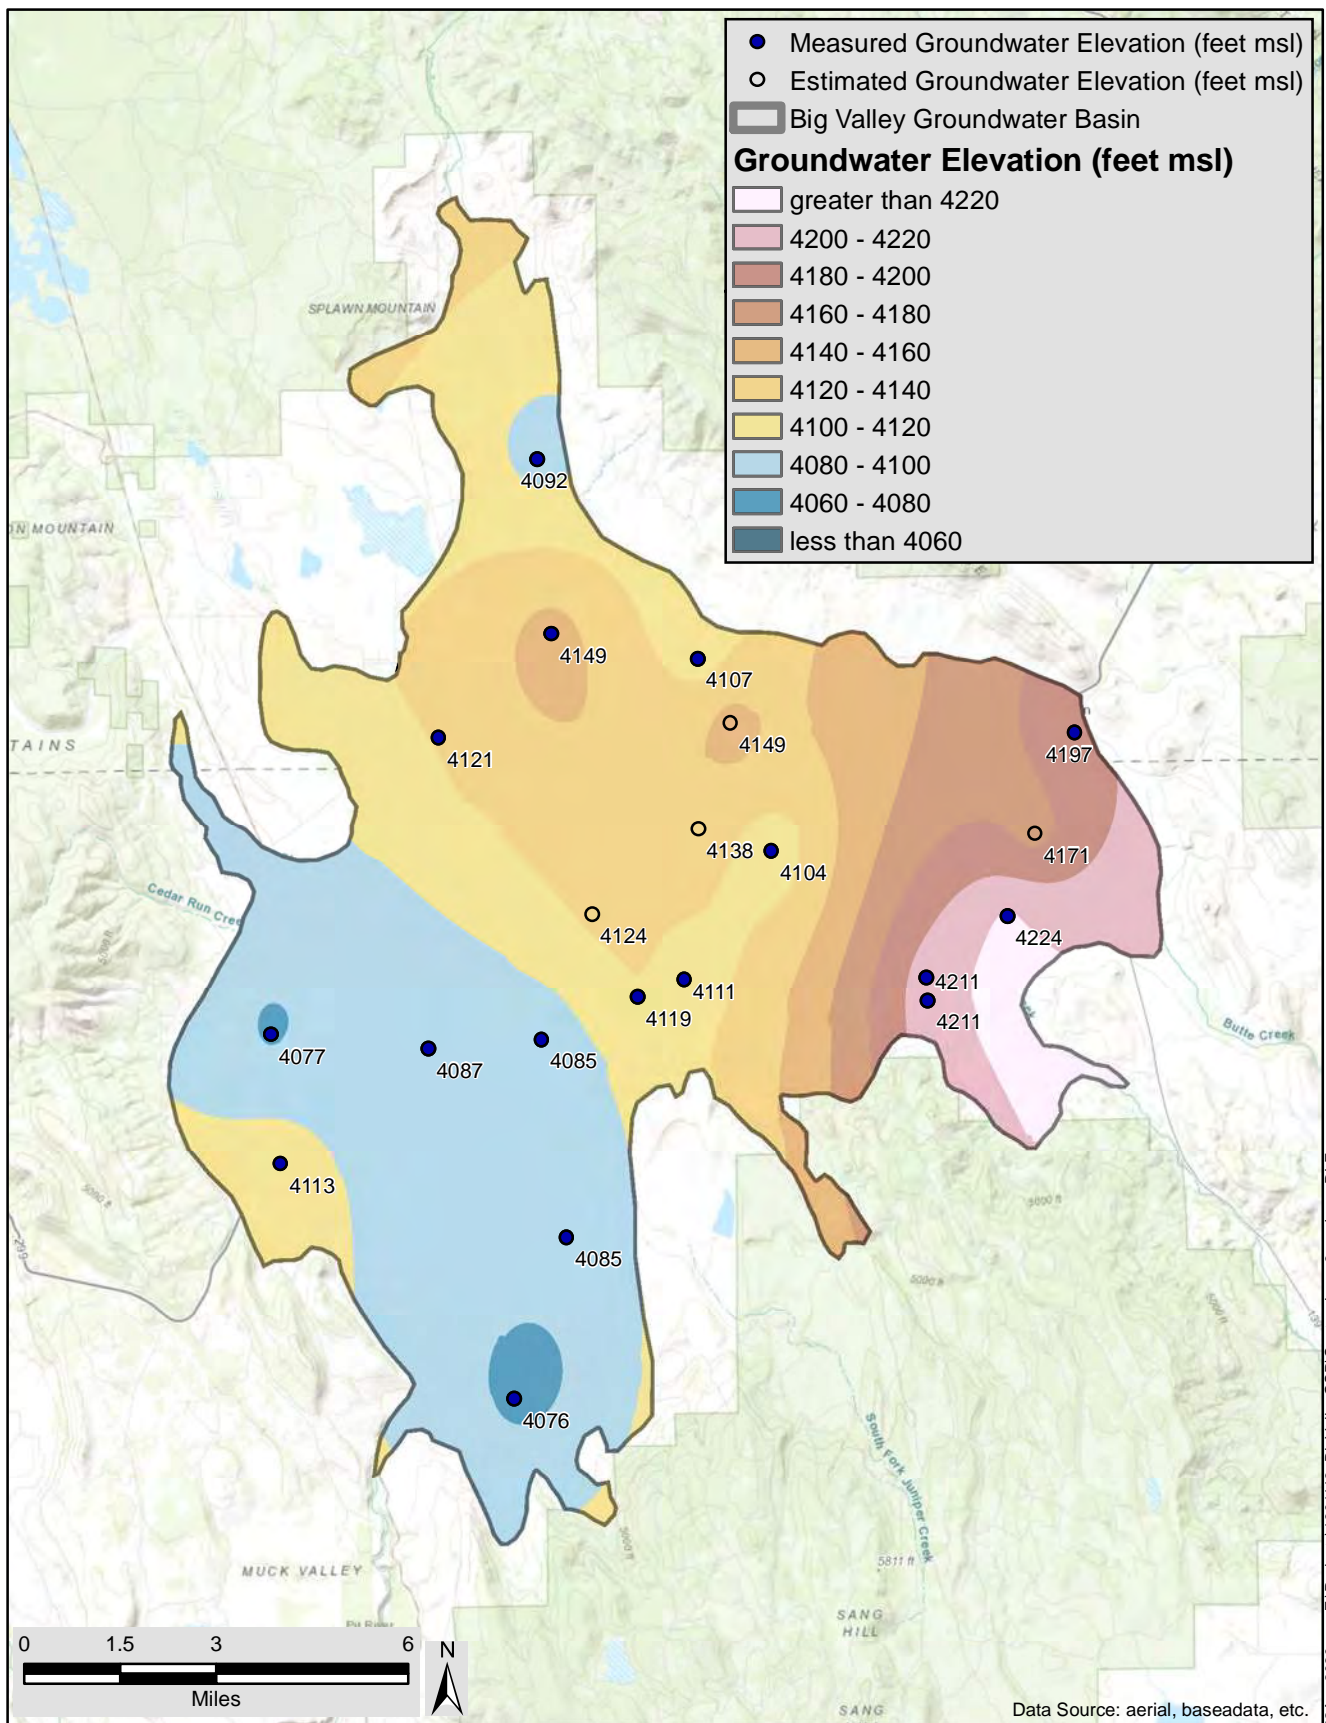


Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020

Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Spring 2015		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE

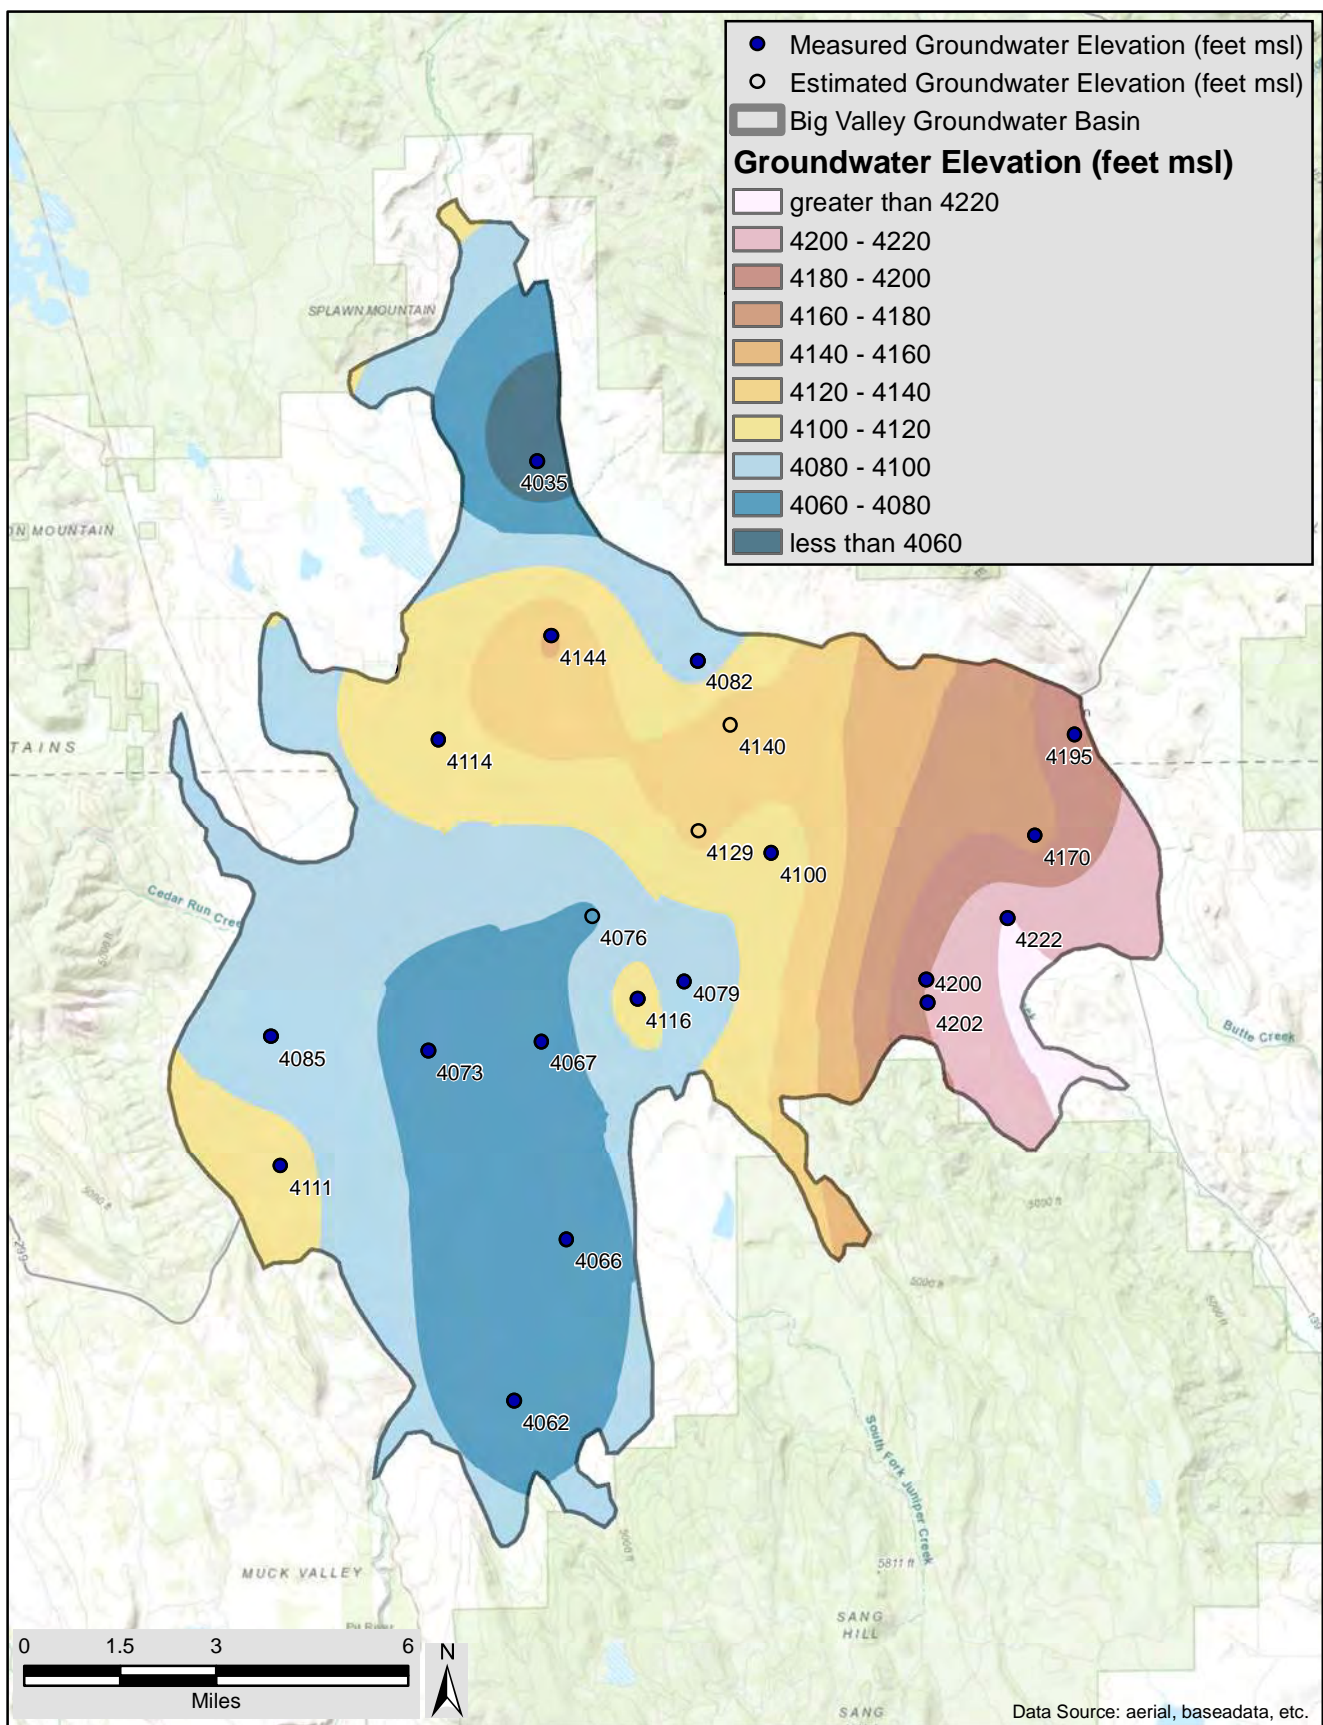




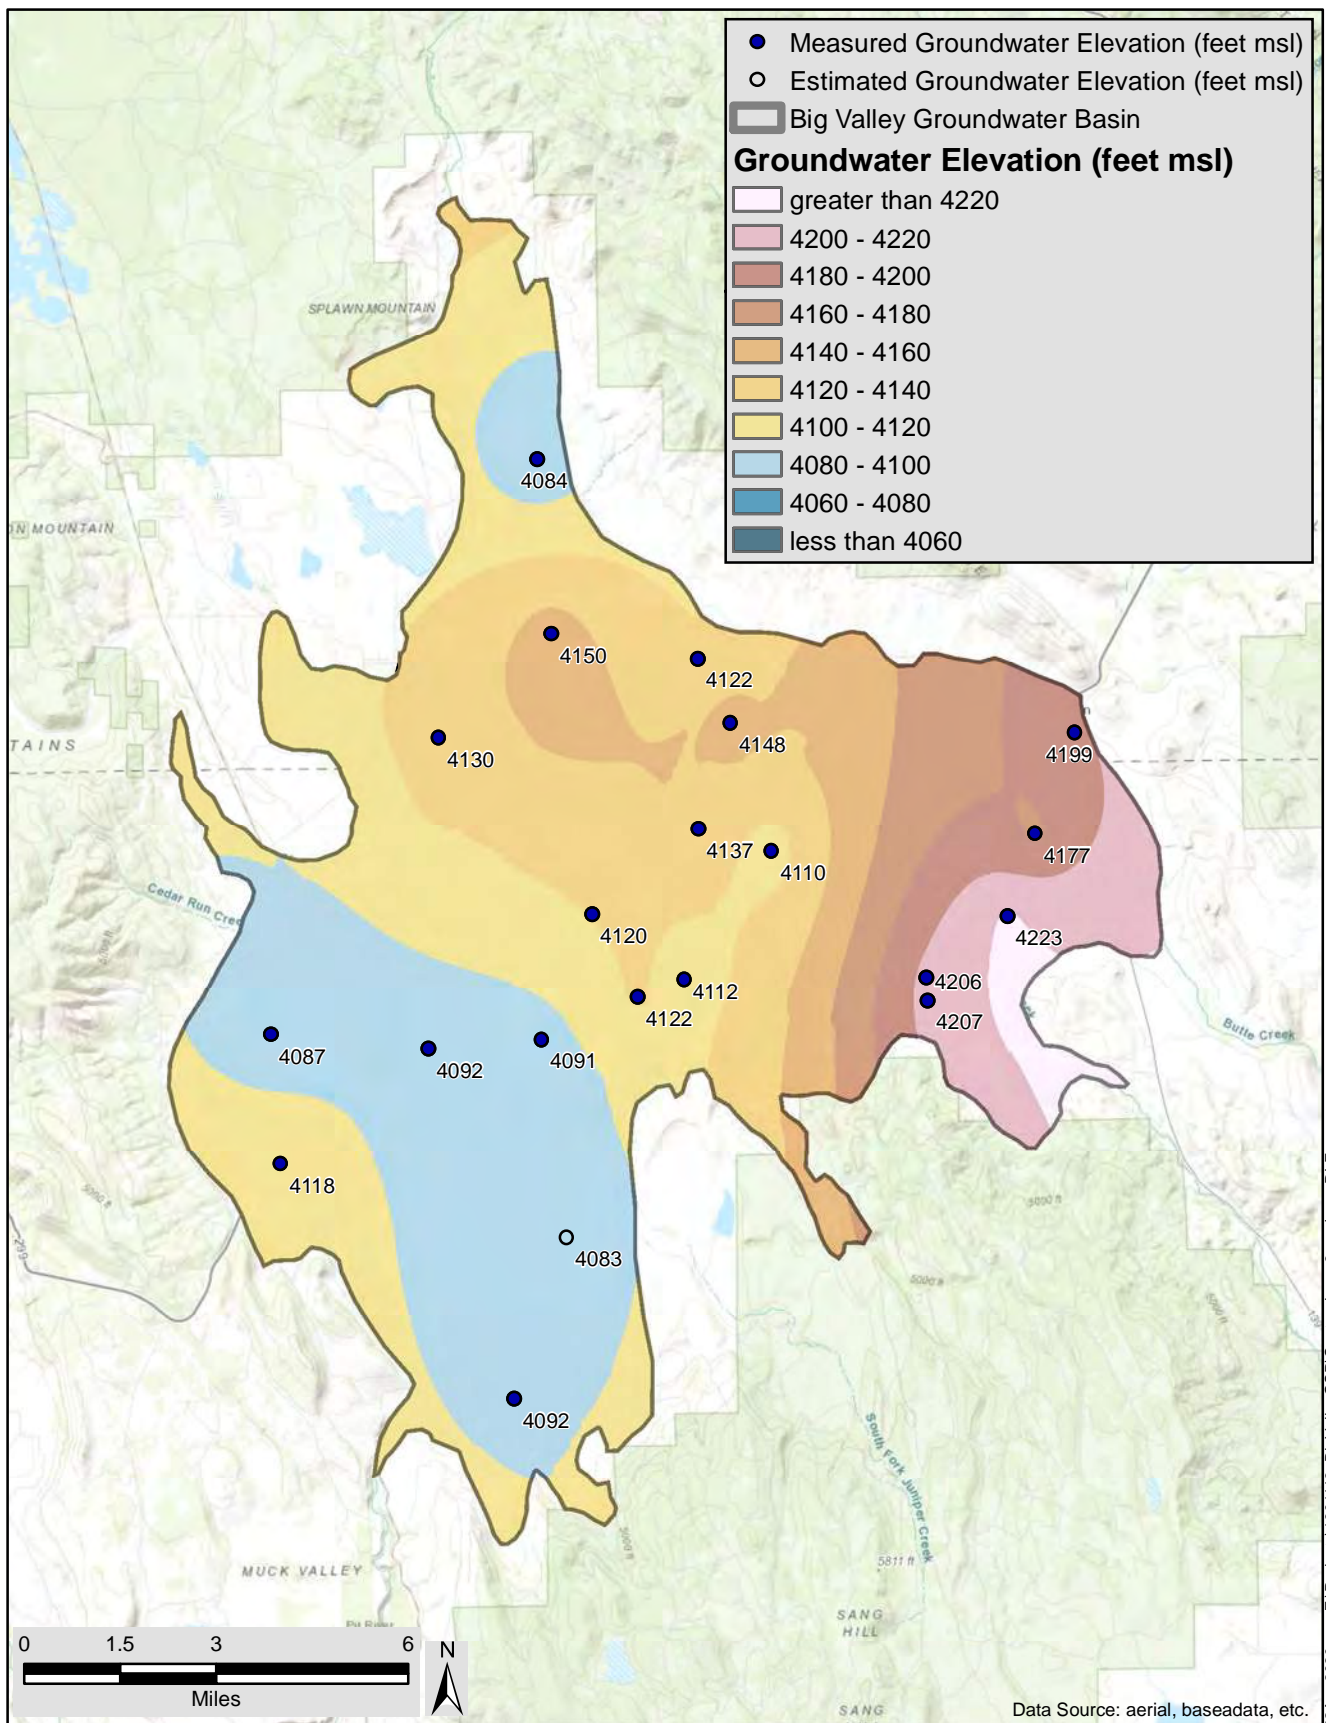

Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020


Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Spring 2016		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE

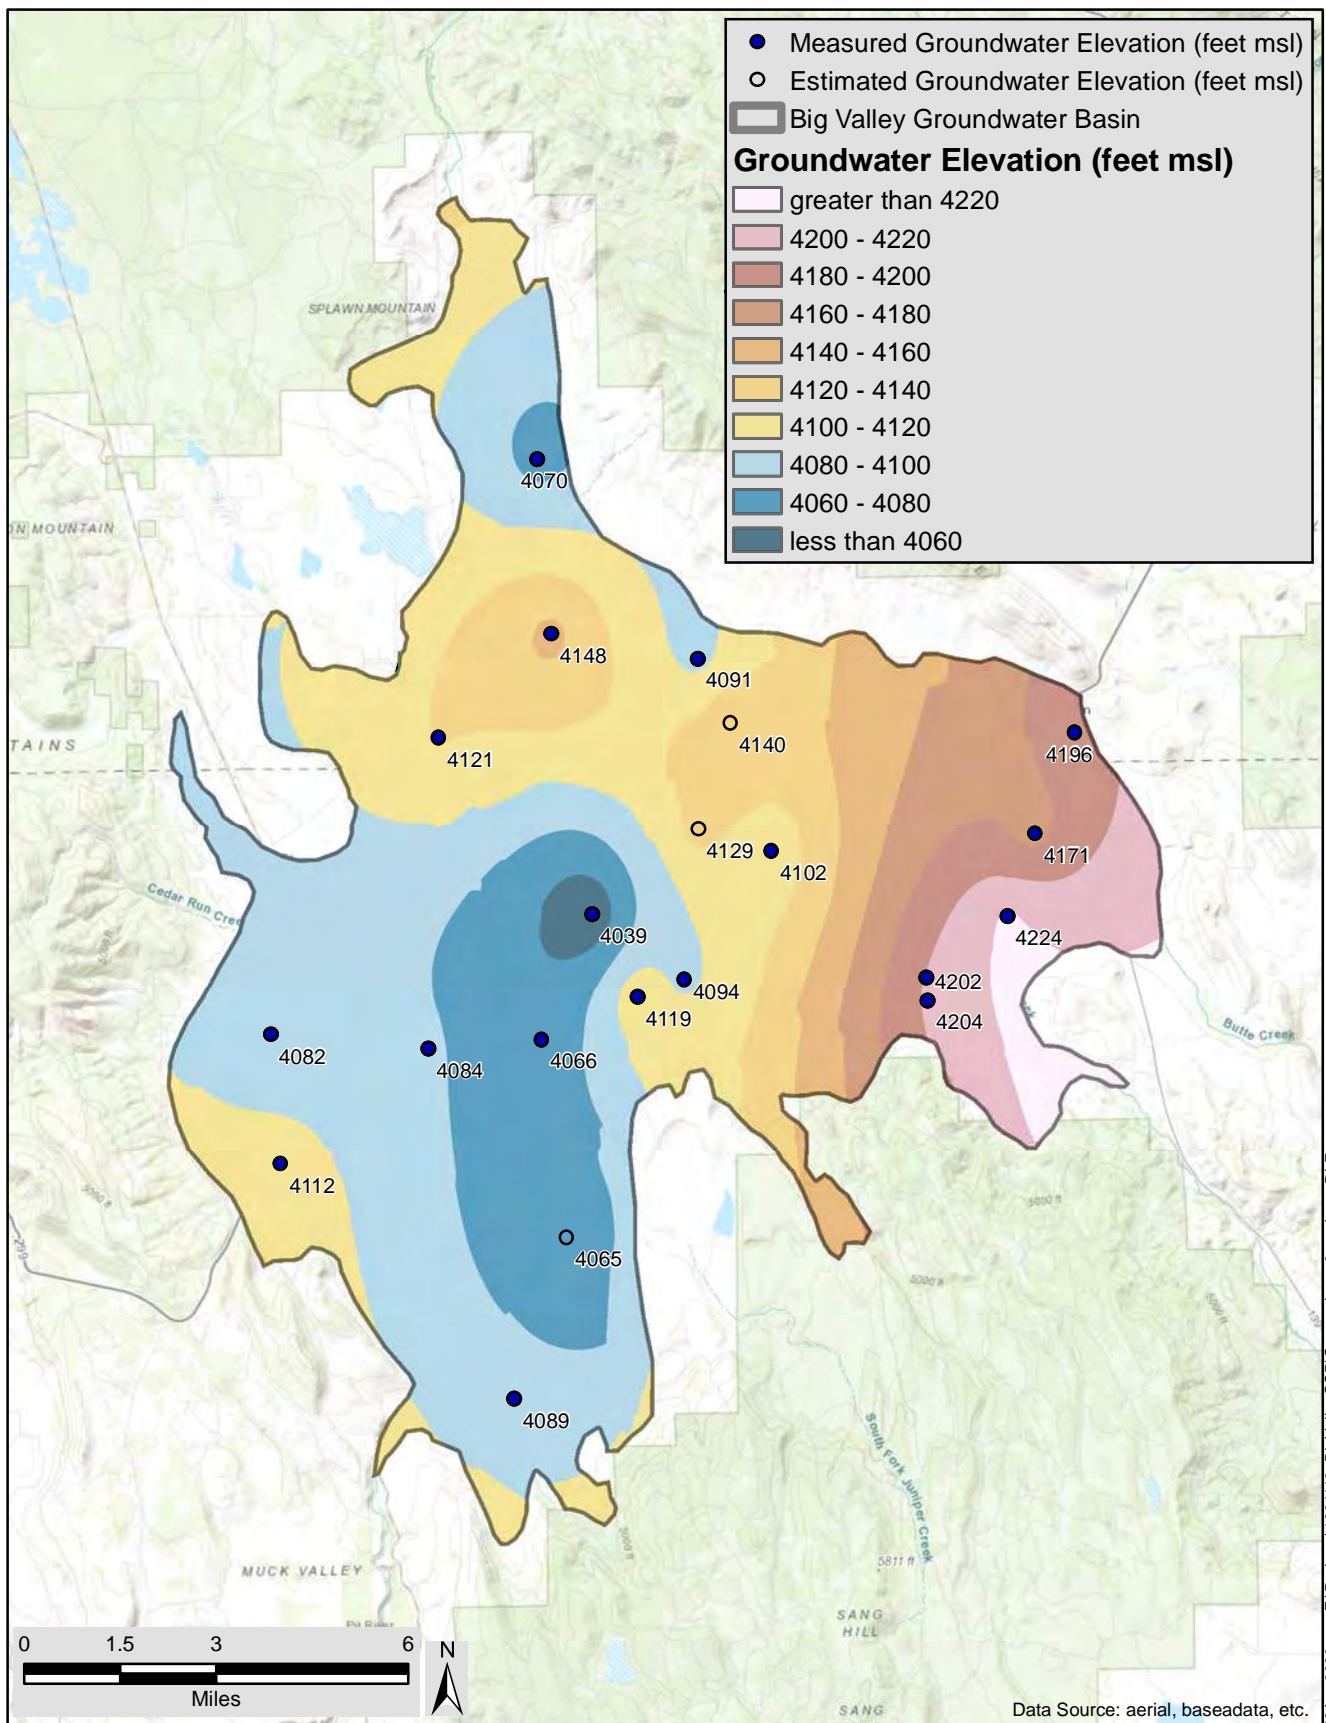

Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020


Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Fall 2016		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE



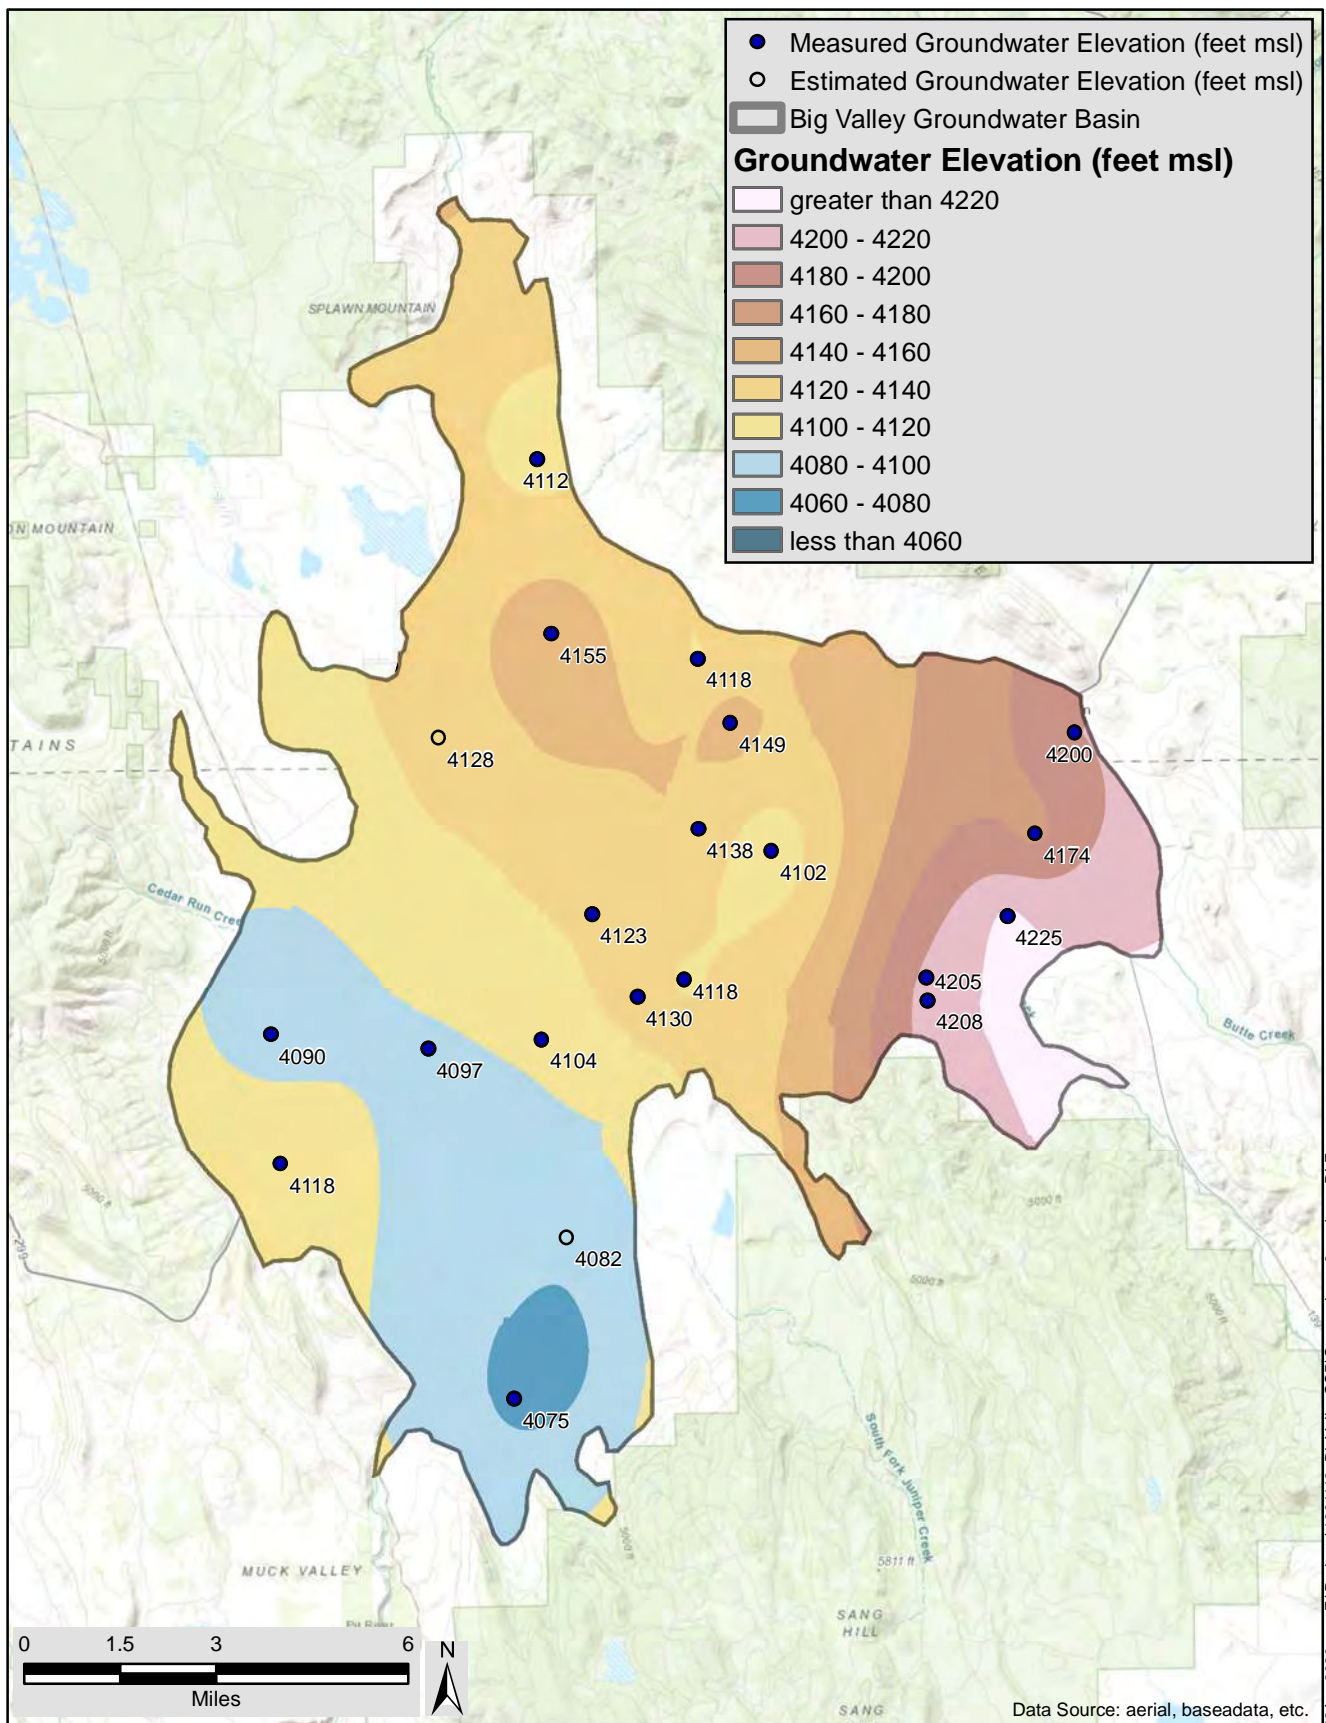

Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020


Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Spring 2017		
Big Valley Groundwater Basin GSAs		AUGUST 2020	<b>DRAFT</b>	FIGURE

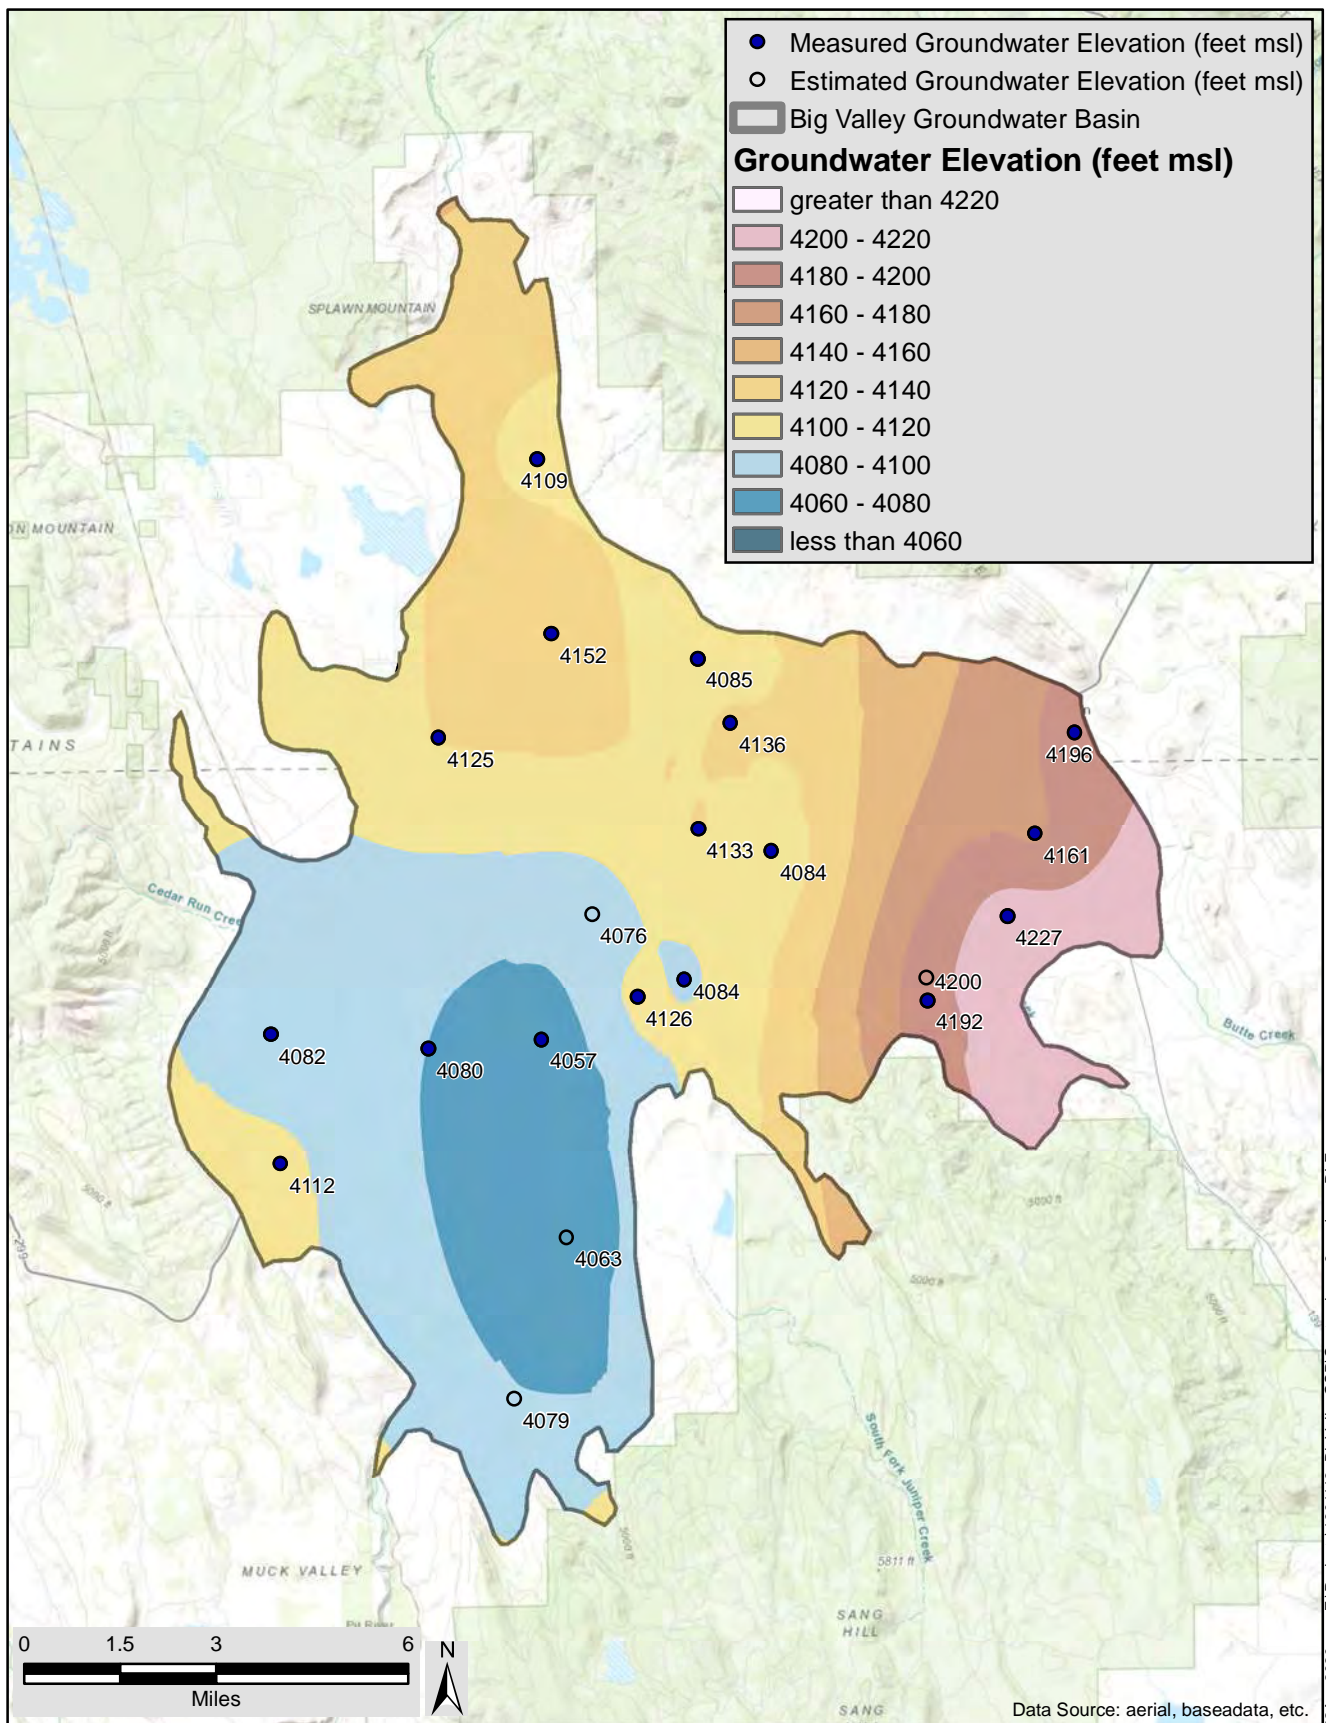

Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020


Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Fall 2017		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE



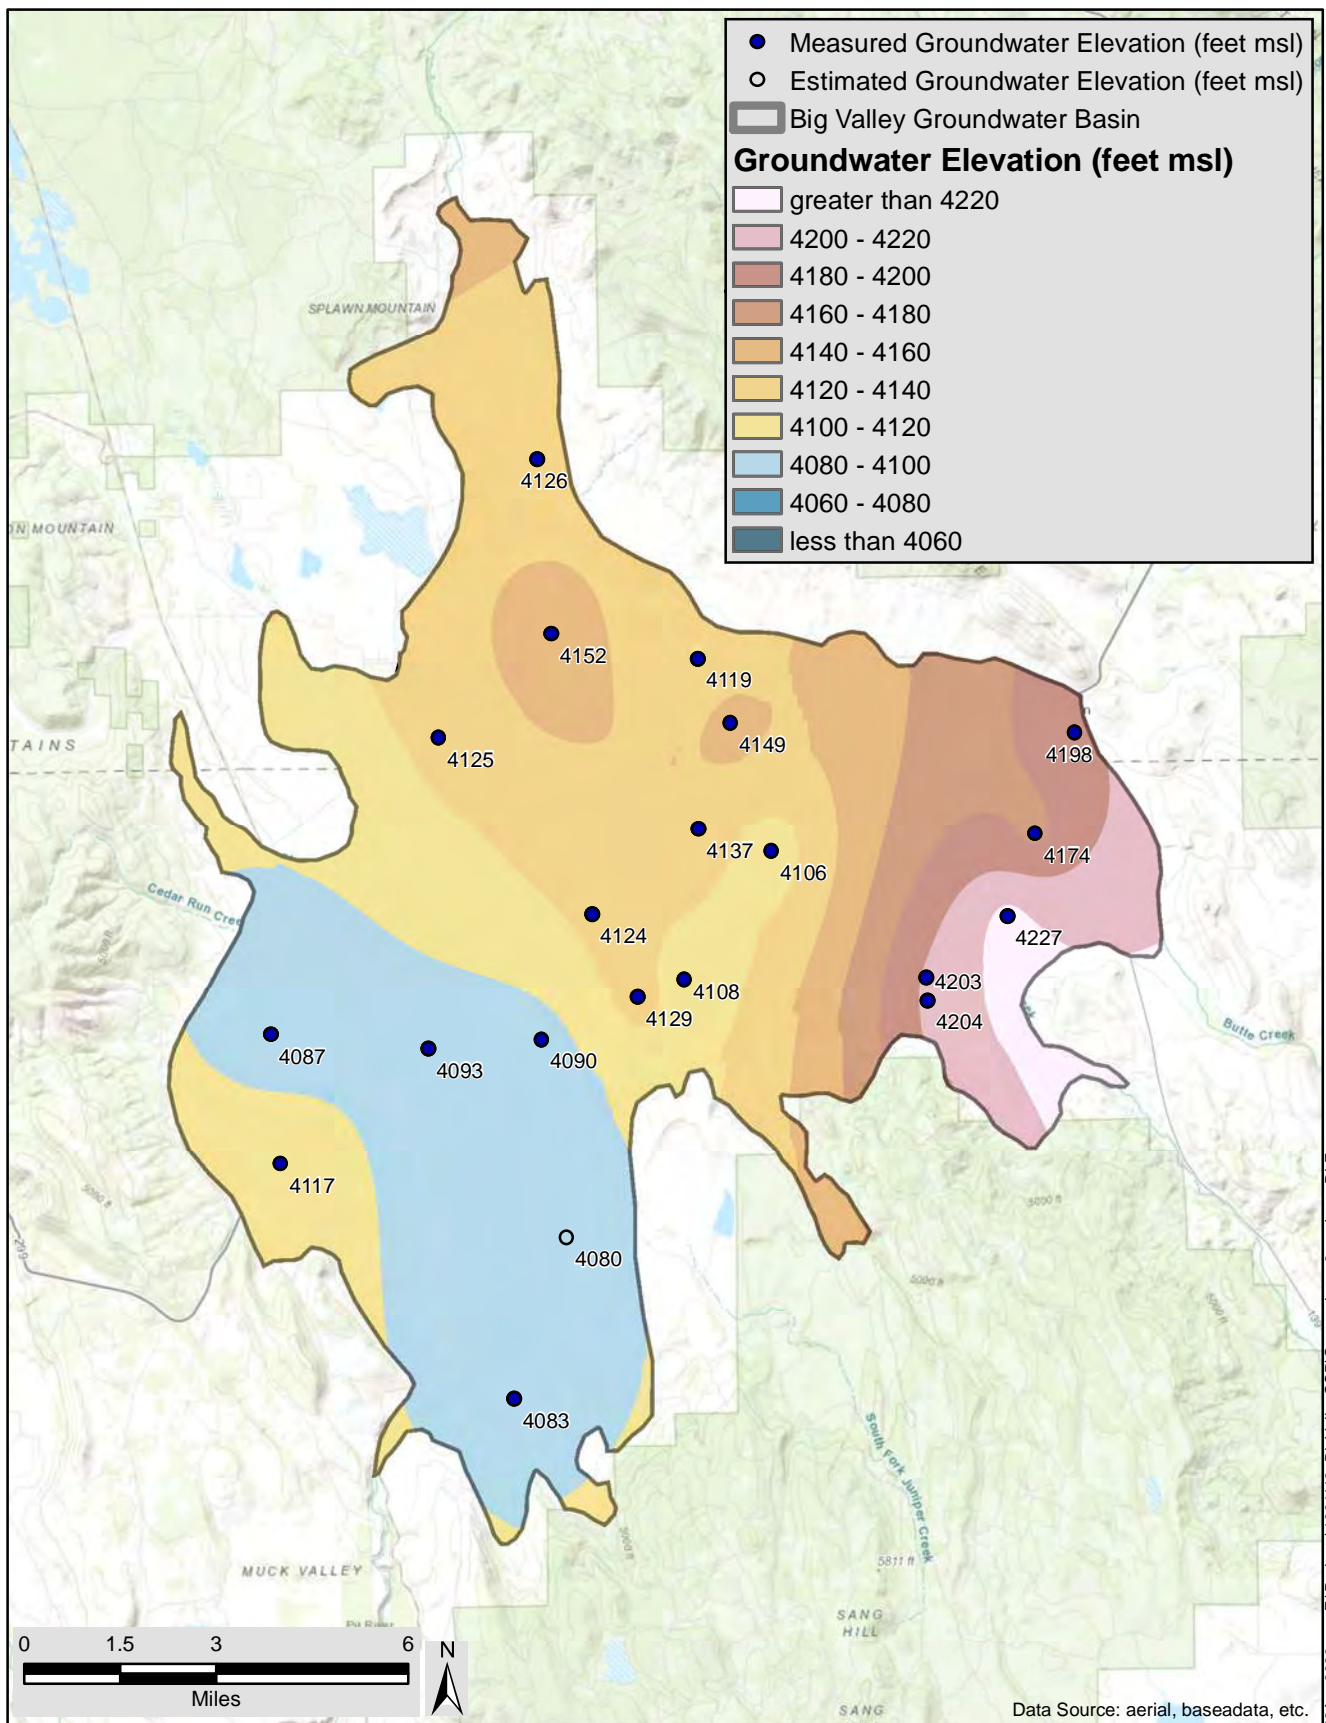

Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020


Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Spring 2018		
Big Valley Groundwater Basin GSAs		AUGUST 2020	<b>DRAFT</b>	FIGURE

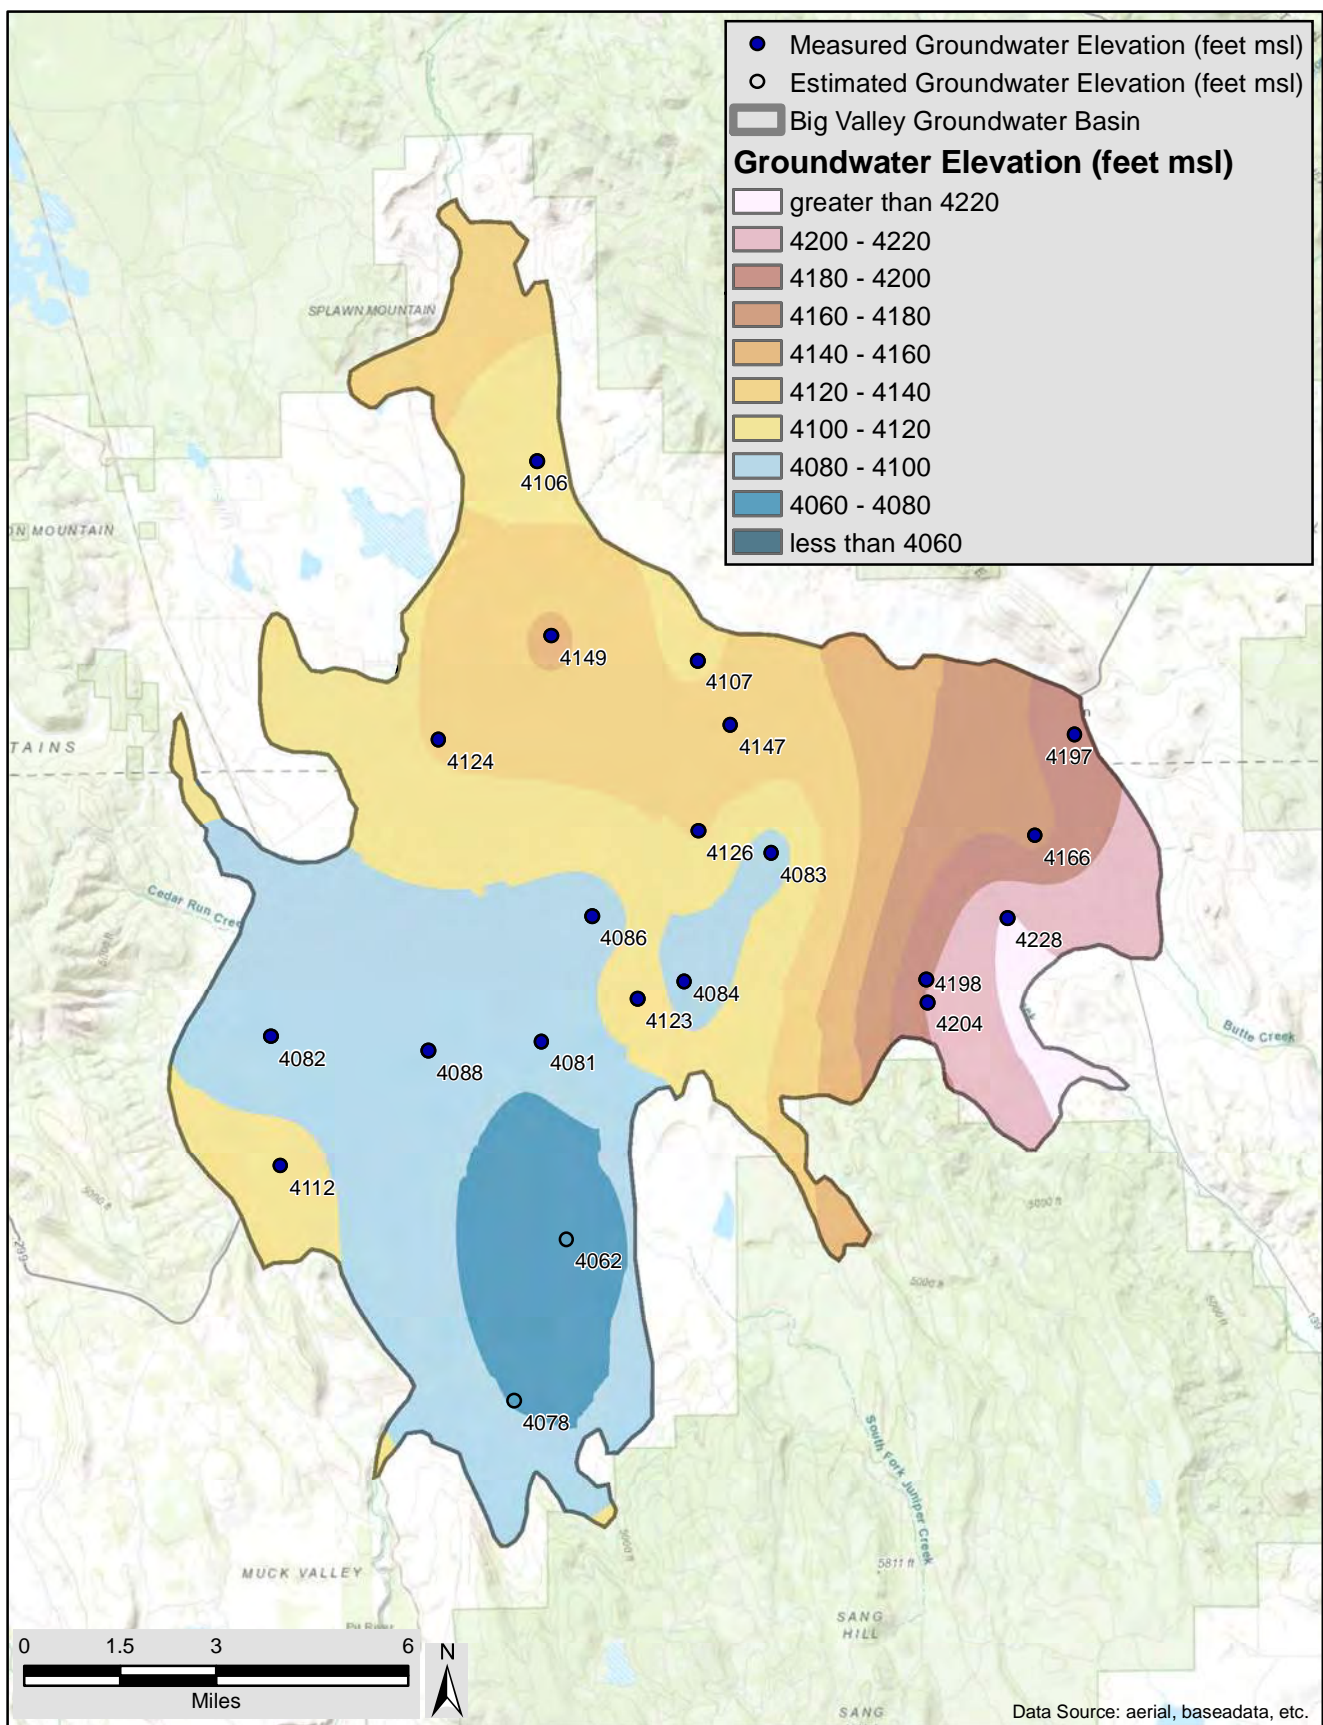

Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020


Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Fall 2018		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE



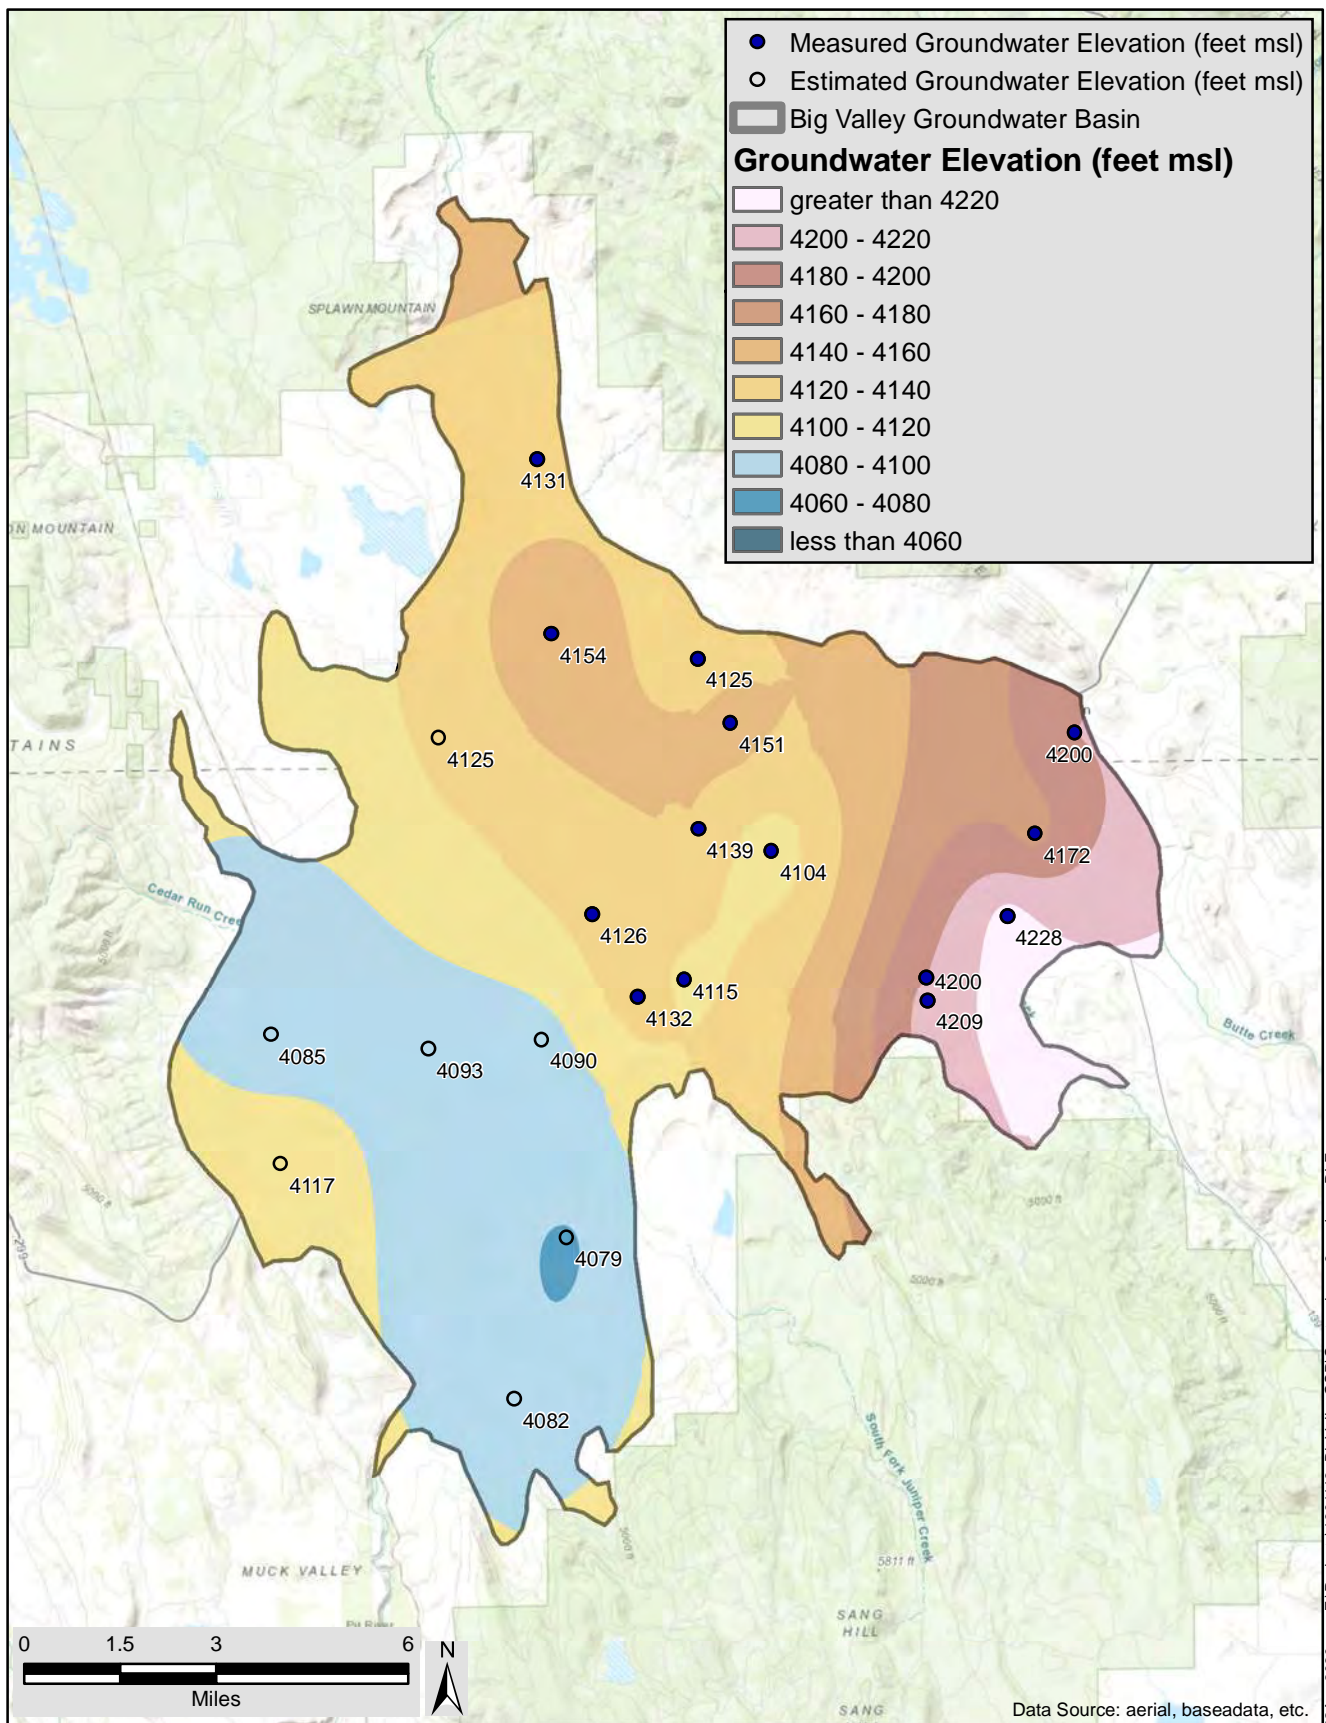

Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020

Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Spring 2019		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE

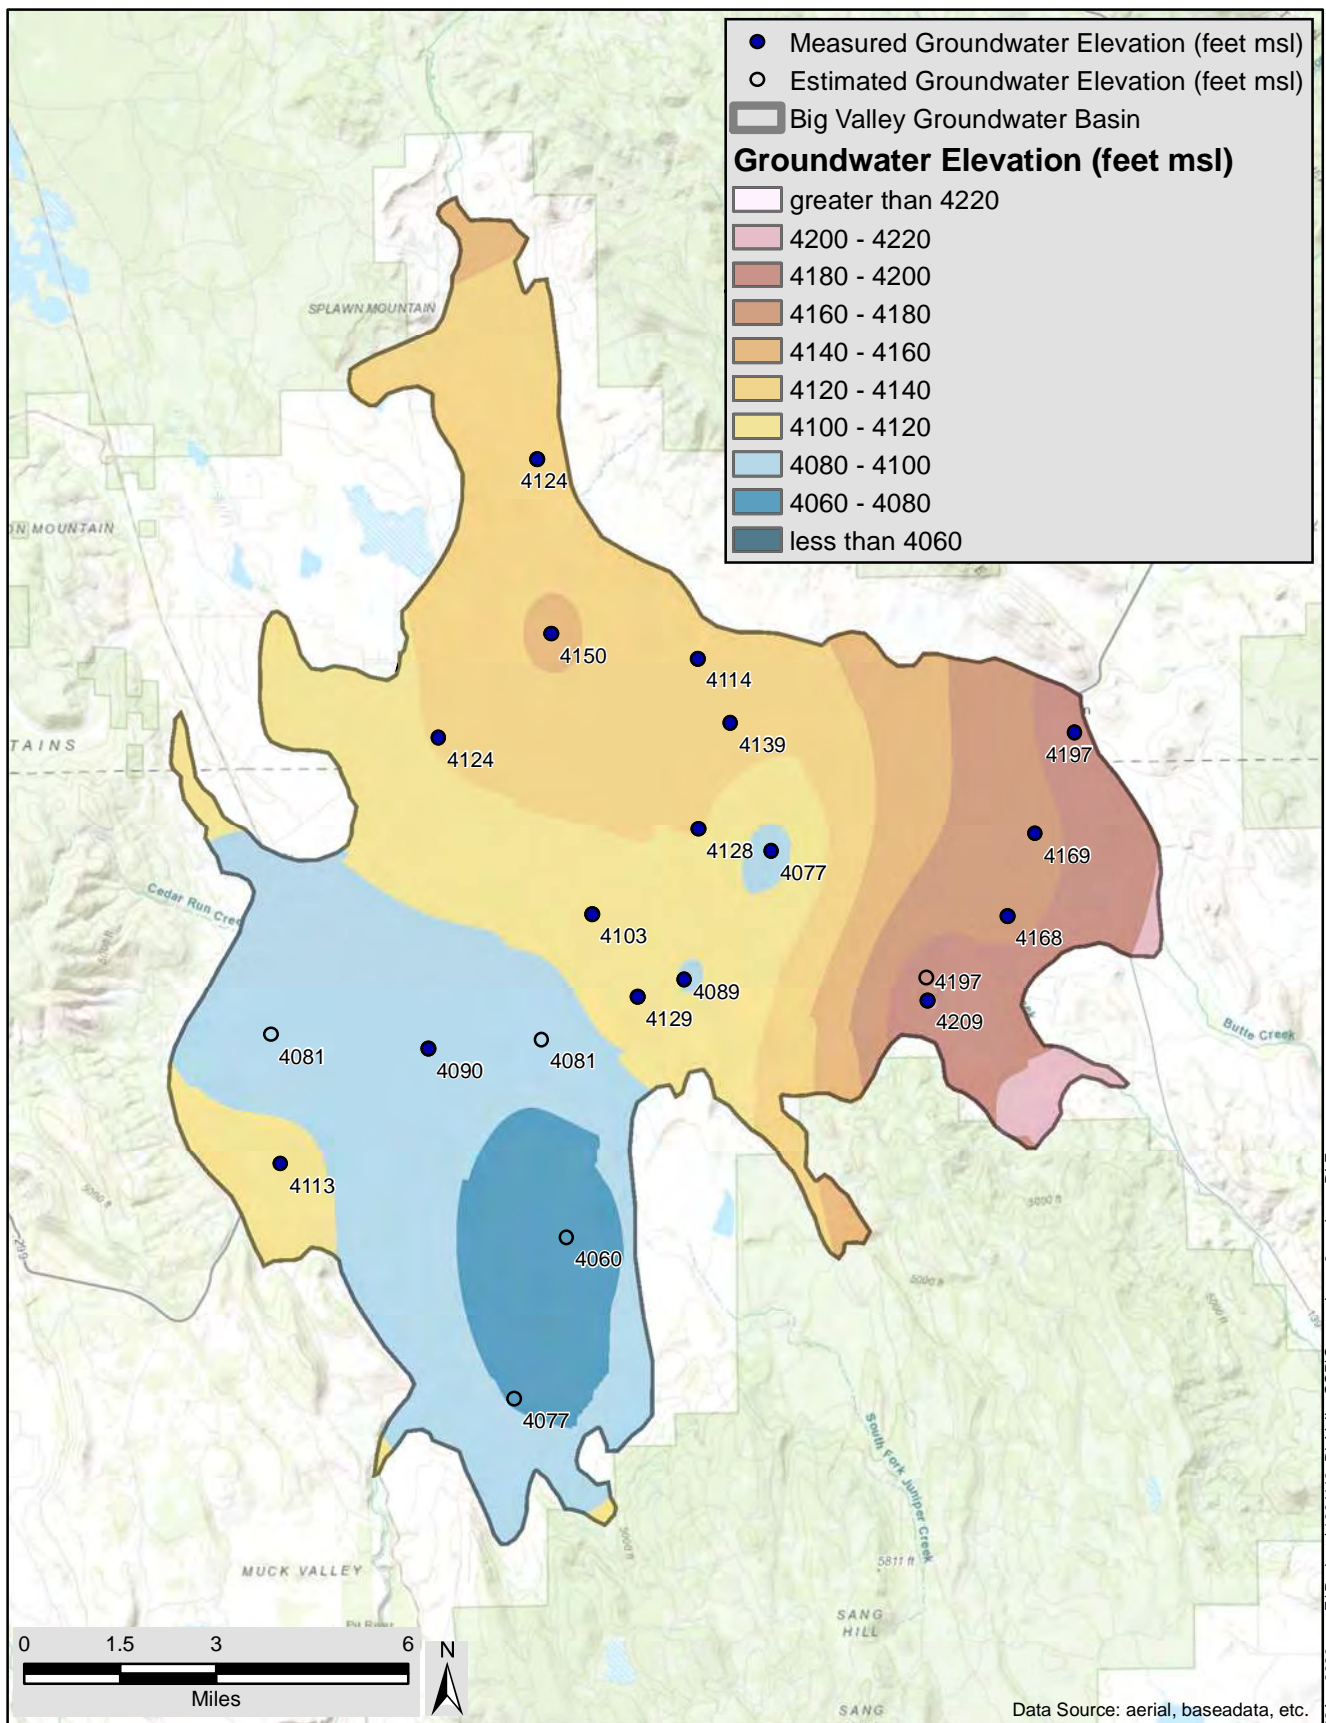

Z:\Projects\1901113\_BigValleyGSP\Contouring\_v3.mxd DLF 22Aug2020


Big Valley Basin Groundwater Sustainability Plan Modoc and Lassen Counties, California		Groundwater Elevations Fall 2019		
Big Valley Groundwater Basin GSAs		AUGUST 2020	DRAFT	FIGURE

## **Appendix 5C    Transducer Data from Monitoring Well Clusters 1 and 4**

---




# Site MW 1

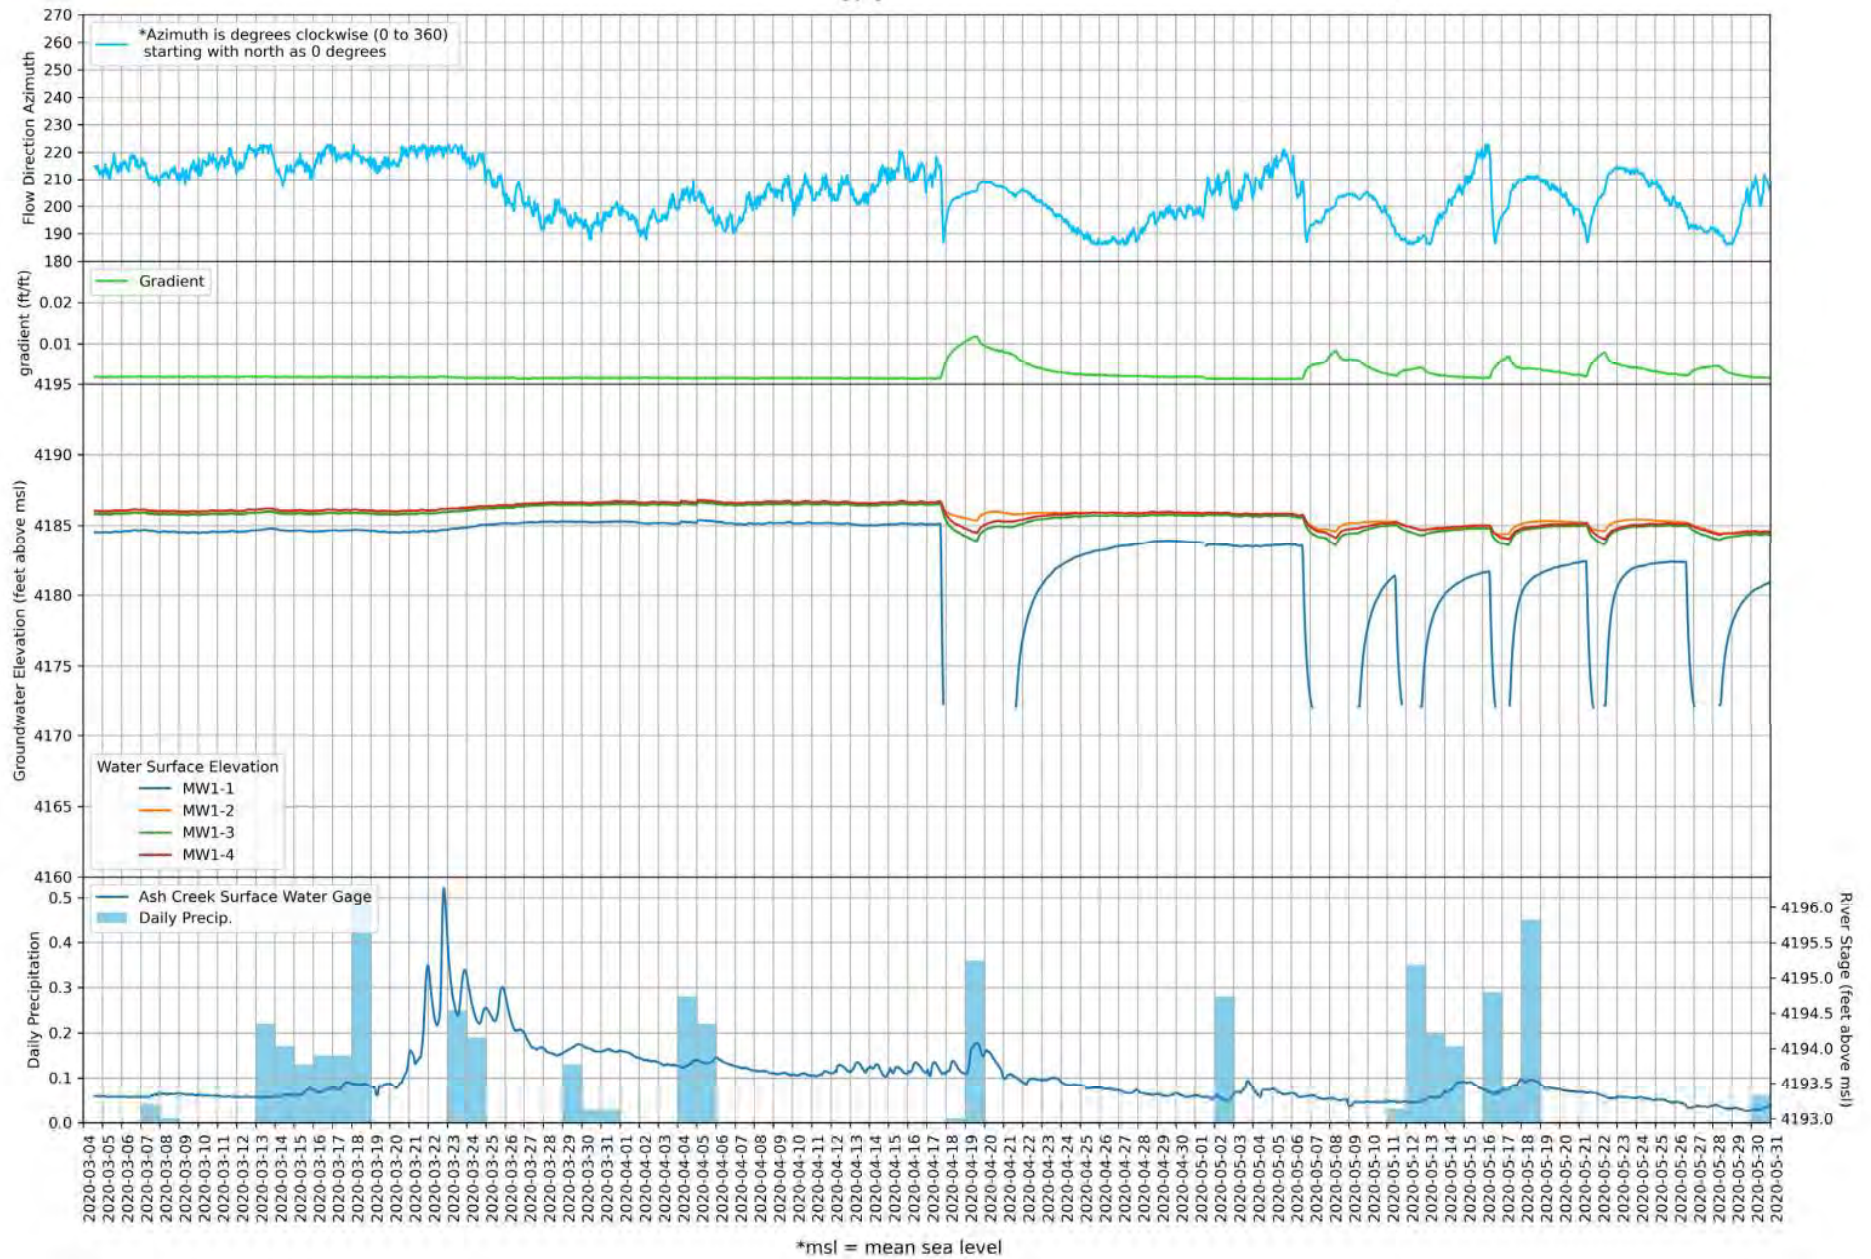



# Site MW 4

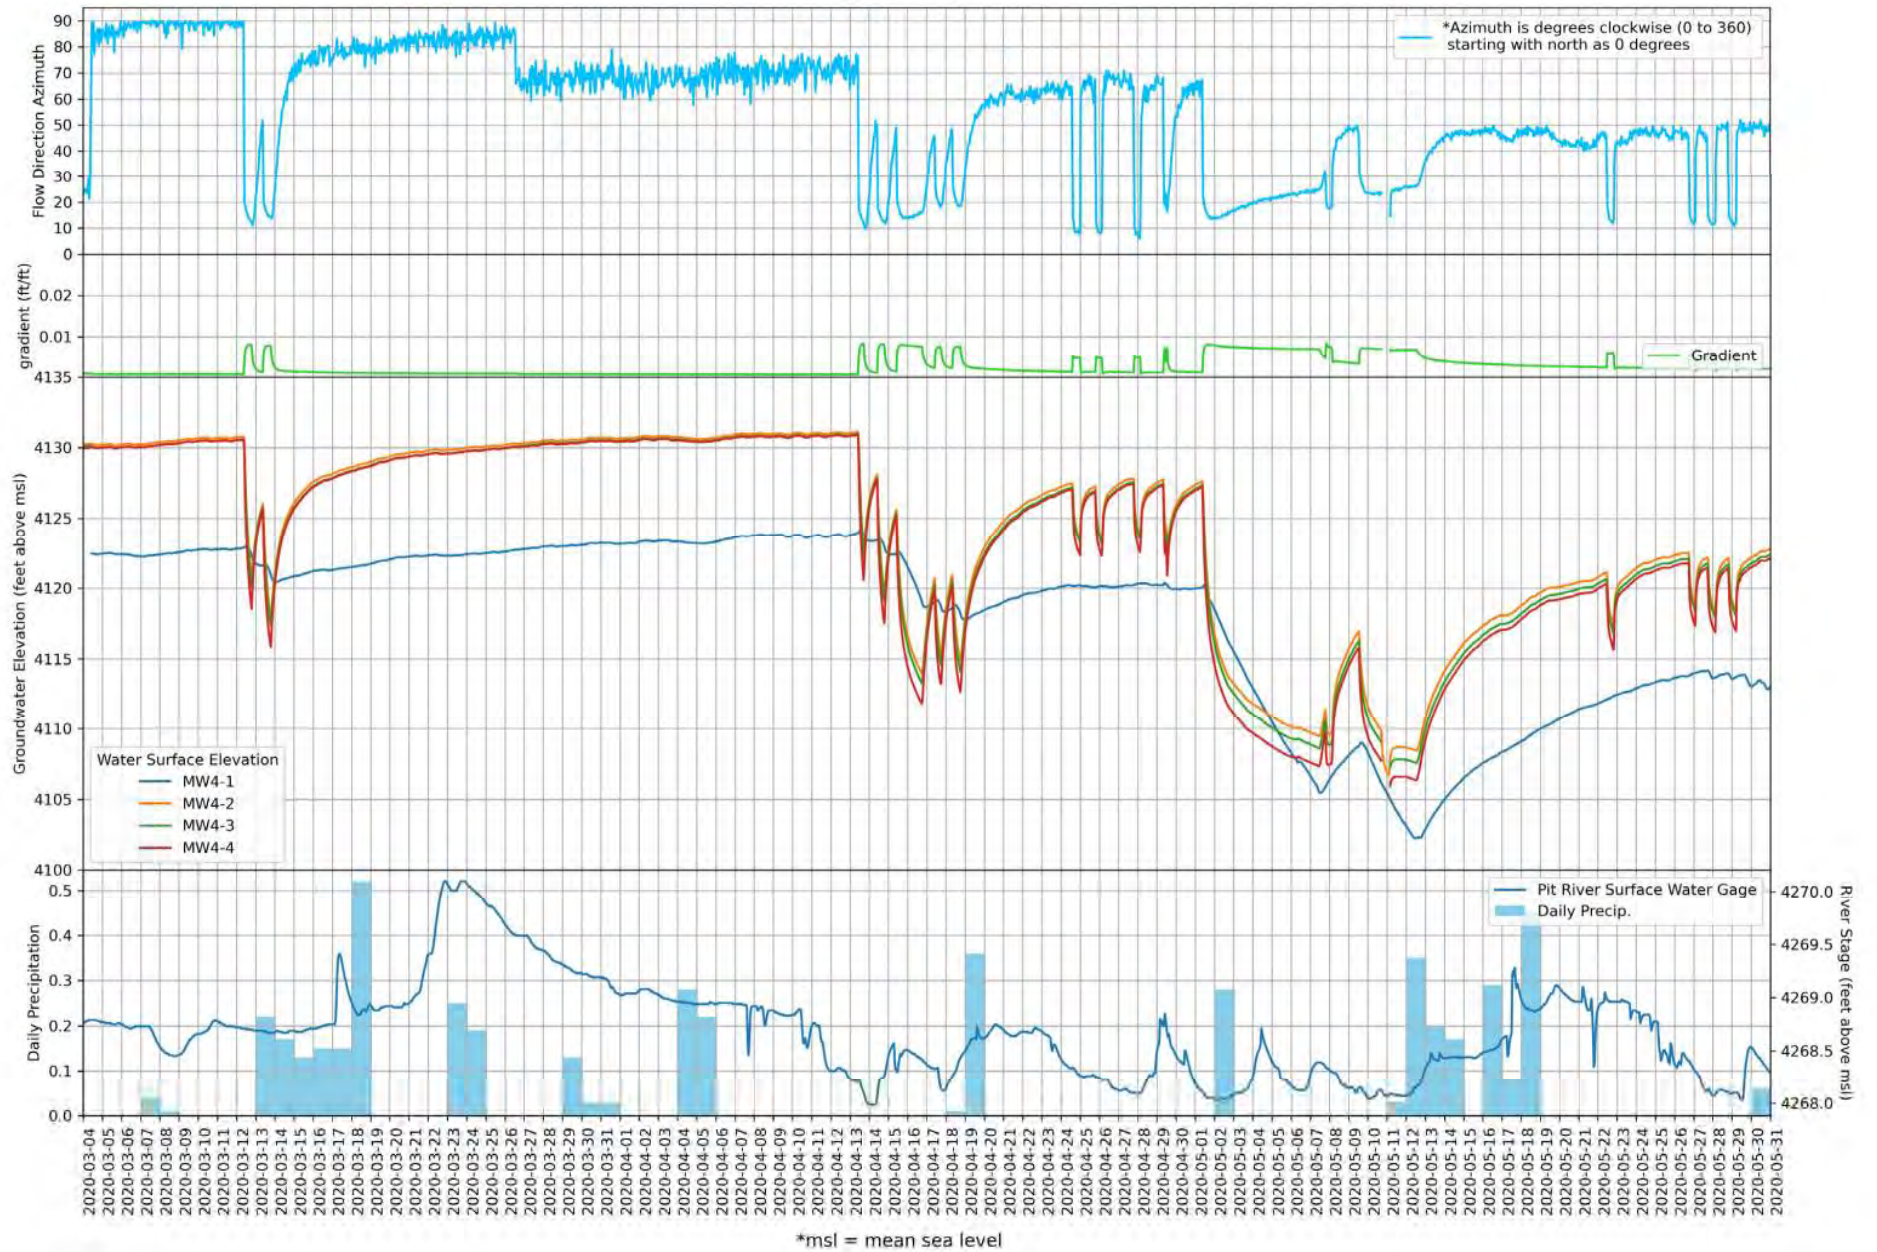

## **Appendix 6A    Water Budget Components**

---

**LAND SYSTEM WATER BUDGET**

Item	Flow Type	Origin/ Destination	Component	Credit(+)/ Debit(-)	Relationship with Other Systems	Data Source(s)	Assumptions	Relative Level of Precision
(1)	Inflow	Into Basin	Precipitation on Land System	+		-Monthly precipitation from PRISM Model (NACSE 2020) evaluated at Bieber -Basin Land area from DWR (2018). -Area of rivers, conveyance, and lakes from USGS (2020).	-Precipitation does not vary spatially throughout the Basin	High
(2)	Inflow	Between Systems	Surface Water Delivery	+	Equal to the <i>Surface Water Delivery</i> term in the surface water system outflow	-Reference Evapotranspiration (ET <sub>o</sub> ) from CIMIS spatial data model evaluated at Bieber (DWR 2020b) -Crop Coefficients (K <sub>c</sub> ) adapted from FAO (1998) using CUP model (Orange, et al 2004) -Monthly precipitation from PRISM Model (NACSE 2020) evaluated at Bieber	-Agriculture and wetland habitats are the only sectors that use surface water. Other uses such as illegal irrigation and fire suppression may use surface water, but there is no way to quantify. -Irrigation efficiency = 85% (NRCS 2020) -35% of agricultural irrigation uses surface water -98% of riparian demands are met by surface water	Low
(3)	Inflow	Between Systems	Groundwater Extraction	+	Equal to the <i>Groundwater Extraction</i> term in the groundwater system outflow	-Reference Evapotranspiration (ET <sub>o</sub> ) from CIMIS spatial data model evaluated at Bieber (DWR 2020b) -Crop Coefficients (K <sub>c</sub> ) adapted from FAO (1998) using CUP model (Orange, et al 2004) -Monthly precipitation from PRISM Model (NACSE 2020) evaluated at Bieber Population of Big Valley from DWR (2018) Population of Bieber from United States Census Bureau (2020)	-Irrigation efficiency = 85% (NRCS 2020) -65% of agricultural irrigation uses groundwater -2% of riparian demands are met by groundwater -Per capita water use is 100 gallons/day/person -All domestic users use groundwater	Low
(4)	Inflow		<i>Total Inflow</i>		<i>(1)+(2)+(3)</i>			
(5)	Outflow	Out of Basin	Evapotranspiration	-		-Reference Evapotranspiration (ET <sub>o</sub> ) from CIMIS spatial data model evaluated at Bieber (DWR 2020b) -Crop Coefficients (K <sub>c</sub> ) adapted from FAO (1998) using CUP model (Orange, et al 2004) -Land use and crop acreages from DWR (2014)	-ET <sub>o</sub> does not vary throughout the Basin -The land system remains in balance from year to year (no change in land system storage).	Moderate
(6)	Outflow	Between Systems	Runoff	-	Equal to the <i>Runoff</i> term in Surface Water System*	-Precipitation from PRISM Model (NACSE 2020) evaluated at Bieber	-Curve number method was used to estimate the amount of runoff (NRCS 1986)	Low
(7)	Outflow	Between Systems	Return Flow	-	Equal to the <i>Return Flow</i> term in Surface Water System*	-See surface water delivery and groundwater extraction above	-50% of agricultural inefficiency results in return flow (7.5% of applied water)	Low
(8)	Outflow	Between Systems	Recharge of Applied Water	-	Equal to the <i>Recharge of Applied Water</i> term in the groundwater system	-See surface water delivery and groundwater extraction above	-50% of agricultural inefficiency results in recharge of groundwater (7.5% of applied water)	Low
(9)	Outflow	Between Systems	Recharge of Precipitation	-	Equal to the <i>Recharge of Precipitation</i> term in the groundwater system	-Precipitation from PRISM Model (NACSE 2020) evaluated at Bieber	-2% of precipitation results in recharge to groundwater	Moderate
(10)	Outflow	Between Systems	Managed Aquifer Recharge	-	Equal to the <i>Managed Aquifer Recharge</i> term in the groundwater system	No managed recharge is currently documented in the Big Valley Groundwater basin		
(11)	Outflow		<i>Total Outflow</i>		<i>(5)+(6)+(7)+(8)+(9)+(10)</i>			
(12)	Storage Change	Change in Land System Storage			<i>(4)-(11)</i>			

**SURFACE WATER SYSTEM WATER BUDGET**

Item	Flow Type	Origin/ Destination	Component	Credit(+)/ Debit(-)	Relationship with Other Systems	Data Source(s)	Assumptions	Relative Level of Precision
(13)	Inflow	Into Basin	Stream Inflow	+		-Historic and current data from Pit River gage at Canby -Historic data from gage on Pit River north of Lookout (where it enters basin), Ash Creek at Adin, Widow Valley Creek, Willow Creek	-Historic relationship between flow at Canby and flow at historic gages is the same as current. E.g. flow during winter events is about 40% higher than Canby once the Pit River reaches Big Valley -Watershed areas outside of those with historic gage measurements have same runoff per acre as the gaged watersheds	Moderate
(14)	Inflow	Into Basin	Precipitation on Lakes	+		-Monthly precipitation from PRISM Model (NACSE 2020) evaluated at Bieber -Area of rivers, conveyance, and lakes from USGS (2020).	-precipitation does not vary spatially throughout the Basin	High
(6)	Inflow	Between Systems	Runoff	+	Equal to the <i>Runoff</i> term in land system (6)	-Precipitation from PRISM Model (NACSE 2020) evaluated at Bieber	-Curve number method was used to estimate the amount of runoff (NRCS 1986)	Low
(7)	Inflow	Between Systems	Return Flow	+	Equal to the <i>Return Flow</i> term in the land system (7)	-See surface water delivery and groundwater extraction above	-50% of agricultural inefficiency results in return flow (7.5% of applied water)	Low
(15)	Inflow	Between Systems	Stream Gain from Groundwater	+	Equal to the <i>Groundwater Loss to Stream</i> term in the groundwater system	-None	-Assumed to be 0 until further analysis of transducer data from new monitoring wells	Low
(16)	Inflow	Between Systems	Lake Gain from Groundwater	+	Equal to the <i>Groundwater Loss to Lake</i> term in the groundwater system	-None	-Assumed to be 0 because most lakes are above the groundwater levels	High
(17)	Inflow		<i>Total Inflow</i>		<i>(13)+(14)+(6)+(7)+(15)+(16)</i>			
(18)	Outflow	Out of Basin	Stream Outflow	-		-Estimated based on this water budget -Estimates verified using analysis of historic gage data from Pit River south of Bieber (exit from Basin)	-The surface water system remains in balance from year to year (no change in surface water storage)	Low
(19)	Outflow	Out of Basin	Conveyance Evaporation	-		-Reference Evapotranspiration (ETo) from CIMIS spatial data model evaluated at Bieber (DWR 2020b) -Area of conveyance from USGS (2020)	-Each year, conveyance is full from May to September and empty from October to April	Moderate
(20)	Outflow	Between Systems	Conveyance Seepage	-	Equal to the <i>Conveyance Seepage</i> term in the groundwater system	-Area of conveyance from USGS (2020)	-Each year, conveyance is full from May to September and empty from October to April -Seepage rate of 0.01 ft/day	Moderate
(2)	Outflow	Between Systems	Surface Water Delivery	-	Equal to the <i>Surface Water Delivery</i> term in land system (2)	-Reference Evapotranspiration (ETo) from CIMIS spatial data model evaluated at Bieber (DWR 2020b) -Crop Coefficients (Kc) adapted from FAO (1998) using CUP model (Orange, et al 2004) -Monthly precipitation from PRISM Model (NACSE 2020) evaluated at Bieber	-Agriculture and wetland habitats are the only sectors that use surface water. Other uses such as illegal irrigation and fire suppression may use surface water, but there is no way to quantify. -Irrigation efficiency = 85% (NRCS 2020) -35% of agricultural irrigation uses surface water -98% of riparian demands are met by surface water	Low
(21)	Outflow	Between Systems	Stream Loss to Groundwater	-	Equal to the <i>Gain from Stream</i> term in the groundwater system	-Historic and current data from Pit River gage at Canby -Historic data from gage on Pit River north of Lookout (where it enters Basin), Ash Creek at Adin, Widow Valley Creek, Willow Creek, Pit River at exit from Basin.	-Calculated from the historic inflow - outflow relationship.	Low
(22)	Outflow	Between Systems	Lake Loss to Groundwater	-	Equal to the <i>Groundwater Gain from Lake</i> term in the groundwater system	-Area of lakes from USGS (2020)	-Each year, lakes are full (100%) and surface area drops throughout summer to 10% in September, then gradually refill over the winter. -Seepage rate of 0.01 ft/day	Moderate



(23)	<b>Outflow</b>	Out of Basin	Lake Evaporation	-		-Reference Evapotranspiration (ETo) from CIMIS spatial data model evaluated at Bieber (DWR 2020b) -Area of lakes from USGS (2020)	-Each year, lakes are full (100%) and surface area drops throughout summer to 10% in September, then gradually refill over the winter.	High
(24)	<b>Outflow</b>	Out of Basin	Stream Evaporation	-		-Reference Evapotranspiration (ETo) from CIMIS spatial data model evaluated at Bieber (DWR 2020b) -Area of streams from USGS (2020)		High
(25)	<b>Outflow</b>		<i>Total Outflow</i>			<i>(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24)</i>		
(26)	<b>Storage Change</b>		Change in Surface Water Storage			<i>(17)-(25)</i>		

GROUNDWATER SYSTEM WATER BUDGET

Item	Flow Type	Origin/ Destination	Component	Credit(+)/ Debit(-)	Relationship with Other Systems	Data Source(s)	Assumptions	Relative Level of Precision
(8)	Inflow	Between Systems	Recharge of Applied Water	+	Equal to the <i>Recharge of Applied Water</i> term in the land system (8)	-See surface water delivery and groundwater extraction above	-50% of agricultural inefficiency results in recharge of groundwater (7.5% of applied water)	Low
(9)	Inflow	Between Systems	Recharge of Precipitation	+	Equal to the <i>Recharge of Precipitation</i> term in the land system (9)	-Precipitation from PRISM Model (NACSE 2020) evaluated at Bieber	-2% of precipitation results in recharge to groundwater	Moderate
(10)	Inflow	Between Systems	Managed Aquifer Recharge	+	Equal to the <i>Managed Aquifer Recharge</i> term in the land system (10)	No managed recharge is currently documented in the Big Valley Groundwater basin		
(21)	Inflow	Between Systems	Groundwater Gain from Stream	+	Equal to the <i>Stream Loss to Groundwater</i> term in the surface water system (21)	-Historic and current data from Pit River gage at Canby -Historic data from gage on Pit River north of Lookout (where it enters Basin), Ash Creek at Adin, Widow Valley Creek, Willow Creek, Pit River at exit from Basin.	-Calculated from the historic inflow - outflow relationship.	Low
(22)	Inflow	Between Systems	Groundwater Gain from Lake	+	Equal to the <i>Lake Loss to Groundwater</i> term in the surface water system (22)	-Area of lakes from USGS (2020)	-Each year, lakes are full (100%) and surface area drops throughout summer to 10% in September, then gradually refill over the winter. -Seepage rate of 0.01 ft/day	Moderate
(20)	Inflow	Between Systems	Conveyance Seepage	+	Equal to the <i>Conveyance Seepage</i> term in the surface water system (20)	-Area of conveyance from USGS (2020)	-Each year, conveyance is full from May to September and empty from October to April -Seepage rate of 0.01 ft/day	Moderate
(27)	Inflow	Into Basin	Subsurface Inflow	+		-Water level data from wells in Round Valley and Adin -Estimate of cross-sectional area of canyon between Round Valley and Big Valley	-Other than subsurface flow from Round Valley (about 1AFY), no subsurface inflow occurs in the BVGB	Moderate
(28)	Inflow		Total Inflow		(8)+(9)+(10)+(21)+(22)+(20)+(27)			
(3)	Outflow	Between Systems	Groundwater Extraction	-	Equal to the <i>Groundwater Extraction</i> term in the land system (3)	-Reference Evapotranspiration (ET <sub>o</sub> ) from CIMIS spatial data model evaluated at Bieber (DWR 2020b) -Crop Coefficients (K <sub>c</sub> ) adapted from FAO (1998) using CUP model (Orange, et al 2004) -Monthly precipitation from PRISM Model (NACSE 2020) evaluated at Bieber Population of Big Valley from DWR (2018) Population of Bieber from United States Census Bureau (2020)	-Irrigation efficiency = 85% (NRCS 2020) -65% of agricultural irrigation uses groundwater -2% of riparian demands are met by groundwater -Per capita water use is 100 gallons/day/person -All domestic users use groundwater	Low
(15)	Outflow	Between Systems	Groundwater Loss to Stream	-	Equal to the <i>Stream Gain from Groundwater</i> term in the surface water system (15)	-None	-Assumed to be 0 until further analysis of transducer data from new monitoring wells	Low
(16)	Outflow	Between Systems	Groundwater Loss to Lake	-	Equal to the <i>Lake Gain from Groundwater</i> term in the surface water system (16)	-None	-Assumed to be 0 because most lakes are above the groundwater levels	High
(29)	Outflow	Out of Basin	Subsurface Outflow	-			-No subsurface outflow occurs in the BVGB	Moderate
(30)	Outflow		Total Outflow		(3)+(15)+(16)+(29)			
(31)	Storage Change	Change in Groundwater Storage			(28)-(30)			

**TOTAL WATER BUDGET**

Item	Flow Type	Origin/ Destination	Component	Credit(+)/ Debit(-)	Relationship with Other Systems	Data Source(s)	Assumptions	Relative Level of Precision
(1)	Inflow	Into Basin	Precipitation on Land System	+	Equal to the <i>Precipitation</i> term in the land system	-Monthly precipitation from PRISM Model (NACSE 2020) evaluated at Bieber -Basin Land area from DWR (2018). -Area of rivers, conveyance, and lakes from USGS (2020).		High
(14)	Inflow	Into Basin	Precipitation on Lakes	+	Equal to the <i>Precipitation on Lakes</i> term in the surface water system	-Monthly precipitation from PRISM Model (NACSE 2020) evaluated at Bieber -Basin Land area from DWR (2018). -Area of rivers, conveyance, and lakes from USGS (2020).	-Precipitation does not vary spatially throughout the Basin	High
(13)	Inflow	Into Basin	Stream Inflow	+	Equal to the <i>Stream Inflow</i> term in the surface water system	-Historic and current data from Pit River gage at Canby -Historic data from gage on Pit River north of Lookout (where it enters basin), Ash Creek at Adin, Widow Valley Creek, Willow Creek	-Historic relationship between flow at Canby and flow at historic gages is the same as current. E.g. flow during winter events is about 40% higher than Canby once the Pit River reaches Big Valley -Watershed areas outside of those with historic gage measurements have same runoff per acre as the gaged watersheds	Moderate
(27)	Inflow	Into Basin	Subsurface Inflow	+	Equal to the <i>Subsurface Inflow</i> term in the groundwater system	-Water level data from wells in Round Valley and Adin -Estimate of cross-sectional area of canyon between Round Valley and Big Valley	-Other than subsurface flow from Round Valley (about 1AFY), no subsurface inflow occurs in the BVGB	Moderate
(32)	Inflow		<i>Total Inflow</i>		$(1)+(14)+(13)+(27)$			
(5)	Outflow	Out of Basin	Evapotranspiration	-	Equal to the <i>Evapotranspiration</i> term in the land system	-Reference Evapotranspiration (ETo) from CIMIS spatial data model evaluated at Bieber (DWR 2020b) -Crop Coefficients (Kc) adapted from FAO (1998) using CUP model (Orange, et al 2004) -Land use and crop acreages from DWR (2014)	-ETo does not vary throughout the Basin -The land system remains in balance from year to year (no change in land system storage).	Moderate
(24)	Outflow	Out of Basin	Stream Evaporation	-	Equal to the <i>Stream Evaporation</i> term in the surface water system	-Reference Evapotranspiration (ETo) from CIMIS spatial data model evaluated at Bieber (DWR 2020b) -Area of streams from USGS (2020)		High
(23)	Outflow	Out of Basin	Lake Evaporation	-	Equal to the <i>Lake Evaporation</i> term in the surface water system	-Reference Evapotranspiration (ETo) from CIMIS spatial data model evaluated at Bieber (DWR 2020b) -Area of lakes from USGS (2020)	-Each year, lakes are full (100%) and surface area drops throughout summer to 10% in September, then gradually refill over the winter.	High
(19)	Outflow	Out of Basin	Conveyance Evaporation	-	Equal to the <i>Conveyance Evaporation</i> term in the surface water system	-Reference Evapotranspiration (ETo) from CIMIS spatial data model evaluated at Bieber (DWR 2020b) -Area of conveyance from USGS (2020)	-Each year, conveyance is full from May to September and empty from October to April	Moderate
(18)	Outflow	Out of Basin	Stream Outflow	-	Equal to the <i>Stream Outflow</i> term in the surface water system	-Estimated based on this water budget -Estimates verified using analysis of historic gage data from Pit River south of Bieber (exit from Basin)	-The surface water system remains in balance from year to year (no change in surface water storage)	Low
(29)	Outflow	Out of Basin	Subsurface Outflow	-	Equal to the <i>Subsurface Outflow</i> term in the groundwater system		-No subsurface outflow occurs in the BVGB	Moderate
(33)	Outflow		<i>Total Outflow</i>		$(5)+(24)+(23)+(19)+(18)+(29)$			
(34)	Storage Change	Change in Total System Storage			$(32)-(33)$			

## **Appendix 6B    Water Budget Details**

---



**LAND SYSTEM WATER BUDGET**

Item	Flow Type	Origin/ Destination	Component	Average (1984-2018)	1984	1985	1986	1987	1988
(1)	Inflow	Into Basin	Precipitation on Land System	136,801	148,899	132,719	193,698	96,315	88,835
(2)	Inflow	Between Systems	Surface Water Delivery	75,811	68,516	76,750	74,262	78,850	85,952
(3)	Inflow	Between Systems	Groundwater Extraction	44,622	39,192	45,598	41,789	47,782	53,245
(4)	Inflow	(1)+(2)+(3)	Total Inflow	257,234	256,607	255,067	309,749	222,946	228,032
(5)	Outflow	Out of Basin	Evapotranspiration	154,040	146,344	152,399	160,318	155,136	159,362
(6)	Outflow	Between Systems	Runoff	83,449	92,329	82,737	130,033	47,265	46,439
(7)	Outflow	Between Systems	Return Flow	5,012	4,396	5,123	4,685	5,373	5,994
(8)	Outflow	Between Systems	Recharge of Applied Water	13,133	11,840	13,309	12,802	13,701	14,966
(9)	Outflow	Between Systems	Recharge of Precipitation	1,601	1,697	1,499	1,910	1,471	1,272
(10)	Outflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-
(11)	Outflow	(5)+(6)+(7)+(8)+(9)+(10)	Total Outflow	257,234	256,607	255,067	309,749	222,946	228,032
(12)	Storage Change	(4)-(11)	Change in Land System Storage	-	-	-	-	-	-

**SURFACE WATER SYSTEM WATER BUDGET**

Item	Flow Type	Origin/ Destination	Component	Average (1984-2018)	1984	1985	1986	1987	1988
(13)	Inflow	Into Basin	Stream Inflow	371,148	808,462	310,960	878,565	161,807	162,980
(14)	Inflow	Into Basin	Precipitation on Reservoirs	501	546	486	710	353	326
(6)	Inflow	Between Systems	Runoff	83,449	92,329	82,737	130,033	47,265	46,439
(7)	Inflow	Between Systems	Return Flow	5,012	4,396	5,123	4,685	5,373	5,994
(15)	Inflow	Between Systems	Stream Gain from Groundwater	-	-	-	-	-	-
(16)	Inflow	Between Systems	Reservoir Gain from Groundwater	-	-	-	-	-	-
(17)	Inflow	(13)+(14)+(6)+(7)+(15)+(16)	Total Inflow	460,110	905,732	399,306	1,013,993	214,798	215,738
(18)	Outflow	Out of Basin	Stream Outflow	358,486	786,443	302,274	865,544	122,626	116,338
(19)	Outflow	Out of Basin	Conveyance Evaporation	46	44	46	45	45	50
(20)	Outflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27
(21)	Outflow	Between Systems	Surface Water Delivery	75,811	68,516	76,750	74,262	78,850	85,952
(22)	Outflow	Between Systems	Stream Loss to Groundwater	24,037	49,085	18,460	72,401	11,524	11,579
(22)	Outflow	Between Systems	Reservoir Loss to Groundwater	596	596	596	596	596	596
(23)	Outflow	Out of Basin	Reservoir Evaporation	722	667	760	727	736	777
(24)	Outflow	Out of Basin	Stream Evaporation	385	354	393	389	393	420
(25)	Outflow	(18)+(19)+(20)+(21)+(22)+(23)+(24)	Total Outflow	460,110	905,732	399,306	1,013,993	214,798	215,738
(26)	Storage Change	(17)-(25)	Change in Surface Water Storage	-	-	-	-	-	-

**GROUNDWATER SYSTEM WATER BUDGET**

Item	Flow Type	Origin/ Destination	Component	Average (1984-2018)	1984	1985	1986	1987	1988
(8)	Inflow	Between Systems	Recharge of Applied Water	13,133	11,840	13,309	12,802	13,701	14,966
(9)	Inflow	Between Systems	Recharge of Precipitation	1,601	1,697	1,499	1,910	1,471	1,272
(10)	Inflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-
(21)	Inflow	Between Systems	Groundwater Gain from Stream	24,037	49,085	18,460	72,401	11,524	11,579
(22)	Inflow	Between Systems	Groundwater Gain from Reservoir	596	596	596	596	596	596
(20)	Inflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27
(27)	Inflow	Into Basin	Subsurface Inflow	1	1	1	1	1	1
(28)	Inflow	(8)+(9)+(10)+(21)+(22)+(20)+(27)	Total Inflow	39,395	63,247	33,892	87,738	27,321	28,441
(3)	Outflow	Between Systems	Groundwater Extraction	44,622	39,192	45,598	41,789	47,782	53,245
(15)	Outflow	Between Systems	Groundwater Loss to Stream	-	-	-	-	-	-
(16)	Outflow	Between Systems	Groundwater Loss to Reservoir	-	-	-	-	-	-
(29)	Outflow	Out of Basin	Subsurface Outflow	-	-	-	-	-	-
(30)	Outflow	(3)+(15)+(16)+(29)	Total Outflow	44,622	39,192	45,598	41,789	47,782	53,245
(31)	Storage Change	(28)-(30)	Change in Groundwater Storage	(5,227)	24,055	(11,706)	45,949	(20,461)	(24,804)

**TOTAL BASIN WATER BUDGET**

Item	Flow Type	Origin/ Destination	Component	Average (1984-2018)	1984	1985	1986	1987	1988
(1)	Inflow	Into Basin	Precipitation on Land System	136,801	148,899	132,719	193,698	96,315	88,835
(14)	Inflow	Into Basin	Precipitation on Reservoirs	501	546	486	710	353	326
(13)	Inflow	Into Basin	Stream Inflow	371,148	808,462	310,960	878,565	161,807	162,980
(27)	Inflow	Into Basin	Subsurface Inflow	1	1	1	1	1	1
(32)	Inflow	(1)+(14)+(13)+(27)	Total Inflow	508,451	957,907	444,166	1,072,973	258,475	252,142
(5)	Outflow	Out of Basin	Evapotranspiration	154,040	146,344	152,399	160,318	155,136	159,362
(24)	Outflow	Out of Basin	Stream Evaporation	385	354	393	389	393	420
(23)	Outflow	Out of Basin	Reservoir Evaporation	722	667	760	727	736	777
(19)	Outflow	Out of Basin	Conveyance Evaporation	46	44	46	45	45	50
(18)	Outflow	Out of Basin	Stream Outflow	358,486	786,443	302,274	865,544	122,626	116,338
(29)	Outflow	Out of Basin	Subsurface Outflow	-	-	-	-	-	-
(33)	Outflow	(5)+(24)+(23)+(19)+(18)+(29)	Total Outflow	513,678	933,852	455,872	1,027,024	278,936	276,946
(34)	Storage Change	(32)-(33)	Change in Total System Storage	(5,227)	24,055	(11,706)	45,949	(20,461)	(24,804)

LAND SYSTEM WATER BUDGET									
Flow Type		Origin/ Destination	Component	1989	1990	1991	1992	1993	1994
Inflow		Into Basin	Precipitation on Land System	150,654	112,418	108,526	75,556	184,082	104,481
Inflow		Between Systems	Surface Water Delivery	72,061	72,399	77,619	82,827	70,993	76,177
Inflow		Between Systems	Groundwater Extraction	41,145	42,407	46,745	52,036	38,861	45,730
Inflow		(1)+(2)+(3) Total Inflow		263,860	227,224	232,890	210,419	293,936	226,387
Outflow		Out of Basin	Evapotranspiration	151,287	148,958	153,216	155,932	156,238	153,369
Outflow		Between Systems	Runoff	93,806	59,374	59,468	32,898	119,194	53,112
Outflow		Between Systems	Return Flow	4,615	4,761	5,255	5,860	4,351	5,140
Outflow		Between Systems	Recharge of Applied Water	12,446	12,539	13,479	14,449	12,207	13,226
Outflow		Between Systems	Recharge of Precipitation	1,705	1,591	1,472	1,280	1,947	1,541
Outflow		Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-
Outflow		(5)+(6)+(7)+(8)+(9)+(10) Total Outflow		263,860	227,224	232,890	210,419	293,936	226,387
Storage Change		(4)-(11)	Change in Land System Storage	-	-	-	-	-	-

SURFACE WATER SYSTEM WATER BUDGET									
Flow Type		Origin/ Destination	Component	1989	1990	1991	1992	1993	1994
Inflow		Into Basin	Stream Inflow	390,854	133,594	263,663	76,254	602,999	167,393
Inflow		Into Basin	Precipitation on Reservoirs	552	412	398	277	675	383
Inflow		Between Systems	Runoff	93,806	59,374	59,468	32,898	119,194	53,112
Inflow		Between Systems	Return Flow	4,615	4,761	5,255	5,860	4,351	5,140
Inflow		Between Systems	Stream Gain from Groundwater	-	-	-	-	-	-
Inflow		Between Systems	Reservoir Gain from Groundwater	-	-	-	-	-	-
Inflow		(13)+(14)+(6)+(7)+(15)+(16) Total Inflow		489,827	198,142	328,784	115,288	727,219	226,028
Outflow		Out of Basin	Stream Outflow	393,854	113,802	233,159	23,084	622,453	136,286
Outflow		Out of Basin	Conveyance Evaporation	45	44	47	48	46	46
Outflow		Between Systems	Conveyance Seepage	27	27	27	27	27	27
Outflow		Between Systems	Surface Water Delivery	72,061	72,399	77,619	82,827	70,993	76,177
Outflow		Between Systems	Stream Loss to Groundwater	22,175	10,212	16,260	7,546	32,039	11,784
Outflow		Between Systems	Reservoir Loss to Groundwater	596	596	596	596	596	596
Outflow		Out of Basin	Reservoir Evaporation	697	693	693	754	693	726
Outflow		Out of Basin	Stream Evaporation	371	368	382	406	370	386
Outflow		(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) Total Outflow		489,827	198,142	328,784	115,288	727,219	226,028
Storage Change		(17)-(25)	Change in Surface Water Storage	-	-	-	-	-	-

GROUNDWATER SYSTEM WATER BUDGET								
Flow Type	Origin/ Destination	Component	1989	1990	1991	1992	1993	1994
Inflow	Between Systems	Recharge of Applied Water	12,446	12,539	13,479	14,449	12,207	13,226
Inflow	Between Systems	Recharge of Precipitation	1,705	1,591	1,472	1,280	1,947	1,541
Inflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-
Inflow	Between Systems	Groundwater Gain from Stream	22,175	10,212	16,260	7,546	32,039	11,784
Inflow	Between Systems	Groundwater Gain from Reservoir	596	596	596	596	596	596
Inflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27
Inflow	Into Basin	Subsurface Inflow	1	1	1	1	1	1
Inflow	(8)+(9)+(10)+(21)+(22)+(20)+(27) Total Inflow		36,950	24,967	31,836	23,899	46,817	27,175
Outflow	Between Systems	Groundwater Extraction	41,145	42,407	46,745	52,036	38,861	45,730
Outflow	Between Systems	Groundwater Loss to Stream	-	-	-	-	-	-
Outflow	Between Systems	Groundwater Loss to Reservoir	-	-	-	-	-	-
Outflow	Out of Basin	Subsurface Outflow	-	-	-	-	-	-
Outflow	(3)+(15)+(16)+(29) Total Outflow		41,145	42,407	46,745	52,036	38,861	45,730
Storage Change	(28)-(30)	Change in Groundwater Storage	(4,194)	(17,440)	(14,909)	(28,137)	7,956	(18,555)

TOTAL BASIN WATER BUDGET									
Flow Type		Origin/ Destination	Component	1989	1990	1991	1992	1993	1994
Inflow		Into Basin	Precipitation on Land System	150,654	112,418	108,526	75,556	184,082	104,481
Inflow		Into Basin	Precipitation on Reservoirs	552	412	398	277	675	383
Inflow		Into Basin	Stream Inflow	390,854	133,594	263,663	76,254	602,999	167,393
Inflow		Into Basin	Subsurface Inflow	1	1	1	1	1	1
Inflow		(1)+(14)+(13)+(27)	Total Inflow	542,060	246,425	372,587	152,087	787,756	272,257
Outflow		Out of Basin	Evapotranspiration	151,287	148,958	153,216	155,932	156,238	153,369
Outflow		Out of Basin	Stream Evaporation	371	368	382	406	370	386
Outflow		Out of Basin	Reservoir Evaporation	697	693	693	754	693	726
Outflow		Out of Basin	Conveyance Evaporation	45	44	47	48	46	46
Outflow		Out of Basin	Stream Outflow	393,854	113,802	233,159	23,084	622,453	136,286
Outflow		Out of Basin	Subsurface Outflow	-	-	-	-	-	-
Outflow		(5)+(24)+(23)+(19)+(18)+(29)	Total Outflow	546,255	263,865	387,496	180,224	779,799	290,812
Storage Change		(32)-(33)	Change in Total System Storage	(4,194)	(17,440)	(14,909)	(28,137)	7,956	388

LAND SYSTEM WATER BUDGET									
Flow Type		Origin/ Destination	Component	1995	1996	1997	1998	1999	2000
Inflow		Into Basin	Precipitation on Land System	192,248	183,776	171,871	229,110	146,533	128,140
Inflow		Between Systems	Surface Water Delivery	65,439	70,985	74,958	64,027	74,092	76,327
Inflow		Between Systems	Groundwater Extraction	35,592	41,037	42,916	32,854	43,259	44,735
Inflow		(1)+(2)+(3) Total Inflow		293,278	295,799	289,744	325,992	263,883	249,201
Outflow		Out of Basin	Evapotranspiration	143,128	150,803	159,397	151,378	152,590	157,889
Outflow		Between Systems	Runoff	133,143	126,391	110,752	157,864	91,975	71,370
Outflow		Between Systems	Return Flow	3,983	4,605	4,815	3,667	4,857	5,024
Outflow		Between Systems	Recharge of Applied Water	11,251	12,278	12,946	10,945	12,826	13,215
Outflow		Between Systems	Recharge of Precipitation	1,773	1,722	1,834	2,137	1,637	1,703
Outflow		Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-
Outflow		(5)+(6)+(7)+(8)+(9)+(10) Total Outflow		293,278	295,799	289,744	325,992	263,883	249,201
Storage Change		(4)-(11)	Change in Land System Storage	-	-	-	-	-	-

SURFACE WATER SYSTEM WATER BUDGET								
Flow Type	Origin/ Destination	Component	1995	1996	1997	1998	1999	2000
Inflow	Into Basin	Stream Inflow	912,444	780,720	614,680	832,300	691,739	240,124
Inflow	Into Basin	Precipitation on Reservoirs	704	673	630	840	537	470
Inflow	Between Systems	Runoff	133,143	126,391	110,752	157,864	91,975	71,370
Inflow	Between Systems	Return Flow	3,983	4,605	4,815	3,667	4,857	5,024
Inflow	Between Systems	Stream Gain from Groundwater	-	-	-	-	-	-
Inflow	Between Systems	Reservoir Gain from Groundwater	-	-	-	-	-	-
Inflow	(13)+(14)+(6)+(7)+(15)+(16)	Total Inflow	1,050,275	912,389	730,877	994,671	789,107	316,987
Outflow	Out of Basin	Stream Outflow	897,057	798,101	621,549	872,733	677,081	223,698
Outflow	Out of Basin	Conveyance Evaporation	41	44	46	42	45	47
Outflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27
Outflow	Between Systems	Surface Water Delivery	65,439	70,985	74,958	64,027	74,092	76,327
Outflow	Between Systems	Stream Loss to Groundwater	86,149	41,575	32,583	56,285	36,166	15,166
Outflow	Between Systems	Reservoir Loss to Groundwater	596	596	596	596	596	596
Outflow	Out of Basin	Reservoir Evaporation	625	692	729	619	720	736
Outflow	Out of Basin	Stream Evaporation	340	369	388	340	379	390
Outflow	(18)+(19)+(20)+(21)+(22)+(23)+(24)	Total Outflow	1,050,275	912,389	730,877	994,671	789,107	316,987
Storage Change	(17)-(25)	Change in Surface Water Storage	-	-	-	-	-	-

GROUNDWATER SYSTEM WATER BUDGET								
Flow Type	Origin/ Destination	Component	1995	1996	1997	1998	1999	2000
Inflow	Between Systems	Recharge of Applied Water	11,251	12,278	12,946	10,945	12,826	13,215
Inflow	Between Systems	Recharge of Precipitation	1,773	1,722	1,834	2,137	1,637	1,703
Inflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-
Inflow	Between Systems	Groundwater Gain from Stream	86,149	41,575	32,583	56,285	36,166	15,166
Inflow	Between Systems	Groundwater Gain from Reservoir	596	596	596	596	596	596
Inflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27
Inflow	Into Basin	Subsurface Inflow	1	1	1	1	1	1
Inflow	(8)+(9)+(10)+(21)+(22)+(20)+(27) Total Inflow		99,798	56,199	47,987	69,992	51,253	30,709
Outflow	Between Systems	Groundwater Extraction	35,592	41,037	42,916	32,854	43,259	44,735
Outflow	Between Systems	Groundwater Loss to Stream	-	-	-	-	-	-
Outflow	Between Systems	Groundwater Loss to Reservoir	-	-	-	-	-	-
Outflow	Out of Basin	Subsurface Outflow	-	-	-	-	-	-
Outflow	(3)+(15)+(16)+(29) Total Outflow		35,592	41,037	42,916	32,854	43,259	44,735
Storage Change	(28)-(30)	Change in Groundwater Storage	64,206	15,162	5,071	37,138	7,994	(14,026)

TOTAL BASIN WATER BUDGET									
Flow Type		Origin/ Destination	Component	1995	1996	1997	1998	1999	2000
Inflow		Into Basin	Precipitation on Land System	192,248	183,776	171,871	229,110	146,533	128,140
Inflow		Into Basin	Precipitation on Reservoirs	704	673	630	840	537	470
Inflow		Into Basin	Stream Inflow	912,444	780,720	614,680	832,300	691,739	240,124
Inflow		Into Basin	Subsurface Inflow	1	1	1	1	1	1
Inflow		(1)+(14)+(13)+(27)	Total Inflow	1,105,397	965,170	787,182	1,062,250	838,809	368,734
Outflow		Out of Basin	Evapotranspiration	143,128	150,803	159,397	151,378	152,590	157,889
Outflow		Out of Basin	Stream Evaporation	340	369	388	340	379	390
Outflow		Out of Basin	Reservoir Evaporation	625	692	729	619	720	736
Outflow		Out of Basin	Conveyance Evaporation	41	44	46	42	45	47
Outflow		Out of Basin	Stream Outflow	897,057	798,101	621,549	872,733	677,081	223,698
Outflow		Out of Basin	Subsurface Outflow	-	-	-	-	-	-
Outflow		(5)+(24)+(23)+(19)+(18)+(29)	Total Outflow	1,041,192	950,008	782,111	1,025,112	830,815	382,760
Storage Change		(32)-(33)	Change in Total System Storage	64,206	15,162	5,071	37,138	7,994	(14,026)

LAND SYSTEM WATER BUDGET										
Flow Type		Origin/ Destination	Component	2001	2002	2003	2004	2005	2006	2007
Inflow		Into Basin	Precipitation on Land System	79,296	109,976	136,611	136,687	147,525	190,721	99,291
Inflow		Between Systems	Surface Water Delivery	80,992	80,604	75,245	78,776	70,606	72,295	78,989
Inflow		Between Systems	Groundwater Extraction	49,626	48,753	44,131	47,093	40,332	40,960	48,745
Inflow		(1)+(2)+(3) Total Inflow		209,913	239,333	255,987	262,556	258,462	303,976	227,025
Outflow		Out of Basin	Evapotranspiration	152,585	153,349	151,547	153,751	149,036	151,973	156,935
Outflow		Between Systems	Runoff	36,368	65,156	84,903	88,396	91,011	133,210	49,352
Outflow		Between Systems	Return Flow	5,583	5,482	4,956	5,293	4,524	4,593	5,485
Outflow		Between Systems	Recharge of Applied Water	14,089	14,001	13,030	13,667	12,197	12,475	13,755
Outflow		Between Systems	Recharge of Precipitation	1,288	1,345	1,551	1,449	1,695	1,725	1,498
Outflow		Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-	-
Outflow		(5)+(6)+(7)+(8)+(9)+(10) Total Outflow		209,913	239,333	255,987	262,556	258,462	303,976	227,025
Storage Change		(4)-(11)	Change in Land System Storage	-	-	-	-	-	-	-

SURFACE WATER SYSTEM WATER BUDGET										
Flow Type		Origin/ Destination	Component	2001	2002	2003	2004	2005	2006	2007
Inflow		Into Basin	Stream Inflow	100,742	153,035	219,963	295,581	381,347	735,770	127,762
Inflow		Into Basin	Precipitation on Reservoirs	291	403	501	501	541	699	364
Inflow		Between Systems	Runoff	36,368	65,156	84,903	88,396	91,011	133,210	49,352
Inflow		Between Systems	Return Flow	5,583	5,482	4,956	5,293	4,524	4,593	5,485
Inflow		Between Systems	Stream Gain from Groundwater	-	-	-	-	-	-	-
Inflow		Between Systems	Reservoir Gain from Groundwater	-	-	-	-	-	-	-
Inflow		(13)+(14)+(6)+(7)+(15)+(16) Total Inflow		142,983	224,076	310,322	389,772	477,422	874,271	182,963
Outflow		Out of Basin	Stream Outflow	51,472	130,528	219,088	291,439	383,378	762,028	92,199
Outflow		Out of Basin	Conveyance Evaporation	48	48	45	46	43	45	47
Outflow		Between Systems	Conveyance Seepage	27	27	27	27	27	27	27
Outflow		Between Systems	Surface Water Delivery	80,992	80,604	75,245	78,776	70,606	72,295	78,989
Outflow		Between Systems	Stream Loss to Groundwater	8,684	11,116	14,228	17,745	21,733	38,213	9,941
Outflow		Between Systems	Reservoir Loss to Groundwater	596	596	596	596	596	596	596
Outflow		Out of Basin	Reservoir Evaporation	763	756	711	747	675	694	762
Outflow		Out of Basin	Stream Evaporation	400	400	380	395	364	372	402
Outflow		(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) Total Outflow		142,983	224,076	310,322	389,772	477,422	874,271	182,963
Storage Change		(17)-(25)	Change in Surface Water Storage	-	-	-	-	-	-	-

GROUNDWATER SYSTEM WATER BUDGET									
Flow Type	Origin/ Destination	Component	2001	2002	2003	2004	2005	2006	2007
Inflow	Between Systems	Recharge of Applied Water	14,089	14,001	13,030	13,667	12,197	12,475	13,755
Inflow	Between Systems	Recharge of Precipitation	1,288	1,345	1,551	1,449	1,695	1,725	1,498
Inflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-	-
Inflow	Between Systems	Groundwater Gain from Stream	8,684	11,116	14,228	17,745	21,733	38,213	9,941
Inflow	Between Systems	Groundwater Gain from Reservoir	596	596	596	596	596	596	596
Inflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27	27
Inflow	Into Basin	Subsurface Inflow	1	1	1	1	1	1	1
Inflow	(8)+(9)+(10)+(21)+(22)+(20)+(27) Total Inflow		24,686	27,086	29,435	33,485	36,249	53,038	25,818
Outflow	Between Systems	Groundwater Extraction	49,626	48,753	44,131	47,093	40,332	40,960	48,745
Outflow	Between Systems	Groundwater Loss to Stream	-	-	-	-	-	-	-
Outflow	Between Systems	Groundwater Loss to Reservoir	-	-	-	-	-	-	-
Outflow	Out of Basin	Subsurface Outflow	-	-	-	-	-	-	-
Outflow	(3)+(15)+(16)+(29) Total Outflow		49,626	48,753	44,131	47,093	40,332	40,960	48,745
Storage Change	(28)-(30)	Change in Groundwater Storage	(24,940)	(21,666)	(14,696)	(13,608)	(4,082)	12,079	(22,927)

TOTAL BASIN WATER BUDGET										
Flow Type		Origin/ Destination	Component	2001	2002	2003	2004	2005	2006	2007
Inflow		Into Basin	Precipitation on Land System	79,296	109,976	136,611	136,687	147,525	190,721	99,291
Inflow		Into Basin	Precipitation on Reservoirs	291	403	501	501	541	699	364
Inflow		Into Basin	Stream Inflow	100,742	153,035	219,963	295,581	381,347	735,770	127,762
Inflow		Into Basin	Subsurface Inflow	1	1	1	1	1	1	1
Inflow		(1)+(14)+(13)+(27)	Total Inflow	180,328	263,415	357,075	432,770	529,413	927,191	227,418
Outflow		Out of Basin	Evapotranspiration	152,585	153,349	151,547	153,751	149,036	151,973	156,935
Outflow		Out of Basin	Stream Evaporation	400	400	380	395	364	372	402
Outflow		Out of Basin	Reservoir Evaporation	763	756	711	747	675	694	762
Outflow		Out of Basin	Conveyance Evaporation	48	48	45	46	43	45	47
Outflow		Out of Basin	Stream Outflow	51,472	130,528	219,088	291,439	383,378	762,028	92,199
Outflow		Out of Basin	Subsurface Outflow	-	-	-	-	-	-	-
Outflow		(5)+(24)+(23)+(19)+(18)+(29)	Total Outflow	205,269	285,081	371,772	446,379	533,495	915,112	250,345
Storage Change		(32)-(33)	Change in Total System Storage	(24,940)	(21,666)	(14,696)	(13,608)	(4,082)	32,079	(22,927)

388



LAND SYSTEM WATER BUDGET										
Flow Type		Origin/ Destination	Component	2008	2009	2010	2011	2012	2013	2014
Inflow		Into Basin	Precipitation on Land System	97,459	114,173	120,660	167,215	93,491	126,995	88,759
Inflow		Between Systems	Surface Water Delivery	78,709	78,245	71,749	68,856	81,443	78,026	85,157
Inflow		Between Systems	Groundwater Extraction	47,716	46,430	41,387	38,575	49,850	46,719	54,126
Inflow		(1)+(2)+(3) Total Inflow		223,885	238,849	233,797	274,646	224,784	251,740	228,042
Outflow		Out of Basin	Evapotranspiration	151,305	156,057	151,911	146,988	154,515	161,099	159,338
Outflow		Between Systems	Runoff	52,178	62,460	63,110	109,739	49,166	70,144	46,463
Outflow		Between Systems	Return Flow	5,366	5,217	4,644	4,323	5,608	5,251	6,098
Outflow		Between Systems	Recharge of Applied Water	13,678	13,564	12,406	11,872	14,165	13,540	14,874
Outflow		Between Systems	Recharge of Precipitation	1,358	1,551	1,727	1,724	1,330	1,706	1,269
Outflow		Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-	-
Outflow		(5)+(6)+(7)+(8)+(9)+(10) Total Outflow		223,885	238,849	233,797	274,646	224,784	251,740	228,042
Storage Change		(4)-(11)	Change in Land System Storage	-	-	-	-	-	-	-

SURFACE WATER SYSTEM WATER BUDGET										
Flow Type		Origin/ Destination	Component	2008	2009	2010	2011	2012	2013	2014
Inflow		Into Basin	Stream Inflow	240,456	143,169	103,605	629,359	125,535	142,221	52,739
Inflow		Into Basin	Precipitation on Reservoirs	357	418	442	613	343	465	325
Inflow		Between Systems	Runoff	52,178	62,460	63,110	109,739	49,166	70,144	46,463
Inflow		Between Systems	Return Flow	5,366	5,217	4,644	4,323	5,608	5,251	6,098
Inflow		Between Systems	Stream Gain from Groundwater	-	-	-	-	-	-	-
Inflow		Between Systems	Reservoir Gain from Groundwater	-	-	-	-	-	-	-
Inflow		(13)+(14)+(6)+(7)+(15)+(16) Total Inflow		298,356	211,263	171,801	744,034	180,651	218,081	105,625
Outflow		Out of Basin	Stream Outflow	202,668	120,562	89,515	640,247	87,552	127,602	12,117
Outflow		Out of Basin	Conveyance Evaporation	46	46	44	42	47	47	49
Outflow		Between Systems	Conveyance Seepage	27	27	27	27	27	27	27
Outflow		Between Systems	Surface Water Delivery	78,709	78,245	71,749	68,856	81,443	78,026	85,157
Outflow		Between Systems	Stream Loss to Groundwater	15,181	10,657	8,818	33,265	9,837	10,613	6,452
Outflow		Between Systems	Reservoir Loss to Groundwater	596	596	596	596	596	596	596
Outflow		Out of Basin	Reservoir Evaporation	737	736	684	648	748	766	802
Outflow		Out of Basin	Stream Evaporation	391	393	368	352	401	403	423
Outflow		(18)+(19)+(20)+(21)+(22)+(23)+(24) Total Outflow		298,356	211,263	171,801	744,034	180,651	218,081	105,625
Storage Change		(17)-(25)	Change in Surface Water Storage	-	-	-	-	-	-	-

GROUNDWATER SYSTEM WATER BUDGET									
Flow Type	Origin/ Destination	Component	2008	2009	2010	2011	2012	2013	2014
Inflow	Between Systems	Recharge of Applied Water	13,678	13,564	12,406	11,872	14,165	13,540	14,874
Inflow	Between Systems	Recharge of Precipitation	1,358	1,551	1,727	1,724	1,330	1,706	1,269
Inflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-	-
Inflow	Between Systems	Groundwater Gain from Stream	15,181	10,657	8,818	33,265	9,837	10,613	6,452
Inflow	Between Systems	Groundwater Gain from Reservoir	596	596	596	596	596	596	596
Inflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27	27
Inflow	Into Basin	Subsurface Inflow	1	1	1	1	1	1	1
Inflow	(8)+(9)+(10)+(21)+(22)+(20)+(27) Total Inflow		30,842	26,398	23,575	47,486	25,957	26,484	23,220
Outflow	Between Systems	Groundwater Extraction	47,716	46,430	41,387	38,575	49,850	46,719	54,126
Outflow	Between Systems	Groundwater Loss to Stream	-	-	-	-	-	-	-
Outflow	Between Systems	Groundwater Loss to Reservoir	-	-	-	-	-	-	-
Outflow	Out of Basin	Subsurface Outflow	-	-	-	-	-	-	-
Outflow	(3)+(15)+(16)+(29) Total Outflow		47,716	46,430	41,387	38,575	49,850	46,719	54,126
Storage Change	(28)-(30)	Change in Groundwater Storage	(16,874)	(20,033)	(17,812)	8,910	(23,893)	(20,235)	(30,907)

TOTAL BASIN WATER BUDGET										
Flow Type		Origin/ Destination	Component	2008	2009	2010	2011	2012	2013	2014
Inflow		Into Basin	Precipitation on Land System	97,459	114,173	120,660	167,215	93,491	126,995	88,759
Inflow		Into Basin	Precipitation on Reservoirs	357	418	442	613	343	465	325
Inflow		Into Basin	Stream Inflow	240,456	143,169	103,605	629,359	125,535	142,221	52,739
Inflow		Into Basin	Subsurface Inflow	1	1	1	1	1	1	1
Inflow		(1)+(14)+(13)+(27)	Total Inflow	338,273	257,761	224,709	797,188	219,369	269,682	141,824
Outflow		Out of Basin	Evapotranspiration	151,305	156,057	151,911	146,988	154,515	161,099	159,338
Outflow		Out of Basin	Stream Evaporation	391	393	368	352	401	403	423
Outflow		Out of Basin	Reservoir Evaporation	737	736	684	648	748	766	802
Outflow		Out of Basin	Conveyance Evaporation	46	46	44	42	47	47	49
Outflow		Out of Basin	Stream Outflow	202,668	120,562	89,515	640,247	87,552	127,602	12,117
Outflow		Out of Basin	Subsurface Outflow	-	-	-	-	-	-	-
Outflow		(5)+(24)+(23)+(19)+(18)+(29)	Total Outflow	355,147	277,794	242,521	788,277	243,262	289,917	172,731
Storage Change		(32)-(33)	Change in Total System Storage	(16,874)	(20,033)	(17,812)	8,910	(23,893)	30,907	(30,907)

LAND SYSTEM WATER BUDGET							
Flow Type		Origin/ Destination	Component	2015	2016	2017	2018
Inflow		Into Basin	Precipitation on Land System	129,361	160,423	201,559	139,969
Inflow		Between Systems	Surface Water Delivery	80,035	78,452	75,027	77,947
Inflow		Between Systems	Groundwater Extraction	47,485	45,590	42,392	46,930
Inflow		(1)+(2)+(3) Total Inflow		256,881	284,465	318,977	264,846
Outflow		Out of Basin	Evapotranspiration	161,258	158,534	159,998	153,469
Outflow		Between Systems	Runoff	74,778	105,600	139,423	91,100
Outflow		Between Systems	Return Flow	5,336	5,118	4,753	5,276
Outflow		Between Systems	Recharge of Applied Water	13,872	13,568	12,939	13,535
Outflow		Between Systems	Recharge of Precipitation	1,637	1,645	1,864	1,466
Outflow		Between Systems	Managed Aquifer Recharge	-	-	-	-
Outflow		(5)+(6)+(7)+(8)+(9)+(10) Total Outflow		256,881	284,465	318,977	264,846
Storage Change		(4)-(11)	Change in Land System Storage	-	-	-	-

SURFACE WATER SYSTEM WATER BUDGET							
Flow Type		Origin/ Destination	Component	2015	2016	2017	2018
Inflow		Into Basin	Stream Inflow	82,881	374,311	809,028	243,145
Inflow		Into Basin	Precipitation on Reservoirs	474	588	739	513
Inflow		Between Systems	Runoff	74,778	105,600	139,423	91,100
Inflow		Between Systems	Return Flow	5,336	5,118	4,753	5,276
Inflow		Between Systems	Stream Gain from Groundwater	-	-	-	-
Inflow		Between Systems	Reservoir Gain from Groundwater	-	-	-	-
Inflow		(13)+(14)+(6)+(7)+(15)+(16) Total Inflow		163,468	485,618	953,943	340,034
Outflow		Out of Basin	Stream Outflow	73,721	383,946	827,869	244,988
Outflow		Out of Basin	Conveyance Evaporation	47	47	48	47
Outflow		Between Systems	Conveyance Seepage	27	27	27	27
Outflow		Between Systems	Surface Water Delivery	80,035	78,452	75,027	77,947
Outflow		Between Systems	Stream Loss to Groundwater	7,854	21,405	49,248	15,306
Outflow		Between Systems	Reservoir Loss to Groundwater	596	596	596	596
Outflow		Out of Basin	Reservoir Evaporation	778	746	737	730
Outflow		Out of Basin	Stream Evaporation	409	398	391	392
Outflow		(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) Total Outflow		163,468	485,618	953,943	340,034
Storage Change		(17)-(25)	Change in Surface Water Storage	-	-	-	-

GROUNDWATER SYSTEM WATER BUDGET						
Flow Type	Origin/ Destination	Component	2015	2016	2017	2018
Inflow	Between Systems	Recharge of Applied Water	13,872	13,568	12,939	13,535
Inflow	Between Systems	Recharge of Precipitation	1,637	1,645	1,864	1,466
Inflow	Between Systems	Managed Aquifer Recharge	-	-	-	-
Inflow	Between Systems	Groundwater Gain from Stream	7,854	21,405	49,248	15,306
Inflow	Between Systems	Groundwater Gain from Reservoir	596	596	596	596
Inflow	Between Systems	Conveyance Seepage	27	27	27	27
Inflow	Into Basin	Subsurface Inflow	1	1	1	1
Inflow	(8)+(9)+(10)+(21)+(22)+(20)+(27) Total Inflow		23,988	37,242	64,675	30,932
Outflow	Between Systems	Groundwater Extraction	47,485	45,590	42,392	46,930
Outflow	Between Systems	Groundwater Loss to Stream	-	-	-	-
Outflow	Between Systems	Groundwater Loss to Reservoir	-	-	-	-
Outflow	Out of Basin	Subsurface Outflow	-	-	-	-
Outflow	(3)+(15)+(16)+(29) Total Outflow		47,485	45,590	42,392	46,930
Storage Change	(28)-(30)	Change in Groundwater Storage	(23,497)	(8,348)	22,283	(15,998)

TOTAL BASIN WATER BUDGET						
Flow Type	Origin/ Destination	Component	2015	2016	2017	2018
Inflow	Into Basin	Precipitation on Land System	129,361	160,423	201,559	139,969
Inflow	Into Basin	Precipitation on Reservoirs	474	588	739	513
Inflow	Into Basin	Stream Inflow	82,881	374,311	809,028	243,145
Inflow	Into Basin	Subsurface Inflow	1	1	1	1
Inflow	(1)+(14)+(13)+(27)	Total Inflow	212,717	535,323	1,011,326	383,627
Outflow	Out of Basin	Evapotranspiration	161,258	158,534	159,998	153,469
Outflow	Out of Basin	Stream Evaporation	409	398	391	392
Outflow	Out of Basin	Reservoir Evaporation	778	746	737	730
Outflow	Out of Basin	Conveyance Evaporation	47	47	48	47
Outflow	Out of Basin	Stream Outflow	73,721	383,946	827,869	244,988
Outflow	Out of Basin	Subsurface Outflow	-	-	-	-
Outflow	(5)+(24)+(23)+(19)+(18)+(29)	Total Outflow	236,214	543,670	989,042	399,625
Storage Change	(32)-(33)	Change in Total System Storage	(23,497)	(8,348)	22,283	(15,998)

LAND SYSTEM WATER BUDGET			
Flow Type	Origin/ Destination	Component	Average (2019-2068)
Inflow	Into Basin	Precipitation on Land System	143,208
Inflow	Between Systems	Surface Water Delivery	77,048
Inflow	Between Systems	Groundwater Extraction	45,162
Inflow	(1)+(2)+(3)	Total Inflow	265,418
Outflow	Out of Basin	Evapotranspiration	156,873
Outflow	Between Systems	Runoff	88,493
Outflow	Between Systems	Return Flow	5,072
Outflow	Between Systems	Recharge of Applied Water	13,339
Outflow	Between Systems	Recharge of Precipitation	1,641
Outflow	Between Systems	Managed Aquifer Recharge	-
Outflow	(5)+(6)+(7)+(8)+(9)+(10)	Total Outflow	265,418
Storage Change	(4)-(11)	Change in Land System Storage	-

SURFACE WATER SYSTEM WATER BUDGET			
Flow Type	Origin/ Destination	Component	Average (2019-2068)
Inflow	Into Basin	Stream Inflow	430,242
Inflow	Into Basin	Precipitation on Reservoirs	525
Inflow	Between Systems	Runoff	88,493
Inflow	Between Systems	Return Flow	5,072
Inflow	Between Systems	Stream Gain from Groundwater	-
Inflow	Between Systems	Reservoir Gain from Groundwater	-
Inflow	(13)+(14)+(6)+(7)+(15)+(16)	Total Inflow	524,331
Outflow	Out of Basin	Stream Outflow	418,003
Outflow	Out of Basin	Conveyance Evaporation	47
Outflow	Between Systems	Conveyance Seepage	27
Outflow	Between Systems	Surface Water Delivery	77,048
Outflow	Between Systems	Stream Loss to Groundwater	27,476
Outflow	Between Systems	Reservoir Loss to Groundwater	596
Outflow	Out of Basin	Reservoir Evaporation	741
Outflow	Out of Basin	Stream Evaporation	393
Outflow	(18)+(19)+(20)+(21)+(22)+(23)+(24)	Total Outflow	524,331
Storage Change	(17)-(25)	Change in Surface Water Storage	-

GROUNDWATER SYSTEM WATER BUDGET			
Flow Type	Origin/ Destination	Component	Average (2019-2068)
Inflow	Between Systems	Recharge of Applied Water	13,339
Inflow	Between Systems	Recharge of Precipitation	1,641
Inflow	Between Systems	Managed Aquifer Recharge	-
Inflow	Between Systems	Groundwater Gain from Stream	27,476
Inflow	Between Systems	Groundwater Gain from Reservoirs	596
Inflow	Between Systems	Conveyance Seepage	27
Inflow	Into Basin	Subsurface Inflow	1
Inflow	(8)+(9)+(10)+(21)+(22)+(20)+(27)	Total Inflow	43,081
Outflow	Between Systems	Groundwater Extraction	45,162
Outflow	Between Systems	Groundwater Loss to Stream	-
Outflow	Between Systems	Groundwater Loss to Reservoirs	-
Outflow	Out of Basin	Subsurface Outflow	-
Outflow	(3)+(15)+(16)+(29)	Total Outflow	45,162
Storage Change	(28)-(30)	Change in Groundwater Storage	(2,080)

TOTAL BASIN WATER BUDGET			
Flow Type	Origin/ Destination	Component	Average (2019-2068)
Inflow	Into Basin	Precipitation on Land System	143,208
Inflow	Into Basin	Precipitation on Reservoirs	525
Inflow	Into Basin	Stream Inflow	430,242
Inflow	Into Basin	Subsurface Inflow	1
Inflow	(1)+(14)+(13)+(27)	Total Inflow	573,975
Outflow	Out of Basin	Evapotranspiration	156,873
Outflow	Out of Basin	Stream Evaporation	393
Outflow	Out of Basin	Reservoir Evaporation	741
Outflow	Out of Basin	Conveyance Evaporation	47
Outflow	Out of Basin	Stream Outflow	418,003
Outflow	Out of Basin	Subsurface Outflow	-
Outflow	(5)+(24)+(23)+(19)+(18)+(29)	Total Outflow	576,056
Storage Change	(32)-(33)	Change in Total System Storage	(2,080)

**LAND SYSTEM WATER BUDGET**

Flow Type	Origin/ Destination	Component	2019	2020	2021	2022	2023	2024
Inflow	Into Basin	Precipitation on Land System	124,782	214,533	111,731	190,645	87,538	177,442
Inflow	Between Systems	Surface Water Delivery	82,510	73,612	82,236	77,699	85,805	79,223
Inflow	Between Systems	Groundwater Extraction	49,372	40,325	49,679	45,952	53,502	46,213
Inflow	(1)+(2)+(3)	Total Inflow	256,664	328,470	243,646	314,297	226,845	302,878
Outflow	Out of Basin	Evapotranspiration	161,959	157,895	160,313	160,477	160,427	158,375
Outflow	Between Systems	Runoff	73,298	151,514	61,974	133,477	44,140	124,005
Outflow	Between Systems	Return Flow	5,550	4,516	5,586	5,162	6,024	5,189
Outflow	Between Systems	Recharge of Applied Water	14,312	12,655	14,281	13,465	14,952	13,706
Outflow	Between Systems	Recharge of Precipitation	1,545	1,891	1,493	1,715	1,302	1,603
Outflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-
Outflow	(5)+(6)+(7)+(8)+(9)+(10)	Total Outflow	256,664	328,470	243,646	314,297	226,845	302,878
Storage Change	(4)-(11)	Change in Land System Storage	-	-	-	-	-	-

**SURFACE WATER SYSTEM WATER BUDGET**

Flow Type	Origin/ Destination	Component	2019	2020	2021	2022	2023	2024
Inflow	Into Basin	Stream Inflow	218,123	697,723	307,955	767,905	183,806	502,177
Inflow	Into Basin	Precipitation on Reservoirs	457	786	409	699	321	650
Inflow	Between Systems	Runoff	73,298	151,514	61,974	133,477	44,140	124,005
Inflow	Between Systems	Return Flow	5,550	4,516	5,586	5,162	6,024	5,189
Inflow	Between Systems	Stream Gain from Groundwater	-	-	-	-	-	-
Inflow	Between Systems	Reservoir Gain from Groundwater	-	-	-	-	-	-
Inflow	(13)+(14)+(6)+(7)+(15)+(16)	Total Inflow	297,429	854,539	375,924	907,243	234,290	632,021
Outflow	Out of Basin	Stream Outflow	198,898	742,701	273,501	787,992	134,030	523,627
Outflow	Out of Basin	Conveyance Evaporation	49	48	48	47	50	49
Outflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27
Outflow	Between Systems	Surface Water Delivery	82,510	73,612	82,236	77,699	85,805	79,223
Outflow	Between Systems	Stream Loss to Groundwater	14,143	36,444	18,320	39,708	12,547	27,351
Outflow	Between Systems	Reservoir Loss to Groundwater	596	596	596	596	596	596
Outflow	Out of Basin	Reservoir Evaporation	790	727	782	770	809	747
Outflow	Out of Basin	Stream Evaporation	416	383	414	403	426	400
Outflow	(18)+(19)+(20)+(21)+(22)+(23)+(24)	Total Outflow	297,429	854,539	375,924	907,243	234,290	632,021
Storage Change	(17)-(25)	Change in Surface Water Storage	-	-	-	-	-	-

**GROUNDWATER SYSTEM WATER BUDGET**

Flow Type	Origin/ Destination	Component	2019	2020	2021	2022	2023	2024
Inflow	Between Systems	Recharge of Applied Water	14,312	12,655	14,281	13,465	14,952	13,706
Inflow	Between Systems	Recharge of Precipitation	1,545	1,891	1,493	1,715	1,302	1,603
Inflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-
Inflow	Between Systems	Groundwater Gain from Stream	14,143	36,444	18,320	39,708	12,547	27,351
Inflow	Between Systems	Groundwater Gain from Reservoir	596	596	596	596	596	596
Inflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27
Inflow	Into Basin	Subsurface Inflow	1	1	1	1	1	1
Inflow	(8)+(9)+(10)+(21)+(22)+(20)+(27)	Total Inflow	30,624	51,614	34,718	55,512	29,425	43,285
Outflow	Between Systems	Groundwater Extraction	49,372	40,325	49,679	45,952	53,502	46,213
Outflow	Between Systems	Groundwater Loss to Stream	-	-	-	-	-	-
Outflow	Between Systems	Groundwater Loss to Reservoirs	-	-	-	-	-	-
Outflow	Out of Basin	Subsurface Outflow	-	-	-	-	-	-
Outflow	(3)+(15)+(16)+(29)	Total Outflow	49,372	40,325	49,679	45,952	53,502	46,213
Storage Change	(28)-(30)	Change in Groundwater Storage	(18,748)	11,289	(14,961)	9,560	(24,077)	(2,928)

**TOTAL BASIN WATER BUDGET**

Flow Type	Origin/ Destination	Component	2019	2020	2021	2022	2023	2024
Inflow	Into Basin	Precipitation on Land System	124,782	214,533	111,731	190,645	87,538	177,442
Inflow	Into Basin	Precipitation on Reservoirs	457	786	409	699	321	650
Inflow	Into Basin	Stream Inflow	218,123	697,723	307,955	767,905	183,806	502,177
Inflow	Into Basin	Subsurface Inflow	1	1	1	1	1	1
Inflow	(1)+(14)+(13)+(27)	Total Inflow	343,363	913,043	420,096	959,249	271,665	680,269
Outflow	Out of Basin	Evapotranspiration	161,959	157,895	160,313	160,477	160,427	158,375
Outflow	Out of Basin	Stream Evaporation	416	383	414	403	426	400
Outflow	Out of Basin	Reservoir Evaporation	790	727	782	770	809	747
Outflow	Out of Basin	Conveyance Evaporation	49	48	48	47	50	49
Outflow	Out of Basin	Stream Outflow	198,898	742,701	273,501	787,992	134,030	523,627
Outflow	Out of Basin	Subsurface Outflow	-	-	-	-	-	-
Outflow	(5)+(24)+(23)+(19)+(18)+(29)	Total Outflow	362,111	901,754	435,058	949,689	295,742	683,197
Storage Change	(32)-(33)	Change in Total System Storage	(18,748)	11,289	(14,961)	9,560	(24,077)	(2,928)



LAND SYSTEM WATER BUDGET									
Flow Type	Origin/ Destination	Component	2025	2026	2027	2028	2029	2030	2031
Inflow	Into Basin	Precipitation on Land System	133,558	164,010	182,632	204,764	123,866	115,700	185,913
Inflow	Between Systems	Surface Water Delivery	79,192	82,117	81,376	74,115	82,207	83,257	79,490
Inflow	Between Systems	Groundwater Extraction	46,615	48,324	47,544	41,095	48,483	49,808	45,707
Inflow	(1)+(2)+(3)	Total Inflow	259,366	294,451	311,552	319,974	254,556	248,765	311,111
Outflow	Out of Basin	Evapotranspiration	160,592	163,111	162,673	161,164	164,323	164,927	162,327
Outflow	Between Systems	Runoff	78,161	110,076	127,816	139,490	68,901	62,194	128,193
Outflow	Between Systems	Return Flow	5,236	5,429	5,339	4,604	5,447	5,599	5,130
Outflow	Between Systems	Recharge of Applied Water	13,715	14,217	14,078	12,757	14,236	14,440	13,730
Outflow	Between Systems	Recharge of Precipitation	1,662	1,618	1,644	1,958	1,649	1,605	1,732
Outflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-	-
Outflow	(5)+(6)+(7)+(8)+(9)+(10)	Total Outflow	259,366	294,451	311,552	319,974	254,556	248,765	311,111
Storage Change	(4)-(11)	Change in Land System Storage	-	-	-	-	-	-	-

SURFACE WATER SYSTEM WATER BUDGET									
Flow Type	Origin/ Destination	Component	2025	2026	2027	2028	2029	2030	2031
Inflow	Into Basin	Stream Inflow	255,335	637,275	624,047	1,007,609	667,874	318,068	592,563
Inflow	Into Basin	Precipitation on Reservoirs	489	601	669	750	454	424	681
Inflow	Between Systems	Runoff	78,161	110,076	127,816	139,490	68,901	62,194	128,193
Inflow	Between Systems	Return Flow	5,236	5,429	5,339	4,604	5,447	5,599	5,130
Inflow	Between Systems	Stream Gain from Groundwater	-	-	-	-	-	-	-
Inflow	Between Systems	Reservoir Gain from Groundwater	-	-	-	-	-	-	-
Inflow	(13)+(14)+(6)+(7)+(15)+(16)	Total Inflow	339,222	753,380	757,872	1,152,454	742,676	386,285	726,567
Outflow	Out of Basin	Stream Outflow	242,296	635,748	641,606	941,819	623,530	282,329	613,664
Outflow	Out of Basin	Conveyance Evaporation	46	49	49	46	49	49	49
Outflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27	27
Outflow	Between Systems	Surface Water Delivery	79,192	82,117	81,376	74,115	82,207	83,257	79,490
Outflow	Between Systems	Stream Loss to Groundwater	15,873	33,633	33,018	134,726	35,056	18,790	31,554
Outflow	Between Systems	Reservoir Loss to Groundwater	596	596	596	596	596	596	596
Outflow	Out of Basin	Reservoir Evaporation	783	792	785	733	793	811	778
Outflow	Out of Basin	Stream Evaporation	408	417	413	390	417	423	407
Outflow	(18)+(19)+(20)+(21)+(22)+(23)+(24)	Total Outflow	339,222	753,380	757,872	1,152,454	742,676	386,285	726,567
Storage Change	(17)-(25)	Change in Surface Water Storage	-	-	-	-	-	-	-

GROUNDWATER SYSTEM WATER BUDGET									
Flow Type	Origin/ Destination	Component	2025	2026	2027	2028	2029	2030	2031
Inflow	Between Systems	Recharge of Applied Water	13,715	14,217	14,078	12,757	14,236	14,440	13,730
Inflow	Between Systems	Recharge of Precipitation	1,662	1,618	1,644	1,958	1,649	1,605	1,732
Inflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-	-
Inflow	Between Systems	Groundwater Gain from Stream	15,873	33,633	33,018	134,726	35,056	18,790	31,554
Inflow	Between Systems	Groundwater Gain from Reservoir	596	596	596	596	596	596	596
Inflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27	27
Inflow	Into Basin	Subsurface Inflow	1	1	1	1	1	1	1
Inflow	(8)+(9)+(10)+(21)+(22)+(20)+(27)	Total Inflow	31,874	50,093	49,366	150,066	51,566	35,460	47,640
Outflow	Between Systems	Groundwater Extraction	46,615	48,324	47,544	41,095	48,483	49,808	45,707
Outflow	Between Systems	Groundwater Loss to Stream	-	-	-	-	-	-	-
Outflow	Between Systems	Groundwater Loss to Reservoir s	-	-	-	-	-	-	-
Outflow	Out of Basin	Subsurface Outflow	-	-	-	-	-	-	-
Outflow	(3)+(15)+(16)+(29)	Total Outflow	46,615	48,324	47,544	41,095	48,483	49,808	45,707
Storage Change	(28)-(30)	Change in Groundwater Storage	(14,741)	1,769	1,822	108,971	3,083	(14,348)	1,933

TOTAL BASIN WATER BUDGET									
Flow Type	Origin/ Destination	Component	2025	2026	2027	2028	2029	2030	2031
Inflow	Into Basin	Precipitation on Land System	133,558	164,010	182,632	204,764	123,866	115,700	185,913
Inflow	Into Basin	Precipitation on Reservoirs	489	601	669	750	454	424	681
Inflow	Into Basin	Stream Inflow	255,335	637,275	624,047	1,007,609	667,874	318,068	592,563
Inflow	Into Basin	Subsurface Inflow	1	1	1	1	1	1	1
Inflow	(1)+(14)+(13)+(27)	Total Inflow	389,384	801,886	807,348	1,213,124	792,195	434,193	779,158
Outflow	Out of Basin	Evapotranspiration	160,592	163,111	162,673	161,164	164,323	164,927	162,327
Outflow	Out of Basin	Stream Evaporation	408	417	413	390	417	423	407
Outflow	Out of Basin	Reservoir Evaporation	783	792	785	733	793	811	778
Outflow	Out of Basin	Conveyance Evaporation	46	49	49	46	49	49	49
Outflow	Out of Basin	Stream Outflow	242,296	635,748	641,606	941,819	623,530	282,329	613,664
Outflow	Out of Basin	Subsurface Outflow	-	-	-	-	-	-	-
Outflow	(5)+(24)+(23)+(19)+(18)+(29)	Total Outflow	404,125	800,117	805,527	1,104,153	789,112	448,540	777,226
Storage Change	(32)-(33)	Change in Total System Storage	(14,741)	1,769	1,822	108,971	3,083	(14,348)	1,933

**LAND SYSTEM WATER BUDGET**

Flow Type	Origin/ Destination	Component	2032	2033	2034	2035	2036	2037	2038	2039
Inflow	Into Basin	Precipitation on Land System	139,206	110,510	85,325	164,468	106,923	179,197	114,326	204,535
Inflow	Between Systems	Surface Water Delivery	79,545	79,582	82,522	77,244	81,768	78,012	81,900	76,749
Inflow	Between Systems	Groundwater Extraction	46,907	48,100	51,806	43,861	49,645	43,934	48,901	42,492
Inflow	(1)+(2)+(3)	Total Inflow	265,658	238,192	219,653	285,573	238,337	301,143	245,127	323,776
Outflow	Out of Basin	Evapotranspiration	162,112	159,554	157,350	163,976	159,997	166,332	163,172	165,607
Outflow	Between Systems	Runoff	82,807	57,826	40,736	101,461	57,051	114,498	60,644	138,214
Outflow	Between Systems	Return Flow	5,269	5,409	5,834	4,920	5,584	4,926	5,496	4,761
Outflow	Between Systems	Recharge of Applied Water	13,778	13,823	14,395	13,326	14,208	13,445	14,203	13,205
Outflow	Between Systems	Recharge of Precipitation	1,692	1,581	1,338	1,890	1,496	1,941	1,610	1,990
Outflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-	-	-
Outflow	(5)+(6)+(7)+(8)+(9)+(10)	Total Outflow	265,658	238,192	219,653	285,573	238,337	301,143	245,127	323,776
Storage Change	(4)-(11)	Change in Land System Storage	-	-	-	-	-	-	-	-

**SURFACE WATER SYSTEM WATER BUDGET**

Flow Type	Origin/ Destination	Component	2032	2033	2034	2035	2036	2037	2038	2039
Inflow	Into Basin	Stream Inflow	557,523	196,081	110,187	299,161	236,541	547,651	165,958	760,457
Inflow	Into Basin	Precipitation on Reservoirs	510	405	313	603	392	657	419	749
Inflow	Between Systems	Runoff	82,807	57,826	40,736	101,461	57,051	114,498	60,644	138,214
Inflow	Between Systems	Return Flow	5,269	5,409	5,834	4,920	5,584	4,926	5,496	4,761
Inflow	Between Systems	Stream Gain from Groundwater	-	-	-	-	-	-	-	-
Inflow	Between Systems	Reservoir Gain from Groundwater	-	-	-	-	-	-	-	-
Inflow	(13)+(14)+(6)+(7)+(15)+(16)	Total Inflow	646,109	259,720	157,070	406,144	299,568	667,733	232,517	904,181
Outflow	Out of Basin	Stream Outflow	534,796	165,138	63,542	309,163	200,936	558,396	137,030	786,222
Outflow	Out of Basin	Conveyance Evaporation	48	46	47	48	48	48	49	49
Outflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27	27	27
Outflow	Between Systems	Surface Water Delivery	79,545	79,582	82,522	77,244	81,768	78,012	81,900	76,749
Outflow	Between Systems	Stream Loss to Groundwater	29,925	13,118	9,124	17,911	14,999	29,466	11,717	39,361
Outflow	Between Systems	Reservoir Loss to Groundwater	596	596	596	596	596	596	596	596
Outflow	Out of Basin	Reservoir Evaporation	766	802	794	754	781	779	783	773
Outflow	Out of Basin	Stream Evaporation	404	411	416	400	412	408	414	403
Outflow	(18)+(19)+(20)+(21)+(22)+(23)+(24)	Total Outflow	646,109	259,720	157,070	406,144	299,568	667,733	232,517	904,181
Storage Change	(17)-(25)	Change in Surface Water Storage	-	-	-	-	-	-	-	-

**GROUNDWATER SYSTEM WATER BUDGET**

Flow Type	Origin/ Destination	Component	2032	2033	2034	2035	2036	2037	2038	2039
Inflow	Between Systems	Recharge of Applied Water	13,778	13,823	14,395	13,326	14,208	13,445	14,203	13,205
Inflow	Between Systems	Recharge of Precipitation	1,692	1,581	1,338	1,890	1,496	1,941	1,610	1,990
Inflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-	-	-
Inflow	Between Systems	Groundwater Gain from Stream	29,925	13,118	9,124	17,911	14,999	29,466	11,717	39,361
Inflow	Between Systems	Groundwater Gain from Reservoirs	596	596	596	596	596	596	596	596
Inflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27	27	27
Inflow	Into Basin	Subsurface Inflow	1	1	1	1	1	1	1	1
Inflow	(8)+(9)+(10)+(21)+(22)+(20)+(27)	Total Inflow	46,020	29,146	25,481	33,752	31,328	45,477	28,156	55,180
Outflow	Between Systems	Groundwater Extraction	46,907	48,100	51,806	43,861	49,645	43,934	48,901	42,492
Outflow	Between Systems	Groundwater Loss to Stream	-	-	-	-	-	-	-	-
Outflow	Between Systems	Groundwater Loss to Reservoirs	-	-	-	-	-	-	-	-
Outflow	Out of Basin	Subsurface Outflow	-	-	-	-	-	-	-	-
Outflow	(3)+(15)+(16)+(29)	Total Outflow	46,907	48,100	51,806	43,861	49,645	43,934	48,901	42,492
Storage Change	(28)-(30)	Change in Groundwater Storage	(888)	(18,954)	(26,325)	(10,109)	(18,317)	1,543	(20,745)	12,688

**TOTAL BASIN WATER BUDGET**

Flow Type	Origin/ Destination	Component	2032	2033	2034	2035	2036	2037	2038	2039
Inflow	Into Basin	Precipitation on Land System	139,206	110,510	85,325	164,468	106,923	179,197	114,326	204,535
Inflow	Into Basin	Precipitation on Reservoirs	510	405	313	603	392	657	419	749
Inflow	Into Basin	Stream Inflow	557,523	196,081	110,187	299,161	236,541	547,651	165,958	760,457
Inflow	Into Basin	Subsurface Inflow	1	1	1	1	1	1	1	1
Inflow	(1)+(14)+(13)+(27)	Total Inflow	697,240	306,996	195,825	464,232	343,856	727,506	280,703	965,743
Outflow	Out of Basin	Evapotranspiration	162,112	159,554	157,350	163,976	159,997	166,332	163,172	165,607
Outflow	Out of Basin	Stream Evaporation	404	411	416	400	412	408	414	403
Outflow	Out of Basin	Reservoir Evaporation	766	802	794	754	781	779	783	773
Outflow	Out of Basin	Conveyance Evaporation	48	46	47	48	48	48	49	49
Outflow	Out of Basin	Stream Outflow	534,796	165,138	63,542	309,163	200,936	558,396	137,030	786,222
Outflow	Out of Basin	Subsurface Outflow	-	-	-	-	-	-	-	-
Outflow	(5)+(24)+(23)+(19)+(18)+(29)	Total Outflow	698,127	325,950	222,150	474,341	362,174	725,963	301,449	953,054
Storage Change	(32)-(33)	Change in Total System Storage	(888)	(18,954)	(26,325)	(10,109)	(18,317)	1,543	(20,745)	12,688

LAND SYSTEM WATER BUDGET										
Flow Type	Origin/ Destination	Component	2040	2041	2042	2043	2044	2045	2046	2047
Inflow	Into Basin	Precipitation on Land System	191,332	148,899	132,719	193,698	96,315	88,835	150,654	112,418
Inflow	Between Systems	Surface Water Delivery	74,947	68,516	76,750	74,262	78,850	85,952	72,061	72,399
Inflow	Between Systems	Groundwater Extraction	41,152	39,192	45,598	41,789	47,782	53,245	41,145	42,407
Inflow	(1)+(2)+(3)	Total Inflow	307,432	256,607	255,067	309,749	222,946	228,032	263,860	227,224
Outflow	Out of Basin	Evapotranspiration	163,789	146,344	152,399	160,318	155,136	159,362	151,287	148,958
Outflow	Between Systems	Runoff	124,132	92,329	82,737	130,033	47,265	46,439	93,806	59,374
Outflow	Between Systems	Return Flow	4,609	4,396	5,123	4,685	5,373	5,994	4,615	4,761
Outflow	Between Systems	Recharge of Applied Water	12,886	11,840	13,309	12,802	13,701	14,966	12,446	12,539
Outflow	Between Systems	Recharge of Precipitation	2,016	1,697	1,499	1,910	1,471	1,272	1,705	1,591
Outflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-	-	-
Outflow	(5)+(6)+(7)+(8)+(9)+(10)	Total Outflow	307,432	256,607	255,067	309,749	222,946	228,032	263,860	227,224
Storage Change	(4)-(11)	Change in Land System Storage	-	-	-	-	-	-	-	-

SURFACE WATER SYSTEM WATER BUDGET										
Flow Type	Origin/ Destination	Component	2040	2041	2042	2043	2044	2045	2046	2047
Inflow	Into Basin	Stream Inflow	697,741	808,462	310,960	878,565	161,807	162,980	390,854	133,594
Inflow	Into Basin	Precipitation on Reservoirs	701	546	486	710	353	326	552	412
Inflow	Between Systems	Runoff	124,132	92,329	82,737	130,033	47,265	46,439	93,806	59,374
Inflow	Between Systems	Return Flow	4,609	4,396	5,123	4,685	5,373	5,994	4,615	4,761
Inflow	Between Systems	Stream Gain from Groundwater	-	-	-	-	-	-	-	-
Inflow	Between Systems	Reservoir Gain from Groundwater	-	-	-	-	-	-	-	-
Inflow	(13)+(14)+(6)+(7)+(15)+(16)	Total Inflow	827,183	905,732	399,306	#####	214,798	215,738	489,827	198,142
Outflow	Out of Basin	Stream Outflow	713,968	786,443	302,274	865,544	122,626	116,338	393,854	113,802
Outflow	Out of Basin	Conveyance Evaporation	47	44	46	45	45	50	45	44
Outflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27	27	27
Outflow	Between Systems	Surface Water Delivery	74,947	68,516	76,750	74,262	78,850	85,952	72,061	72,399
Outflow	Between Systems	Stream Loss to Groundwater	36,445	49,085	18,460	72,401	11,524	11,579	22,175	10,212
Outflow	Between Systems	Reservoir Loss to Groundwater	596	596	596	596	596	596	596	596
Outflow	Out of Basin	Reservoir Evaporation	757	667	760	727	736	777	697	693
Outflow	Out of Basin	Stream Evaporation	395	354	393	389	393	420	371	368
Outflow	(18)+(19)+(20)+(21)+(22)+(23)+(24)	Total Outflow	827,183	905,732	399,306	#####	214,798	215,738	489,827	198,142
Storage Change	(17)-(25)	Change in Surface Water Storage	-	-	-	-	-	-	-	-

GROUNDWATER SYSTEM WATER BUDGET										
Flow Type	Origin/ Destination	Component	2040	2041	2042	2043	2044	2045	2046	2047
Inflow	Between Systems	Recharge of Applied Water	12,886	11,840	13,309	12,802	13,701	14,966	12,446	12,539
Inflow	Between Systems	Recharge of Precipitation	2,016	1,697	1,499	1,910	1,471	1,272	1,705	1,591
Inflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-	-	-
Inflow	Between Systems	Groundwater Gain from Stream	36,445	49,085	18,460	72,401	11,524	11,579	22,175	10,212
Inflow	Between Systems	Groundwater Gain from Reservoirs	596	596	596	596	596	596	596	596
Inflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27	27	27
Inflow	Into Basin	Subsurface Inflow	1	1	1	1	1	1	1	1
Inflow	(8)+(9)+(10)+(21)+(22)+(20)+(27)	Total Inflow	51,971	63,247	33,892	87,738	27,321	28,441	36,950	24,967
Outflow	Between Systems	Groundwater Extraction	41,152	39,192	45,598	41,789	47,782	53,245	41,145	42,407
Outflow	Between Systems	Groundwater Loss to Stream	-	-	-	-	-	-	-	-
Outflow	Between Systems	Groundwater Loss to Reservoirs	-	-	-	-	-	-	-	-
Outflow	Out of Basin	Subsurface Outflow	-	-	-	-	-	-	-	-
Outflow	(3)+(15)+(16)+(29)	Total Outflow	41,152	39,192	45,598	41,789	47,782	53,245	41,145	42,407
Storage Change	(28)-(30)	Change in Groundwater Storage	10,819	24,055	(11,706)	45,949	(20,461)	(24,804)	(4,194)	(17,440)

TOTAL BASIN WATER BUDGET										
Flow Type	Origin/ Destination	Component	2040	2041	2042	2043	2044	2045	2046	2047
Inflow	Into Basin	Precipitation on Land System	191,332	148,899	132,719	193,698	96,315	88,835	150,654	112,418
Inflow	Into Basin	Precipitation on Reservoirs	701	546	486	710	353	326	552	412
Inflow	Into Basin	Stream Inflow	697,741	808,462	310,960	878,565	161,807	162,980	390,854	133,594
Inflow	Into Basin	Subsurface Inflow	1	1	1	1	1	1	1	1
Inflow	(1)+(14)+(13)+(27)	Total Inflow	889,774	957,907	444,166	#####	258,475	252,142	542,060	246,425
Outflow	Out of Basin	Evapotranspiration	163,789	146,344	152,399	160,318	155,136	159,362	151,287	148,958
Outflow	Out of Basin	Stream Evaporation	395	354	393	389	393	420	371	368
Outflow	Out of Basin	Reservoir Evaporation	757	667	760	727	736	777	697	693
Outflow	Out of Basin	Conveyance Evaporation	47	44	46	45	45	50	45	44
Outflow	Out of Basin	Stream Outflow	713,968	786,443	302,274	865,544	122,626	116,338	393,854	113,802
Outflow	Out of Basin	Subsurface Outflow	-	-	-	-	-	-	-	-
Outflow	(5)+(24)+(23)+(19)+(18)+(29)	Total Outflow	878,956	933,852	455,872	#####	278,936	276,946	546,255	263,865
Storage Change	(32)-(33)	Change in Total System Storage	10,819	24,055	(11,706)	45,949	(20,461)	(24,804)	(4,194)	(17,440)

## LAND SYSTEM WATER BUDGET

Flow Type	Origin/ Destination	Component	2048	2049	2050	2051	2052	2053	2054	2055
Inflow	Into Basin	Precipitation on Land System	108,526	75,556	184,082	104,481	192,248	183,776	171,871	229,110
Inflow	Between Systems	Surface Water Delivery	77,619	82,827	70,993	76,177	65,439	70,985	74,958	64,027
Inflow	Between Systems	Groundwater Extraction	46,745	52,036	38,861	45,730	35,592	41,037	42,916	32,854
Inflow	(1)+(2)+(3)	Total Inflow	232,890	210,419	293,936	226,387	293,278	295,799	289,744	325,992
Outflow	Out of Basin	Evapotranspiration	153,216	155,932	156,238	153,369	143,128	150,803	159,397	151,378
Outflow	Between Systems	Runoff	59,468	32,898	119,194	53,112	133,143	126,391	110,752	157,864
Outflow	Between Systems	Return Flow	5,255	5,860	4,351	5,140	3,983	4,605	4,815	3,667
Outflow	Between Systems	Recharge of Applied Water	13,479	14,449	12,207	13,226	11,251	12,278	12,946	10,945
Outflow	Between Systems	Recharge of Precipitation	1,472	1,280	1,947	1,541	1,773	1,722	1,834	2,137
Outflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-	-	-
Outflow	(5)+(6)+(7)+(8)+(9)+(10)	Total Outflow	232,890	210,419	293,936	226,387	293,278	295,799	289,744	325,992
Storage Change	(4)-(11)	Change in Land System Storage	-	-	-	-	-	-	-	-

## SURFACE WATER SYSTEM WATER BUDGET

Flow Type	Origin/ Destination	Component	2048	2049	2050	2051	2052	2053	2054	2055
Inflow	Into Basin	Stream Inflow	263,663	76,254	602,999	167,393	912,444	780,720	614,680	832,300
Inflow	Into Basin	Precipitation on Reservoirs	398	277	675	383	704	673	630	840
Inflow	Between Systems	Runoff	59,468	32,898	119,194	53,112	133,143	126,391	110,752	157,864
Inflow	Between Systems	Return Flow	5,255	5,860	4,351	5,140	3,983	4,605	4,815	3,667
Inflow	Between Systems	Stream Gain from Groundwater	-	-	-	-	-	-	-	-
Inflow	Between Systems	Reservoir Gain from Groundwater	-	-	-	-	-	-	-	-
Inflow	(13)+(14)+(6)+(7)+(15)+(16)	Total Inflow	328,784	115,288	727,219	226,028	1,050,275	912,389	730,877	994,671
Outflow	Out of Basin	Stream Outflow	233,159	23,084	622,453	136,286	897,057	798,101	621,549	872,733
Outflow	Out of Basin	Conveyance Evaporation	47	48	46	46	41	44	46	42
Outflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27	27	27
Outflow	Between Systems	Surface Water Delivery	77,619	82,827	70,993	76,177	65,439	70,985	74,958	64,027
Outflow	Between Systems	Stream Loss to Groundwater	16,260	7,546	32,039	11,784	86,149	41,575	32,583	56,285
Outflow	Between Systems	Reservoir Loss to Groundwater	596	596	596	596	596	596	596	596
Outflow	Out of Basin	Reservoir Evaporation	693	754	693	726	625	692	729	619
Outflow	Out of Basin	Stream Evaporation	382	406	370	386	340	369	388	340
Outflow	(18)+(19)+(20)+(21)+(22)+(23)+(24)	Total Outflow	328,784	115,288	727,219	226,028	1,050,275	912,389	730,877	994,671
Storage Change	(17)-(25)	Change in Surface Water Storage	-	-	-	-	-	-	-	-

## GROUNDWATER SYSTEM WATER BUDGET

Flow Type	Origin/ Destination	Component	2048	2049	2050	2051	2052	2053	2054	2055
Inflow	Between Systems	Recharge of Applied Water	13,479	14,449	12,207	13,226	11,251	12,278	12,946	10,945
Inflow	Between Systems	Recharge of Precipitation	1,472	1,280	1,947	1,541	1,773	1,722	1,834	2,137
Inflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-	-	-
Inflow	Between Systems	Groundwater Gain from Stream	16,260	7,546	32,039	11,784	86,149	41,575	32,583	56,285
Inflow	Between Systems	Groundwater Gain from Reservoirs	596	596	596	596	596	596	596	596
Inflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27	27	27
Inflow	Into Basin	Subsurface Inflow	1	1	1	1	1	1	1	1
Inflow	(8)+(9)+(10)+(21)+(22)+(20)+(27)	Total Inflow	31,836	23,899	46,817	27,175	99,798	56,199	47,987	69,992
Outflow	Between Systems	Groundwater Extraction	46,745	52,036	38,861	45,730	35,592	41,037	42,916	32,854
Outflow	Between Systems	Groundwater Loss to Stream	-	-	-	-	-	-	-	-
Outflow	Between Systems	Groundwater Loss to Reservoirs	-	-	-	-	-	-	-	-
Outflow	Out of Basin	Subsurface Outflow	-	-	-	-	-	-	-	-
Outflow	(3)+(15)+(16)+(29)	Total Outflow	46,745	52,036	38,861	45,730	35,592	41,037	42,916	32,854
Storage Change	(28)-(30)	Change in Groundwater Storage	(14,909)	(28,137)	7,956	(18,555)	64,206	15,162	5,071	37,138

## TOTAL BASIN WATER BUDGET

Flow Type	Origin/ Destination	Component	2048	2049	2050	2051	2052	2053	2054	2055
Inflow	Into Basin	Precipitation on Land System	108,526	75,556	184,082	104,481	192,248	183,776	171,871	229,110
Inflow	Into Basin	Precipitation on Reservoirs	398	277	675	383	704	673	630	840
Inflow	Into Basin	Stream Inflow	263,663	76,254	602,999	167,393	912,444	780,720	614,680	832,300
Inflow	Into Basin	Subsurface Inflow	1	1	1	1	1	1	1	1
Inflow	(1)+(14)+(13)+(27)	Total Inflow	372,587	152,087	787,756	272,257	1,105,397	965,170	787,182	#####
Outflow	Out of Basin	Evapotranspiration	153,216	155,932	156,238	153,369	143,128	150,803	159,397	151,378
Outflow	Out of Basin	Stream Evaporation	382	406	370	386	340	369	388	340
Outflow	Out of Basin	Reservoir Evaporation	693	754	693	726	625	692	729	619
Outflow	Out of Basin	Conveyance Evaporation	47	48	46	46	41	44	46	42
Outflow	Out of Basin	Stream Outflow	233,159	23,084	622,453	136,286	897,057	798,101	621,549	872,733
Outflow	Out of Basin	Subsurface Outflow	-	-	-	-	-	-	-	-
Outflow	(5)+(24)+(23)+(19)+(18)+(29)	Total Outflow	387,496	180,224	779,799	290,812	1,041,192	950,008	782,111	#####
Storage Change	(32)-(33)	Change in Total System Storage	(14,909)	(28,137)	7,956	(18,555)	64,206	15,162	5,071	37,138



**LAND SYSTEM WATER BUDGET**

Flow Type	Origin/ Destination	Component	2056	2057	2058	2059	2060	2061	2062	2063
Inflow	Into Basin	Precipitation on Land System	146,533	128,140	79,296	109,976	136,611	136,687	147,525	190,721
Inflow	Between Systems	Surface Water Delivery	74,092	76,327	80,992	80,604	75,245	78,776	70,606	72,295
Inflow	Between Systems	Groundwater Extraction	43,259	44,735	49,626	48,753	44,131	47,093	40,332	40,960
Inflow	(1)+(2)+(3)	Total Inflow	263,883	249,201	209,913	239,333	255,987	262,556	258,462	303,976
Outflow	Out of Basin	Evapotranspiration	152,590	157,889	152,585	153,349	151,547	153,751	149,036	151,973
Outflow	Between Systems	Runoff	91,975	71,370	36,368	65,156	84,903	88,396	91,011	133,210
Outflow	Between Systems	Return Flow	4,857	5,024	5,583	5,482	4,956	5,293	4,524	4,593
Outflow	Between Systems	Recharge of Applied Water	12,826	13,215	14,089	14,001	13,030	13,667	12,197	12,475
Outflow	Between Systems	Recharge of Precipitation	1,637	1,703	1,288	1,345	1,551	1,449	1,695	1,725
Outflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-	-	-
Outflow	(5)+(6)+(7)+(8)+(9)+(10)	Total Outflow	263,883	249,201	209,913	239,333	255,987	262,556	258,462	303,976
Storage Change	(4)-(11)	Change in Land System Storage	-	-	-	-	-	-	-	-

**SURFACE WATER SYSTEM WATER BUDGET**

Flow Type	Origin/ Destination	Component	2056	2057	2058	2059	2060	2061	2062	2063
Inflow	Into Basin	Stream Inflow	691,739	240,124	100,742	153,035	219,963	295,581	381,347	735,770
Inflow	Into Basin	Precipitation on Reservoirs	537	470	291	403	501	501	541	699
Inflow	Between Systems	Runoff	91,975	71,370	36,368	65,156	84,903	88,396	91,011	133,210
Inflow	Between Systems	Return Flow	4,857	5,024	5,583	5,482	4,956	5,293	4,524	4,593
Inflow	Between Systems	Stream Gain from Groundwater	-	-	-	-	-	-	-	-
Inflow	Between Systems	Reservoir Gain from Groundwater	-	-	-	-	-	-	-	-
Inflow	(13)+(14)+(6)+(7)+(15)+(16)	Total Inflow	789,107	316,987	142,983	224,076	310,322	389,772	477,422	874,271
Outflow	Out of Basin	Stream Outflow	677,081	223,698	51,472	130,528	219,088	291,439	383,378	762,028
Outflow	Out of Basin	Conveyance Evaporation	45	47	48	48	45	46	43	45
Outflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27	27	27
Outflow	Between Systems	Surface Water Delivery	74,092	76,327	80,992	80,604	75,245	78,776	70,606	72,295
Outflow	Between Systems	Stream Loss to Groundwater	36,166	15,166	8,684	11,116	14,228	17,745	21,733	38,213
Outflow	Between Systems	Reservoir Loss to Groundwater	596	596	596	596	596	596	596	596
Outflow	Out of Basin	Reservoir Evaporation	720	736	763	756	711	747	675	694
Outflow	Out of Basin	Stream Evaporation	379	390	400	400	380	395	364	372
Outflow	(18)+(19)+(20)+(21)+(22)+(23)+(24)	Total Outflow	789,107	316,987	142,983	224,076	310,322	389,772	477,422	874,271
Storage Change	(17)-(25)	Change in Surface Water Storage	-	-	-	-	-	-	-	-

**GROUNDWATER SYSTEM WATER BUDGET**

Flow Type	Origin/ Destination	Component	2056	2057	2058	2059	2060	2061	2062	2063
Inflow	Between Systems	Recharge of Applied Water	12,826	13,215	14,089	14,001	13,030	13,667	12,197	12,475
Inflow	Between Systems	Recharge of Precipitation	1,637	1,703	1,288	1,345	1,551	1,449	1,695	1,725
Inflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-	-	-
Inflow	Between Systems	Groundwater Gain from Stream	36,166	15,166	8,684	11,116	14,228	17,745	21,733	38,213
Inflow	Between Systems	Groundwater Gain from Reservoirs	596	596	596	596	596	596	596	596
Inflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27	27	27
Inflow	Into Basin	Subsurface Inflow	1	1	1	1	1	1	1	1
Inflow	(8)+(9)+(10)+(21)+(22)+(20)+(27)	Total Inflow	51,253	30,709	24,686	27,086	29,435	33,485	36,249	53,038
Outflow	Between Systems	Groundwater Extraction	43,259	44,735	49,626	48,753	44,131	47,093	40,332	40,960
Outflow	Between Systems	Groundwater Loss to Stream	-	-	-	-	-	-	-	-
Outflow	Between Systems	Groundwater Loss to Reservoirs	-	-	-	-	-	-	-	-
Outflow	Out of Basin	Subsurface Outflow	-	-	-	-	-	-	-	-
Outflow	(3)+(15)+(16)+(29)	Total Outflow	43,259	44,735	49,626	48,753	44,131	47,093	40,332	40,960
Storage Change	(28)-(30)	Change in Groundwater Storage	7,994	(14,026)	(24,940)	(21,666)	(14,696)	(13,608)	(4,082)	12,079

**TOTAL BASIN WATER BUDGET**

Flow Type	Origin/ Destination	Component	2056	2057	2058	2059	2060	2061	2062	2063
Inflow	Into Basin	Precipitation on Land System	146,533	128,140	79,296	109,976	136,611	136,687	147,525	190,721
Inflow	Into Basin	Precipitation on Reservoirs	537	470	291	403	501	501	541	699
Inflow	Into Basin	Stream Inflow	691,739	240,124	100,742	153,035	219,963	295,581	381,347	735,770
Inflow	Into Basin	Subsurface Inflow	1	1	1	1	1	1	1	1
Inflow	(1)+(14)+(13)+(27)	Total Inflow	838,809	368,734	180,328	263,415	357,075	432,770	529,413	927,191
Outflow	Out of Basin	Evapotranspiration	152,590	157,889	152,585	153,349	151,547	153,751	149,036	151,973
Outflow	Out of Basin	Stream Evaporation	379	390	400	400	380	395	364	372
Outflow	Out of Basin	Reservoir Evaporation	720	736	763	756	711	747	675	694
Outflow	Out of Basin	Conveyance Evaporation	45	47	48	48	45	46	43	45
Outflow	Out of Basin	Stream Outflow	677,081	223,698	51,472	130,528	219,088	291,439	383,378	762,028
Outflow	Out of Basin	Subsurface Outflow	-	-	-	-	-	-	-	-
Outflow	(5)+(24)+(23)+(19)+(18)+(29)	Total Outflow	830,815	382,760	205,269	285,081	371,772	446,379	533,495	915,112
Storage Change	(32)-(33)	Change in Total System Storage	7,994	(14,026)	(24,940)	(21,666)	(14,696)	(13,608)	(4,082)	12,079

LAND SYSTEM WATER BUDGET							
Flow Type	Origin/ Destination	Component	2064	2065	2066	2067	2068
Inflow	Into Basin	Precipitation on Land System	99,291	97,459	114,173	120,660	167,215
Inflow	Between Systems	Surface Water Delivery	78,989	78,709	78,245	71,749	68,856
Inflow	Between Systems	Groundwater Extraction	48,745	47,716	46,430	41,387	38,575
Inflow	(1)+(2)+(3)	Total Inflow	227,025	223,885	238,849	233,797	274,646
Outflow	Out of Basin	Evapotranspiration	156,935	151,305	156,057	151,911	146,988
Outflow	Between Systems	Runoff	49,352	52,178	62,460	63,110	109,739
Outflow	Between Systems	Return Flow	5,485	5,366	5,217	4,644	4,323
Outflow	Between Systems	Recharge of Applied Water	13,755	13,678	13,564	12,406	11,872
Outflow	Between Systems	Recharge of Precipitation	1,498	1,358	1,551	1,727	1,724
Outflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-
Outflow	(5)+(6)+(7)+(8)+(9)+(10)	Total Outflow	227,025	223,885	238,849	233,797	274,646
Storage Change	(4)-(11)	Change in Land System Storage	-	-	-	-	-

SURFACE WATER SYSTEM WATER BUDGET							
Flow Type	Origin/ Destination	Component	2064	2065	2066	2067	2068
Inflow	Into Basin	Stream Inflow	127,762	240,456	143,169	103,605	629,359
Inflow	Into Basin	Precipitation on Reservoirs	364	357	418	442	613
Inflow	Between Systems	Runoff	49,352	52,178	62,460	63,110	109,739
Inflow	Between Systems	Return Flow	5,485	5,366	5,217	4,644	4,323
Inflow	Between Systems	Stream Gain from Groundwater	-	-	-	-	-
Inflow	Between Systems	Reservoir Gain from Groundwater	-	-	-	-	-
Inflow	(13)+(14)+(6)+(7)+(15)+(16)	Total Inflow	182,963	298,356	211,263	171,801	744,034
Outflow	Out of Basin	Stream Outflow	92,199	202,668	120,562	89,515	640,247
Outflow	Out of Basin	Conveyance Evaporation	47	46	46	44	42
Outflow	Between Systems	Conveyance Seepage	27	27	27	27	27
Outflow	Between Systems	Surface Water Delivery	78,989	78,709	78,245	71,749	68,856
Outflow	Between Systems	Stream Loss to Groundwater	9,941	15,181	10,657	8,818	33,265
Outflow	Between Systems	Reservoir Loss to Groundwater	596	596	596	596	596
Outflow	Out of Basin	Reservoir Evaporation	762	737	736	684	648
Outflow	Out of Basin	Stream Evaporation	402	391	393	368	352
Outflow	(18)+(19)+(20)+(21)+(22)+(23)+(24)	Total Outflow	182,963	298,356	211,263	171,801	744,034
Storage Change	(17)-(25)	Change in Surface Water Storage	-	-	-	-	-

GROUNDWATER SYSTEM WATER BUDGET							
Flow Type	Origin/ Destination	Component	2064	2065	2066	2067	2068
Inflow	Between Systems	Recharge of Applied Water	13,755	13,678	13,564	12,406	11,872
Inflow	Between Systems	Recharge of Precipitation	1,498	1,358	1,551	1,727	1,724
Inflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-
Inflow	Between Systems	Groundwater Gain from Stream	9,941	15,181	10,657	8,818	33,265
Inflow	Between Systems	Groundwater Gain from Reservoirs	596	596	596	596	596
Inflow	Between Systems	Conveyance Seepage	27	27	27	27	27
Inflow	Into Basin	Subsurface Inflow	1	1	1	1	1
Inflow	(8)+(9)+(10)+(21)+(22)+(20)+(27)	Total Inflow	25,818	30,842	26,398	23,575	47,486
Outflow	Between Systems	Groundwater Extraction	48,745	47,716	46,430	41,387	38,575
Outflow	Between Systems	Groundwater Loss to Stream	-	-	-	-	-
Outflow	Between Systems	Groundwater Loss to Reservoirs	-	-	-	-	-
Outflow	Out of Basin	Subsurface Outflow	-	-	-	-	-
Outflow	(3)+(15)+(16)+(29)	Total Outflow	48,745	47,716	46,430	41,387	38,575
Storage Change	(28)-(30)	Change in Groundwater Storage	(22,927)	(16,874)	(20,033)	(17,812)	8,910

TOTAL BASIN WATER BUDGET							
Flow Type	Origin/ Destination	Component	2064	2065	2066	2067	2068
Inflow	Into Basin	Precipitation on Land System	99,291	97,459	114,173	120,660	167,215
Inflow	Into Basin	Precipitation on Reservoirs	364	357	418	442	613
Inflow	Into Basin	Stream Inflow	127,762	240,456	143,169	103,605	629,359
Inflow	Into Basin	Subsurface Inflow	1	1	1	1	1
Inflow	(1)+(14)+(13)+(27)	Total Inflow	227,418	338,273	257,761	224,709	797,188
Outflow	Out of Basin	Evapotranspiration	156,935	151,305	156,057	151,911	146,988
Outflow	Out of Basin	Stream Evaporation	402	391	393	368	352
Outflow	Out of Basin	Reservoir Evaporation	762	737	736	684	648
Outflow	Out of Basin	Conveyance Evaporation	47	46	46	44	42
Outflow	Out of Basin	Stream Outflow	92,199	202,668	120,562	89,515	640,247
Outflow	Out of Basin	Subsurface Outflow	-	-	-	-	-
Outflow	(5)+(24)+(23)+(19)+(18)+(29)	Total Outflow	250,345	355,147	277,794	242,521	788,277
Storage Change	(32)-(33)	Change in Total System Storage	(22,927)	(16,874)	(20,033)	(17,812)	8,910

**LAND SYSTEM WATER BUDGET**

Item	Flow Type	Origin/ Destination	Component	Average (2019-2068)
(1)	Inflow	Into Basin	Precipitation on Land System	152,224
(2)	Inflow	Between Systems	Surface Water Delivery	81,239
(3)	Inflow	Between Systems	Groundwater Extraction	47,500
(4)	Inflow	(1)+(2)+(3)	Total Inflow	280,964
(5)	Outflow	Out of Basin	Evapotranspiration	165,795
(6)	Outflow	Between Systems	Runoff	94,032
(7)	Outflow	Between Systems	Return Flow	5,335
(8)	Outflow	Between Systems	Recharge of Applied Water	14,056
(9)	Outflow	Between Systems	Recharge of Precipitation	1,746
(10)	Outflow	Between Systems	Managed Aquifer Recharge	-
(11)	Outflow	(5)+(6)+(7)+(8)+(9)+(10)	Total Outflow	280,964
(12)	Storage Change	(4)-(11)	Change in Land System Storage	-

**SURFACE WATER SYSTEM WATER BUDGET**

Item	Flow Type	Origin/ Destination	Component	Average (2019-2068)
(13)	Inflow	Into Basin	Stream Inflow	450,360
(14)	Inflow	Into Basin	Precipitation on Reservoirs	558
(6)	Inflow	Between Systems	Runoff	94,032
(7)	Inflow	Between Systems	Return Flow	5,335
(15)	Inflow	Between Systems	Stream Gain from Groundwater	-
(16)	Inflow	Between Systems	Reservoir Gain from Groundwater	-
(17)	Inflow	(13)+(14)+(6)+(7)+(15)+(16)	Total Inflow	550,284
(18)	Outflow	Out of Basin	Stream Outflow	436,663
(19)	Outflow	Out of Basin	Conveyance Evaporation	50
(20)	Outflow	Between Systems	Conveyance Seepage	27
(2)	Outflow	Between Systems	Surface Water Delivery	81,239
(21)	Outflow	Between Systems	Stream Loss to Groundwater	30,515
(22)	Outflow	Between Systems	Reservoir Loss to Groundwater	596
(23)	Outflow	Out of Basin	Reservoir Evaporation	780
(24)	Outflow	Out of Basin	Stream Evaporation	414
(25)	Outflow	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24)	Total Outflow	550,284
(26)	Storage Change	(17)-(25)	Change in Surface Water Storage	-

**GROUNDWATER SYSTEM WATER BUDGET**

Item	Flow Type	Origin/ Destination	Component	Average (2019-2068)
(8)	Inflow	Between Systems	Recharge of Applied Water	14,056
(9)	Inflow	Between Systems	Recharge of Precipitation	1,746
(10)	Inflow	Between Systems	Managed Aquifer Recharge	-
(21)	Inflow	Between Systems	Groundwater Gain from Stream	30,515
(22)	Inflow	Between Systems	Groundwater Gain from Reservoir	596
(20)	Inflow	Between Systems	Conveyance Seepage	27
(27)	Inflow	Into Basin	Subsurface Inflow	1
(28)	Inflow	(8)+(9)+(10)+(21)+(22)+(20)+(27)	Total Inflow	46,942
(3)	Outflow	Between Systems	Groundwater Extraction	47,500
(15)	Outflow	Between Systems	Groundwater Loss to Stream	-
(16)	Outflow	Between Systems	Groundwater Loss to Reservoir s	-
(29)	Outflow	Out of Basin	Subsurface Outflow	-
(30)	Outflow	(3)+(15)+(16)+(29)	Total Outflow	47,500
(31)	Storage Change	(28)-(30)	Change in Groundwater Storage	(558)

**TOTAL BASIN WATER BUDGET**

Item	Flow Type	Origin/ Destination	Component	Average (2019-2068)
(1)	Inflow	Into Basin	Precipitation on Land System	152,224
(14)	Inflow	Into Basin	Precipitation on Reservoirs	558
(13)	Inflow	Into Basin	Stream Inflow	450,360
(27)	Inflow	Into Basin	Subsurface Inflow	1
(32)	Inflow	(1)+(14)+(13)+(27)	Total Inflow	603,143
(5)	Outflow	Out of Basin	Evapotranspiration	165,795
(24)	Outflow	Out of Basin	Stream Evaporation	414
(23)	Outflow	Out of Basin	Reservoir Evaporation	780
(19)	Outflow	Out of Basin	Conveyance Evaporation	50
(18)	Outflow	Out of Basin	Stream Outflow	436,663
(29)	Outflow	Out of Basin	Subsurface Outflow	-
(33)	Outflow	(5)+(24)+(23)+(19)+(18)+(29)	Total Outflow	603,701
(34)	Storage Change	(32)-(33)	Change in Total System Storage	(558)

LAND SYSTEM WATER BUDGET										
Flow Type		Origin/ Destination	Component	2019	2020	2021	2022	2023	2024	2025
Inflow		Into Basin	Precipitation on Land System	129,500	222,333	117,416	190,878	86,735	178,276	131,750
Inflow		Between Systems	Surface Water Delivery	85,796	76,976	85,067	81,416	89,423	82,756	83,061
Inflow		Between Systems	Groundwater Extraction	51,348	42,198	51,204	48,394	55,962	48,513	49,306
Inflow		(1)+(2)+(3)	Total Inflow	266,644	341,507	253,687	320,687	232,119	309,545	264,117
Outflow		Out of Basin	Evapotranspiration	168,320	164,569	166,471	165,779	165,207	163,577	165,440
Outflow		Between Systems	Runoff	76,070	157,023	65,127	133,640	43,735	124,588	77,103
Outflow		Between Systems	Return Flow	5,773	4,726	5,758	5,438	6,302	5,449	5,541
Outflow		Between Systems	Recharge of Applied Water	14,879	13,230	14,763	14,113	15,585	14,321	14,394
Outflow		Between Systems	Recharge of Precipitation	1,603	1,959	1,569	1,717	1,290	1,611	1,639
Outflow		Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-	-
Outflow		(5)+(6)+(7)+(8)+(9)+(10)	Total Outflow	266,644	341,507	253,687	320,687	232,119	309,545	264,117
Storage Change		(4)-(11)	Change in Land System Storage	-	-	-	-	-	-	-

SURFACE WATER SYSTEM WATER BUDGET										
Flow Type		Origin/ Destination	Component	2019	2020	2021	2022	2023	2024	2025
Inflow		Into Basin	Stream Inflow	231,125	772,605	313,116	811,978	194,478	508,919	263,663
Inflow		Into Basin	Precipitation on Reservoirs	475	815	430	699	318	653	483
Inflow		Between Systems	Runoff	76,070	157,023	65,127	133,640	43,735	124,588	77,103
Inflow		Between Systems	Return Flow	5,773	4,726	5,758	5,438	6,302	5,449	5,541
Inflow		Between Systems	Stream Gain from Groundwater	-	-	-	-	-	-	-
Inflow		Between Systems	Reservoir Gain from Groundwater	-	-	-	-	-	-	-
Inflow		(13)+(14)+(6)+(7)+(15)+(16)	Total Inflow	313,442	935,169	384,431	951,756	244,833	639,609	346,789
Outflow		Out of Basin	Stream Outflow	210,973	816,434	278,896	818,346	140,411	527,323	245,560
Outflow		Out of Basin	Conveyance Evaporation	51	50	50	49	52	51	48
Outflow		Between Systems	Conveyance Seepage	27	27	27	27	27	27	27
Outflow		Between Systems	Surface Water Delivery	85,796	76,976	85,067	81,416	89,423	82,756	83,061
Outflow		Between Systems	Stream Loss to Groundwater	14,747	39,926	18,560	50,102	13,043	27,665	16,260
Outflow		Between Systems	Reservoir Loss to Groundwater	596	596	596	596	596	596	596
Outflow		Out of Basin	Reservoir Evaporation	818	759	807	799	839	775	812
Outflow		Out of Basin	Stream Evaporation	432	400	428	419	442	415	424
Outflow		(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24)	Total Outflow	313,442	935,169	384,431	951,756	244,833	639,609	346,789
Storage Change		(17)-(25)	Change in Surface Water Storage	-	-	-	-	-	-	-

GROUNDWATER SYSTEM WATER BUDGET									
Flow Type	Origin/ Destination	Component	2019	2020	2021	2022	2023	2024	2025
Inflow	Between Systems	Recharge of Applied Water	14,879	13,230	14,763	14,113	15,585	14,321	14,394
Inflow	Between Systems	Recharge of Precipitation	1,603	1,959	1,569	1,717	1,290	1,611	1,639
Inflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-	-
Inflow	Between Systems	Groundwater Gain from Stream	14,747	39,926	18,560	50,102	13,043	27,665	16,260
Inflow	Between Systems	Groundwater Gain from Reservoir	596	596	596	596	596	596	596
Inflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27	27
Inflow	Into Basin	Subsurface Inflow	1	1	1	1	1	1	1
Inflow	(8)+(9)+(10)+(21)+(22)+(20)+(27) Total Inflow		31,854	55,740	35,516	66,557	30,543	44,221	32,918
Outflow	Between Systems	Groundwater Extraction	51,348	42,198	51,204	48,394	55,962	48,513	49,306
Outflow	Between Systems	Groundwater Loss to Stream	-	-	-	-	-	-	-
Outflow	Between Systems	Groundwater Loss to Reservoir s	-	-	-	-	-	-	-
Outflow	Out of Basin	Subsurface Outflow	-	-	-	-	-	-	-
Outflow	(3)+(15)+(16)+(29) Total Outflow		51,348	42,198	51,204	48,394	55,962	48,513	49,306
Storage Change	(28)-(30)	Change in Groundwater Storage	(19,494)	13,542	(15,688)	18,163	(25,419)	(4,292)	(16,388)

TOTAL BASIN WATER BUDGET									
Flow Type	Origin/ Destination	Component	2019	2020	2021	2022	2023	2024	2025
Inflow	Into Basin	Precipitation on Land System	129,500	222,333	117,416	190,878	86,735	178,276	131,750
Inflow	Into Basin	Precipitation on Reservoirs	475	815	430	699	318	653	483
Inflow	Into Basin	Stream Inflow	231,125	772,605	313,116	811,978	194,478	508,919	263,663
Inflow	Into Basin	Subsurface Inflow	1	1	1	1	1	1	1
Inflow	(1)+(14)+(13)+(27)	Total Inflow	361,100	995,753	430,963	1,003,556	281,532	687,849	395,896
Outflow	Out of Basin	Evapotranspiration	168,320	164,569	166,471	165,779	165,207	163,577	165,440
Outflow	Out of Basin	Stream Evaporation	432	400	428	419	442	415	424
Outflow	Out of Basin	Reservoir Evaporation	818	759	807	799	839	775	812
Outflow	Out of Basin	Conveyance Evaporation	51	50	50	49	52	51	48
Outflow	Out of Basin	Stream Outflow	210,973	816,434	278,896	818,346	140,411	527,323	245,560
Outflow	Out of Basin	Subsurface Outflow	-	-	-	-	-	-	-
Outflow	(5)+(24)+(23)+(19)+(18)+(29)	Total Outflow	380,595	982,212	446,651	985,392	306,950	692,141	412,284
Storage Change	(32)-(33)	Change in Total System Storage	(19,494)	13,542	(15,688)	18,163	(25,419)	(4,292)	(16,388)



**LAND SYSTEM WATER BUDGET**

Item	Flow Type	Origin/ Destination	Component	2026	2027	2028	2029	2030	2031	2032
(1)	Inflow	Into Basin	Precipitation on Land System	169,078	181,223	223,561	122,811	117,302	187,191	133,627
(2)	Inflow	Between Systems	Surface Water Delivery	85,585	85,130	76,120	85,600	86,677	82,850	83,904
(3)	Inflow	Between Systems	Groundwater Extraction	50,419	50,097	41,580	50,791	52,010	47,910	50,101
(4)	Inflow	(1)+(2)+(3)	Total Inflow	305,082	316,450	341,260	259,201	255,989	317,951	267,632
(5)	Outflow	Out of Basin	Evapotranspiration	169,456	167,624	169,093	168,714	170,424	167,439	166,339
(6)	Outflow	Between Systems	Runoff	113,477	126,831	152,295	68,314	63,055	129,075	79,488
(7)	Outflow	Between Systems	Return Flow	5,665	5,628	4,656	5,708	5,848	5,379	5,632
(8)	Outflow	Between Systems	Recharge of Applied Water	14,816	14,735	13,079	14,830	15,035	14,315	14,549
(9)	Outflow	Between Systems	Recharge of Precipitation	1,668	1,632	2,138	1,635	1,627	1,743	1,624
(10)	Outflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-	-
(11)	Outflow	(5)+(6)+(7)+(8)+(9)+(10)	Total Outflow	305,082	316,450	341,260	259,201	255,989	317,951	267,632
(12)	Storage Change	(4)-(11)	Change in Land System Storage	-	-	-	-	-	-	-

**SURFACE WATER SYSTEM WATER BUDGET**

Item	Flow Type	Origin/ Destination	Component	2026	2027	2028	2029	2030	2031	2032
(13)	Inflow	Into Basin	Stream Inflow	657,649	631,029	1,061,564	701,971	332,242	627,237	588,265
(14)	Inflow	Into Basin	Precipitation on Reservoirs	620	664	819	450	430	686	490
(6)	Inflow	Between Systems	Runoff	113,477	126,831	152,295	68,314	63,055	129,075	79,488
(7)	Inflow	Between Systems	Return Flow	5,665	5,628	4,656	5,708	5,848	5,379	5,632
(15)	Inflow	Between Systems	Stream Gain from Groundwater	-	-	-	-	-	-	-
(16)	Inflow	Between Systems	Reservoir Gain from Groundwater	-	-	-	-	-	-	-
(17)	Inflow	(13)+(14)+(6)+(7)+(15)+(16)	Total Inflow	777,411	764,153	1,219,334	776,443	401,574	762,376	673,874
(18)	Outflow	Out of Basin	Stream Outflow	655,315	643,761	971,790	652,274	293,494	644,456	556,723
(19)	Outflow	Out of Basin	Conveyance Evaporation	52	51	48	51	52	51	51
(20)	Outflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27	27
(2)	Outflow	Between Systems	Surface Water Delivery	85,585	85,130	76,120	85,600	86,677	82,850	83,904
(21)	Outflow	Between Systems	Stream Loss to Groundwater	34,581	33,343	169,590	36,642	19,449	33,167	31,354
(22)	Outflow	Between Systems	Reservoir Loss to Groundwater	596	596	596	596	596	596	596
(23)	Outflow	Out of Basin	Reservoir Evaporation	822	814	759	820	840	806	796
(24)	Outflow	Out of Basin	Stream Evaporation	433	429	404	432	439	423	421
(25)	Outflow	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24)	Total Outflow	777,411	764,153	1,219,334	776,443	401,574	762,376	673,874
(26)	Storage Change	(17)-(25)	Change in Surface Water Storage	-	-	-	-	-	-	-

**GROUNDWATER SYSTEM WATER BUDGET**

Item	Flow Type	Origin/ Destination	Component	2026	2027	2028	2029	2030	2031	2032
(8)	Inflow	Between Systems	Recharge of Applied Water	14,816	14,735	13,079	14,830	15,035	14,315	14,549
(9)	Inflow	Between Systems	Recharge of Precipitation	1,668	1,632	2,138	1,635	1,627	1,743	1,624
(10)	Inflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-	-
(21)	Inflow	Between Systems	Groundwater Gain from Stream	34,581	33,343	169,590	36,642	19,449	33,167	31,354
(22)	Inflow	Between Systems	Groundwater Gain from Reservoir	596	596	596	596	596	596	596
(20)	Inflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27	27
(27)	Inflow	Into Basin	Subsurface Inflow	1	1	1	1	1	1	1
(28)	Inflow	(8)+(9)+(10)+(21)+(22)+(20)+(27)	Total Inflow	51,689	50,335	185,432	53,731	36,736	49,850	48,152
(3)	Outflow	Between Systems	Groundwater Extraction	50,419	50,097	41,580	50,791	52,010	47,910	50,101
(15)	Outflow	Between Systems	Groundwater Loss to Stream	-	-	-	-	-	-	-
(16)	Outflow	Between Systems	Groundwater Loss to Reservoir s	-	-	-	-	-	-	-
(29)	Outflow	Out of Basin	Subsurface Outflow	-	-	-	-	-	-	-
(30)	Outflow	(3)+(15)+(16)+(29)	Total Outflow	50,419	50,097	41,580	50,791	52,010	47,910	50,101
(31)	Storage Change	(28)-(30)	Change in Groundwater Storage	1,270	238	143,851	2,941	(15,273)	1,939	(1,949)

**TOTAL BASIN WATER BUDGET**

Item	Flow Type	Origin/ Destination	Component	2026	2027	2028	2029	2030	2031	2032
(1)	Inflow	Into Basin	Precipitation on Land System	169,078	181,223	223,561	122,811	117,302	187,191	133,627
(14)	Inflow	Into Basin	Precipitation on Reservoirs	620	664	819	450	430	686	490
(13)	Inflow	Into Basin	Stream Inflow	657,649	631,029	1,061,564	701,971	332,242	627,237	588,265
(27)	Inflow	Into Basin	Subsurface Inflow	1	1	1	1	1	1	1
(32)	Inflow	(1)+(14)+(13)+(27)	Total Inflow	827,348	812,918	1,285,945	825,232	449,974	815,115	722,382
(5)	Outflow	Out of Basin	Evapotranspiration	169,456	167,624	169,093	168,714	170,424	167,439	166,339
(24)	Outflow	Out of Basin	Stream Evaporation	433	429	404	432	439	423	421
(23)	Outflow	Out of Basin	Reservoir Evaporation	822	814	759	820	840	806	796
(19)	Outflow	Out of Basin	Conveyance Evaporation	52	51	48	51	52	51	51
(18)	Outflow	Out of Basin	Stream Outflow	655,315	643,761	971,790	652,274	293,494	644,456	556,723
(29)	Outflow	Out of Basin	Subsurface Outflow	-	-	-	-	-	-	-
(33)	Outflow	(5)+(24)+(23)+(19)+(18)+(29)	Total Outflow	826,078	812,679	1,142,093	822,292	465,248	813,176	724,331
(34)	Storage Change	(32)-(33)	Change in Total System Storage	1,270	238	143,851	2,941	(15,273)	1,939	(1,949)

**LAND SYSTEM WATER BUDGET**

Item	Flow Type	Origin/ Destination	Component	2033	2034	2035	2036	2037	2038	2039
(1)	Inflow	Into Basin	Precipitation on Land System	112,985	87,563	166,097	108,662	182,240	116,838	212,359
(2)	Inflow	Between Systems	Surface Water Delivery	82,916	85,651	80,321	84,772	81,197	84,997	79,509
(3)	Inflow	Between Systems	Groundwater Extraction	50,186	53,811	45,810	51,508	45,858	50,845	43,902
(4)	Inflow	(1)+(2)+(3)	Total Inflow	246,087	227,025	292,228	244,942	309,296	252,680	335,770
(5)	Outflow	Out of Basin	Evapotranspiration	165,305	162,848	168,854	164,920	171,741	168,601	171,612
(6)	Outflow	Between Systems	Runoff	59,121	41,805	102,466	57,979	116,443	61,977	143,501
(7)	Outflow	Between Systems	Return Flow	5,644	6,060	5,140	5,794	5,143	5,716	4,919
(8)	Outflow	Between Systems	Recharge of Applied Water	14,401	14,939	13,860	14,728	13,995	14,740	13,672
(9)	Outflow	Between Systems	Recharge of Precipitation	1,616	1,373	1,909	1,520	1,974	1,646	2,066
(10)	Outflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-	-
(11)	Outflow	(5)+(6)+(7)+(8)+(9)+(10)	Total Outflow	246,087	227,025	292,228	244,942	309,296	252,680	335,770
(12)	Storage Change	(4)-(11)	Change in Land System Storage	-	-	-	-	-	-	-

**SURFACE WATER SYSTEM WATER BUDGET**

Item	Flow Type	Origin/ Destination	Component	2033	2034	2035	2036	2037	2038	2039
(13)	Inflow	Into Basin	Stream Inflow	207,813	116,791	312,968	249,739	560,602	170,483	840,537
(14)	Inflow	Into Basin	Precipitation on Reservoirs	414	321	609	398	668	428	778
(6)	Inflow	Between Systems	Runoff	59,121	41,805	102,466	57,979	116,443	61,977	143,501
(7)	Inflow	Between Systems	Return Flow	5,644	6,060	5,140	5,794	5,143	5,716	4,919
(15)	Inflow	Between Systems	Stream Gain from Groundwater	-	-	-	-	-	-	-
(16)	Inflow	Between Systems	Reservoir Gain from Groundwater	-	-	-	-	-	-	-
(17)	Inflow	(13)+(14)+(6)+(7)+(15)+(16)	Total Inflow	272,991	164,977	421,182	313,910	682,856	238,603	989,735
(18)	Outflow	Out of Basin	Stream Outflow	174,482	67,971	320,441	211,623	569,687	139,767	849,395
(19)	Outflow	Out of Basin	Conveyance Evaporation	49	49	50	50	51	51	51
(20)	Outflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27	27
(2)	Outflow	Between Systems	Surface Water Delivery	82,916	85,651	80,321	84,772	81,197	84,997	79,509
(21)	Outflow	Between Systems	Stream Loss to Groundwater	13,663	9,431	18,553	15,613	30,068	11,927	58,942
(22)	Outflow	Between Systems	Reservoir Loss to Groundwater	596	596	596	596	596	596	596
(23)	Outflow	Out of Basin	Reservoir Evaporation	831	821	779	804	807	809	798
(24)	Outflow	Out of Basin	Stream Evaporation	427	431	413	425	422	429	417
(25)	Outflow	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24)	Total Outflow	272,991	164,977	421,182	313,910	682,856	238,603	989,735
(26)	Storage Change	(17)-(25)	Change in Surface Water Storage	-	-	-	-	-	-	-

**GROUNDWATER SYSTEM WATER BUDGET**

Item	Flow Type	Origin/ Destination	Component	2033	2034	2035	2036	2037	2038	2039
(8)	Inflow	Between Systems	Recharge of Applied Water	14,401	14,939	13,860	14,728	13,995	14,740	13,672
(9)	Inflow	Between Systems	Recharge of Precipitation	1,616	1,373	1,909	1,520	1,974	1,646	2,066
(10)	Inflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-	-
(21)	Inflow	Between Systems	Groundwater Gain from Stream	13,663	9,431	18,553	15,613	30,068	11,927	58,942
(22)	Inflow	Between Systems	Groundwater Gain from Reservoir	596	596	596	596	596	596	596
(20)	Inflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27	27
(27)	Inflow	Into Basin	Subsurface Inflow	1	1	1	1	1	1	1
(28)	Inflow	(8)+(9)+(10)+(21)+(22)+(20)+(27)	Total Inflow	30,305	26,367	34,946	32,486	46,661	28,938	75,305
(3)	Outflow	Between Systems	Groundwater Extraction	50,186	53,811	45,810	51,508	45,858	50,845	43,902
(15)	Outflow	Between Systems	Groundwater Loss to Stream	-	-	-	-	-	-	-
(16)	Outflow	Between Systems	Groundwater Loss to Reservoir s	-	-	-	-	-	-	-
(29)	Outflow	Out of Basin	Subsurface Outflow	-	-	-	-	-	-	-
(30)	Outflow	(3)+(15)+(16)+(29)	Total Outflow	50,186	53,811	45,810	51,508	45,858	50,845	43,902
(31)	Storage Change	(28)-(30)	Change in Groundwater Storage	(19,881)	(27,444)	(10,864)	(19,022)	803	(21,907)	31,402

**TOTAL BASIN WATER BUDGET**

Item	Flow Type	Origin/ Destination	Component	2033	2034	2035	2036	2037	2038	2039
(1)	Inflow	Into Basin	Precipitation on Land System	112,985	87,563	166,097	108,662	182,240	116,838	212,359
(14)	Inflow	Into Basin	Precipitation on Reservoirs	414	321	609	398	668	428	778
(13)	Inflow	Into Basin	Stream Inflow	207,813	116,791	312,968	249,739	560,602	170,483	840,537
(27)	Inflow	Into Basin	Subsurface Inflow	1	1	1	1	1	1	1
(32)	Inflow	(1)+(14)+(13)+(27)	Total Inflow	321,212	204,676	479,674	358,800	743,511	287,749	#####
(5)	Outflow	Out of Basin	Evapotranspiration	165,305	162,848	168,854	164,920	171,741	168,601	171,612
(24)	Outflow	Out of Basin	Stream Evaporation	427	431	413	425	422	429	417
(23)	Outflow	Out of Basin	Reservoir Evaporation	831	821	779	804	807	809	798
(19)	Outflow	Out of Basin	Conveyance Evaporation	49	49	50	50	51	51	51
(18)	Outflow	Out of Basin	Stream Outflow	174,482	67,971	320,441	211,623	569,687	139,767	849,395
(29)	Outflow	Out of Basin	Subsurface Outflow	-	-	-	-	-	-	-
(33)	Outflow	(5)+(24)+(23)+(19)+(18)+(29)	Total Outflow	341,093	232,120	490,538	377,822	742,708	309,656	#####
(34)	Storage Change	(32)-(33)	Change in Total System Storage	(19,881)	(27,444)	(10,864)	(19,022)	803	(21,907)	31,402

**LAND SYSTEM WATER BUDGET**

Item	Flow Type	Origin/ Destination	Component	2040	2041	2042	2043	2044	2045	2046
(1)	Inflow	Into Basin	Precipitation on Land System	194,896	150,631	141,993	197,252	96,916	93,605	146,583
(2)	Inflow	Between Systems	Surface Water Delivery	78,633	71,640	78,677	77,256	81,529	88,716	75,392
(3)	Inflow	Between Systems	Groundwater Extraction	43,464	41,156	46,349	43,597	49,524	54,803	43,509
(4)	Inflow	(1)+(2)+(3)	Total Inflow	316,993	263,426	267,019	318,105	227,969	237,125	265,484
(5)	Outflow	Out of Basin	Evapotranspiration	170,100	151,307	158,063	165,533	159,191	165,244	154,639
(6)	Outflow	Between Systems	Runoff	126,445	93,403	88,518	132,419	47,560	48,932	91,271
(7)	Outflow	Between Systems	Return Flow	4,870	4,617	5,206	4,889	5,570	6,169	4,883
(8)	Outflow	Between Systems	Recharge of Applied Water	13,524	12,382	13,627	13,319	14,168	15,439	13,032
(9)	Outflow	Between Systems	Recharge of Precipitation	2,054	1,717	1,604	1,945	1,481	1,340	1,659
(10)	Outflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-	-
(11)	Outflow	(5)+(6)+(7)+(8)+(9)+(10)	Total Outflow	316,993	263,426	267,019	318,105	227,969	237,125	265,484
(12)	Storage Change	(4)-(11)	Change in Land System Storage	-	-	-	-	-	-	-

**SURFACE WATER SYSTEM WATER BUDGET**

Item	Flow Type	Origin/ Destination	Component	2040	2041	2042	2043	2044	2045	2046
(13)	Inflow	Into Basin	Stream Inflow	727,089	878,808	337,563	890,868	170,896	171,875	421,974
(14)	Inflow	Into Basin	Precipitation on Reservoirs	714	552	520	723	355	343	537
(6)	Inflow	Between Systems	Runoff	126,445	93,403	88,518	132,419	47,560	48,932	91,271
(7)	Inflow	Between Systems	Return Flow	4,870	4,617	5,206	4,889	5,570	6,169	4,883
(15)	Inflow	Between Systems	Stream Gain from Groundwater	-	-	-	-	-	-	-
(16)	Inflow	Between Systems	Reservoir Gain from Groundwater	-	-	-	-	-	-	-
(17)	Inflow	(13)+(14)+(6)+(7)+(15)+(16)	Total Inflow	859,118	977,381	431,808	#####	224,381	227,319	518,665
(18)	Outflow	Out of Basin	Stream Outflow	740,802	831,518	331,578	872,619	129,071	124,699	417,877
(19)	Outflow	Out of Basin	Conveyance Evaporation	49	46	48	47	47	52	47
(20)	Outflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27	27
(2)	Outflow	Between Systems	Surface Water Delivery	78,633	71,640	78,677	77,256	81,529	88,716	75,392
(21)	Outflow	Between Systems	Stream Loss to Groundwater	37,810	72,494	19,697	77,195	11,947	11,992	23,622
(22)	Outflow	Between Systems	Reservoir Loss to Groundwater	596	596	596	596	596	596	596
(23)	Outflow	Out of Basin	Reservoir Evaporation	789	691	781	754	758	802	720
(24)	Outflow	Out of Basin	Stream Evaporation	412	368	404	403	405	433	384
(25)	Outflow	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24)	Total Outflow	859,118	977,381	431,808	#####	224,381	227,319	518,665
(26)	Storage Change	(17)-(25)	Change in Surface Water Storage	-	-	-	-	-	-	-

**GROUNDWATER SYSTEM WATER BUDGET**

Item	Flow Type	Origin/ Destination	Component	2040	2041	2042	2043	2044	2045	2046
(8)	Inflow	Between Systems	Recharge of Applied Water	13,524	12,382	13,627	13,319	14,168	15,439	13,032
(9)	Inflow	Between Systems	Recharge of Precipitation	2,054	1,717	1,604	1,945	1,481	1,340	1,659
(10)	Inflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-	-
(21)	Inflow	Between Systems	Groundwater Gain from Stream	37,810	72,494	19,697	77,195	11,947	11,992	23,622
(22)	Inflow	Between Systems	Groundwater Gain from Reservoir	596	596	596	596	596	596	596
(20)	Inflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27	27
(27)	Inflow	Into Basin	Subsurface Inflow	1	1	1	1	1	1	1
(28)	Inflow	(8)+(9)+(10)+(21)+(22)+(20)+(27)	Total Inflow	54,012	87,217	35,553	93,084	28,220	29,396	38,938
(3)	Outflow	Between Systems	Groundwater Extraction	43,464	41,156	46,349	43,597	49,524	54,803	43,509
(15)	Outflow	Between Systems	Groundwater Loss to Stream	-	-	-	-	-	-	-
(16)	Outflow	Between Systems	Groundwater Loss to Reservoir s	-	-	-	-	-	-	-
(29)	Outflow	Out of Basin	Subsurface Outflow	-	-	-	-	-	-	-
(30)	Outflow	(3)+(15)+(16)+(29)	Total Outflow	43,464	41,156	46,349	43,597	49,524	54,803	43,509
(31)	Storage Change	(28)-(30)	Change in Groundwater Storage	10,548	46,061	(10,796)	49,487	(21,304)	(25,407)	(4,571)

**TOTAL BASIN WATER BUDGET**

Item	Flow Type	Origin/ Destination	Component	2040	2041	2042	2043	2044	2045	2046
(1)	Inflow	Into Basin	Precipitation on Land System	194,896	150,631	141,993	197,252	96,916	93,605	146,583
(14)	Inflow	Into Basin	Precipitation on Reservoirs	714	552	520	723	355	343	537
(13)	Inflow	Into Basin	Stream Inflow	727,089	878,808	337,563	890,868	170,896	171,875	421,974
(27)	Inflow	Into Basin	Subsurface Inflow	1	1	1	1	1	1	1
(32)	Inflow	(1)+(14)+(13)+(27)	Total Inflow	922,700	#####	480,077	#####	268,168	265,823	569,095
(5)	Outflow	Out of Basin	Evapotranspiration	170,100	151,307	158,063	165,533	159,191	165,244	154,639
(24)	Outflow	Out of Basin	Stream Evaporation	412	368	404	403	405	433	384
(23)	Outflow	Out of Basin	Reservoir Evaporation	789	691	781	754	758	802	720
(19)	Outflow	Out of Basin	Conveyance Evaporation	49	46	48	47	47	52	47
(18)	Outflow	Out of Basin	Stream Outflow	740,802	831,518	331,578	872,619	129,071	124,699	417,877
(29)	Outflow	Out of Basin	Subsurface Outflow	-	-	-	-	-	-	-
(33)	Outflow	(5)+(24)+(23)+(19)+(18)+(29)	Total Outflow	912,152	983,931	490,873	#####	289,472	291,231	573,666
(34)	Storage Change	(32)-(33)	Change in Total System Storage	10,548	46,061	(10,796)	49,487	(21,304)	(25,407)	(4,571)

LAND SYSTEM WATER BUDGET										
Flow Type		Origin/ Destination	Component	2047	2048	2049	2050	2051	2052	2053
Inflow		Into Basin	Precipitation on Land System	112,828	109,588	75,064	225,757	109,477	199,671	205,058
Inflow		Between Systems	Surface Water Delivery	75,481	81,148	86,327	75,721	83,120	71,972	76,728
Inflow		Between Systems	Groundwater Extraction	44,408	49,085	54,406	39,876	50,096	39,618	44,076
Inflow		(1)+(2)+(3) Total Inflow		232,717	239,821	215,797	341,355	242,692	311,261	325,861
Outflow		Out of Basin	Evapotranspiration	153,467	158,670	160,652	175,368	165,364	154,317	164,713
Outflow		Between Systems	Runoff	59,591	60,050	32,684	146,180	55,652	138,285	141,027
Outflow		Between Systems	Return Flow	4,988	5,520	6,128	4,458	5,633	4,437	4,946
Outflow		Between Systems	Recharge of Applied Water	13,076	14,095	15,061	12,961	14,429	12,381	13,254
Outflow		Between Systems	Recharge of Precipitation	1,597	1,486	1,271	2,387	1,615	1,842	1,921
Outflow		Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-	-
Outflow		(5)+(6)+(7)+(8)+(9)+(10) Total Outflow		232,717	239,821	215,797	341,355	242,692	311,261	325,861
Storage Change		(4)-(11)	Change in Land System Storage	-	-	-	-	-	-	-

SURFACE WATER SYSTEM WATER BUDGET									
Flow Type	Origin/ Destination	Component	2047	2048	2049	2050	2051	2052	2053
Inflow	Into Basin	Stream Inflow	136,845	266,826	77,677	639,443	168,796	939,201	838,666
Inflow	Into Basin	Precipitation on Reservoirs	413	402	275	827	401	732	751
Inflow	Between Systems	Runoff	59,591	60,050	32,684	146,180	55,652	138,285	141,027
Inflow	Between Systems	Return Flow	4,988	5,520	6,128	4,458	5,633	4,437	4,946
Inflow	Between Systems	Stream Gain from Groundwater	-	-	-	-	-	-	-
Inflow	Between Systems	Reservoir Gain from Groundwater	-	-	-	-	-	-	-
Inflow	(13)+(14)+(6)+(7)+(15)+(16) Total Inflow		201,836	332,797	116,764	790,908	230,482	1,082,654	985,391
Outflow	Out of Basin	Stream Outflow	114,222	233,452	20,949	679,625	133,636	910,698	848,509
Outflow	Out of Basin	Conveyance Evaporation	46	49	50	50	51	46	48
Outflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27	27
Outflow	Between Systems	Surface Water Delivery	75,481	81,148	86,327	75,721	83,120	71,972	76,728
Outflow	Between Systems	Stream Loss to Groundwater	10,363	16,407	7,612	33,734	11,849	98,262	58,331
Outflow	Between Systems	Reservoir Loss to Groundwater	596	596	596	596	596	596	596
Outflow	Out of Basin	Reservoir Evaporation	719	720	781	752	785	682	751
Outflow	Out of Basin	Stream Evaporation	381	397	421	402	418	371	400
Outflow	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24) Total Outflow		201,836	332,797	116,764	790,908	230,482	1,082,654	985,391
Storage Change	(17)-(25)	Change in Surface Water Storage	-	-	-	-	-	-	-

GROUNDWATER SYSTEM WATER BUDGET									
Flow Type	Origin/ Destination	Component	2047	2048	2049	2050	2051	2052	2053
Inflow	Between Systems	Recharge of Applied Water	13,076	14,095	15,061	12,961	14,429	12,381	13,254
Inflow	Between Systems	Recharge of Precipitation	1,597	1,486	1,271	2,387	1,615	1,842	1,921
Inflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-	-
Inflow	Between Systems	Groundwater Gain from Stream	10,363	16,407	7,612	33,734	11,849	98,262	58,331
Inflow	Between Systems	Groundwater Gain from Reservoir	596	596	596	596	596	596	596
Inflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27	27
Inflow	Into Basin	Subsurface Inflow	1	1	1	1	1	1	1
Inflow	(8)+(9)+(10)+(21)+(22)+(20)+(27) Total Inflow		25,661	32,613	24,569	49,707	28,518	113,109	74,131
Outflow	Between Systems	Groundwater Extraction	44,408	49,085	54,406	39,876	50,096	39,618	44,076
Outflow	Between Systems	Groundwater Loss to Stream	-	-	-	-	-	-	-
Outflow	Between Systems	Groundwater Loss to Reservoir s	-	-	-	-	-	-	-
Outflow	Out of Basin	Subsurface Outflow	-	-	-	-	-	-	-
Outflow	(3)+(15)+(16)+(29) Total Outflow		44,408	49,085	54,406	39,876	50,096	39,618	44,076
Storage Change	(28)-(30)	Change in Groundwater Storage	(18,748)	(16,471)	(29,836)	9,832	(21,578)	73,491	30,055

TOTAL BASIN WATER BUDGET										
Flow Type		Origin/ Destination	Component	2047	2048	2049	2050	2051	2052	2053
Inflow		Into Basin	Precipitation on Land System	112,828	109,588	75,064	225,757	109,477	199,671	205,058
Inflow		Into Basin	Precipitation on Reservoirs	413	402	275	827	401	732	751
Inflow		Into Basin	Stream Inflow	136,845	266,826	77,677	639,443	168,796	939,201	838,666
Inflow		Into Basin	Subsurface Inflow	1	1	1	1	1	1	1
Inflow		(1)+(14)+(13)+(27)	Total Inflow	250,087	376,817	153,017	866,029	278,675	1,139,604	#####
Outflow		Out of Basin	Evapotranspiration	153,467	158,670	160,652	175,368	165,364	154,317	164,713
Outflow		Out of Basin	Stream Evaporation	381	397	421	402	418	371	400
Outflow		Out of Basin	Reservoir Evaporation	719	720	781	752	785	682	751
Outflow		Out of Basin	Conveyance Evaporation	46	49	50	50	51	46	48
Outflow		Out of Basin	Stream Outflow	114,222	233,452	20,949	679,625	133,636	910,698	848,509
Outflow		Out of Basin	Subsurface Outflow	-	-	-	-	-	-	-
Outflow		(5)+(24)+(23)+(19)+(18)+(29)	Total Outflow	268,834	393,288	182,853	856,197	300,253	1,066,113	#####
Storage Change		(32)-(33)	Change in Total System Storage	(18,748)	(16,471)	(29,836)	9,832	(21,578)	73,491	30,055



**LAND SYSTEM WATER BUDGET**

Item	Flow Type	Origin/ Destination	Component	2054	2055	2056	2057	2058	2059	2060
(1)	Inflow	Into Basin	Precipitation on Land System	181,148	240,300	165,297	145,585	86,442	130,562	161,922
(2)	Inflow	Between Systems	Surface Water Delivery	81,726	69,567	80,770	82,627	87,201	86,559	80,563
(3)	Inflow	Between Systems	Groundwater Extraction	46,992	36,069	46,825	47,959	53,321	51,640	46,430
(4)	Inflow	(1)+(2)+(3)	Total Inflow	309,865	345,936	292,892	276,171	226,963	268,760	288,915
(5)	Outflow	Out of Basin	Evapotranspiration	171,815	162,194	168,075	173,482	164,756	169,002	167,314
(6)	Outflow	Between Systems	Runoff	116,731	165,574	103,752	81,087	39,646	77,352	100,633
(7)	Outflow	Between Systems	Return Flow	5,274	4,029	5,257	5,385	5,999	5,805	5,211
(8)	Outflow	Between Systems	Recharge of Applied Water	14,113	11,896	13,962	14,283	15,158	15,005	13,917
(9)	Outflow	Between Systems	Recharge of Precipitation	1,933	2,242	1,846	1,935	1,404	1,596	1,839
(10)	Outflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-	-
(11)	Outflow	(5)+(6)+(7)+(8)+(9)+(10)	Total Outflow	309,865	345,936	292,892	276,171	226,963	268,760	288,915
(12)	Storage Change	(4)-(11)	Change in Land System Storage	-	-	-	-	-	-	-

**SURFACE WATER SYSTEM WATER BUDGET**

Item	Flow Type	Origin/ Destination	Component	2054	2055	2056	2057	2058	2059	2060
(13)	Inflow	Into Basin	Stream Inflow	659,533	809,502	712,444	240,135	96,425	160,946	229,397
(14)	Inflow	Into Basin	Precipitation on Reservoirs	664	881	606	533	317	478	593
(6)	Inflow	Between Systems	Runoff	116,731	165,574	103,752	81,087	39,646	77,352	100,633
(7)	Inflow	Between Systems	Return Flow	5,274	4,029	5,257	5,385	5,999	5,805	5,211
(15)	Inflow	Between Systems	Stream Gain from Groundwater	-	-	-	-	-	-	-
(16)	Inflow	Between Systems	Reservoir Gain from Groundwater	-	-	-	-	-	-	-
(17)	Inflow	(13)+(14)+(6)+(7)+(15)+(16)	Total Inflow	782,201	979,986	822,059	327,140	142,387	244,582	335,835
(18)	Outflow	Out of Basin	Stream Outflow	663,923	859,330	702,286	227,447	44,776	144,611	238,751
(19)	Outflow	Out of Basin	Conveyance Evaporation	51	46	50	51	52	52	49
(20)	Outflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27	27
(2)	Outflow	Between Systems	Surface Water Delivery	81,726	69,567	80,770	82,627	87,201	86,559	80,563
(21)	Outflow	Between Systems	Stream Loss to Groundwater	34,668	49,384	37,129	15,166	8,484	11,484	14,667
(22)	Outflow	Between Systems	Reservoir Loss to Groundwater	596	596	596	596	596	596	596
(23)	Outflow	Out of Basin	Reservoir Evaporation	789	668	786	801	820	819	769
(24)	Outflow	Out of Basin	Stream Evaporation	420	367	414	424	430	433	412
(25)	Outflow	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24)	Total Outflow	782,201	979,986	822,059	327,140	142,387	244,582	335,835
(26)	Storage Change	(17)-(25)	Change in Surface Water Storage	-	-	-	-	-	-	-

**GROUNDWATER SYSTEM WATER BUDGET**

Item	Flow Type	Origin/ Destination	Component	2054	2055	2056	2057	2058	2059	2060
(8)	Inflow	Between Systems	Recharge of Applied Water	14,113	11,896	13,962	14,283	15,158	15,005	13,917
(9)	Inflow	Between Systems	Recharge of Precipitation	1,933	2,242	1,846	1,935	1,404	1,596	1,839
(10)	Inflow	Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-	-
(21)	Inflow	Between Systems	Groundwater Gain from Stream	34,668	49,384	37,129	15,166	8,484	11,484	14,667
(22)	Inflow	Between Systems	Groundwater Gain from Reservoir	596	596	596	596	596	596	596
(20)	Inflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27	27
(27)	Inflow	Into Basin	Subsurface Inflow	1	1	1	1	1	1	1
(28)	Inflow	(8)+(9)+(10)+(21)+(22)+(20)+(27)	Total Inflow	51,339	64,147	53,562	32,009	25,671	28,710	31,048
(3)	Outflow	Between Systems	Groundwater Extraction	46,992	36,069	46,825	47,959	53,321	51,640	46,430
(15)	Outflow	Between Systems	Groundwater Loss to Stream	-	-	-	-	-	-	-
(16)	Outflow	Between Systems	Groundwater Loss to Reservoir s	-	-	-	-	-	-	-
(29)	Outflow	Out of Basin	Subsurface Outflow	-	-	-	-	-	-	-
(30)	Outflow	(3)+(15)+(16)+(29)	Total Outflow	46,992	36,069	46,825	47,959	53,321	51,640	46,430
(31)	Storage Change	(28)-(30)	Change in Groundwater Storage	4,347	28,079	6,736	(15,950)	(27,650)	(22,930)	(15,382)

**TOTAL BASIN WATER BUDGET**

Item	Flow Type	Origin/ Destination	Component	2054	2055	2056	2057	2058	2059	2060
(1)	Inflow	Into Basin	Precipitation on Land System	181,148	240,300	165,297	145,585	86,442	130,562	161,922
(14)	Inflow	Into Basin	Precipitation on Reservoirs	664	881	606	533	317	478	593
(13)	Inflow	Into Basin	Stream Inflow	659,533	809,502	712,444	240,135	96,425	160,946	229,397
(27)	Inflow	Into Basin	Subsurface Inflow	1	1	1	1	1	1	1
(32)	Inflow	(1)+(14)+(13)+(27)	Total Inflow	841,345	#####	878,347	386,254	183,184	291,987	391,913
(5)	Outflow	Out of Basin	Evapotranspiration	171,815	162,194	168,075	173,482	164,756	169,002	167,314
(24)	Outflow	Out of Basin	Stream Evaporation	420	367	414	424	430	433	412
(23)	Outflow	Out of Basin	Reservoir Evaporation	789	668	786	801	820	819	769
(19)	Outflow	Out of Basin	Conveyance Evaporation	51	46	50	51	52	52	49
(18)	Outflow	Out of Basin	Stream Outflow	663,923	859,330	702,286	227,447	44,776	144,611	238,751
(29)	Outflow	Out of Basin	Subsurface Outflow	-	-	-	-	-	-	-
(33)	Outflow	(5)+(24)+(23)+(19)+(18)+(29)	Total Outflow	836,998	#####	871,611	402,204	210,835	314,917	407,295
(34)	Storage Change	(32)-(33)	Change in Total System Storage	4,347	28,079	6,736	(15,950)	(27,650)	(22,930)	(15,382)

LAND SYSTEM WATER BUDGET										
Flow Type		Origin/ Destination	Component	2061	2062	2063	2064	2065	2066	2067
Inflow		Into Basin	Precipitation on Land System	146,572	148,701	232,665	118,707	132,516	149,197	135,123
Inflow		Between Systems	Surface Water Delivery	85,780	77,131	76,997	84,401	82,618	83,095	77,644
Inflow		Between Systems	Groundwater Extraction	51,324	44,577	42,403	51,384	48,300	47,652	44,474
Inflow		(1)+(2)+(3)	Total Inflow	283,677	270,410	352,064	254,491	263,434	279,943	257,241
Outflow		Out of Basin	Evapotranspiration	166,689	158,629	169,465	173,250	170,923	176,605	166,236
Outflow		Between Systems	Runoff	94,789	91,736	162,505	59,003	70,946	81,620	70,674
Outflow		Between Systems	Return Flow	5,770	5,003	4,750	5,780	5,425	5,348	4,990
Outflow		Between Systems	Recharge of Applied Water	14,876	13,333	13,240	14,667	14,293	14,344	13,407
Outflow		Between Systems	Recharge of Precipitation	1,554	1,709	2,105	1,791	1,847	2,027	1,933
Outflow		Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-	-
Outflow		(5)+(6)+(7)+(8)+(9)+(10)	Total Outflow	283,677	270,410	352,064	254,491	263,434	279,943	257,241
Storage Change		(4)-(11)	Change in Land System Storage	-	-	-	-	-	-	-

SURFACE WATER SYSTEM WATER BUDGET									
Flow Type	Origin/ Destination	Component	2061	2062	2063	2064	2065	2066	2067
Inflow	Into Basin	Stream inflow	321,321	372,195	798,642	131,362	254,574	150,766	106,628
Inflow	Into Basin	Precipitation on Reservoirs	537	545	853	435	486	547	495
Inflow	Between Systems	Runoff	94,789	91,736	162,505	59,003	70,946	81,620	70,674
Inflow	Between Systems	Return Flow	5,770	5,003	4,750	5,780	5,425	5,348	4,990
Inflow	Between Systems	Stream Gain from Groundwater	-	-	-	-	-	-	-
Inflow	Between Systems	Reservoir Gain from Groundwater	-	-	-	-	-	-	-
Inflow	(13)+(14)+(6)+(7)+(15)+(16)	Total Inflow	422,417	469,479	966,750	196,580	331,430	238,280	182,788
Outflow	Out of Basin	Stream Outflow	315,780	369,247	841,604	100,139	231,086	142,278	94,373
Outflow	Out of Basin	Conveyance Evaporation	51	47	49	51	51	50	48
Outflow	Between Systems	Conveyance Seepage	27	27	27	27	27	27	27
Outflow	Between Systems	Surface Water Delivery	85,780	77,131	76,997	84,401	82,618	83,095	77,644
Outflow	Between Systems	Stream Loss to Groundwater	18,941	21,307	46,323	10,108	15,838	11,011	8,958
Outflow	Between Systems	Reservoir Loss to Groundwater	596	596	596	596	596	596	596
Outflow	Out of Basin	Reservoir Evaporation	811	730	750	823	793	797	742
Outflow	Out of Basin	Stream Evaporation	429	393	403	434	420	427	399
Outflow	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24)	Total Outflow	422,417	469,479	966,750	196,580	331,430	238,280	182,788
Storage Change	(17)-(25)	Change in Surface Water Storage	-	-	-	-	-	-	-

GROUNDWATER SYSTEM WATER BUDGET										
Flow Type		Origin/ Destination	Component	2061	2062	2063	2064	2065	2066	2067
Inflow		Between Systems	Recharge of Applied Water	14,876	13,333	13,240	14,667	14,293	14,344	13,407
Inflow		Between Systems	Recharge of Precipitation	1,554	1,709	2,105	1,791	1,847	2,027	1,933
Inflow		Between Systems	Managed Aquifer Recharge	-	-	-	-	-	-	-
Inflow		Between Systems	Groundwater Gain from Stream	18,941	21,307	46,323	10,108	15,838	11,011	8,958
Inflow		Between Systems	Groundwater Gain from Reservoir	596	596	596	596	596	596	596
Inflow		Between Systems	Conveyance Seepage	27	27	27	27	27	27	27
Inflow		Into Basin	Subsurface Inflow	1	1	1	1	1	1	1
Inflow		(8)+(9)+(10)+(21)+(22)+(20)+(27) Total Inflow		35,995	36,973	62,292	27,191	32,602	28,006	24,924
Outflow		Between Systems	Groundwater Extraction	51,324	44,577	42,403	51,384	48,300	47,652	44,474
Outflow		Between Systems	Groundwater Loss to Stream	-	-	-	-	-	-	-
Outflow		Between Systems	Groundwater Loss to Reservoir s	-	-	-	-	-	-	-
Outflow		Out of Basin	Subsurface Outflow	-	-	-	-	-	-	-
Outflow		(3)+(15)+(16)+(29) Total Outflow		51,324	44,577	42,403	51,384	48,300	47,652	44,474
Storage Change		(28)-(30)	Change in Groundwater Storage	(15,329)	(7,604)	19,889	(24,192)	(15,698)	(19,646)	(19,550)

TOTAL BASIN WATER BUDGET										
Flow Type		Origin/ Destination	Component	2061	2062	2063	2064	2065	2066	2067
Inflow		Into Basin	Precipitation on Land System	146,572	148,701	232,665	118,707	132,516	149,197	135,123
Inflow		Into Basin	Precipitation on Reservoirs	537	545	853	435	486	547	495
Inflow		Into Basin	Stream Inflow	321,321	372,195	798,642	131,362	254,574	150,766	106,628
Inflow		Into Basin	Subsurface Inflow	1	1	1	1	1	1	1
Inflow		(1)+(14)+(13)+(27)	Total Inflow	468,431	521,442	#####	250,505	387,576	300,511	242,247
Outflow		Out of Basin	Evapotranspiration	166,689	158,629	169,465	173,250	170,923	176,605	166,236
Outflow		Out of Basin	Stream Evaporation	429	393	403	434	420	427	399
Outflow		Out of Basin	Reservoir Evaporation	811	730	750	823	793	797	742
Outflow		Out of Basin	Conveyance Evaporation	51	47	49	51	51	50	48
Outflow		Out of Basin	Stream Outflow	315,780	369,247	841,604	100,139	231,086	142,278	94,373
Outflow		Out of Basin	Subsurface Outflow	-	-	-	-	-	-	-
Outflow		(5)+(24)+(23)+(19)+(18)+(29)	Total Outflow	483,760	529,046	#####	274,697	403,274	320,156	261,797
Storage Change		(32)-(33)	Change in Total System Storage	(15,329)	(7,604)	19,889	(24,192)	(15,698)	(19,646)	(19,550)

LAND SYSTEM WATER BUDGET			
Flow Type	Origin/ Destination	Component	2068
Inflow	Into Basin	Precipitation on Land System	198,737
Inflow	Between Systems	Surface Water Delivery	73,214
Inflow	Between Systems	Groundwater Extraction	39,935
Inflow	(1)+(2)+(3)Total Inflow		311,886
Outflow	Out of Basin	Evapotranspiration	162,359
Outflow	Between Systems	Runoff	130,426
Outflow	Between Systems	Return Flow	4,471
Outflow	Between Systems	Recharge of Applied Water	12,581
Outflow	Between Systems	Recharge of Precipitation	2,049
Outflow	Between Systems	Managed Aquifer Recharge	-
Outflow	(5)+(6)+(7)+(8)+(9)+(10)Total Outflow		311,886
Storage Change	(4)-(11)	Change in Land System Storage	-

SURFACE WATER SYSTEM WATER BUDGET			
Flow Type	Origin/ Destination	Component	2068
Inflow	Into Basin	Stream Inflow	652,832
Inflow	Into Basin	Precipitation on Reservoirs	728
Inflow	Between Systems	Runoff	130,426
Inflow	Between Systems	Return Flow	4,471
Inflow	Between Systems	Stream Gain from Groundwater	-
Inflow	Between Systems	Reservoir Gain from Groundwater	-
Inflow	(13)+(14)+(6)+(7)+(15)+(16)	Total Inflow	788,457
Outflow	Out of Basin	Stream Outflow	679,139
Outflow	Out of Basin	Conveyance Evaporation	46
Outflow	Between Systems	Conveyance Seepage	27
Outflow	Between Systems	Surface Water Delivery	73,214
Outflow	Between Systems	Stream Loss to Groundwater	34,357
Outflow	Between Systems	Reservoir Loss to Groundwater	596
Outflow	Out of Basin	Reservoir Evaporation	697
Outflow	Out of Basin	Stream Evaporation	380
Outflow	(18)+(19)+(20)+(2)+(21)+(22)+(23)+(24)	Total Outflow	788,457
Storage Change	(17)-(25)	Change in Surface Water Storage	-

GROUNDWATER SYSTEM WATER BUDGET			
Flow Type	Origin/ Destination	Component	2068
Inflow	Between Systems	Recharge of Applied Water	12,581
Inflow	Between Systems	Recharge of Precipitation	2,049
Inflow	Between Systems	Managed Aquifer Recharge	-
Inflow	Between Systems	Groundwater Gain from Stream	34,357
Inflow	Between Systems	Groundwater Gain from Reservoir	596
Inflow	Between Systems	Conveyance Seepage	27
Inflow	Into Basin	Subsurface Inflow	1
Inflow	(8)+(9)+(10)+(21)+(22)+(20)+(27) Total Inflow		49,612
Outflow	Between Systems	Groundwater Extraction	39,935
Outflow	Between Systems	Groundwater Loss to Stream	-
Outflow	Between Systems	Groundwater Loss to Reservoir s	-
Outflow	Out of Basin	Subsurface Outflow	-
Outflow	(3)+(15)+(16)+(29) Total Outflow		39,935
Storage Change	(28)-(30)	Change in Groundwater Storage	9,676

TOTAL BASIN WATER BUDGET			
Flow Type	Origin/ Destination	Component	2068
Inflow	Into Basin	Precipitation on Land System	198,737
Inflow	Into Basin	Precipitation on Reservoirs	728
Inflow	Into Basin	Stream Inflow	652,832
Inflow	Into Basin	Subsurface Inflow	1
Inflow	(1)+(14)+(13)+(27)	Total Inflow	852,297
Outflow	Out of Basin	Evapotranspiration	162,359
Outflow	Out of Basin	Stream Evaporation	380
Outflow	Out of Basin	Reservoir Evaporation	697
Outflow	Out of Basin	Conveyance Evaporation	46
Outflow	Out of Basin	Stream Outflow	679,139
Outflow	Out of Basin	Subsurface Outflow	-
Outflow	(5)+(24)+(23)+(19)+(18)+(29)	Total Outflow	842,621
Storage Change	(32)-(33)	Change in Total System Storage	9,676


## **Appendix 6C    Water Budget Bar Charts**

---




Historic Water Budget

LAND SYSTEM

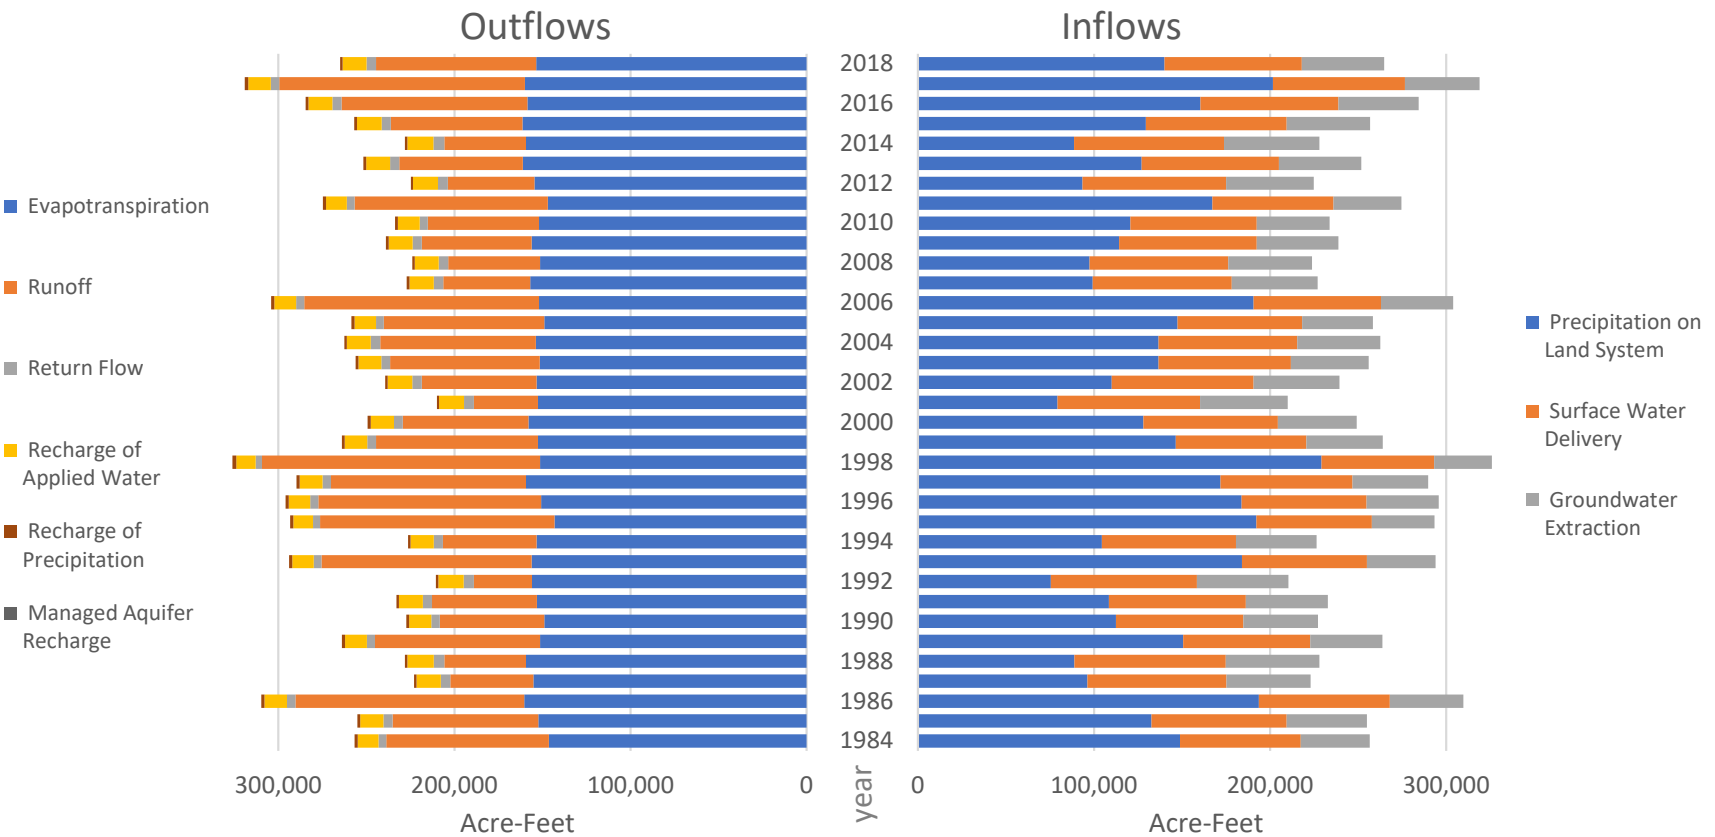


# Future Water Budget

## LAND SYSTEM

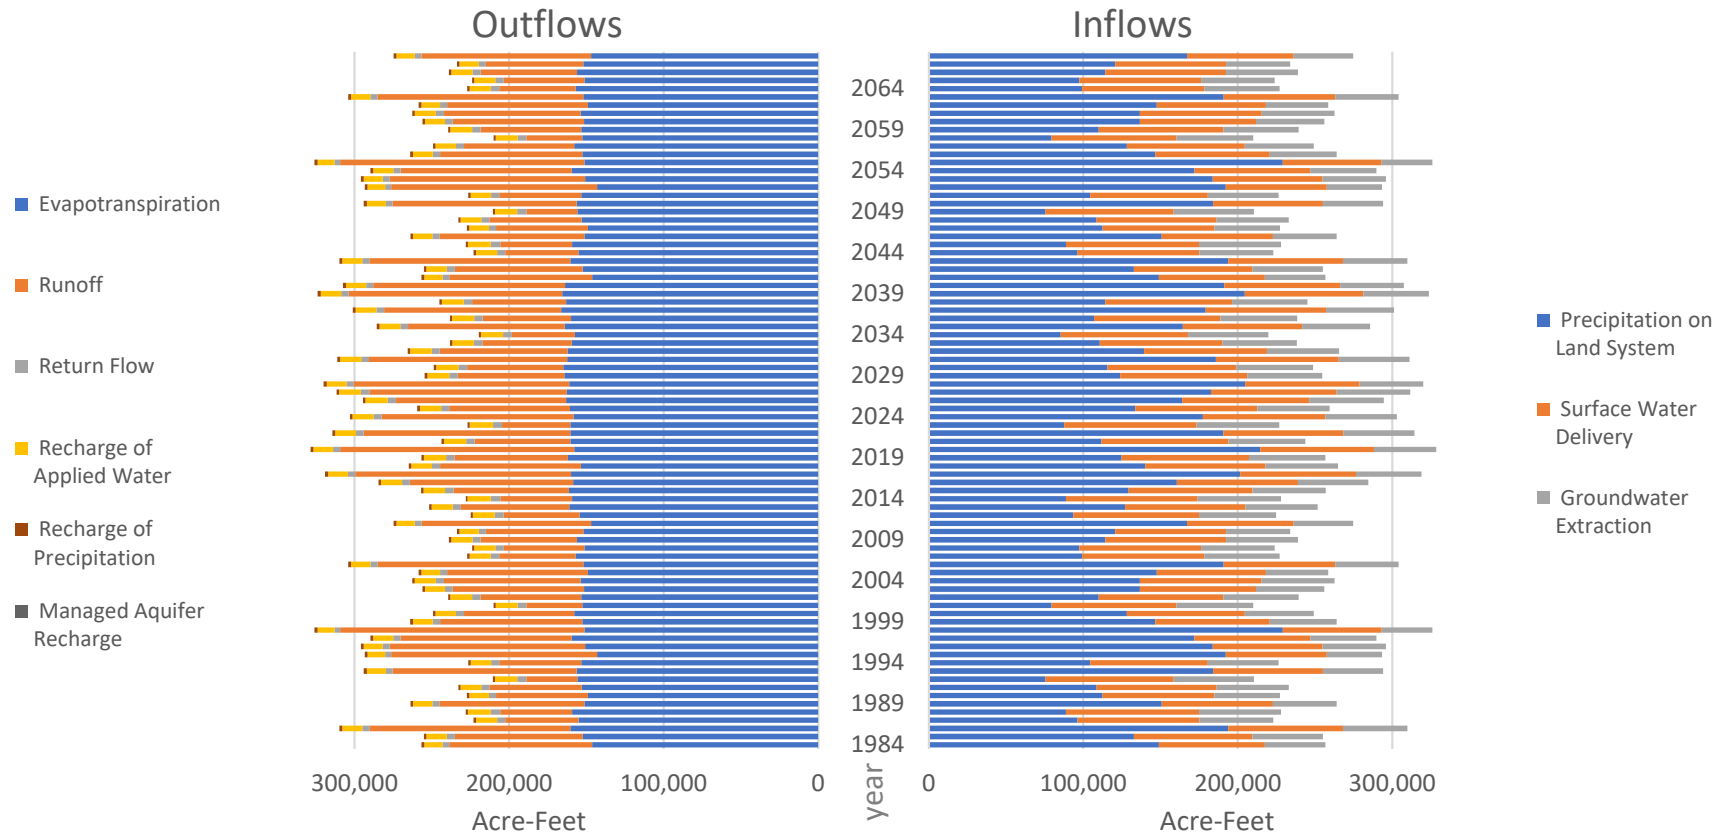


# Future Water Budget With Climate Change

## LAND SYSTEM

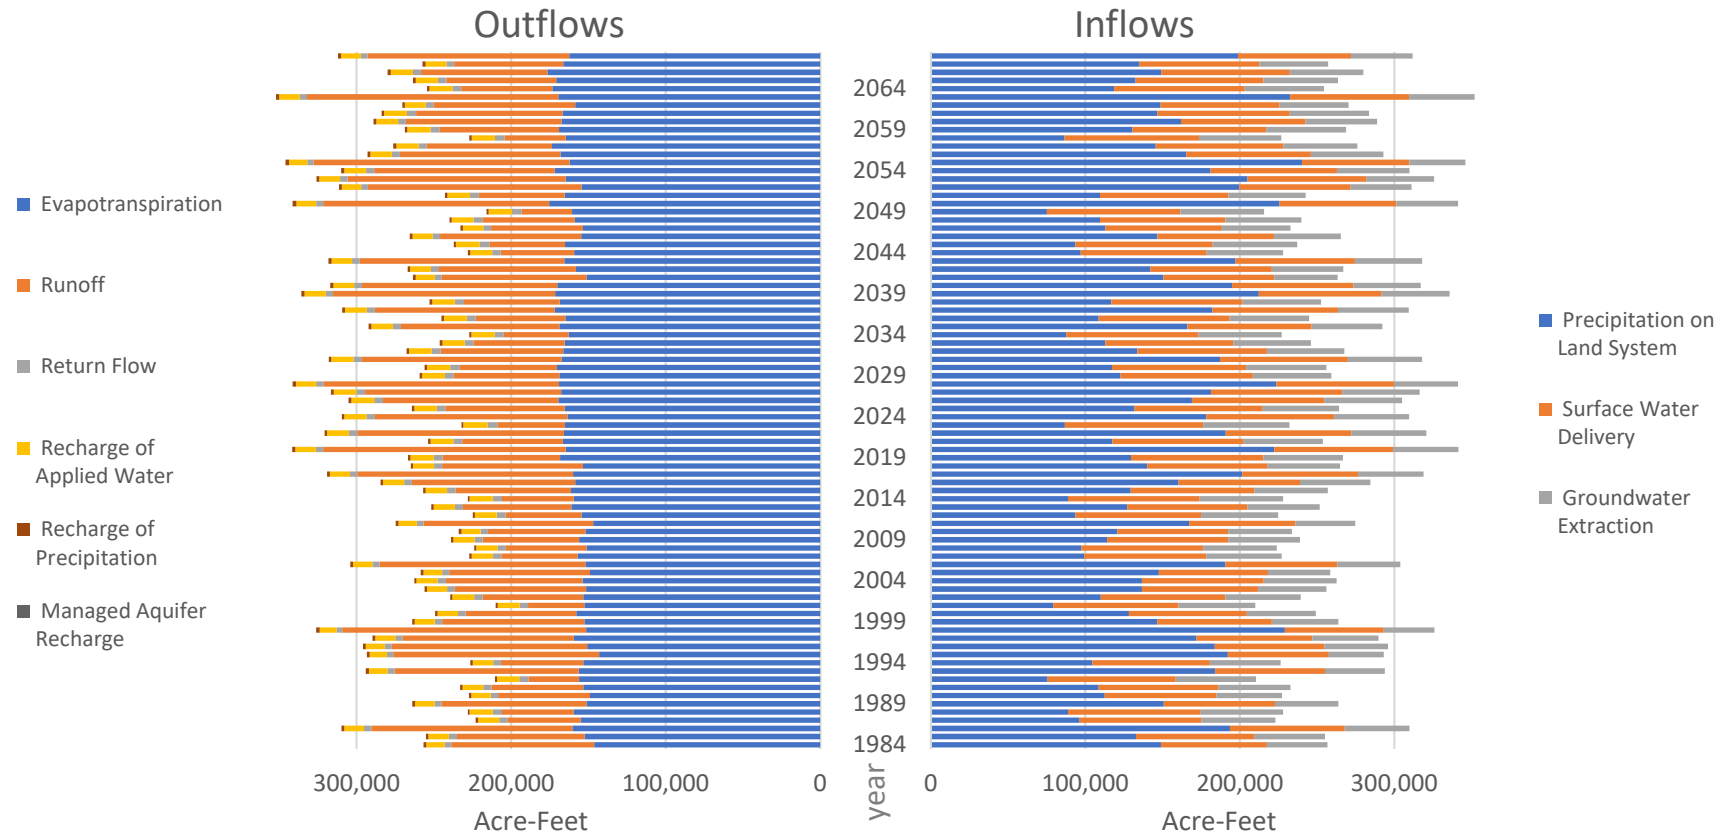

# 


## 

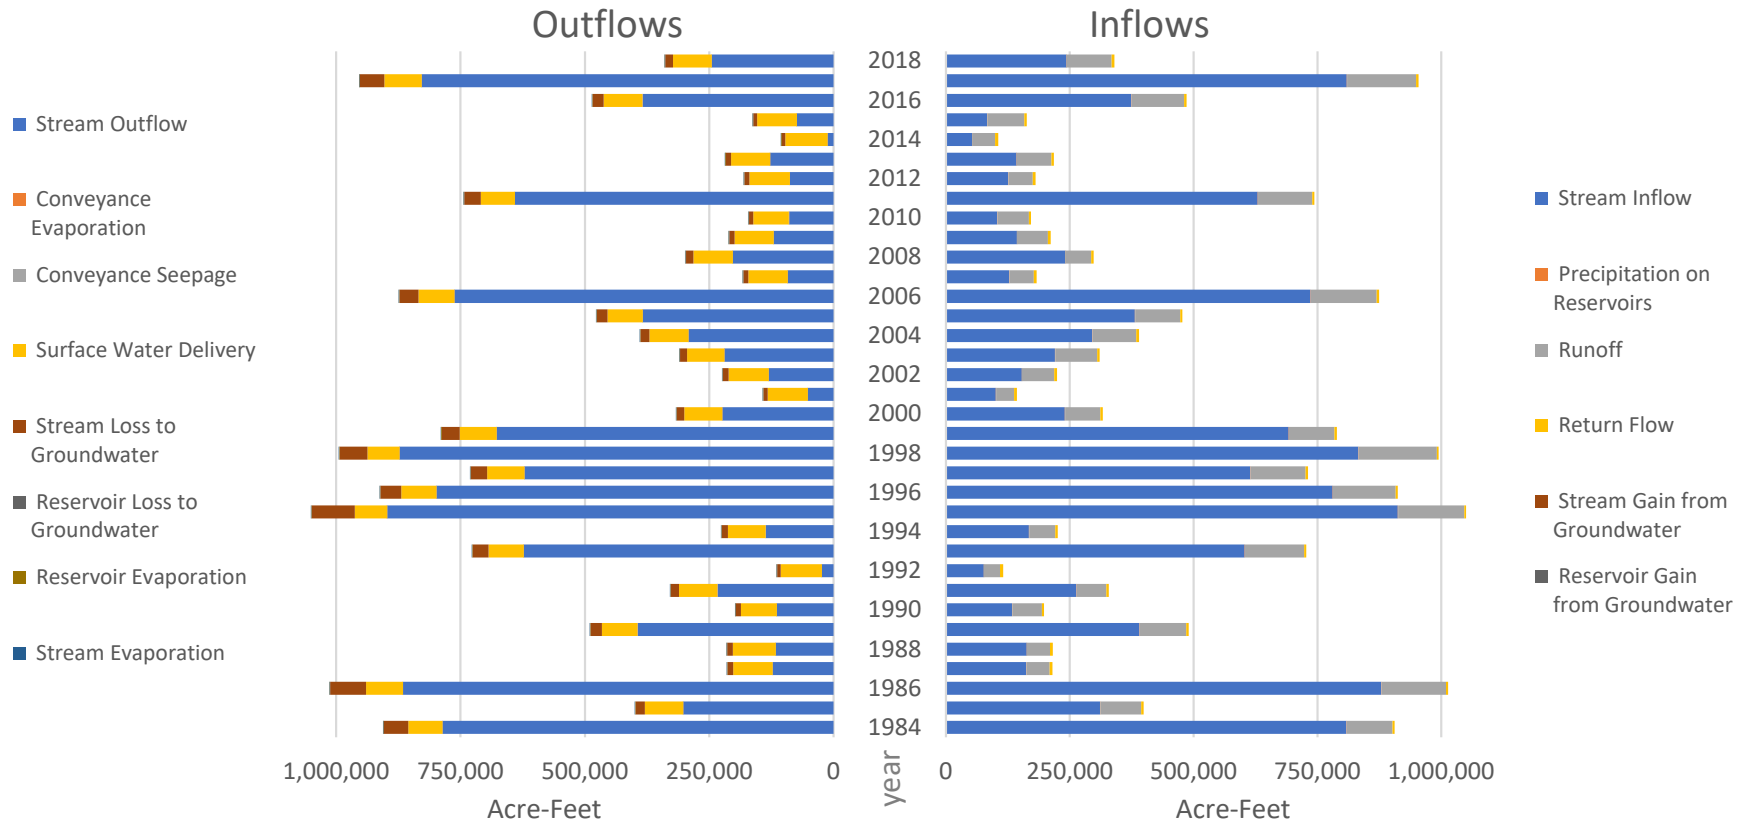




# Future Water Budget

## SURFACE WATER SYSTEM

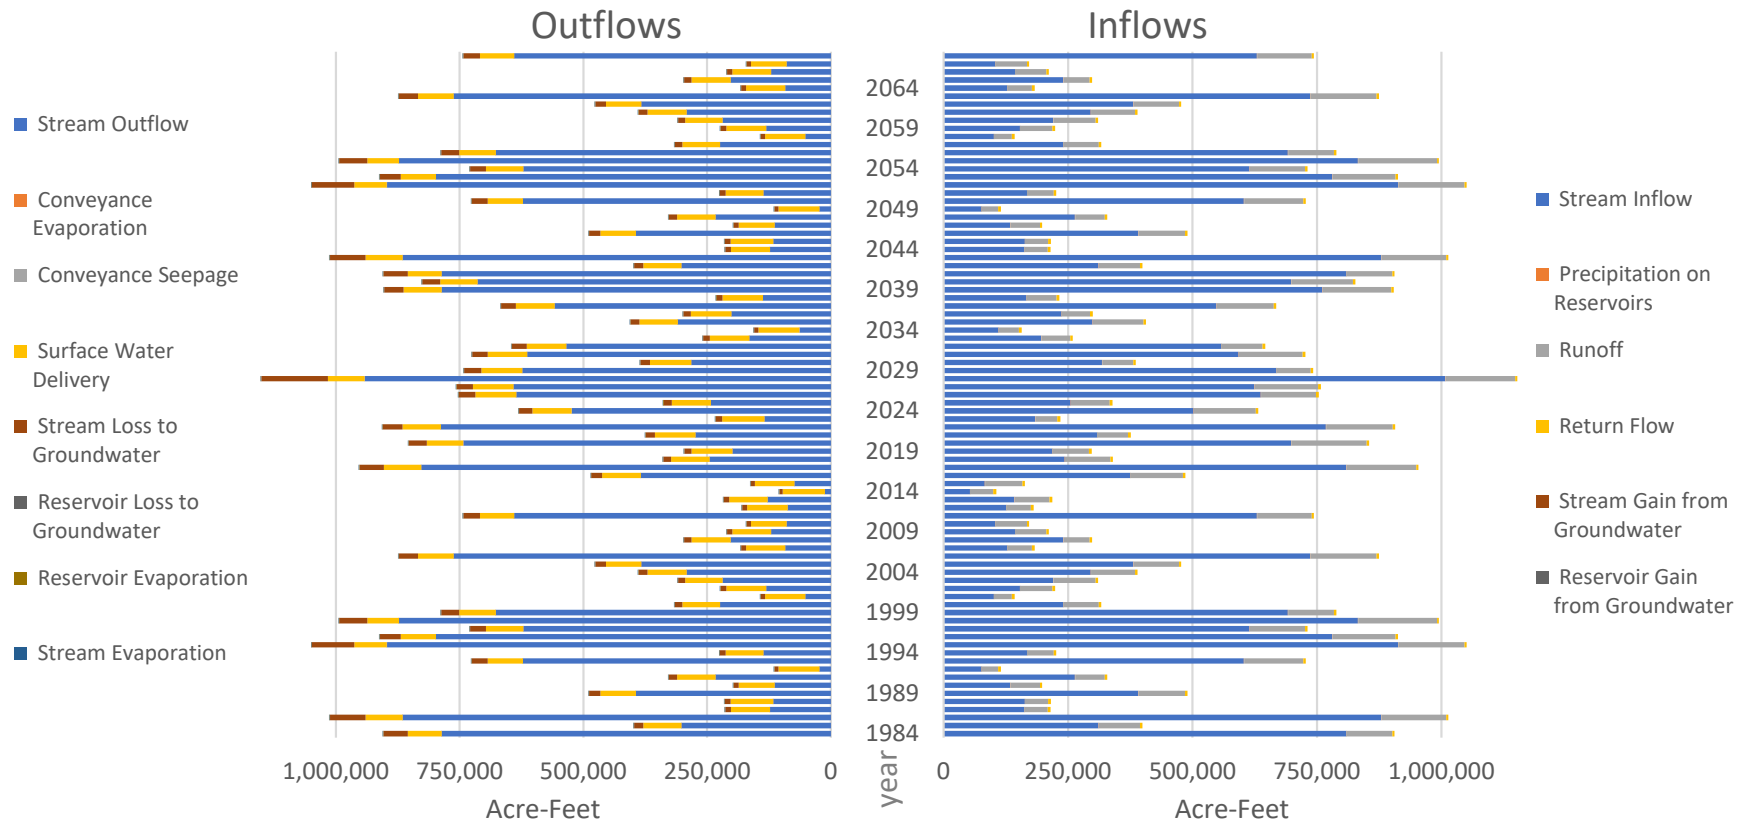


# Future Water Budget With Climate Change

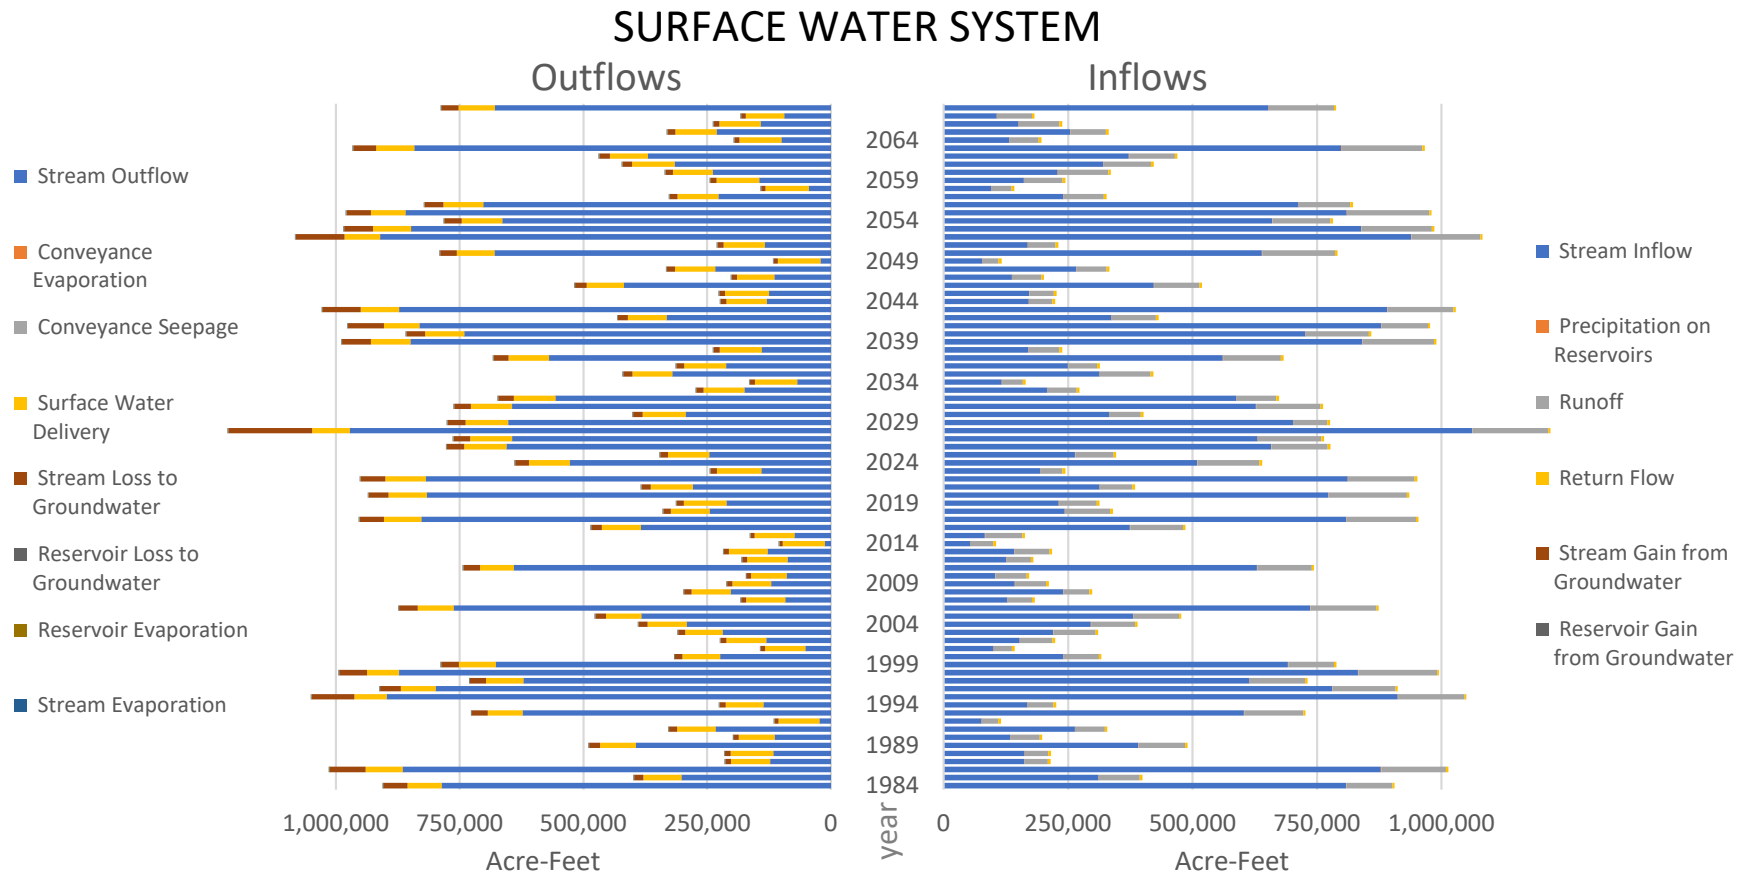


# 

## GROUNDWATER SYSTEM

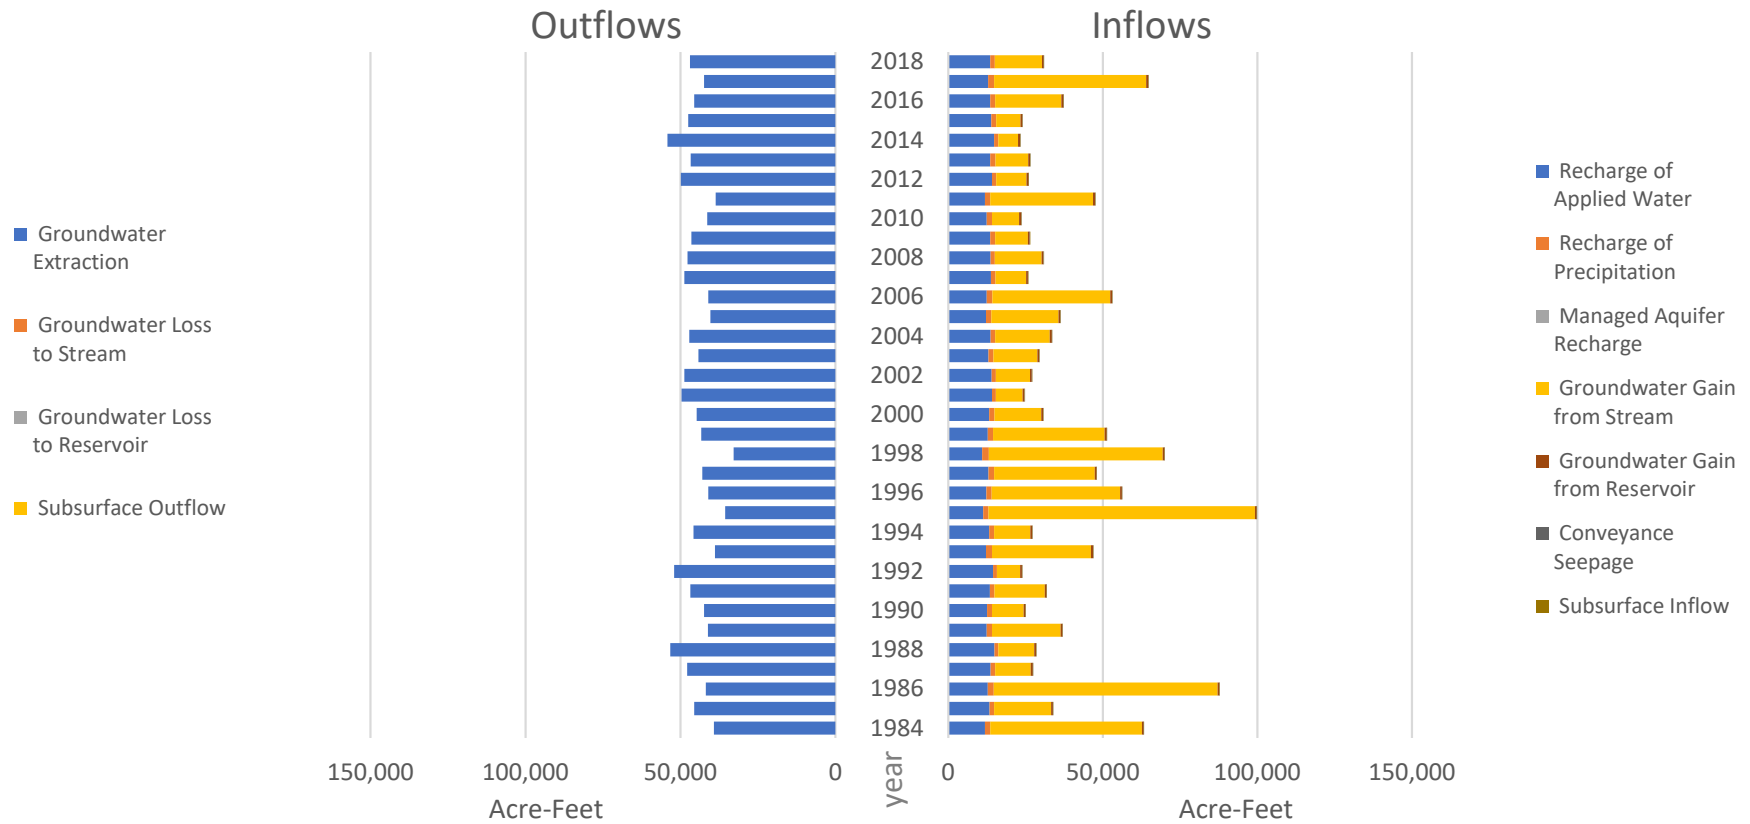


# Future Water Budget

## GROUNDWATER SYSTEM

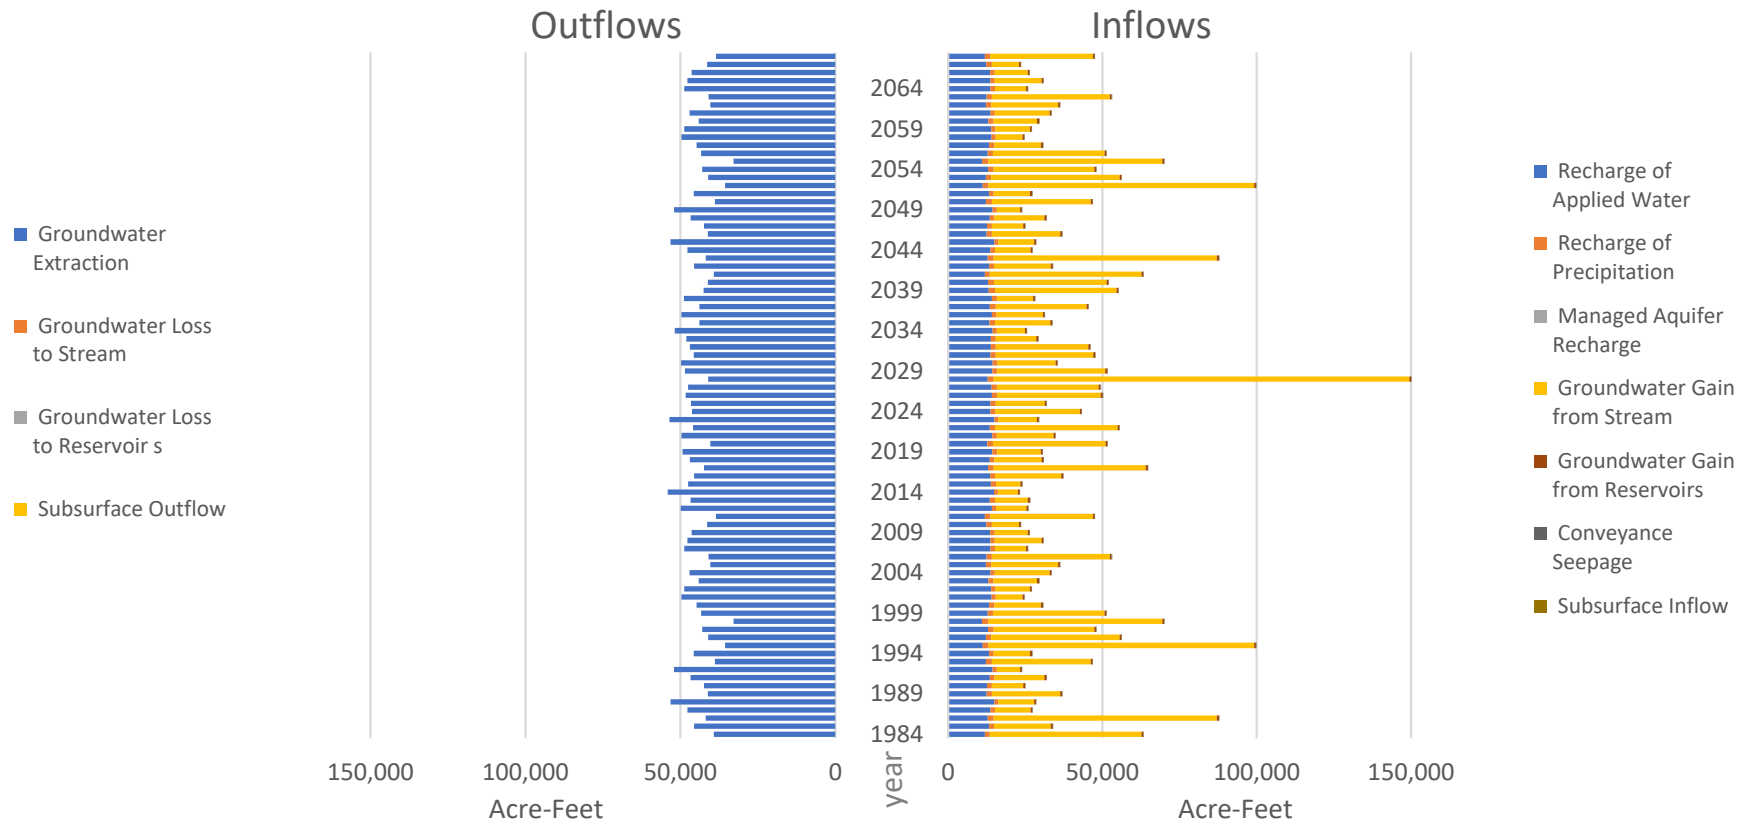





# Future Water Budget With Climate Change

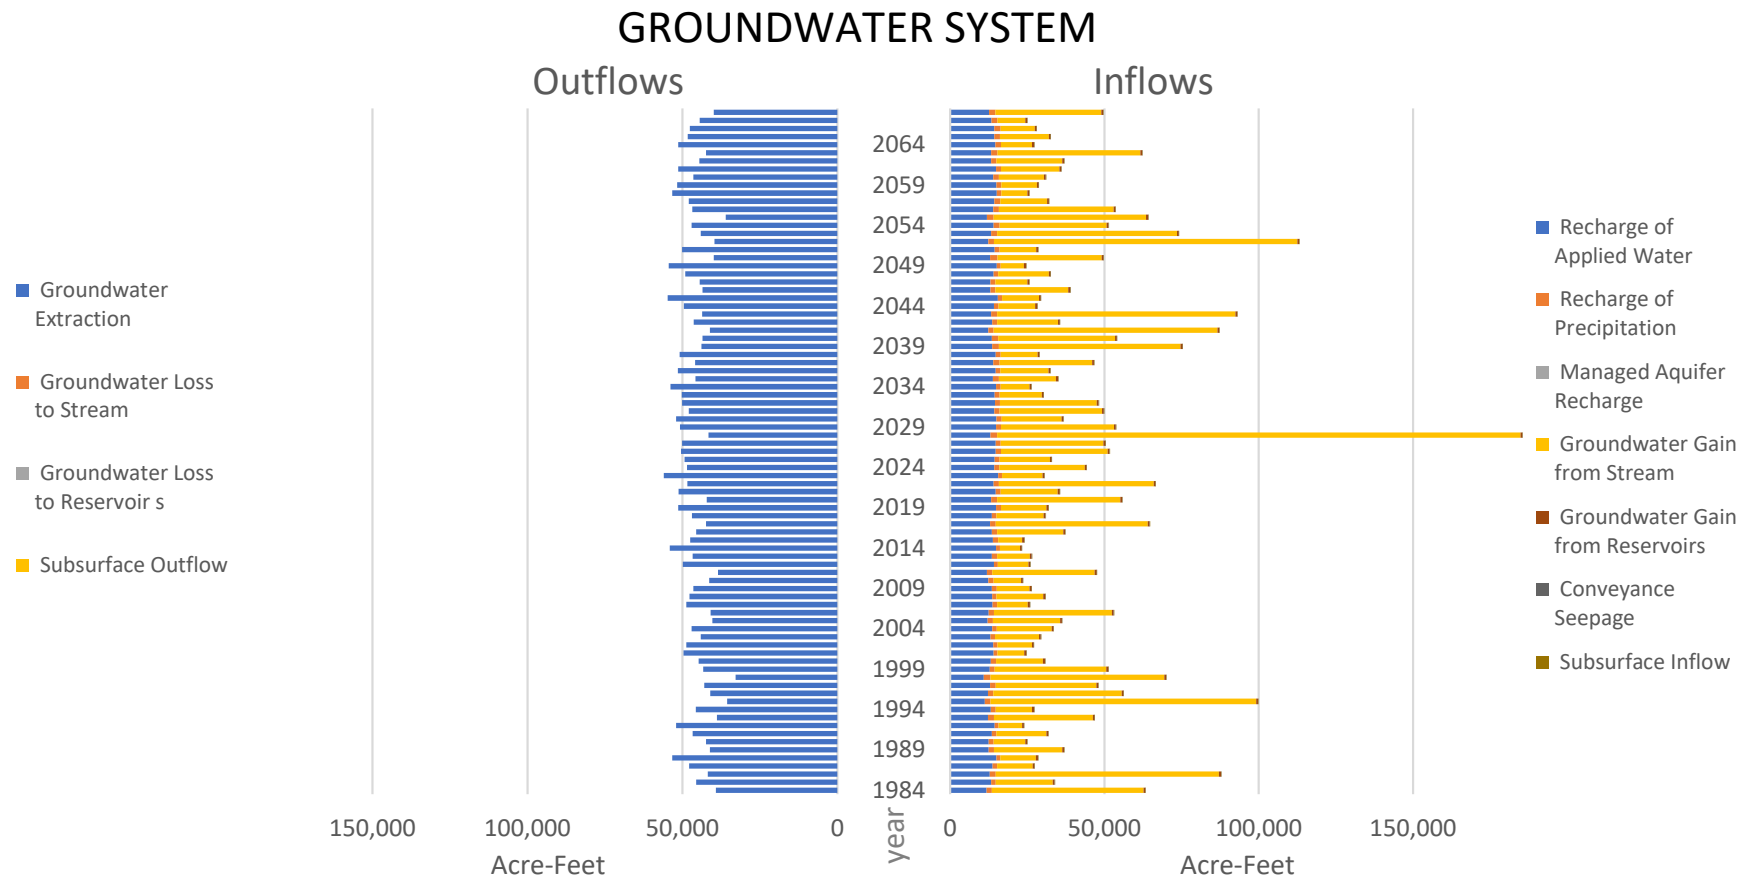


# 

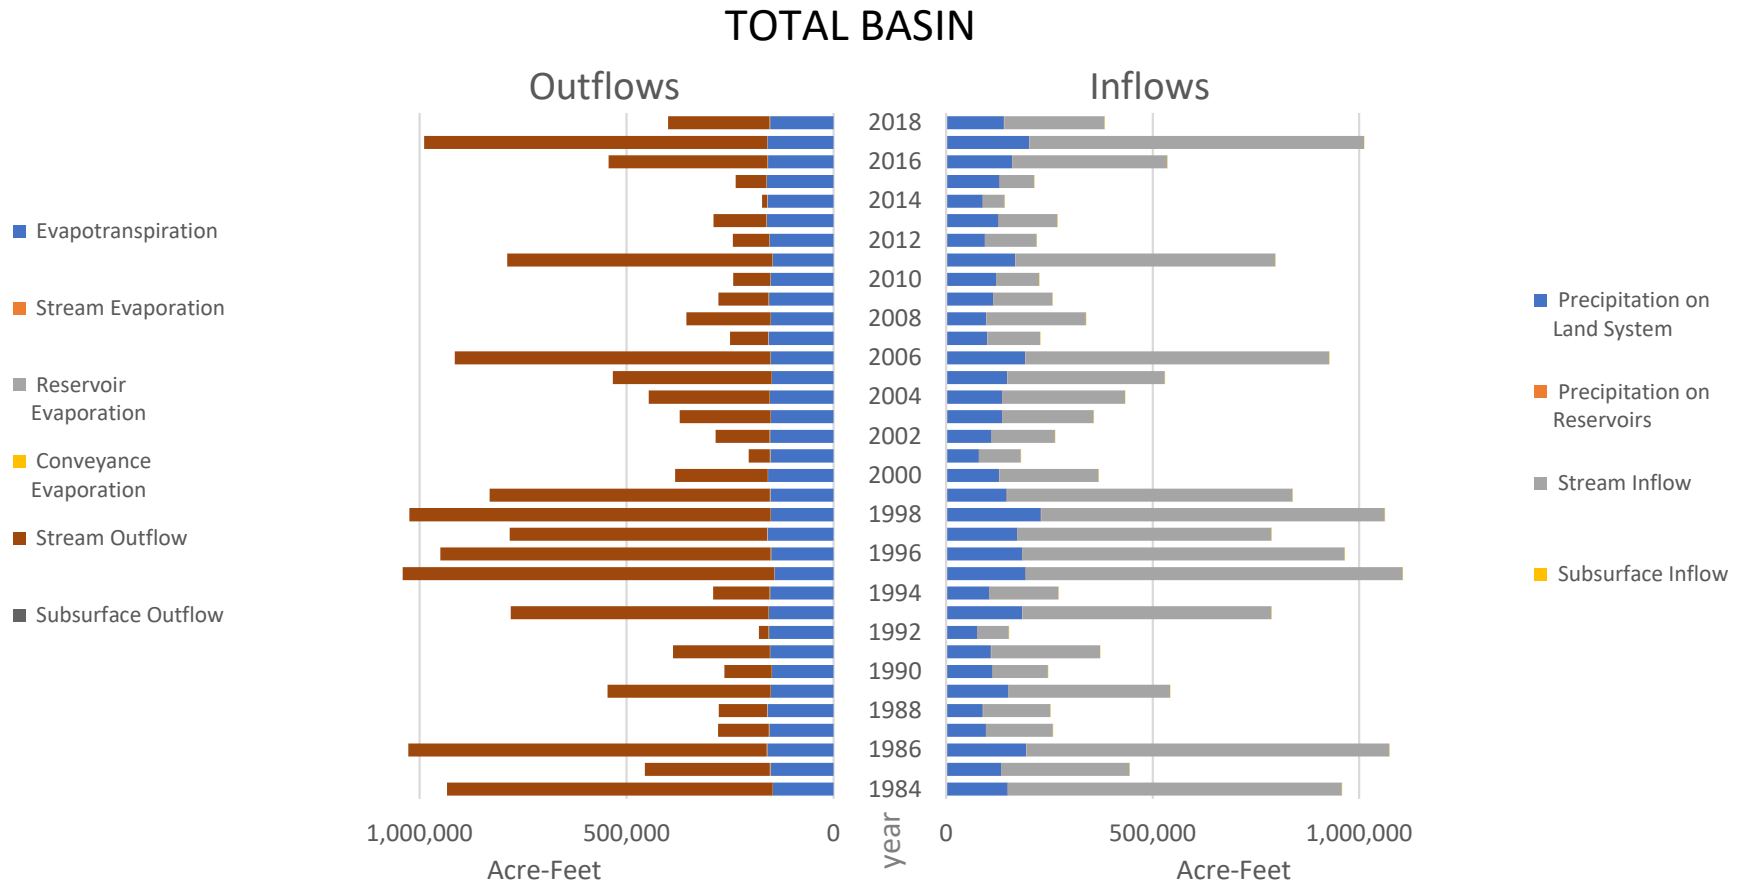

# Future Water Budget

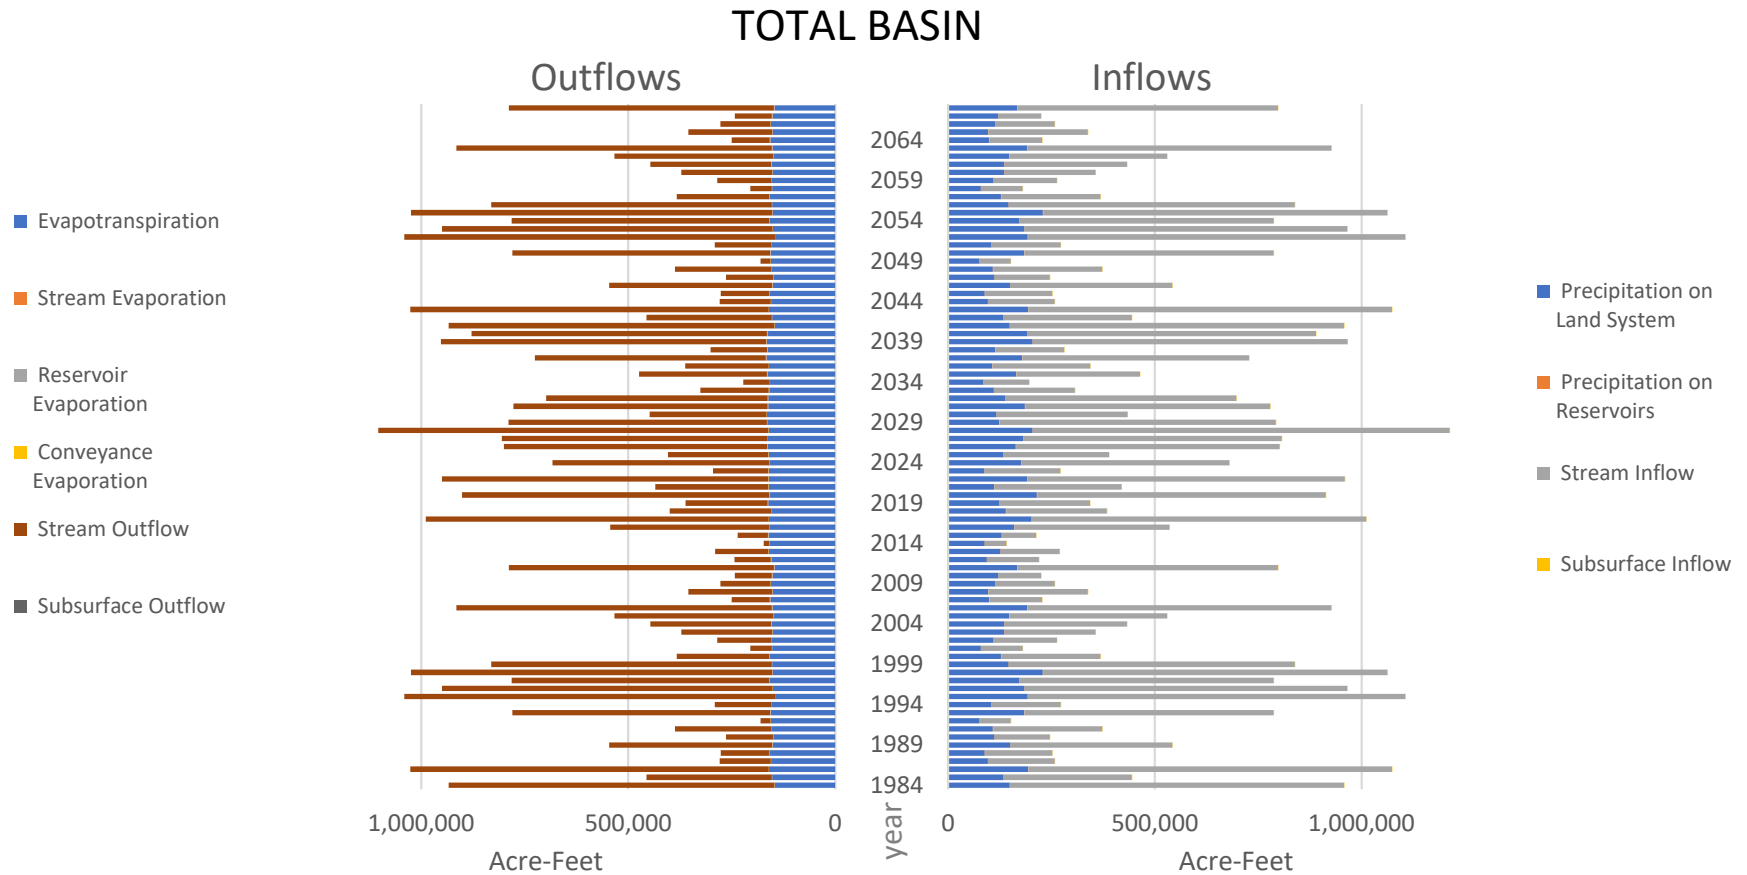

# Future Water Budget With Climate Change

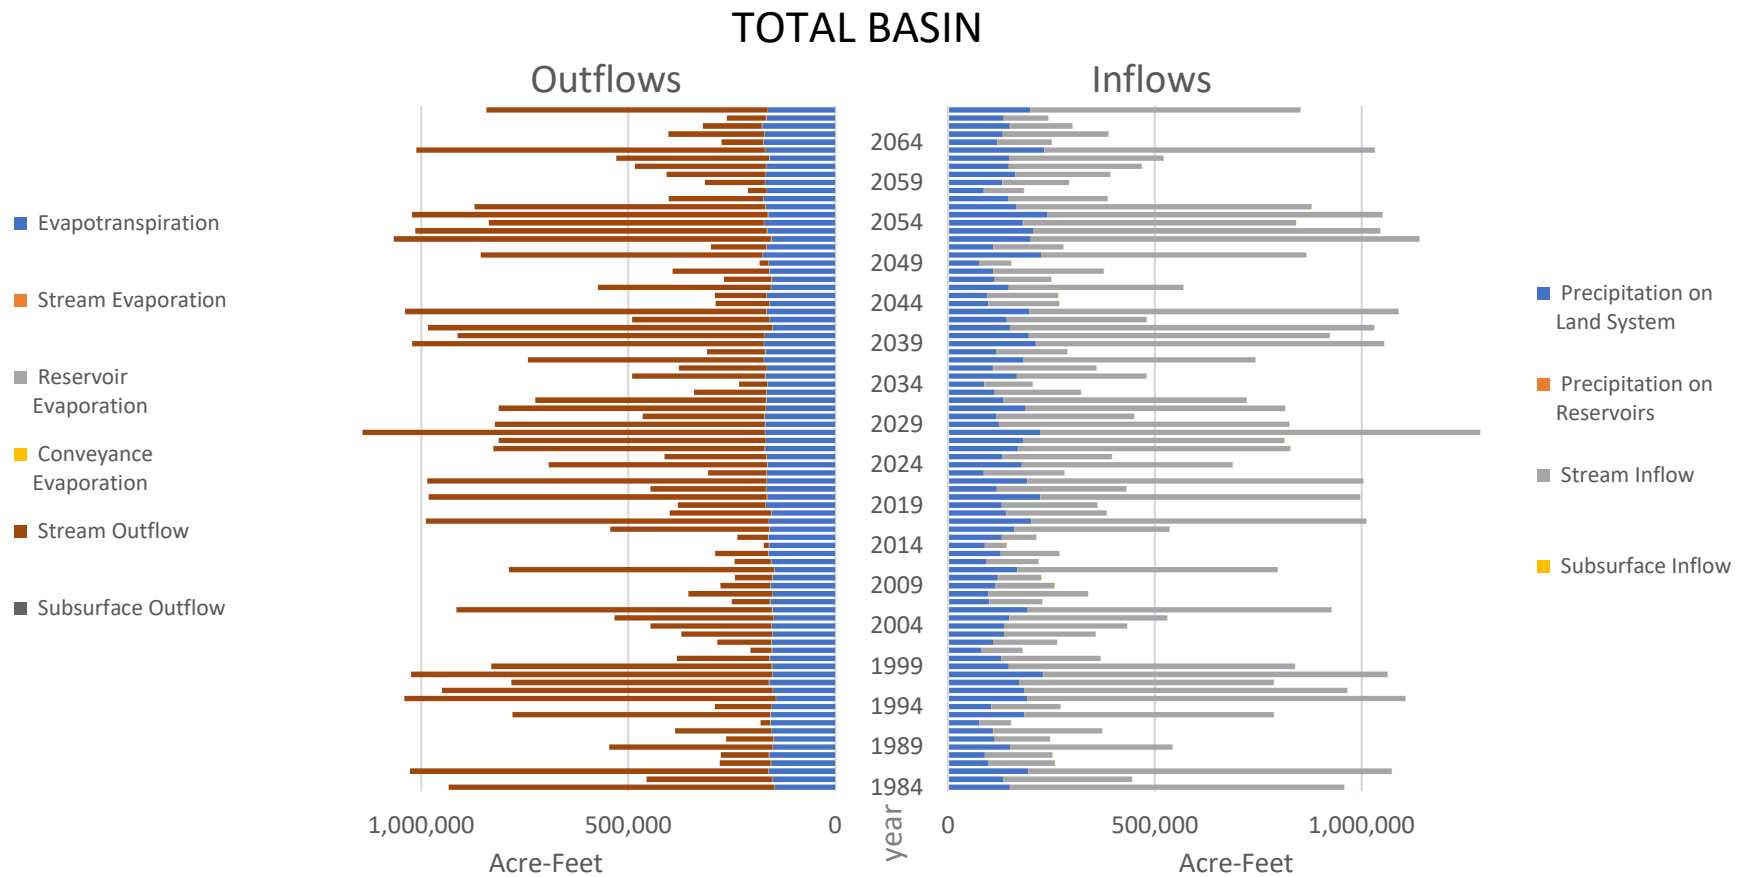



## **Appendix 7A   Pumping Cost Calculations**

---

## Example of Typical Well Pumps And Capabilities

Horsepower	Gallons per minute	Pumping head or lift
50 HP	500 GPM	304'
75 HP	500 GPM	456'
		(152' drop)
100 HP	1000 GPM	320'
150 HP	1000 GPM	480'
		(160' drop)
144 HP	1500 GPM	328'
216 HP	1500 GPM	492'
		(164' drop)

- For every 50 ft of drop in pumping level 16.66% increase in horsepower or cost. 150 ft drop = 50 HP increase in HP or cost

## **Surprise Valley Electric Cost to Pump 2021**


50 HP uses	41.45 kWh per hour so $41.45 \times 24 =$	994.80 kWh
75 HP uses	62.18 kWh per hour so $62.18 \times 24 =$	1492.32 kWh
100 HP uses	82.90 kWh per hour so $82.90 \times 24 =$	1989.6 kWh
125 HP uses	103.63 kWh per hour so $103.63 \times 24 =$	2487.12 kWh
150 HP uses	124.35 kWh per hour so $124.36 \times 24 =$	2984.64 kWh
200 HP uses	165.80 kWh per hour so $165.80 \times 24 =$	3979.20 kWh

\*Basic Charge for irrigation accounts is \$2.67 per HP

	<b>BASIC/MONTH</b>	<b>KWh/DAY</b>	<b>IRRIGATION RATE</b>	<b><u>DAILY COST</u></b>
<b>50 HP</b>	<b>\$133.50</b>	<b>994.80</b>	<b>\$.069</b>	<b>\$68.64</b>
<b>75 HP</b>	<b>\$200.25</b>	<b>1492.32</b>	<b>\$.069</b>	<b>\$102.97</b>
<b>100 HP</b>	<b>\$267.00</b>	<b>1989.60</b>	<b>\$.069</b>	<b>\$137.28</b>
<b>125 HP</b>	<b>\$333.75</b>	<b>2487.12</b>	<b>\$.069</b>	<b>\$171.61</b>
<b>150 HP</b>	<b>\$400.50</b>	<b>2984.64</b>	<b>\$.069</b>	<b>\$205.94</b>
<b>200 HP</b>	<b>\$534.00</b>	<b>3979.20</b>	<b>\$.069</b>	<b>\$274.56</b>



# **Pumping Electricity Cost at Varying Well Depth** Estimated cost per ton of hay produced

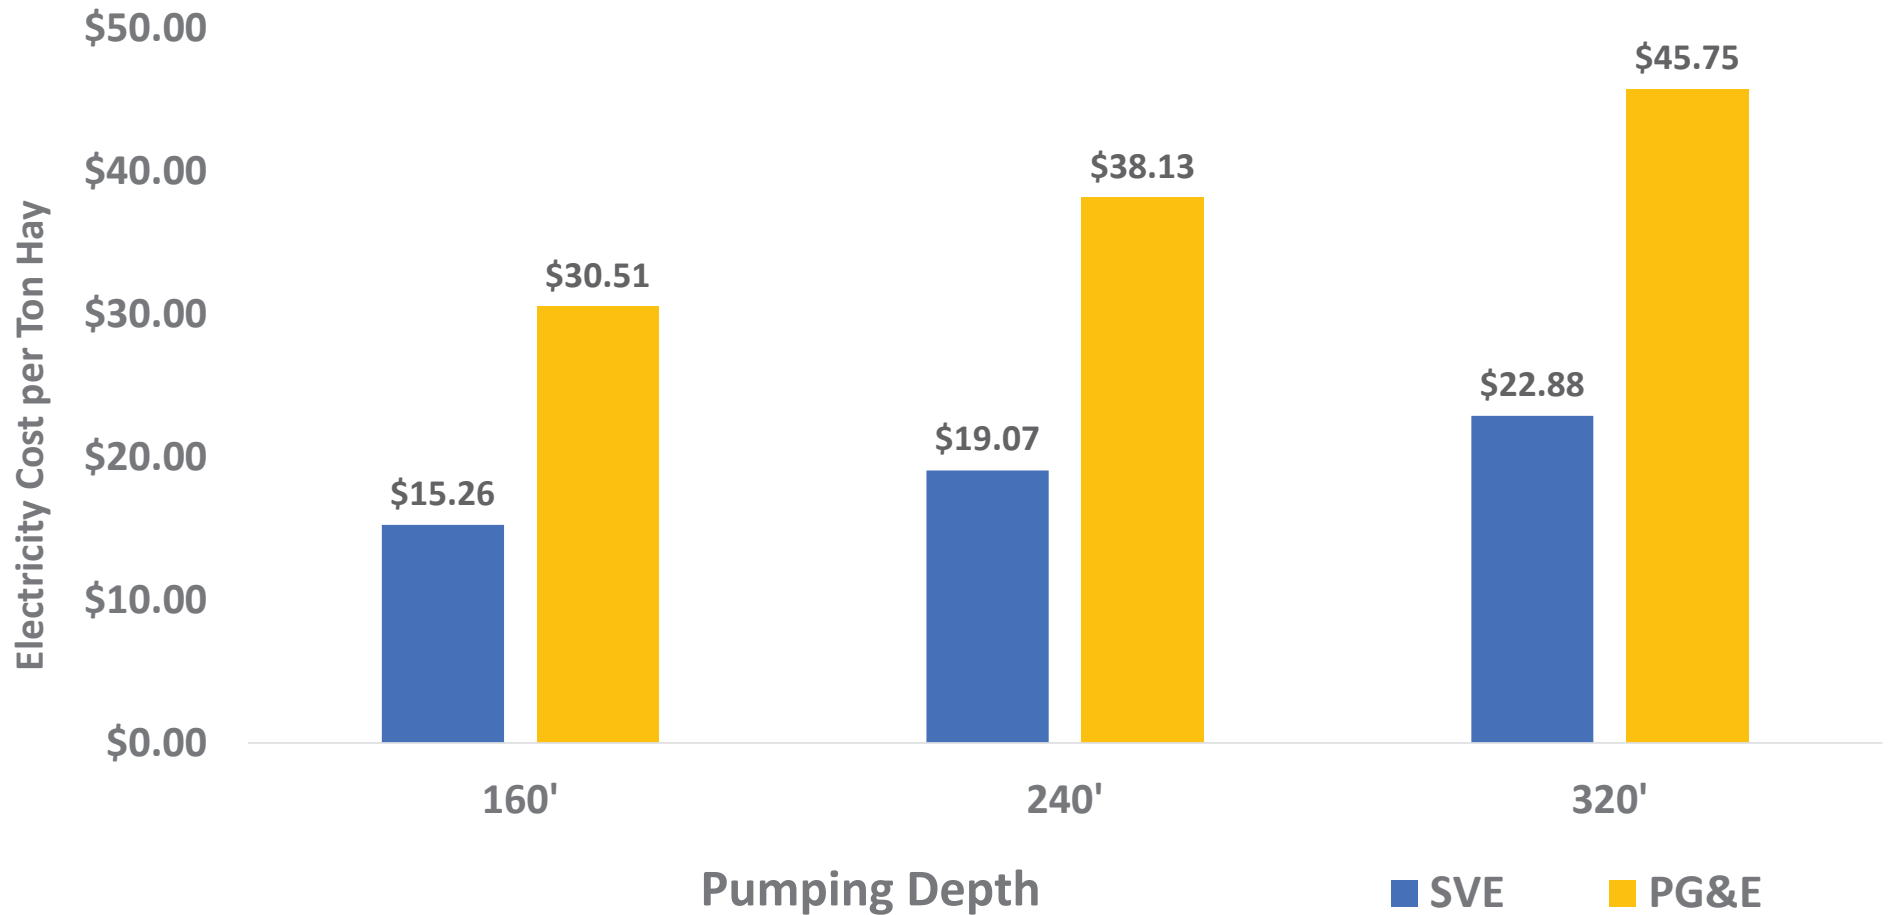

## **Appendix 8A    Water Level Monitoring Well Details**

---

Well Name	State Well Number	DWR Site Code	DWR Well Completion Report Number	Well Use	Ground Surface Elevation (feet msl)	Reference Point Elevation (feet msl)	Reference Point Description	Well Depth (feet bgs)	Open Hole	Screen <sup>1</sup> Interval (feet bgs)	Period of Record Start (water year)	Period of Record End (water year)	Highest Depth to Water (feet bgs)	Lowest Depth to Water (feet bgs)	Depth to Water Range (feet bgs)	Groundwater Elevation Range (feet msl)	Comments
01A1	39N07E01A001M	412539N1211050W001	14565	Stockwatering	4183.40	4184.40	Hole in plate at TOC.	300	yes	40 - 300	1979	2021	19.50	148.00	20 - 148	4164 - 4035	
03D1	38N08E03D001M	411647N1210358W001	16564	Irrigation	4163.40	4163.40	TOC below pump base, west side.	280	no	50 - 280	1982	2021	14.80	91.80	15 - 92	4149 - 4072	
06C1	37N08E06C001M	410777N1210986W001	14580	Irrigation	4133.40	4133.90	Hole in pump base on NW side.	400	yes	20 - 400	1982	2016	6.60	67.20	7 - 67	4127 - 4066	
08F1	38N09E08F001M	411493N1209656W001	49934	Other	4253.40	4255.40	Top of casing below welded plate.	217	yes	26 - 217	1979	2021	23.60	32.90	24 - 33	4230 - 4221	
12G1	38N07E12G001M	411467N1211110W001	--	Residential	4143.38	4144.38	None Provided	116	no	--	1979	1994	4.70	12.40	5 - 12	4139 - 4131	Measurements stopped in 1994
13K2	37N07E13K002M	410413N1211147W001	090029	Irrigation	4127.40	4127.90	Hole in pump base NE side; remove bolt.	260	yes	20 - 260	1982	2021	17.70	65.50	18 - 66	4110 - 4062	
16D1	38N08E16D001M	411359N1210625W001	090143	Irrigation	4171.40	4171.60	2" access tube, SW side.	491	yes	100 - 491	1982	2021	9.00	92.67	9 - 93	4162 - 4079	
17K1	38N08E17K001M	411320N1210766W001	218	Residential	4153.30	4154.30	TOC	180	yes	30 - 180	1957	2021	3.30	38.20	3 - 38	4150 - 4115	
18E1	38N09E18E001M	411356N1209900W001	138559	Irrigation	4248.40	4249.50	Hole in pumpbase, SE side.	520	yes	21 - 520	1981	2021	14.30	86.40	14 - 86	4234 - 4162	
18M1	38N09E18M001M	411305N1209896W001	138563	Irrigation	4288.40	4288.90	Under cap plate, southwest side.	525	yes	40 - 525	1981	2021	55.70	96.10	56 - 96	4233 - 4192	Located next to 18E1
18N2	39N08E18N002M	412144N1211013W001	127457	Residential	4163.40	4164.40	TOC	250	yes	40 - 250	1979	2021	3.20	26.80	3 - 27	4160 - 4137	Located next to BVMW-3
20B6	38N07E20B006M	411242N1211866W001	128135	Residential	4126.30	4127.30	TOC where rope goes in well.	183	yes	41 - 183	1979	2021	9.70	49.40	10 - 49	4117 - 4077	
21C1	39N08E21C001M	412086N1210574W001	127008	Irrigation	4161.40	4161.70	TOC; remove bolt from 3/8" hole in steel plate SE side	300	yes	30 - 300	1979	2021	12.90	79.30	13 - 79	4149 - 4082	
22G1	39N07E22G001M	412074N1211497W001	5322	Residential	4143.40	4144.40	TOC under plate -- SW side.	260	yes	115 - 260	1979	2021	6.70	38.20	7 - 38	4137 - 4105	In Lookout, outside basin
23E1	38N07E23E001M	411207N1211395W001	38108	Residential	4123.40	4123.40	TOC where rope goes in.	84	yes	28 - 84	1979	2021	14.30	53.00	14 - 53	4109 - 4070	In Bieber next to BVMW-5
24J2	38N07E24J002M	411228N1211054W001	--	Irrigation	4138.40	4139.40	Hole in pump base.	192	yes	1 - 192	1979	2021	0.70	81.70	1 - 82	4138 - 4057	
26E1	39N07E26E001M	411911N1211354W001	127484	Irrigation	4133.40	4135.00	Hole inside SE corner of pumpbase.	400	no	20 - 400	1979	2021	2.10	44.50	2 - 45	4131 - 4089	
28F1	39N09E28F001M	411907N1209447W001	--	Residential	4206.60	4207.10	None Provided	73	no	--	1982	2021	4.50	12.03	5 - 12	4202 - 4195	In Adin next to BVMW-1
32A2	38N07E32A002M	410950N1211839W001	--	Other	4118.80	4119.50	TOC	49	no	--	1959	2021	0.00	12.10	0 - 12	4119 - 4107	
32R1	39N09E32R001M	411649N1209569W001	--	Irrigation	4243.40	4243.60	Hole in pumpbase, south side.	--	no	--	1981	2021	37.90	82.20	38 - 82	4206 - 4161	
ACWA-1	38N08E07A001M	411508N1210900W001	0962825	Irrigation	4142.00	4142.75	Access port on NE side of wellhead.	780	no	60 - 780	2016	2021	15.65	102.85	16 - 103	4126 - 4039	
ACWA-2	39N08E33P002M	411699N1210579W001	484622	Irrigation	4153.00	4153.20	Access on SE side of well casing	800	no	50 - 800	2016	2021	13.65	26.60	14 - 27	4139 - 4126	
ACWA-3	39N08E28A001M	411938N1210478W001	0951365	Irrigation	4159.00	4159.83	Hole in pump base, remove plug. Same access as airline.	720	no	60 - 720	2016	2021	8.42	23.07	8 - 23	4151 - 4136	
BVMW 1-1	--	411880N1209599W001	2020-006214	Observation	4214.17	4213.84	Notch on PVC casing	265	no	175 - 265	2020	2021	29.66	52.66	30 - 53	4185 - 4162	
BVMW 1-2	--	411881N1209598W001	2020-006283	Observation	4214.54	4214.21	Notch on PVC casing	52	no	32 - 52	2020	2021	28.69	36.82	29 - 37	4186 - 4178	
BVMW 1-3	--	411878N1209593W001	2020-006285	Observation	4218.50	4218.17	Notch on PVC casing	50	no	30 - 50	2020	2021	32.69	40.84	33 - 41	4186 - 4178	
BVMW 1-4	--	411880N1209590W001	2020-006328	Observation	4218.39	4218.06	Notch on PVC casing	49	no	29 - 49	2020	2021	32.38	40.36	32 - 40	4186 - 4178	
BVMW 2-1	--	412119N1210286W001	2020-006667	Observation	4216.51	4216.18	Notch on PVC casing	250	no	210 - 250	2020	2021	21.66	22.33	22 - 22	4195 - 4194	
BVMW 2-2	--	412118N1210286W001	2020-006670	Observation	4216.77	4216.44	Notch on PVC casing	70	no	50 - 70	2020	2021	17.48	20.82	17 - 21	4199 - 4196	
BVMW 2-3	--	412110N1210287W001	2020-006674	Observation	4214.26	4213.93	Notch on PVC casing	70	no	50 - 70	2020	2021	31.30	34.73	31 - 35	4183 - 4180	
BVMW 2-4	--	412120N1210294W001	2020-006677	Observation	4209.95	4209.62	Notch on PVC casing	60	no	40 - 60	2020	2021	19.77	23.63	20 - 24	4190 - 4186	
BVMW 3-1	--	412169N1211050W001	2020-006592	Observation	4164.75	4164.41	Notch on PVC casing	185	no	135 - 185	2020	2021	14.86	18.34	15 - 18	4150 - 4146	
BVMW 3-2	--	412170N1211050W001	2020-006595	Observation	4164.92	4164.58	Notch on PVC casing	40	no	25 - 40	2020	2021	9.96	13.60	10 - 14	4155 - 4151	
BVMW 3-3	--	412157N1211051W001	2020-006593	Observation	4164.36	4164.02	Notch on PVC casing	50	no	25 - 50	2020	2021	5.70	8.56	6 - 9	4159 - 4156	
BVMW 3-4	--	412157N1211054W001	2020-006596	Observation	4165.31	4164.97	Notch on PVC casing	50	no	25 - 50	2020	2021	6.83	9.81	7 - 10	4158 - 4156	
BVMW 4-1	--	412029N1211587W001	2019-017359	Observation	4152.73	4152.40	Notch on PVC casing	425	no	385 - 415	2020	2021	37.43	64.75	37 - 65	4115 - 4088	
BVMW 4-2	--	412029N1211588W001	2019-017360	Observation	4153.06	4152.73	Notch on PVC casing	74	no	54 - 74	2020	2021	29.77	48.57	30 - 49	4123 - 4104	
BVMW 4-3	--	412030N1211579W001	2019-017361	Observation	4152.66	4152.33	Notch on PVC casing	80	no	60 - 80	2020	2021	29.68	48.96	30 - 49	4123 - 4104	
BVMW 4-4	--	412035N1211578W001	2019-017362	Observation	4161.65	4161.32	Notch on PVC casing	93	no	73 - 93	2020	2021	39.06	58.80	39 - 59	4123 - 4103	
BVMW 5-1	--	411219N1211339W001	2020-006658	Observation	4129.05	4129.05	Notch on PVC casing	540	no	485 - 535	2020	2021	40.35	46.65	40 - 47	4089 - 4082	
BVMW 5-2	--	411220N1211339W001	2020-006659	Observation	4128.92	4128.92	Notch on PVC casing	115	no	65 - 115	2020	2021	20.40	25.80	20 - 26	4109 - 4103	
BVMW 5-3	--	411212N1211366W001	2020-006661	Observation	4131.73	4131.73	Notch on PVC casing	85	no	65 - 85	2020	2021	34.86	45.02	35 - 45	4097 - 4087	
BVMW 5-4	--	411206N1211340W001	2020-006663	Observation	4130.23	4130.23	Notch on PVC casing	90	no	70 - 90	2020	2021	33.67	43.27	34 - 43	4097 - 4087	

Notes:

-- = information not available

feet bgs = feet below ground surface (depth to water)

feet msl = feet above mean sea level (groundwater elevation NAVD88)

water year = October 1 to September 30

<sup>1</sup> For the purposes of this GSP, the terms "screen" or "perforation" encompasses any interval that allows water to enter the well from the aquifer, including casing perforations, well screens, or open hole.

## **Appendix 8B    New Monitoring Well As-Built Drawings**



## D

**B**


## DEPTH (FT)




## DEPTH (FT)

Note: Well m


## DEPTH (FT)



## DEPTH (FT)



ON BEHALF OF:



	REVIEWED: D. Fairman
--	-------------------------

BIG VALLEY  
GROUNDWATER BASIN

DRAWING 1

## Site 1









## D

**B**

DEPTH (FT)

5

20

130

135

185

185.5

193

470

Traffic Box  
See Detail

2-Sack Sand-Cement Slurry

DTW = 9.80' on  
3/4/2020

Neat cement  
sanitary seal

8-inch dia.  
borehole

2.5-inch dia.  
SCH 80 PVC  
blank casing

Bentonite chips

8 x 16 Gravel envelope

2.5-inch dia. SCH 80 PVC  
well screen (0.030 slot)

Bentonite chips

Note:  
as BV  
other

See Detail

2-Sack Sand-Cement Slurry

2-inch dia. SCH 40 PVC blank casing

2-inch dia. SCH 40 PVC well screen (0.032 slot)

DEPTH (FT)

5

20

22

25

40

40.5

45

DTW = 13.90 on 3/4/2020

Note: Well materials same as BVMW 3-1 unless otherwise noted

DEPTH (FT)

DTW = 5.68' on 3/4/2020

0

20

22

25

50

50.5

52

55

2.5-inch dia. SCH 40 PVC blank casing

2-inch dia. SCH 40 PVC well screen (0.032 slot)

DEPTH (FT)

DTW = 6.96' on 3/4/2020

0

20

22

25

50

50.5

55

100

2.5-inch dia. SCH 40 PVC blank casing

2-inch dia. SCH 40 PVC well screen (0.032 slot)

The diagram illustrates the cross-section of a traffic box installation. Key components and dimensions include:

- Native Ground:** The original ground level on the left side.
- Traffic Box:** A rectangular structure embedded in the road base.
- Road Base:** The material surrounding the traffic box, with a total thickness of 60 inches.
- 2-Sack Sand-Cement Slurry:** A layer applied to the top of the traffic box.
- 2 or 2.5-inch dia. PVC Blank Casing:** A vertical pipe passing through the traffic box.
- Neat Cement Sanitary Seal:** A seal at the base of the PVC casing.
- Dimensions:**
  - 60" (width of the road base section shown)
  - 12" (height of the road base section shown)
  - 60" (total height of the road base)
  - 8" (width of the traffic box)

**Site 3**

**MW 3-2**

**MW 3-1 (Deep)**

**MW 3-3**

**MW 3-4**

*E Gouger Neck Rd*

*Co Rd 87*

0 200 400 Feet

*\*Corrected reference point elevation should be used for water level measurements and accounts for horizontal offset and curvature of casing.*

ON BEHALF OF:



FUNDED BY:



PROJECT ENGINEER:



DESIGNED:  
D. Fairman

DRAWN:  
F. Olson / V. Yap

CHECKED:  
J. Zumbro

REVIEWED:  
D. Fairman



Date: 4/13/2021

Drilling Completed By:  
Maggiore Brothers Drilling, Inc.  
Jan-Feb 2020

BIG VALLEY  
GROUNDWATER BASIN

# AS-BUILT MONITORING WELL CONSTRUCTION DETAILS: SITE 3 ROADS 87 & 90

DRAWING 3

## D

**B**

---

**1**

---


**2**



---

**5**

DEPTH (FT)



---

**6**

DEPTH (FT)



---

**7**


DEPTH (FT)



## ON BEHALF OF:



DRAWN: F. Olson / V. Yap	REVIEWED: D. Fairman
-----------------------------	-------------------------

BIG VALLEY  
GROUNDWATER BASIN







**DRAWING 4**





# LITHOLOGIC LOG

## E-LOGS

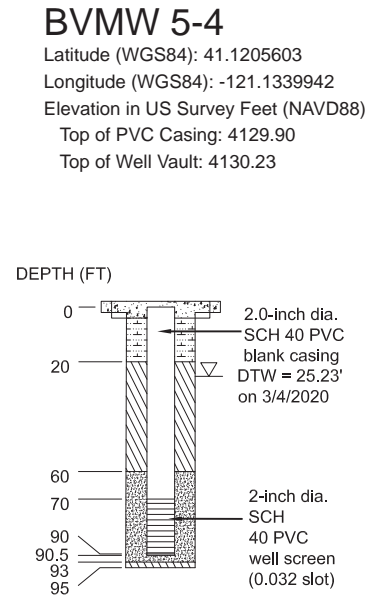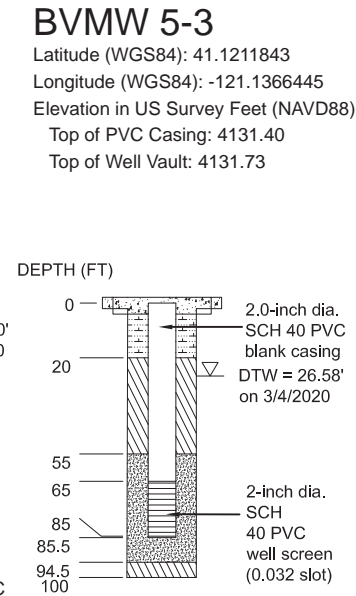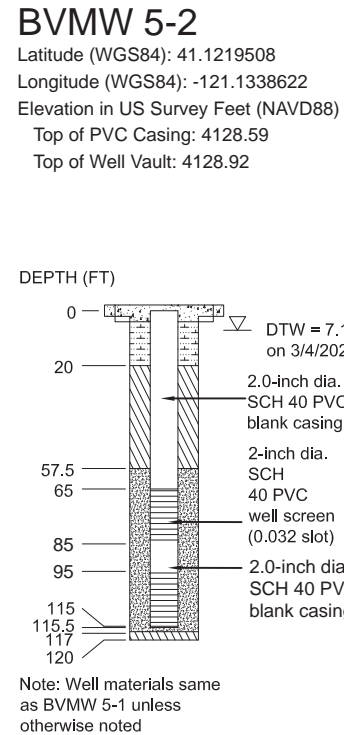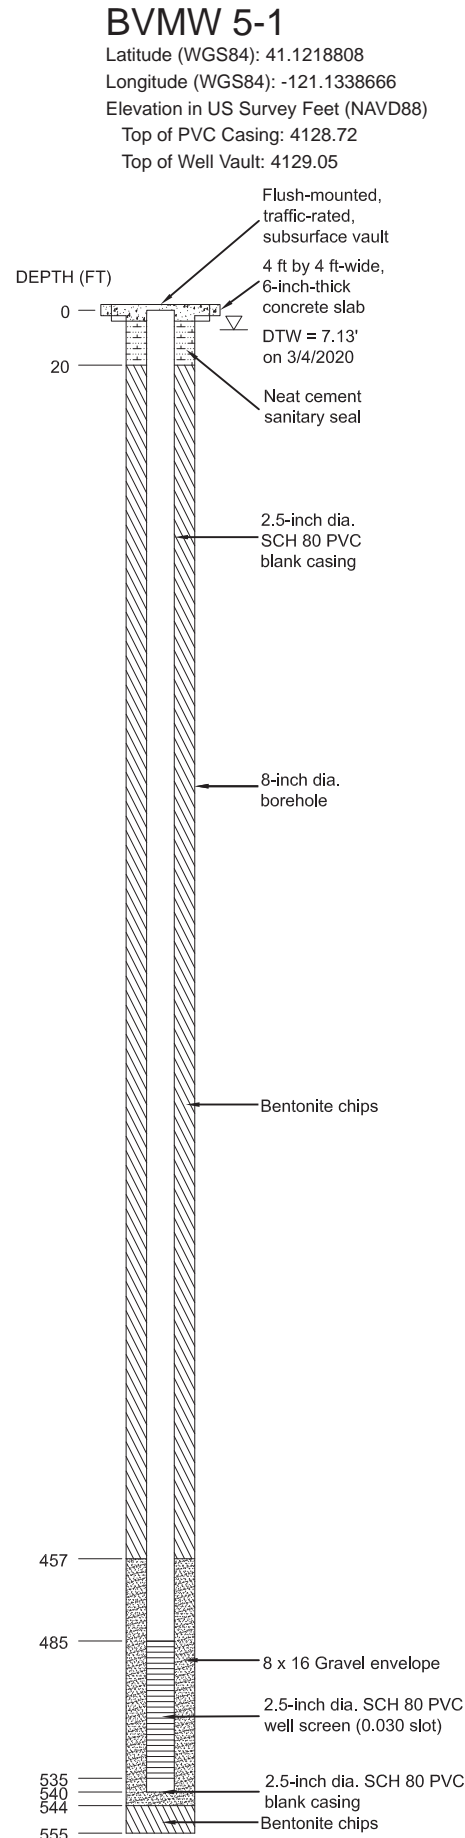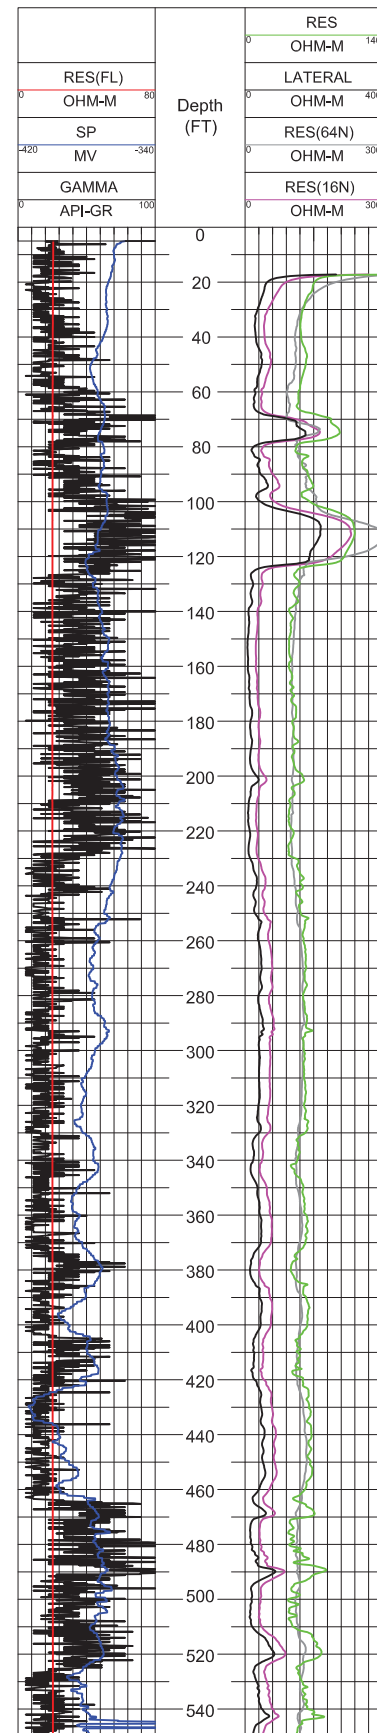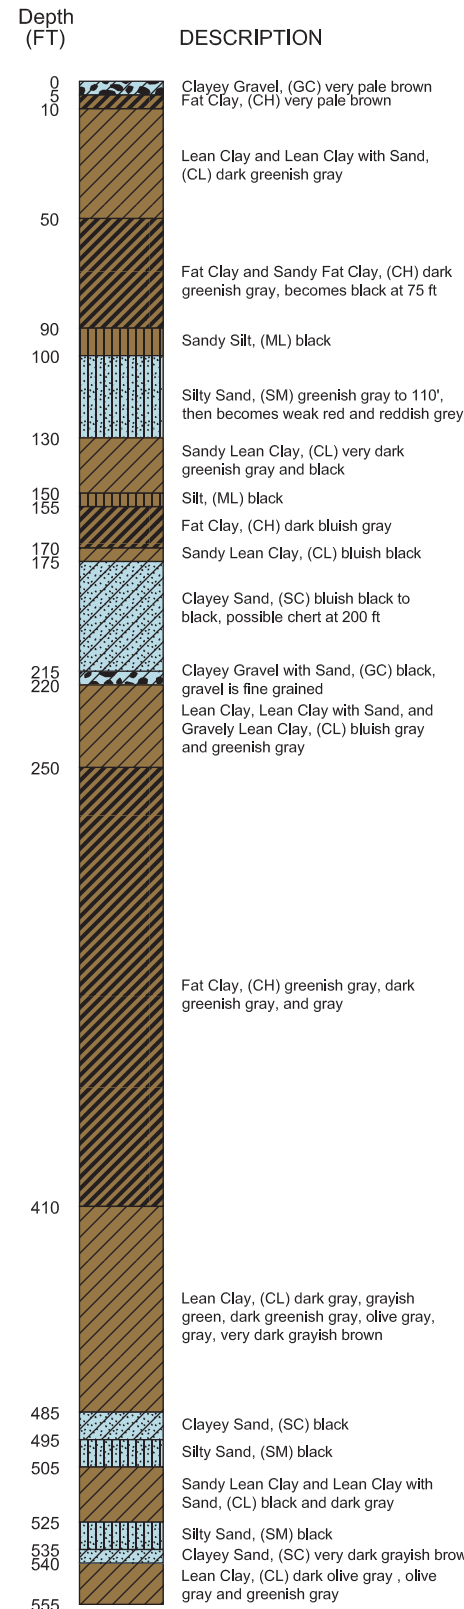


FUNDED BY:



PROJECT ENGINEER:



DESIGNED: D. Fairman	CHECKED: J. Zumbro
DRAWN: F. Olson / V. Yap	REVIEWED: D. Fairman



Date: 4/13/2021

Drilling Completed By:  
Maggiore Brothers Drilling, Inc.  
Dec 2019 - Jan 2020

BIG VALLEY  
GROUNDWATER BASIN

**AS-BUILT  
MONITORING WELL  
CONSTRUCTION  
DETAILS: SITE 5  
BIEBER**

**DRAWING 5**

## **Appendix 8C    Selection from DWR Monitoring BMP**

---

## PROTOCOLS FOR MEASURING GROUNDWATER LEVELS

This section presents considerations for the methodology of collection of groundwater level data such that it meets the requirements of the GSP Regulations and the DQOs of the specific GSP. Groundwater levels are a fundamental measure of the status of groundwater conditions within a basin. In many cases, relationships of the sustainability indicators may be able to be correlated with groundwater levels. The quality of this data must consider the specific aquifer being monitored and the methodology for collecting these levels.

The following considerations for groundwater level measuring protocols should ensure the following:

- Groundwater level data are taken from the correct location, well ID, and screen interval depth
- Groundwater level data are accurate and reproducible
- Groundwater level data represent conditions that inform appropriate basin management DQOs
- All salient information is recorded to correct, if necessary, and compare data
- Data are handled in a way that ensures data integrity

### **General Well Monitoring Information**

The following presents considerations for collection of water level data that include regulatory required components as well as those which are recommended.

- Groundwater elevation data will form the basis of basin-wide water-table and piezometric maps, and should approximate conditions at a discrete period in time. Therefore, all groundwater levels in a basin should be collected within as short a time as possible, preferably within a 1 to 2 week period.
- Depth to groundwater must be measured relative to an established Reference Point (RP) on the well casing. The RP is usually identified with a permanent marker, paint spot, or a notch in the lip of the well casing. By convention in open casing monitoring wells, the RP reference point is located on the north side of the well casing. If no mark is apparent, the person performing the measurement should measure the depth to groundwater from the north side of the top of the well casing.
- The elevation of the RP of each well must be surveyed to the North American Vertical Datum of 1988 (NAVD88), or a local datum that can be converted to NAVD88. The elevation of the RP must be accurate to within 0.5 foot. It is preferable for the RP elevation to be accurate to 0.1 foot or less. Survey grade global navigation satellite system (GNSS) global positioning system (GPS) equipment can achieve similar vertical accuracy when corrected. Guidance for use of GPS can be found at USGS <http://water.usgs.gov/osw/gps/>. Hand-held GPS units likely will not produce reliable vertical elevation measurement accurate enough for the casing elevation consistent with the DQOs and regulatory requirements.
- The sampler should remove the appropriate cap, lid, or plug that covers the monitoring access point listening for pressure release. If a release is observed, the measurement should follow a period of time to allow the water level to equilibrate.
- Depth to groundwater must be measured to an accuracy of 0.1 foot below the RP. It is preferable to measure depth to groundwater to an accuracy of 0.01 foot. Air lines and acoustic sounders may not provide the required accuracy of 0.1 foot.
- The water level meter should be decontaminated after measuring each well.



Where existing wells do not meet the base standard as described in the GSP Regulations or the considerations provided above, new monitoring wells may need to be constructed to meet the DQOs of the GSP. The design, installation, and documentation of new monitoring wells must consider the following:

- Construction consistent with California Well Standards as described in Bulletins 74-81 and 74-90, and local permitting agency standards of practice.
- Logging of borehole cuttings under the supervision of a California Professional Geologist and described consistent with the Unified Soil Classification System methods according to ASTM standard D2487-11.
- Written criteria for logging of borehole cuttings for comparison to known geologic formations, principal aquifers and aquitards/aquicludes, or specific marker beds to aid in consistent stratigraphic correlation within and across basins.
- Geophysical surveys of boreholes to aid in consistency of logging practices. Methodologies should include resistivity, spontaneous potential, spectral gamma, or other methods as appropriate for the conditions. Selection of geophysical methods should be based upon the opinion of a professional geologist or professional engineer, and address the DQOs for the specific borehole and characterization needs.
- Prepare and submit State well completion reports according to the requirements of §13752. Well completion report documentation should include geophysical logs, detailed geologic log, and formation identification as attachments. An example well completion as-built log is illustrated in **Figure 2**. DWR well completion reports can be filed directly at the Online System for Well Completion Reports (OSWCR) <http://water.ca.gov/oswcr/index.cfm>.

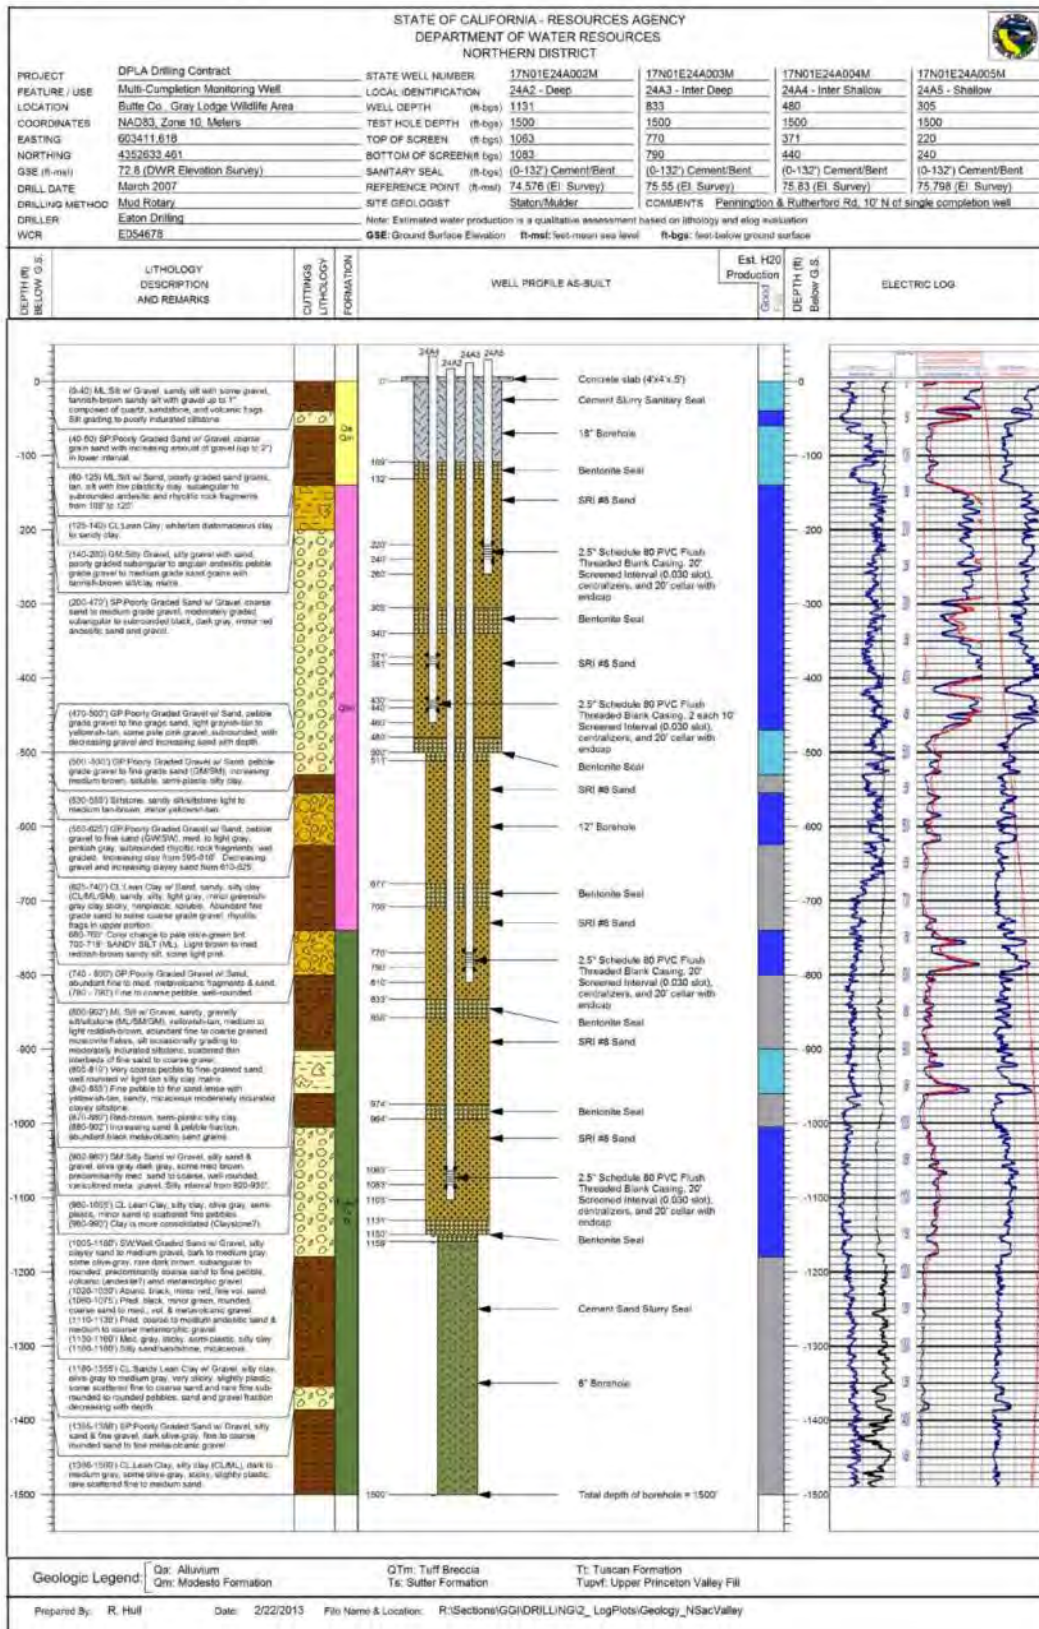


Figure 2 – Example As-Built Multi-Completion Monitoring Well Log

### **Measuring Groundwater Levels**

Well construction, anticipated groundwater level, groundwater level measuring equipment, field conditions, and well operations should be considered prior collection of the groundwater level measurement. The USGS *Groundwater Technical Procedures* (Cunningham and Schalk, 2011) provide a thorough set of procedures which can be used to establish specific Standard Operating Procedures (SOPs) for a local agency. **Figure 3** illustrates a typical groundwater level measuring event and simultaneous pressure transducer download.



**Figure 3 – Collection of Water Level Measurement and Pressure Transducer Download**

The following points provide a general approach for collecting groundwater level measurements:

- Measure depth to water in the well using procedures appropriate for the measuring device. Equipment must be operated and maintained in accordance with manufacturer's instructions. Groundwater levels should be measured to the nearest 0.01 foot relative to the RP.
- For measuring wells that are under pressure, allow a period of time for the groundwater levels to stabilize. In these cases, multiple measurements should be collected to ensure the well has reached equilibrium such that no significant changes in water level are observed. Every effort should be made to ensure that a representative stable depth to groundwater is recorded. If a well does not stabilize, the quality of the value should be appropriately qualified as a

questionable measurement. In the event that a well is artesian, site specific procedures should be developed to collect accurate information and be protective of safety conditions associated with a pressurized well. In many cases, an extension pipe may be adequate to stabilize head in the well. Record the dimension of the extension and document measurements and configuration.

- The sampler should calculate the groundwater elevation as:

$$GWE = RPE - DTW$$

Where:

GWE = Groundwater Elevation

RPE = Reference Point Elevation

DTW = Depth to Water

The sampler must ensure that all measurements are in consistent units of feet, tenths of feet, and hundredths of feet. Measurements and RPEs should not be recorded in feet and inches.

### **Recording Groundwater Levels**

- The sampler should record the well identifier, date, time (24-hour format), RPE, height of RP above or below ground surface, DTW, GWE, and comments regarding any factors that may influence the depth to water readings such as weather, nearby irrigation, flooding, potential for tidal influence, or well condition. If there is a questionable measurement or the measurement cannot be obtained, it should be noted. An example of a field sheet with the required information is shown in **Figure 4**. It includes questionable measurement and no measurement codes that should be noted. This field sheet is provided as an example. Standardized field forms should be used for all data collection. The aforementioned USGS *Groundwater Technical Procedures* offers a number of example forms.
- The sampler should replace any well caps or plugs, and lock any well buildings or covers.
- All data should be entered into the GSA data management system (DMS) as soon as possible. Care should be taken to avoid data entry mistakes and the entries should be checked by a second person for compliance with the DQOs.



STATE OF CALIFORNIA  
THE RESOURCES AGENCY  
DEPARTMENT OF WATER RESOURCES  
**WELL DATA**

[illegible]

**Figure 4 – Example of Water Level Well Data Field Collection Form**

## **Pressure Transducers**

Groundwater levels and/or calculated groundwater elevations may be recorded using pressure transducers equipped with data loggers installed in monitoring wells. When installing pressure transducers, care must be exercised to ensure that the data recorded by the transducers is confirmed with hand measurements.

The following general protocols must be followed when installing a pressure transducer in a monitoring well:

- The sampler must use an electronic sounder or chalked steel tape and follow the protocols listed above to measure the groundwater level and calculate the groundwater elevation in the monitoring well to properly program and reference the installation. It is recommended that transducers record measured groundwater level to conserve data capacity; groundwater elevations can be calculated at a later time after downloading.
- The sampler must note the well identifier, the associated transducer serial number, transducer range, transducer accuracy, and cable serial number.
- Transducers must be able to record groundwater levels with an accuracy of at least 0.1 foot. Professional judgment should be exercised to ensure that the data being collected is meeting the DQO and that the instrument is capable. Consideration of the battery life, data storage capacity, range of groundwater level fluctuations, and natural pressure drift of the transducers should be included in the evaluation.
- The sampler must note whether the pressure transducer uses a vented or non-vented cable for barometric compensation. Vented cables are preferred, but non-vented units provide accurate data if properly corrected for natural barometric pressure changes. This requires the consistent logging of barometric pressures to coincide with measurement intervals.
- Follow manufacturer specifications for installation, calibration, data logging intervals, battery life, correction procedure (if non-vented cables used), and anticipated life expectancy to assure that DQOs are being met for the GSP.
- Secure the cable to the well head with a well dock or another reliable method. Mark the cable at the elevation of the reference point with tape or an indelible marker. This will allow estimates of future cable slippage.
- The transducer data should periodically be checked against hand measured groundwater levels to monitor electronic drift or cable movement. This should happen during routine site visits, at least annually or as necessary to maintain data integrity.

- The data should be downloaded as necessary to ensure no data is lost and entered into the basin's DMS following the QA/QC program established for the GSP. Data collected with non-vented data logger cables should be corrected for atmospheric barometric pressure changes, as appropriate. After the sampler is confident that the transducer data have been safely downloaded and stored, the data should be deleted from the data logger to ensure that adequate data logger memory remains.

## PROTOCOLS FOR SAMPLING GROUNDWATER QUALITY

The following protocols can be incorporated into a GSP's monitoring protocols for collecting groundwater quality data. More detailed sampling procedures and protocols are included in the standards and guidance documents listed at the end of this BMP. A GSP that adopts protocols that deviate from these BMPs must demonstrate that the adopted protocols will yield comparable data.

In general, the use of existing water quality data within the basin should be done to the greatest extent possible if it achieves the DQOs for the GSP. In some cases it may be necessary to collect additional water quality data to support monitoring programs or evaluate specific projects. The USGS *National Field Manual for the Collection of Water Quality Data* (Wilde, 2005) should be used to guide the collection of reliable data. **Figure 5** illustrates a typical groundwater quality sampling setup.



**Figure 5 – Typical Groundwater Quality Sampling Event**

## **Appendix 11A GSA Letters to Governor and Legislature**



# County of Lassen Board of Supervisors



**CHRIS GALLAGHER**

*District 1*

**DAVID TEETER**

*District 2*

**JEFF HEMPHILL**

*District 3*

**AARON ALBAUGH**

*District 4*

**TOM HAMMOND**

*District 5*

County Administration Office  
221 S. Roop Street, Suite 4  
Susanville, CA 96130  
Phone: 530-251-8333  
Fax: 530-251-2663

August 11, 2020

Gavin Newsom  
Governor, State of California  
1303 10th Street, Suite 1173  
Sacramento, CA 95814

RE: Request for Extension for Submittal of a Groundwater Sustainability Plan for the Big Valley Groundwater Basin

Dear Governor Newsom:

COVID-19 has had (and continues to have) a monumental impact on the ability of State and local government to conduct the people's business. Accordingly, as the Governor of the State of California, you have, on multiple occasions, exercised authority granted to you pursuant to the State's police power and through the Emergency Services Act to issue Executive Orders in response to the COVID-19 emergency. As discussed herein, these orders have often altered the implementation of various Statutes and Regulations. This letter is to request that you use your authority to extend the January 31, 2022, deadline to submit a Groundwater Sustainability Plan (GSP) to the Department of Water Resources (DWR) for the Big Valley Groundwater Basin (DWR Bulletin 118 Basin 5-004) as required by the Sustainable Groundwater Management Act (SGMA).

The Big Valley Groundwater Basin is located in two counties (Lassen and Modoc), and the counties have stepped forward to act as the Groundwater Sustainability Agencies (GSAs) for their respective portions of the Basin. Big Valley is a rural, agricultural area where ranching and farming make up the bulk of the economy by producing alfalfa, hay, wild rice, pasture and range. Ranching and farming have a long history in Big Valley and many current, active ranchers are the same families that homesteaded here. In addition, there is a state wildlife refuge in the middle of the Basin that supports important species and acts as part of the Pacific flyway. Big Valley is designated as a disadvantaged community. To say that there is a high level of interest in how the GSP for Big Valley is developed is an understatement.

The GSAs have been unable to successfully conduct the public outreach expected by stakeholders and required by the SGMA during the COVID-19 emergency. Further, the ability to conduct telephonic or web-based participation is highly limited in Big Valley because there is inadequate internet access and in some cases no internet access at all for stakeholders to participate in public meetings.

While the GSP deadline is still 16 months away, it is clear that we do not have enough time to meet the robust public participation requirements found in the SGMA (summarized in this letter) while also meeting the current submittal deadline. The combination of complex GSP Regulations which require highly technical content and the need for public participation mean that the outreach process will take a lot of time for all parties to come to a shared understanding of what the Regulations require and what the content of the GSP means to them. Decisions that will have a huge impact in the Basin will be made and implemented through the GSP.

The public outreach and participation plan we developed prior to COVID-19 requires frequent public meetings between now and January 31, 2022, to prepare a draft GSP that the GSAs can approve and submit to DWR as required by the SGMA. Between now and the due date, we will be working chapter by chapter, requirement by requirement, attempting to develop a shared understanding and make reasoned decisions. Even before COVID-19, the schedule was tight and the GSAs were challenged to accommodate adequate public involvement, which is focused through the Big Valley Groundwater Basin Advisory Committee (BVAC). The BVAC is formed through a memorandum of understanding between the two GSAs and is proving ineffective because COVID-19 requirements and health considerations have made it difficult or impossible to conduct public meetings. Given the realities of the COVID-19 emergency, many will be left out of the conversation unless additional time is provided.

You have responded to difficulties that agencies are experiencing conducting public meetings during COVID-19 by relaxing certain Brown Act meeting requirements. Through Executive Order Numbers N-25-20 and N-29-20, your Administration has taken important steps to ensure that public meetings are able to convene and conduct necessary public business during the COVID-19 emergency. Again, you issued the above and many other executive orders, as authorized by the State's police power and through the Emergency Services Act to maintain proper functioning of state and local governments. In summary, said Executive Orders modified certain requirements for noticing and conducting public meetings, as described in Government Code sections 54950-54963 (Chapter 9, Meetings). In part, provisions of these orders allow remote (web or phone-based) meetings to be conducted from multiple locations, without meeting all of the requirements of the above sections. This includes allowing elected or appointed representatives to participate remotely.

The intent for meeting in this fashion is to allow government to continue functioning while those that need to can maintain isolation. This is necessary and prudent for routine functions, but the SGMA is different. This legislation is new territory for all involved and has wide reaching impacts on stakeholders of all varieties. Because of the long-term nature of the SGMA, the GSAs and stakeholders want to develop a GSP off the bat that stakeholders can live with and reduces the uncertainty that the future holds.

Unfortunately, the above orders are not enough in the Big Valley Groundwater Basin because this remote area of rural, mountainous, northeastern California does not have the digital connectivity required to successfully conduct remote meetings. As discussed herein, attempts to conduct remote meetings in Big Valley have been unsuccessful due to the exceptionally poor internet connectivity. Allowing the public to attend meetings through the internet may be a good strategy for areas that have reliable internet connectivity, but not in rural mountain areas. For internet-based meetings to be successful, infrastructure is needed. This infrastructure is severely lacking in Big Valley and surrounding areas.

In addition to the lack of internet capability, Big Valley is already recognized by the DWR and other State Departments as an economically disadvantaged area. The reality is that many of the citizens in Big Valley do not have the resources, both technical and financial, to access the internet, even if adequate internet connectivity were available. The internet access disparity between urban and rural areas is well-documented. Further, many of the residents are not familiar with the mechanics of participating in meetings electronically. They have had no training or exposure to this technology and meeting venue. Another challenge is staff availability to facilitate internet-based meetings. The two Big Valley Groundwater Basin GSAs, like many rural governments, have very limited staff, especially technical staff.

On July 1, 2020, the GSAs attempted to conduct a combined live and internet-based meeting in lieu of a traditional live-only public outreach meeting. We attempted to conduct the meeting with “Go-To-Webinar” and failed miserably with unintelligible audio. After thirty minutes, one stakeholder who tried to participate from home decided to take the risk of coming to the live portion of the meeting because of the webinar problems even though her spouse has health concerns that make him high risk.

As stated, the fundamental issue we are working through is that, because of COVID-19, there are now two sections of the SGMA that conflict with each other. The legislation provides a deadline, but the same legislation also requires meaningful public involvement. Because of COVID-19, the public in the Big Valley Groundwater Basin has shown a reluctance to attend public meetings to discuss development of the GSP. Further, and again as a direct result of COVID-19, limitations and requirements have been placed on local governments on how public meetings are to be conducted. Below is a summary of some of the public participation requirements found in the SGMA that, as a result of this health emergency, are at odds with the January 31, 2022, deadline:

- In part, Water Code section 10723.2 states “[t]he groundwater sustainability agency shall consider the interests of all beneficial uses and users of groundwater, as well as those responsible for implementing groundwater sustainability plans. These interests include, but are not limited to, all of the following...” Without providing an effective means of participation and in the current COVID-19 environment, it is not possible to consider the interest of all beneficial users or to work with our professional staff on the implementation of whatever plan is ultimately adopted. More time is necessary or an important part of the SGMA will be meaningless. This weakens the resulting GSP, making it more difficult to implement and subjecting the GSP to added scrutiny and challenge. Again, we cannot meet the above public participation requirement while also meeting the January 31, 2022, deadline.
- In part, Water Code section 10727.8 states “Prior to initiating the development of a groundwater sustainability plan, the groundwater sustainability agency shall make available to the public and the department a written statement describing the manner in which interested parties may participate in the development and implementation of the groundwater sustainability plan...” In accordance with said section, the GSA’s have adopted a memorandum of understanding that establishes an Advisory Committee. A primary function of the Advisory Committee is to facilitate public comment. A meeting format has been



established to incorporate public comment. In light of COVID-19, the above process has proved itself insufficient to capture and facilitate public comment regarding development of the GSP.

Clearly it was the intent of the legislature in adopting the SGMA that GSPs be prepared with broad public participation. Unfortunately, COVID-19 has restricted the ways in which public meetings can be conducted. The GSP will have a huge impact on the lives of the residents and their children. As such, the SGMA rightfully provides the requirement to include the public in the preparation of the GSP. COVID-19, is jeopardizing the public's participation in the very process that the SGMA assured them they could be part of. It is not realistic to expect the public to be satisfied with our limited ability to conduct internet and phone-based meetings for a process they were assured by the legislature that they would be allowed to participate in. Given the lack of alternatives we have for engaging the public in the GSP development process, it seems clear that we will not be able to meet the January 31, 2022, deadline the legislature established for submittal of the GSP to DWR.

We owe it to the public to provide an opportunity to meaningfully participate. In the end, allowing additional time to prepare the GSP is not likely to have as profound an impact as preparing and submitting a GSP without involving the affected public. The GSP is a major undertaking that will affect the lives of the residents and generations to come. For the GSP to be implemented successfully, the legislature recognized the importance of public participation. Submittal of a plan that will take more than 20 years to implement without the involvement and participation of the very people it will affect is not a good way to start.

As stated, an Executive Order is an appropriate mechanism to grant our request to provide additional time for the GSAs to more fully engage the public in this process as intended by the SGMA. The authority of the Executive to temporarily modify the implementation of Statute and Regulation is demonstrated through the many other Executive Orders you have issued in response to the COVID-19 pandemic. Examples of Statutes affected by Executive Orders you have issued include the Elections Code, Insurance Code, Education Code, Penal Code, Civil Code, Code of Civil Procedure, Vehicle Code, Labor Code, Welfare and Institutions Code, Health and Safety Code, Public Resources Code, Government Code, Unemployment Insurance Code and others. As said, there are also examples of Regulations that have been affected by your Executive Orders.

As a result of this health emergency, you are authorized to issue an Executive Order allowing more time to submit the required GSP to DWR. The COVID-19 emergency has directly hindered our ability to conduct the public outreach and participation required by the SGMA to prepare said GSP. You continue to issue executive orders in response to this pandemic that affect our ability to properly engage the public. Thus, such an order falls under your authority pursuant to the State police power and through the Emergency Services Act. There are various ways in which such an order could be implemented:

- You could simply issue an Executive Order extending the deadline to submit a GSP by one year (until January 31, 2023, or further). In summary, support for such an order is demonstrated through the continued quarantine limitations that are in effect and in the continued advice from health professionals for at risk segments of the population to avoid public gatherings. After a year, the need for any further extension could be evaluated based on the status of the COVID-19 pandemic at that time.



- Another (or additional), more specific way, to implement such an Order is through section 10735.2 of the Water Code. Said section requires the Water Resources Control Board to schedule a public hearing to designate Big Valley as a “probationary basin” if the GSP is not submitted by January 31, 2022. In summary, your Executive Order could direct the Water Resources Control Board to postpone scheduling said public hearing, should we not meet the January 31, 2022, GSP submittal deadline.

Thank you for considering our request.

Sincerely,



David Teeter, Chairman  
Lassen County Board of Supervisors

DT:MLA:gfn

cc: Toni G. Atkins, President pro Tempore, California Senate  
Anthony Rendon, California State Assembly, Speaker  
Brian Dahle, Senator, California Senate  
Megan Dahle, Assembly Member, California State Assembly  
Modoc County Board of Supervisors as the Big Valley Modoc GSA  
Big Valley Groundwater Basin Advisory Committee  
Department of Water Resources

c/sustainable groundwater management/extend deadline

County of Lassen  
Board of Supervisors



**CHRIS GALLAGHER**

*District 1*

**DAVID TEETER**

*District 2*

**JEFF HEMPHILL**

*District 3*

**AARON ALBAUGH**

*District 4*

**TOM HAMMOND**

*District 5*

County Administration Office  
221 S. Roop Street, Suite 4  
Susanville, CA 96130  
Phone: 530-251-8333  
Fax: 530-251-2663

November 17, 2020

CERTIFIED MAIL/RETURN RECEIPT

7017 1070 0000 7544 8450

Gavin Newsom

Governor, State of California

1303 10<sup>th</sup> Street

Sacramento, CA 95814

RE: Inquiry Regarding an August 11, 2020, Letter Requesting an Extension for Submittal of a Groundwater Sustainability Plan for the Big Valley Groundwater Basin (DWR Bulletin 118 Basin 5-004)

Dear Governor Gavin Newsom:

This letter is to request a response from you to our letter to you dated August 11, 2020 (attached), in regard to preparation of the Groundwater Sustainability Plan (GSP) required to be submitted to the Department of Water Resources by January 31, 2022, pursuant to the Sustainable Groundwater Management Act of 2014 (SGMA), for the Big Valley Groundwater Basin. To date, we have not received communication of any type regarding said letter (by telephone, letter or email).

As stated in more detail in our previous letter, COVID-19 has drastically limited our ability, and the public's willingness, to have the in-person public meetings necessary to prepare the required GSP. This has left both the Lassen and Modoc Groundwater Sustainability Agencies (GSAs) with few options. Many around the state have turned to internet-based meetings during this pandemic. However, conducting meetings through the internet is a poor substitution in Big Valley because there is not sufficient internet access. Further, we do not have sufficient resources to conduct internet-based meetings in a meaningful way. Again, our letter to you describes our challenges in great detail.


Even though the GSP deadline is still a little over a year away, it is clear that we do not have enough time to prepare a GSP supported by the level of public participation a plan of this

magnitude deserves. Lassen County and the residents of Big Valley have accepted the responsibility required by SGMA to prepare the GSP when no one else would. Neither Lassen County or Modoc County were required by SGMA to accept the responsibility (financially and in terms of land use responsibility) to serve as the GSAs for Big Valley, but that is exactly what we have done. We have more than demonstrated our willingness to meet the challenges presented by SGMA head-on. That said, if we are going to prepare this GSP, it is in the interest of everyone, including you, that it be done right.

This was a serious enough subject to warrant passage of SGMA and signature by the prior Governor. We can assure you that preparation of the GSP for the Basin is certainly a matter of direct concern to the citizens of Big Valley. As such, this Board deserves an answer to our letter, and, even more so, the citizens of Big Valley deserve the courtesy of an answer, even if the answer is contrary to our request. To give the GSP the service it truly deserves, we simply need a little more time. That's all.

Thank you for considering our request and we look forward to your prompt response.

Thank you in advance,



David Teeter, Chairman  
Lassen County Board of Supervisors

DT:MLA:gfn

cc: Brian Dahle, Senator, California Senate  
Megan Dahle, Assembly Member, California State Assembly  
Modoc County Board of Supervisors as the Big Valley Modoc GSA  
Big Valley Groundwater Basin Advisory Committee  
Department of Water Resources



County of Lassen  
Board of Supervisors

---



**CHRIS GALLAGHER**

*District 1*

**DAVID TEETER**

*District 2*

**JEFF HEMPHILL**

*District 3*

**AARON ALBAUGH**

*District 4*

**TOM HAMMOND**

*District 5*

County Administration Office  
221 S. Roop Street, Suite 4  
Susanville, CA 96130  
Phone: 530-251-8333  
Fax: 530-251-2663

February 16, 2021

CERTIFIED RETURN RECEIPT

7020 1290 0000 0270 7632

Gavin Newsom

Governor, State of California

1303 10<sup>th</sup> Street

Sacramento, CA 95814

RE: Inquiry Regarding an August 11, 2020, Letter Requesting an Extension for Submittal of a Groundwater Sustainability Plan for the Big Valley Groundwater Basin (DWR Bulletin 118 Basin 5-004)

Dear Governor Gavin Newsom:

This letter is to request a response from you to our letters to you dated August 11, 2020 and November 17, 2020 (attached), in regard to preparation of the Groundwater Sustainability Plan (GSP) required to be submitted to the Department of Water Resources by January 31, 2022, pursuant to the Sustainable Groundwater Management Act of 2014 (SGMA), for the Big Valley Groundwater Basin. To date, we have not received communication of any type regarding said letter (by telephone, letter or email).

As stated in more detail in our previous letter, COVID-19 has drastically limited our ability, and the public's willingness, to have the in-person public meetings necessary to prepare the required GSP. This has left both the Lassen and Modoc Groundwater Sustainability Agencies (GSAs) with few options. Many around the state have turned to internet-based meetings during this pandemic. However, conducting meetings through the internet is a poor substitution in Big Valley because there is not sufficient internet access. Further, we do not have sufficient resources to conduct internet-based meetings in a meaningful way. Again, our letter to you describes our challenges in great detail.

Even though the GSP deadline is still a little over a year away, it is clear that we do not have enough time to prepare a GSP supported by the level of public participation a plan of this magnitude deserves. Lassen County and the residents of Big Valley have accepted the

Choose Civility



responsibility required by SGMA to prepare the GSP when no one else would. Neither Lassen County or Modoc County were required by SGMA to accept the responsibility (financially and in terms of land use responsibility) to serve as the GSAs for Big Valley, but that is exactly what we have done. We have more than demonstrated our willingness to meet the challenges presented by SGMA head-on. That said, if we are going to prepare this GSP, it is in the interest of everyone, including you, that it be done right.

This was a serious enough subject to warrant passage of SGMA and signature by the prior Governor. We can assure you that preparation of the GSP for the Basin is certainly a matter of direct concern to the citizens of Big Valley. As such, this Board deserves an answer to our letter, and, even more so, the citizens of Big Valley deserve the courtesy of an answer, even if the answer is contrary to our request. To give the GSP the service it truly deserves, we simply need a little more time. That's all.

Thank you for considering our request and we look forward to your prompt response.

Thank you in advance,



Aaron Albaugh, Chairman  
Lassen County Board of Supervisors

DT:MLA:gfn

cc: Brian Dahle, Senator, California Senate  
Megan Dahle, Assembly Member, California State Assembly  
Modoc County Board of Supervisors as the Big Valley Modoc GSA  
Big Valley Groundwater Basin Advisory Committee  
Department of Water Resources

County of Lassen  
Board of Supervisors



**CHRIS GALLAGHER**

*District 1*

**DAVID TEETER**

*District 2*

**JEFF HEMPHILL**

*District 3*

**AARON ALBAUGH**

*District 4*

**TOM HAMMOND**

*District 5*

County Administration Office  
221 S. Roop Street, Suite 4  
Susanville, CA 96130  
Phone: 530-251-8333  
Fax: 530-251-2663

March 23, 2021

CERTIFIED RETURN RECEIPT

7017 0660 0000 6271 1758

Gavin Newsom

Governor, State of California

1303 10<sup>th</sup> Street

Sacramento, CA 95814

**COPY**

RE: Inquiry Regarding the February 16, 2020, Letter Requesting an Extension for Submittal of a Groundwater Sustainability Plan for the Big Valley Groundwater Basin (DWR Bulletin 118 Basin 5-004)

Dear Governor Gavin Newsom:

This letter is to request a response from you to our letters to you dated February 16, 2021, August 11, 2020 and November 17, 2020 (attached), in regard to preparation of the Groundwater Sustainability Plan (GSP) required to be submitted to the Department of Water Resources by January 31, 2022, pursuant to the Sustainable Groundwater Management Act of 2014 (SGMA), for the Big Valley Groundwater Basin. To date, we have not received communication of any type regarding said letter (by telephone, letter or email).

As stated in more detail in our previous letter, Government imposed COVID-19 restrictions have drastically limited our ability, and the public's willingness, to have the in-person public meetings necessary to prepare the required GSP. This has left both the Lassen and Modoc Groundwater Sustainability Agencies (GSAs) with few options. Many around the state have turned to internet-based meetings during this pandemic. However, conducting meetings through the internet is a poor substitution in Big Valley because there is not sufficient internet access. Further, we do not have sufficient resources to conduct internet-based meetings in a meaningful way. Again, our letter to you describes our challenges in great detail.

The GSP deadline is approximately 7 months away and it is clear that we do not have enough time to prepare a GSP supported by the level of public participation a plan of this magnitude deserves. Lassen County and the residents of Big Valley have accepted the responsibility


Choose Civility

required by SGMA to prepare the GSP when no one else would. Neither Lassen County or Modoc County were required by SGMA to accept the responsibility (financially and in terms of land use responsibility) to serve as the GSAs for Big Valley, but that is exactly what we have done. We have more than demonstrated our willingness to meet the challenges presented by SGMA head-on. That said, if we are going to prepare this GSP, it is in the interest of everyone, including you, that it be done right.

This was a serious enough subject to warrant passage of SGMA and signature by the prior Governor. We can assure you that preparation of the GSP for the Basin is certainly a matter of direct concern to the citizens of Big Valley. As such, this Board deserves an answer to our letter, and, even more so, the citizens of Big Valley deserve the courtesy of an answer, even if the answer is contrary to our request. To give the GSP the service it truly deserves, we simply need a little more time or simply remove the Government imposed regulations. That's all.

Thank you for considering our request and we look forward to your prompt response.

Thank you in advance,



Aaron Albaugh, Chairman  
Lassen County Board of Supervisors

AA:MLA:gfn

cc: Brian Dahle, Senator, California Senate  
Megan Dahle, Assembly Member, California State Assembly  
Modoc County Board of Supervisors as the Big Valley Modoc GSA  
Big Valley Groundwater Basin Advisory Committee  
Department of Water Resources



County of Lassen  
Board of Supervisors

---



**CHRIS GALLAGHER**

*District 1*

**DAVID TEETER**

*District 2*

**JEFF HEMPHILL**

*District 3*

**AARON ALBAUGH**

*District 4*

**TOM HAMMOND**

*District 5*

County Administration Office  
221 S. Roop Street, Suite 4  
Susanville, CA 96130  
Phone: 530-251-8333  
Fax: 530-251-2663

April 13, 2021

CERTIFIED RETURN RECEIPT

7017 0660 0000 6271 3752 & 7017 0660 0000 6271 3745

Assembly Member Eduardo Garcia  
Chair of the Water, Parks, and Wildlife Committee  
Legislative Office Building  
1020 N. Street, Room 160  
Sacramento, CA 95814

Assembly Member Megan Dahle  
Vice Chair of the Water, Parks, and Wildlife Committee  
Legislative Office Building  
1020 N. Street, Room 160  
Sacramento, CA 95814

Dear Chair Garcia and Vice Chair Dahle:

This letter is in support of Assembly Bill 754, which was introduced by Assembly Member Devon Mathis. Said Assembly Bill was referred to the Water, Parks, and Wildlife Committee on March 15, 2021. In summary, this bill would extend the due date to January 31, 2023, for Groundwater Sustainability Agencies (GSA) in basins that are not critically over drafted to submit a Groundwater Sustainability Plan (GSP) to the Department of Water Resources.

Lassen County and Modoc County serve as the GSAs for the Big Valley Groundwater Basin, for the portion of the basin within their respective jurisdiction. Said GSAs have been working cooperatively (through a memorandum of understanding) to prepare a single GSP for the entire basin.

Preparation of said GSP has been negatively impacted by the Governor's Executive Orders. Specifically, the Governor's order has made it difficult to conduct the public outreach needed to prepare the plan. Over the last year, the public has been less inclined to meet physically because of the Executive Orders. We have attempted to accommodate by conducting more internet and phone-based meetings. However, internet connectivity in Big Valley is exceedingly poor and the basin is not well



Assembly Member Eduardo Garcia, Chair Water, Parks, and Wildlife Committee  
Assembly Member Megan Dahle, Vice Chair of the Water, Parks, and Wildlife Committee  
April 13, 2021  
Page 2 of 2

situated to allow online type public meetings. We were very pleased to see proposed legislation to provide more time to submit the required GSP. In fact, on August 11, 2020, we sent a letter to the legislature requesting additional time (see attached) for this very reason (lack of ability to have meaningful public dialogue because of COVID-19). We have also sent multiple letters to the Governor, requesting an executive order allowing more time.

If adopted, this legislation will greatly improve upon the GSP that is ultimately adopted by ensuring the time needed for adequate public participation. The above said, please understand that we support this legislation only to the extent that it will provide more time to submit the required GSP. We are not supportive at all of the bill becoming a vehicle to legislate additional requirements. It is our position that the requirements of the Sustainable Groundwater Management Act are already too onerous, especially in basins like ours that were only designated a "medium priority basin" by half of one point.

Sincerely,



Aaron Albaugh, Chairman,  
Lassen County Board of Supervisors  
Big Valley Lassen Groundwater Sustainability Agency

AA:MLA:gfn  
Enclosure

cc: Devon Mathis, Assembly Member, California State Assembly  
Modoc County Board of Supervisors as the Big Valley Modoc GSA  
Rural County Representatives of California (RCRC)  
California State Association of Counties (CSAC)

County of Lassen  
Board of Supervisors

---



**CHRIS GALLAGHER**

*District 1*

**DAVID TEETER**

*District 2*

**JEFF HEMPHILL**

*District 3*

**AARON ALBAUGH**

*District 4*

**TOM HAMMOND**

*District 5*

County Administration Office  
221 S. Roop Street, Suite 4  
Susanville, CA 96130  
Phone: 530-251-8333  
Fax: 530-251-2663

April 27, 2021

CERTIFIED RETURN RECEIPT  
7020 1290 0000 0270 7649

Gavin Newsom  
Governor, State of California  
1303 10<sup>th</sup> Street  
Sacramento, CA 95814

RE: Inquiry Regarding the March 23, 2021, Letter Requesting an Extension for Submittal of a Groundwater Sustainability Plan for the Big Valley Groundwater Basin (DWR Bulletin 118 Basin 5-004)

Dear Governor Gavin Newsom:

This letter is to request a response from you to our letters to you dated March 23, 2021, February 9, 2021, November 17, 2020, and August 11, 2020 (attached), in regard to preparation of the Groundwater Sustainability Plan (GSP) required to be submitted to the Department of Water Resources by January 31, 2022, pursuant to the Sustainable Groundwater Management Act of 2014 (SGMA), for the Big Valley Groundwater Basin. To date, we have not received communication of any type regarding said letter (by telephone, letter or email).

As stated in more detail in our previous letter, your Executive Orders have drastically limited our ability, and the public's willingness, to have the in-person public meetings necessary to prepare the required GSP. This has left both the Lassen and Modoc Groundwater Sustainability Agencies (GSAs) with few options. Many around the state have turned to internet-based meetings during this pandemic. However, conducting meetings through the internet is a poor substitution in Big Valley because there is not sufficient internet access. Further, we do not have sufficient resources to conduct internet-based meetings in a meaningful way. Again, our letter to you describes our challenges in great detail.

**DEPARTMENT OF WATER RESOURCES**

1416 NINTH STREET, P.O. BOX 942836  
SACRAMENTO, CA 94236-0001  
(916) 653-5791



June 3, 2021

County of Lassen  
Board of Supervisors  
ATTN: Chairman David Teeter  
221 S. Roop Street, Suite 4  
Susanville, CA 96130

Dear Chairman Teeter,

On behalf of Governor Newsom, I first want to thank you for your dedicated leadership in your community during these challenging times. The COVID-19 pandemic is a continuing and unprecedented global crisis and it has impacted our communities across California in many ways. I appreciate your attention to these impacts weighing on your community.

Your recent letter(s) submitted to the Governor requests an extension of the deadline for submitting your groundwater sustainability plan (GSP) to the Department of Water Resources (DWR) and highlights your concerns over your ability to ensure robust public outreach and stakeholder engagement with the limitations on public interaction resulting from COVID-19. We recognize the limitations all state and local entities have experienced with holding meetings virtually, especially in rural and mountainous areas where internet connectivity is less available and reliable. Despite these COVID-19 challenges, public agencies, such as yours, are continuing to provide their best efforts to ensure public engagement and oversight of activities in the public's interest.

With this in mind, a suspension or change to the submittal deadline cannot be granted. The GSP submittal process and deadline is in the Sustainable Groundwater Management Act (SGMA), which cannot be changed without an amendment to the law and approval by the Legislature. If a local agency does not submit a GSP by the statutory deadline, DWR is required to refer the basin to the State Water Board for intervention.

The Administration is committed to the central tenant of SGMA which is local control. To facilitate such, SGMA establishes a timeframe of 20 years for basins to achieve their sustainability goals and provides an outcome-based process for SGMA implementation to occur. Through this outcome-based process, local agencies have an opportunity to improve plans and continue public outreach over time. A number of DWR and other state agency assistance programs have been established to help with public outreach and to assist groundwater managers in maintaining local control throughout GSP development and implementation.


DWR values the working partnership with water managers in your basin, which have been established through continued dialogue and dedicated planning and financial assistance (summarized in Attachment A) to support your plan development and facilitate engagement among stakeholders. If you find your local outreach efforts lacking, even with this assistance and the efforts we have collectively undertaken, I encourage you to review the attached summary of state assistance (Attachment B) and reach out to my staff (identified below) so you can use all applicable programs that will aid in your local SGMA efforts.

For these reasons, I encourage you to continue working towards submitting your GSP by the statutory deadline. Within that plan, you may identify any data gaps, including how stakeholder engagement has been impacted by COVID-19, and document the next steps that will be taken to fill those gaps. As locals continue to conduct engagement efforts, GSAs can amend their plans at any time to reflect stakeholder

input. This documentation in the GSP will allow DWR to understand your planning efforts and complete the evaluation of your plan. Given this information, DWR will be able to align future assistance to continue to support locals in implementing their GSP and filling the specified data gaps.

Please contact Acting Deputy Director Steven Springhorn ([Steven.Springhorn@water.ca.gov](mailto:Steven.Springhorn@water.ca.gov)) or DWR's Northern Region Office Chief Teresa Connor ([Teresa.Connor@water.ca.gov](mailto:Teresa.Connor@water.ca.gov)) if you have any additional questions, or if you need help in navigating moving forward.

Sincerely,



Karla A. Nemeth

cc:

The Honorable Gavin Newsom, Governor, State of California  
The Honorable Toni G. Atkins, President pro Tempore, California State Senate  
The Honorable Anthony Rendon, Speaker, California State Assembly  
The Honorable Brian Dahle, California State Senate  
The Honorable Megan Dahle, California State Assembly  
Christine Hironaka, Deputy Cabinet Secretary, Office of the Governor  
Angela Pontes, Deputy Legislative Secretary, Office of the Governor  
Sidd Nag, Legislative Advocate, Rural County Representatives of California  
Catherine Freeman, Legislative Representative, California State Association of Counties  
Gaylon Norwood, Assistant Director, County of Lassen GSA

Enclosure:

Attachment A: Summary Table of DWR Facilitation and Grant Funding Support  
Attachment B: Summary of Statewide SGMA Assistance (June 2021)



**Attachment A:**

<b>Summary Table of DWR Facilitation and Grant Funding Support</b>				
<b>Subbasin</b>	<b>Funding Recipient</b>	<b>DWR Facilitation Funding</b>	<b>DWR Planning Funding</b>	<b>Total DWR Funding Support</b>
Vina Subbasin, Butte Subbasin, Wyandotte Creek Subbasin	Butte County	\$173,000	\$1,498,800	<b>\$1,725,800</b>
Vina Subbasin	Vina GSA	\$54,000	—	
Big Valley Basin	County of Modoc GSA	\$82,000	\$987,660	<b>\$2,068,845</b>
	Lassen County	—	\$999,185	
Colusa Subbasin	Colusa County	\$112,000	—	<b>\$2,171,600</b>
	Colusa Groundwater Authority	\$60,000	\$1,999,600	

## Attachment B:

## Summary of Statewide SGMA Assistance (As of June 2021)

The State is committed to supporting locals to develop and implement their Groundwater Sustainability Plans (GSPs). In addition to the two agencies (Department of Water Resources and State Water Resources Control Board) with defined roles in SGMA, there are other State agencies with existing programs that support local groundwater management. The following summarizes that assistance.

### Department of Water Resources (DWR)

Since 2015 DWR has provided planning, technical, and financial assistance to support locals with SGMA implementation.

#### Planning Assistance

- **Basin Points of Contact/Regional Coordinators:** Each of the 94 high- and medium- priority basins are assigned a Point of Contact (POC) and a Regional Coordinator (RC) from DWR Region Offices. POCs and RCs assist Ground Sustainability Agencies and stakeholders in the basin to connect with DWR and locate resources for assistance. The following links contain each basin's POC and their respective contact information:
  - [Northern Region](#) – RC: Pat Vellines ([Patricia.Vellines@water.ca.gov](mailto:Patricia.Vellines@water.ca.gov))
  - [North Central Region](#) – RC: Chelsea Spier ([Chelsea.Spier@water.ca.gov](mailto:Chelsea.Spier@water.ca.gov))
  - [South Central Region](#) – RC: Amanda Peisch-Derby ([Amanda.Peisch@water.ca.gov](mailto:Amanda.Peisch@water.ca.gov))
  - [Southern Region](#) – RC: Brian Moniz ([Brian.Moniz@water.ca.gov](mailto:Brian.Moniz@water.ca.gov))
- **Facilitation Support Services (FSS):** Provides professional facilitators to help Groundwater Sustainability Agencies (GSAs) foster discussions among diverse water management interest groups.
  - GSAs or other groups coordinating with the GSAs to develop GSPs, are eligible to apply on a continuous basis using the following link:  
<https://sgma.gsae.water.ca.gov/SGMPUB/Facilitation/2020/FSSApp2020.aspx>
- **Written Translation Services (WTS):** Available to help GSAs, or other groups assisting in local SGMA implementation efforts, to communicate the groundwater planning activities with their non-English speaking constituents.
  - GSAs or other groups coordinating with the GSAs to develop GSPs, are eligible to apply on a continuous basis using the following link:  
<https://sgma.gsae.water.ca.gov/SGMPUB/Translation/TranslationServiceRequest.aspx>

#### Technical Assistance

- **Technical Support Services (TSS):** Provides DWR technical staff and drilling and other contractors to assist GSAs with the installation of dedicated groundwater monitoring wells and other monitoring stations to fill data gaps identified in the basins.
  - For more information or help starting a TSS application, contact DWR's Region Coordinators at [sgmp\\_rc@water.ca.gov](mailto:sgmp_rc@water.ca.gov)
- **Data and Tools:** Statewide datasets and models have been developed to assist GSAs and the public by providing information to help inform the development of GSP elements. The following datasets and tools have been made available:



- Eight new online interactive maps for the public to view and download SGMA datasets: groundwater levels, wells, environmental, land use, and subsidence data
- A water resources management and planning model that simulates groundwater, surface water, stream-groundwater interaction (C2VSim-FG)
- <https://water.ca.gov/Programs/Groundwater-Management/Data-and-Tools>
- **Guidance and Education:**
  - [Six Best Management Practices \(BMPs\)](#) and [five Guidance Documents](#) to provide clarification, guidance, and examples to help GSAs develop elements of a GSP.
  - [California's Groundwater Update](#): State's official publication on the occurrence and nature of groundwater in California.

### **Financial Assistance**

- **Sustainable Groundwater Management (SGM) Grant Programs:**
  - **SGM Planning Grant Program:** provides funds to develop and implement sustainable groundwater planning and projects. Approximately \$150 million (M) has been awarded to date through three rounds of solicitations. Funding has been provided by Proposition 1 and Proposition 68.
  - **SGM Implementation Grant Program:** designed to fund projects and programs that will assist GSAs implement their GSPs. Proposition 68 authorized ~\$100M for this new program.
    - The FY 20/21 Budget directed the acceleration of \$26M for the critically overdrafted (COD) basins responsible for implementing GSPs or Alternatives to a GSP. Final awards for this first round were announced April 23, 2021.
    - The second round for the remaining funds will begin in early 2022.
- **Integrated Regional Water Management (IRWM) Implementation Grant Program:** provides funding for projects and programs that implement an IRWM Plan, including groundwater management projects. Approximately \$220M of Proposition 1 funding has been awarded in 2019/2020.
  - Another \$180M in Proposition 1 funds will be available in 2021-2022 timeframe.
- **Drainage Reuse Grant Program:** provides funds to local public agencies, including public universities, in the state of California for research and/or programs that resolve agricultural subsurface drainage water issues. The program is funded by Proposition 204, through the California Department of Food and Agriculture (CDFA), who has entered into a memorandum of understanding to transfer the funds, as well as the responsibility for implementing the programs required by the legislation, to DWR. Approximately \$1.1M was awarded in 2020.

### **State Water Resources Control Board (State Water Board)**

SGMA requires the State Water Board protect basins that are not managed sustainably through a process called State Intervention. In addition to this responsibility, the State Water Board has initiated assistance that will support locals with SGMA implementation. Assistance has been organized and distributed by the following categories:

#### **Planning Assistance**

- **Recharge Permitting Options:** Capturing surface water to artificially recharge groundwater aquifers is a potential method for improving groundwater basin conditions. To help support this method, the Division of Water Rights has developed a streamlined permitting process for diversions of water from high flow events to underground storage.



- Streamlining is primarily achieved through identifying eligibility criteria and a simplified water availability analysis targeting diversion of high flow events during winter.
- Temporary water right permits for groundwater recharge may be appropriate for short-term projects where an urgent need exists.
- New legislation through AB 658 gave the State Water Board a new 5-year temporary permitting option, also authorizing a 5-year temporary change petition.

#### **Technical Assistance**

- **Water Availability Tool:** State Water Board staff has developed an interactive Fully Appropriated Stream Systems (FASS) GIS Web Map, which provides users with information on fully appropriated stream systems, including seasonal limitations, relevant court references, and Board decisions/orders.
  - The interactive map can be accessed online and includes an overview and quick reference guide.
  - State and Federal Wild and Scenic Rivers are included as separate layers in the web map, as those systems also have limitations on new water right applications.

#### **Financial Assistance**

- **Groundwater Grant Program:** will administer a total of \$800M to prevent and cleanup contamination of groundwater that serves (or has served) as a source of drinking water. The funds are available as planning grants and construction grants.
  - Round 3 Solicitation is expected to open in Summer 2021.
- **Water Recycling Funding Program (WRFP):** promotes the beneficial use of treated municipal wastewater to augment fresh water supplies in California, by providing technical and financial assistance to agencies and other stakeholders in support of water recycling projects and research. The funds are available as planning grants and construction grants.
- **Clean Water State Revolving Fund (CWSRF) Program:** provides low-interest loans to public agencies for planning, design, and construction of water recycling projects.
- **Small Community Funding:** is available to help small DACs, providing drinking water service to less than 10,000 people or wastewater service to less than 20,000 people, with: technical assistance needs, interim water supplies, and implement eligible drinking water or wastewater capital improvement projects. The funds are available as planning grants and construction grants.
- **Drinking Water State Revolving Fund (DWSRF) program:** assists public water systems in financing the cost of drinking water infrastructure projects needed to achieve or maintain compliance with Safe Drinking Water Act requirements. The funds are available as planning grants and construction grants.
- **Groundwater Treatment and Remediation Grant Program:** will administer \$74M in grants from Proposition 68 for treatment and remediation activities that prevent or reduce the contamination of groundwater that serves as a source of drinking water.

### **Department of Conservation (DOC)**

The DOC offers financial incentive programs to further California's goals to conserve agricultural lands, restore and manage watersheds, and reduce greenhouse gas emissions.

- **2020 Sustainable Groundwater Management Watershed Coordinator (SGMA) Grant Program:** awards funding for watershed coordinators that will build broad coalitions of



government, stakeholders, and communities to develop plans and projects to improve watershed health and meet California's groundwater sustainability goals. Awarded \$1.5M in January 2021.

- **Sustainable Agricultural Lands Conservation (SALC) Program:** SALC is a component of the SGC's Affordable Housing and Sustainable Communities (AHSC) Program. SALC complements investments made in urban areas with the purchase of agricultural conservation easements, development of agricultural land strategy plans, and other mechanisms that result in GHG reductions and a more resilient agricultural sector.
  - Draft Guidelines for Round 7 were released February 19, 2021

## Department of Food and Agriculture (CDFA)

CDFA supports agricultural production by incentivizing practices resulting in a net benefit for the environment through innovation, efficient management and science.

- **State Water Efficiency and Enhancement Program (SWEEP):** provides grant funding to implement irrigation systems that reduce greenhouse gases and save water on California agricultural operations. Eligible system components include (among others) soil moisture monitoring, drip systems, switching to low pressure irrigation systems, pump retrofits, variable frequency drives and installation of renewable energy to reduce on-farm water use and energy. Approximately, \$81.1M has been awarded to date to nearly 835 projects, covering over 137,000 acres. CDFA estimates that over 81,000 metric tons of CO2 emissions will be reduced annually.
- **Healthy Soils Program (HSP):** consists of two components: the HSP Incentives Program and the HSP Demonstration Projects.
  - HSP Incentives Program provides financial assistance for implementation of conservation management that improve soil health, sequester carbon and reduce greenhouse gas emissions. The 2020 HSP Incentives Program selected 324 projects for award, requesting almost a total of \$22M.
  - HSP Demonstration Projects showcase California farmers and rancher's implementation of HSP practices. The 2020 HSP Demonstration Projects selected 20 projects for award, requesting a total of over \$2.9M.

## **Appendix 11B List of Public Meetings**

---

## Meetings Held By Lassen and Modoc Counties Related to GSP Development

Event	GSA(s)	Date	Time	Location
Special Joint Meeting of the Lassen County and Modoc County Board of Supervisors	Lassen County, Modoc County	2/23/2016	2:00:00 PM	Adin Community Building 609 Main Street Adin, CA 96006
Meeting of the Lassen-Modoc County Flood Control and Water Conservation District	Lassen County, Modoc County	2/23/2016	2:00:00 PM	Adin Community Building 609 Main Street Adin, CA 96006
Public Outreach Meeting	Lassen County, Modoc County	1/27/2017	9:00:00 AM	Bieber Veterans Memorial Hall 657-575 Bridge Street Bieber, CA 96009
Meeting of Modoc County Board of Supervisors	Modoc County	2/28/2017	10:00:00 AM	Board of Supervisors Room 204 South Court Street #203 Alturas, CA 96101
Lassen County Board of Supervisors Meeting	Lassen County	3/14/2017	9:00:00 AM	Board Chambers 707 Nevada Street Susanville, CA 96130
Public Outreach Meeting June 2019	Lassen County, Modoc County	6/3/2019	2:00:00 PM	Bieber Veterans Memorial Hall 657-575 Bridge Street Bieber, CA 96009
Public Outreach Meeting Sept 2019	Lassen County, Modoc County	9/4/2019	4:00:00 PM	Adin Community Center 605 Highway 299 Adin, CA 96006
Big Valley Groundwater Basin Advisory Committee (BVAC) Meeting	Lassen County, Modoc County	2/3/2020	4:00:00 PM	Bieber Veterans Memorial Hall 657-575 Bridge Street Bieber, CA 96009
Big Valley Groundwater Basin Advisory Committee (BVAC) Meeting	Lassen County, Modoc County	3/4/2020	4:00:00 PM	Adin Community Center 605 Highway 299 Adin, CA 96006
Big Valley Groundwater Basin Advisory Committee (BVAC) Meeting	Lassen County, Modoc County	5/6/2020	4:00:00 PM	Bieber Veterans Memorial Hall 657-575 Bridge Street Bieber, CA 96009
Big Valley Groundwater Basin Advisory Committee (BVAC) Meeting	Lassen County, Modoc County	7/1/2020	4:00:00 PM	Adin Community Center 605 Highway 299 Adin, CA 96006
Big Valley Groundwater Basin Advisory Committee (BVAC) Special Meeting	Lassen County, Modoc County	9/24/2020	4:00:00 PM	Bieber Veterans Memorial Hall 657-575 Bridge Street Bieber, CA 96009
Big Valley Groundwater Basin Advisory Committee (BVAC) Meeting	Lassen County, Modoc County	11/4/2020	4:00:00 PM	Adin Community Center 605 Highway 299 Adin, CA 96006
Big Valley Groundwater Basin Advisory Committee (BVAC) Special Meeting	Lassen County, Modoc County	12/2/2020	4:00:00 PM	Adin Community Center 605 Highway 299 Adin, CA 96006
Big Valley Groundwater Basin Advisory Committee (BVAC) Meeting	Lassen County, Modoc County	2/3/2021	4:00:00 PM	Adin Community Center 605 Highway 299 Adin, CA 96006
Big Valley Groundwater Basin Advisory Committee (BVAC) Special Meeting	Lassen County, Modoc County	3/3/2021	4:00:00 PM	Adin Community Center 605 Highway 299 Adin, CA 96006
Groundwater Management Workshop	Lassen County, Modoc County	3/24/2021	5:00:00 PM	Adin Community Center 605 Highway 299 Adin, CA 96006
Big Valley Groundwater Basin Advisory Committee (BVAC) Meeting	Lassen County, Modoc County	4/7/2021	4:00:00 PM	Adin Community Center 605 Highway 299 Adin, CA 96006
Big Valley Groundwater Basin Advisory Committee (BVAC) Special Meeting	Lassen County, Modoc County	5/5/2021	2:00:00 PM	Bieber Veterans Memorial Hall 657-575 Bridge Street Bieber, CA 96009
Big Valley Groundwater Basin Advisory Committee (BVAC) Meeting	Lassen County, Modoc County	6/2/2021	2:00:00 PM	Adin Community Center 605 Highway 299 Adin, CA 96006
Big Valley Groundwater Basin Advisory Committee (BVAC) Meeting	Lassen County, Modoc County	7/7/2021	2:00:00 PM	Bieber Veterans Memorial Hall 657-575 Bridge Street Bieber, CA 96009

Assembled 6/18/2021

## **Appendix 11C Brochure Summarizing the Big Valley GSP May 2021**

---



# Summary of the Big Valley Groundwater Sustainability Plan

bigvalleygsp.org

May 2021


In 2014, California's Sustainable Groundwater Management Act (SGMA) was signed into law, requiring local governments and agencies in groundwater basins designated as high and medium priority to create governance structures and develop, adopt, and implement a Groundwater Sustainability Plan (GSP) for each basin. The Big Valley Groundwater Basin (BVGB) is identified as a medium-priority basin by the California Department of Water Resources (DWR) and is therefore subject to SGMA. The "high" and "medium" designations were assigned by DWR prior to the adoption of SGMA. Local agencies in the BVGB contested the medium-priority designation, which DWR denied, and are preparing a GSP to comply with the law because non-compliance may result in intervention by the State Water Board. Intervention could include metering, reporting, and fees for pumping groundwater. All formal basin-priority challenges have been denied to-date but may be revisited in the future.

## Location and Boundaries

BVGB is a small basin in the north-eastern region of California. It encompasses a 144-square-mile area located in portions of Modoc and Lassen counties, including the unincorporated communities of Adin, Lookout, Bieber, and Nubieber. SGMA applies only to the areas inside the basin boundary (**Figure 1**), but GSP projects may include areas outside the boundary. The boundary lacks accurate detail in places and does not follow the DWR boundary definition, so leaders in the BVGB submitted a basin boundary modification request to DWR in 2016 that was denied. There are plans to submit another basin boundary modification request in the future.

## GSP Content and Structure

Governments and agencies in basins subject to SGMA form one or more Groundwater Sustainability Agencies (GSA) to develop a GSP and oversee its implementation. The two counties, Lassen and Modoc, have designated themselves as the GSAs for the Basin and that designation has been confirmed by DWR. The counties took on this huge responsibility because no other local agencies were able to serve as the GSAs. If the counties had not agreed to be the GSAs, the State Water Board would have assumed management responsibility (e.g., "intervention"). Each GSA manages the portion of the basin in its county. In 2019, the Big Valley Groundwater Basin Advisory Committee (BVAC) was formed to advise the GSAs on preparation of a single GSP for the entire BVGB. The BVAC consists of representatives from each county's board of supervisors and two BVGB residents from each county who were appointed by the GSAs after extensive outreach was conducted to all residents of the BVGB. The BVAC holds regular meetings which are open to the public. Meeting information can be found on the Big Valley GSP website: <https://bigvalleygsp.org>.

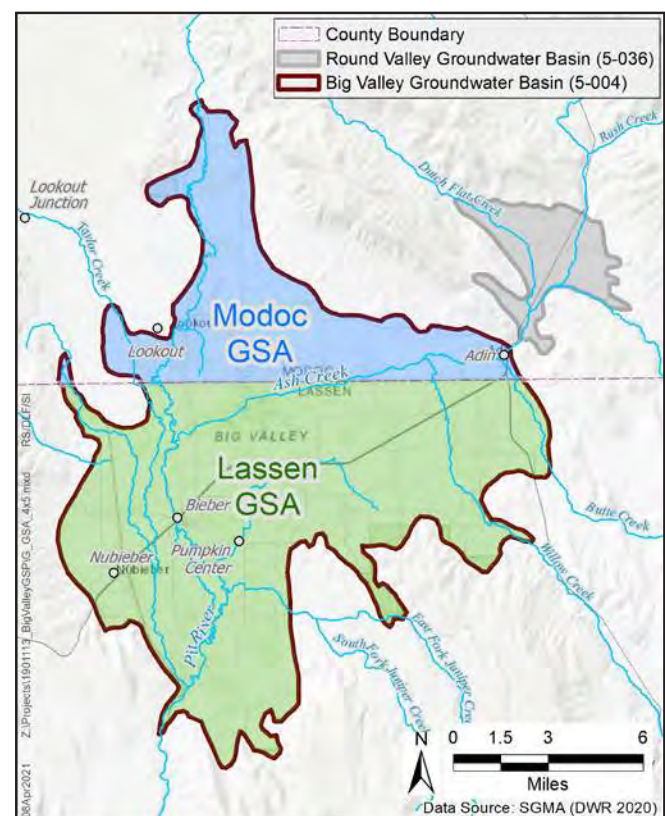

**FIGURE 1: BIG VALLEY GROUNDWATER BASIN AND GSA BOUNDARIES**

## Physical Characteristics


The BVGB GSP follows a very specific structure because SGMA regulatory requirements dictate the information that must be contained within the document. First, the GSP must describe the general background and physical characteristics of the groundwater basin. In the BVGB GSP, this information is covered in Chapters 1 through 4 as follows:

- **Chapter 1.** Introduction to BVGB
- **Chapter 2.** Agency Information
- **Chapter 3.** Plan Area
- **Chapter 4.** Hydrogeologic Conceptual Model

Plan Area (Chapter 3) and Hydrogeologic Conceptual Model (Chapter 4) introduce important information, such as land use, geology, and hydrology, that will be used to make decisions throughout the planning process. They are based on the best available scientific data, but also include assumptions where reliable data is not available. The term ‘hydrogeologic conceptual model’ refers to a written description of the physical characteristics of the basin – where the water flows, the makeup of the soils, how deep the groundwater is, etc.


Drafts of Chapters 1 through 4 were developed in 2020, reviewed by the BVAC and the public, and “set aside” in order to move forward with the GSP. They will be revisited once the entire document is assembled. The “set aside” drafts are available and open for comment on the home page of the BGVB website (<https://bigvalleygsp.org>). Previous chapter versions, comments submitted, and other relevant information is available on the documents page.

**Figures 2 and 3** show data highlights from Chapters 3 and 4 of the GSP.

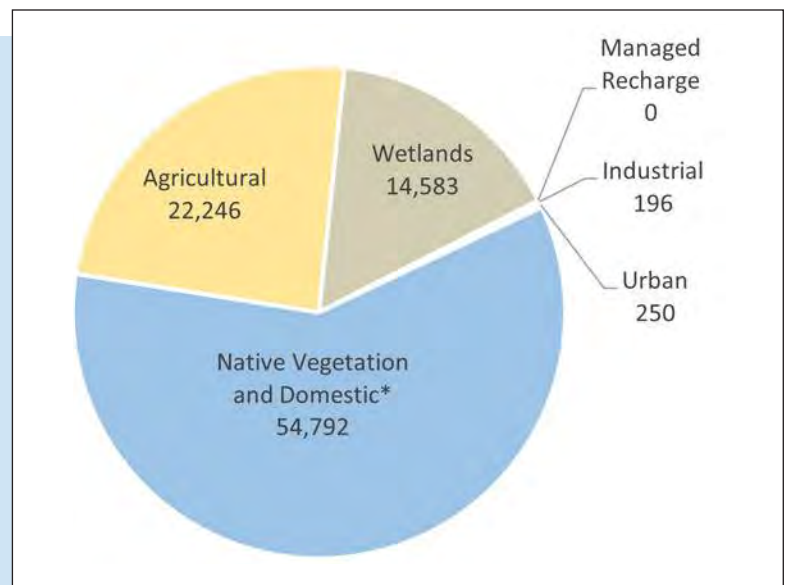

**FIGURE 2: BIG VALLEY GROUNDWATER BASIN LAND USE**

\* Domestic use generally occurs in conjunction with agricultural and native vegetation and is best categorized with native vegetation, as most of the agricultural area is delineated by field and does not include residences.

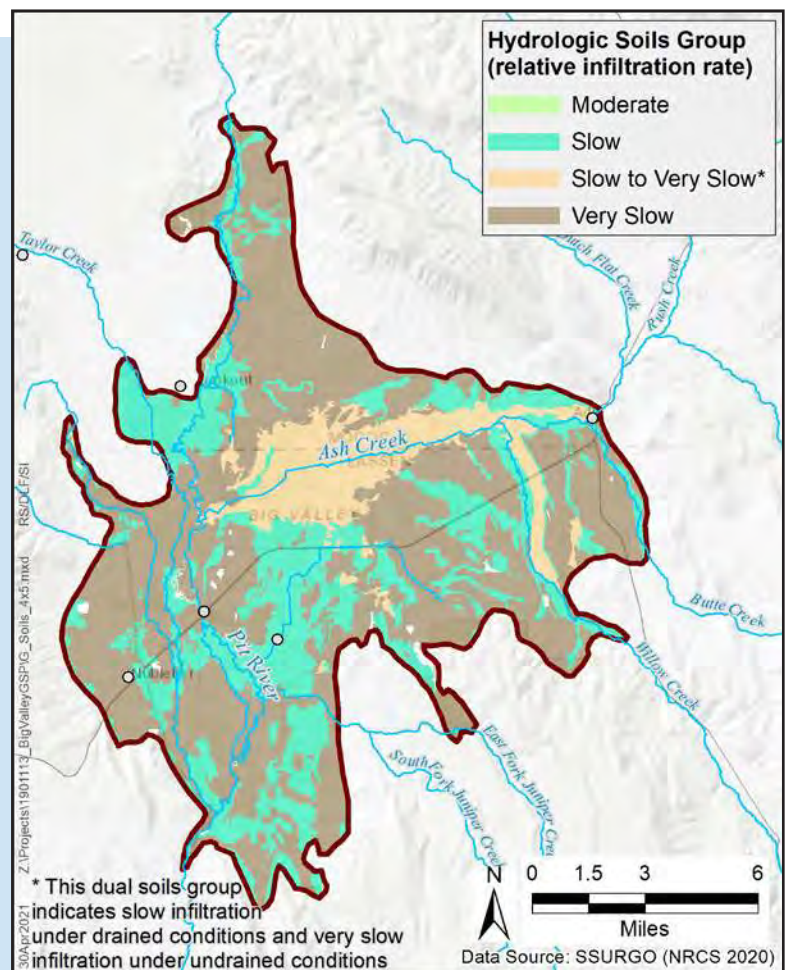

**FIGURE 3: BIG VALLEY GROUNDWATER BASIN HYDROLOGIC SOILS GROUPS**




## Groundwater Conditions


Professional geologists and hydrogeologists examined data from wells throughout BVGB to determine groundwater conditions. They observed that most areas of the BVGB have experienced little to no change in water levels, while other areas have fluctuated more. They also found that groundwater in the BVGB is generally of excellent quality. The details of their findings are available in BVGB GSP **Chapter 5. Groundwater Conditions** (which has been temporarily “set aside” by the BVAC). Chapter 5 also includes other data required by the GSP regulations including changes in groundwater storage, water quality, land subsidence, and interconnected surface water. None of these indicators have shown undesirable results.

**Figure 4** shows the estimated direction of groundwater flow in the BVGB.

An important tool to monitor groundwater sustainability is a water budget. BVGB GSP **Chapter 6. Water Budget** (“set aside”) has estimates of the volume of water flowing into and out of the basin – from causes such as rain, rivers, and evaporation. Comparing the volumes of water entering and exiting the basin indicates if the basin is in balance, is in overdraft, or has surplus water. **Figure 5** shows the draft historical water budget (1984 to 2018).

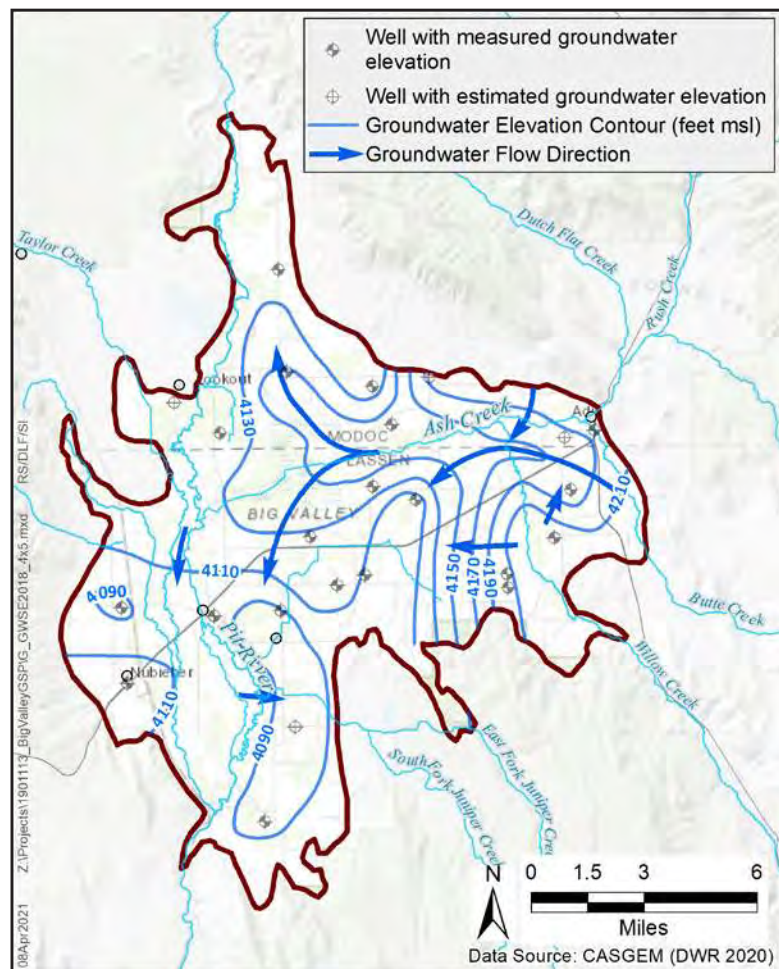


**FIGURE 4: BIG VALLEY GROUNDWATER BASIN GROUNDWATER CONTOURS AND ESTIMATED FLOW DIRECTION**

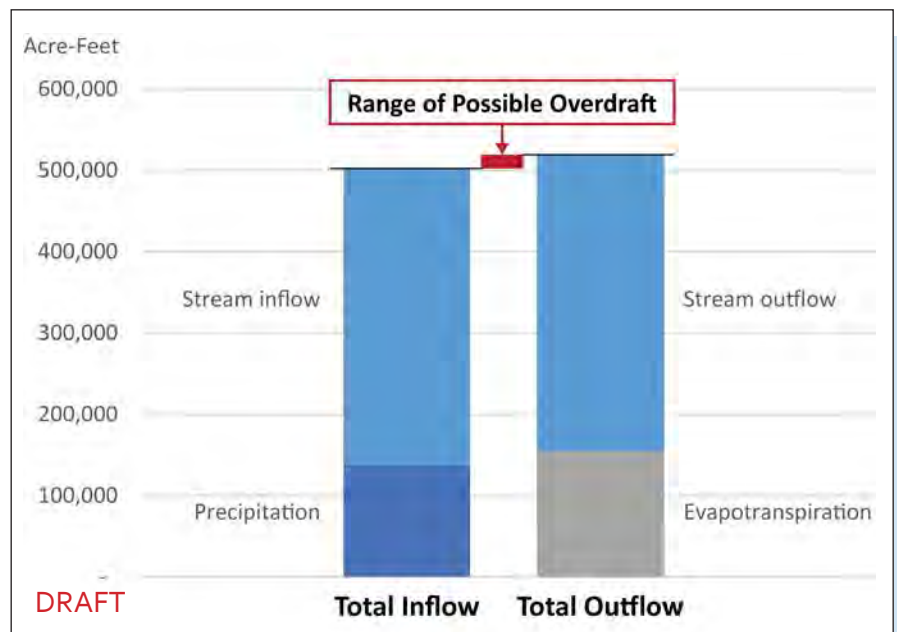

**FIGURE 5: DRAFT AVERAGE ANNUAL WATER BUDGET (1984–2018)**

**Figure 6** shows the change in groundwater storage and indicates that most of the deficit is due to the 2000-2018 time frame being drier than it had been historically. Conversely, the extended wet periods that occurred in the late 1990s caused groundwater levels to recover.

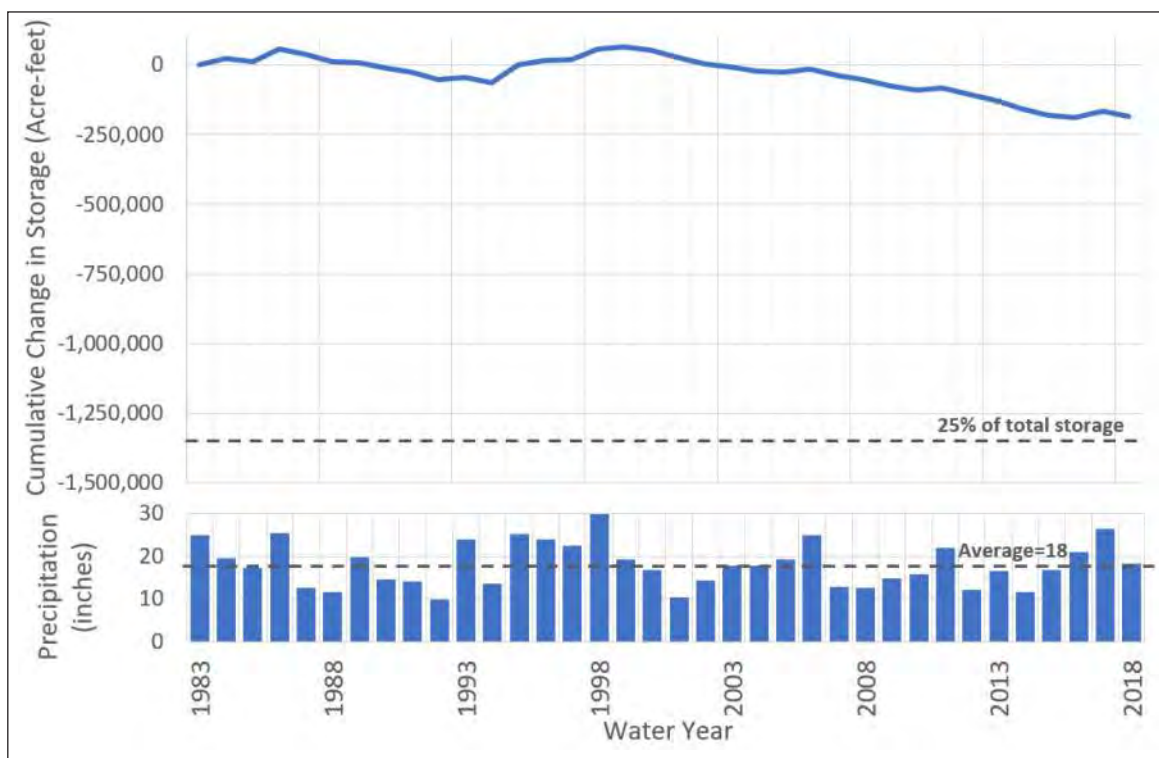

**FIGURE 6: CUMULATIVE CHANGE IN STORAGE (1982-2018)**

## Up Next: Projects and Actions

The next steps in the GSP process are to set measurable criteria to track progress toward sustainability and to define projects and actions to help move the basin toward sustainable groundwater management. The BVAC and GSAs are currently developing these items, and **you are invited** to participate.

### How to Participate

- Register as an interested party on our website: <https://bigvalleygsp.org>.
- Attend BVAC meetings, which are advertised to interested parties and viewable on the online calendar: <https://bigvalleygsp.org/calendar>.
- View draft GSP documents and offer your comments using the online form: <https://bigvalleygsp.org/comment/new>.

**Thank you for your interest in the Big Valley GSP.**



## **Appendix 11D Comment Matrix**

---

## Big Valley GSP Comment Matrix Chapters 1-3

Document	Page & Line Number	Comment	Date	Response
Public Draft Chapters 1 and 2	Section 1.2, line 23	Prove description of Lassen County Basin. DWR boundary definitions and the GSP need to be more specific.	3/4/2020	The boundaries of the basin are established by DWR in their Bulletin 118 for SGMA. A basin boundary modification process is allowed under SGMA and can be investigated, but is outside the scope of writing the GSP. A background section has been added to Chap 1 that describes the County's request for basin boundary modification that was denied by DWR.
Public Draft Chapters 1 and 2	Section 1.3	DWR prioritization criteria are subjective. Groundwater irrigated acres need to be differentiated from surface water irrigation. DWR doesn't respond to questions.	3/4/2020	A section was added describing the basin prioritization process and the interaction between the counties and DWR regarding the ranking. DWR's dataset that they used to determine irrigated acres is documented on their website. The acreage irrigated by groundwater will be evaluated in Chapter 6: Water Budget. The extent of lowering groundwater levels in the basin will be evaluated in Chapter 5: Groundwater Conditions. DWR's lack of responsiveness to questions is noted.
Public Draft Chapters 1 and 2	Chap 2 Line 61	Add that GSA was established because we have to, it is not voluntary	3/4/2020	A Background section was added describing the basin prioritization, basin boundary modification request, and correspondence between the counties and DWR. The overarching message of this new text is to document that the counties did not start this process willingly. Wording was changed in Chap 2 to add the word "mandate" when referring to SGMA to emphasize that compliance with this law is not voluntary.
Public Draft Chapters 1 and 2	Page #: 1.1, Line #: 6,7,&8	1.1 Lines 6,7,&8 Should state in the body with verbiage of the fact that the Stake Holders" contested DWR findings and protested the priority ranking.1.3 Line 54 graphWhat is it? Where do these numbers come from?I also think that we should refer to the land owners with wells effected by the basin should be referred to as "Stake Holders"	3/5/2020	A background section has been added to Chap 1 that describes the prioritization and the Counties' responses. DWR provides some of the data it used for prioritization on its website, at the URL shown on Line 53. Use of the term "stakeholders" will be defined and used in future chapters.

## Big Valley GSP Comment Matrix Chapters 1-3

Document	Page & Line Number	Comment	Date	Response
Public Draft Chapters 1 and 2	Page #: 1-2, Line #: 42	I would like to recommend that the description of the boundary of the Big Valley Basin be amended to include the water delivery sources which feed into the water table of the valley. These water sources are varied and include a number of perennial and ephemeral drainages, springs and reservoirs. For example:North: Halls Canyon Creek, Howell Canyon Creek, Fox Draw, Hayes Canyon and seventeen (17) Unnamed ephemeral drainages along Barber and Ryan Ridges.East: Ash Creek, Butte Creek and seven (7) Unnamed Ephemeral drainages.South: Willow Creek, Juniper Creek, Juniper Creek " South Fork, Hot Springs Slough, Gobel Slough, Big Valley Canal and twenty (20) Unnamed ephemeral drainages.West: Taylor Reservoir, Kramer Reservoir, Lower Roberts Reservoir, Taylor Creek, Widow Valley Creek, Bull Run Slough, Egg Lake Slough and fifteen (15) Unnamed ephemeral drainages.My reasoning for this recommendation to include these delivery systems is due to the topographic gradients that assist in the recharging of the Big Valley Basin groundwater. The Pit River itself offers limited influence on recharging groundwater levels to the West and southwest areas of the basin. It offers very little to no influence to the north, east and southern areas. The elevation gradient in the basin varies approximately from 4450 feet in the east to 4160 feet in the west, a drop of a few hundred feet. These areas are vital to not only modeling the water budget for the Basin, but provide potential areas for remediation projects. It will make it easier for project planning in the future since we will not have to go through amending the original boundaries at a later date.Although DWR Bulletin 118 determines the boundary based on alluvial deposits, the basin does not exist in an environmental vacuum and is dependent upon all of its water delivery systems.	3/8/2020	A background section has been added to Chap 1 that, in part, describes Lassen County's request for a basin boundary modification that was denied by DWR in 2016. DWR will again accept requests for basin boundary modifications in 2023. The current GSP will need to honor the currently established basin boundary. With that said, the GSP will acknowledge the importance of areas outside the basin on recharge. Projects and management actions described in the Plan are not restricted to being inside the groundwater basin.
Public Draft Chapter 3	Section 3.1 lines 23-34	Says that Round Valley is separated from the basin by a 1/2 mile gap. What is the proof of that?	5/6/2020	This text describes how the basin boundaries were drawn by DWR. The text has been updated to reflect this. Connectivity to the Round Valley groundwater basin may be investigated at a later time.
Public Draft Chapter 3	Section 3.4.2	Concern expressed that domestic well is being combined with agricultural use.	5/6/2020	Text has been updated and domestic categorized as a separate use from agriculture
Public Draft Chapter 3	Section 3.4.1	Disagree with USGS being represented as a public supply well.	5/6/2020	There are specific definitions used by the SWRCB with regard to a public water supply system, and the text reflects this categorization. Text has been modified to emphasize that the USFS station does not serve a resident population.
Public Draft Chapter 3	Section 3.5	The addition of monitoring wells into the well inventory increases the well density per square mile. This is not right. There is some confusion on the public supply wells, with 6 on the maps, but only 2 public water supply systems.	5/6/2020	The figures in this section only show wells that are designated by drillers on their well completion reports as production, domestic, and public supply. Some of the public supply wells on the map are inactive. The map has been updated to indicate inactive public supply wells.
Public Draft Chapter 3	Section 3.6.1	Information on wells monitored by LMFCWCD says information is not readily available. This information should be public.	5/6/2020	The information has not yet been obtained
Public Draft Chapter 3	3.6.6	Should say that the Lassen County ordinance prohibits extraction of groundwater for use outside the County.	5/6/2020	Noted, text will be updated to reflect this

## Big Valley GSP Comment Matrix Chapters 1-3

Document	Page & Line Number	Comment	Date	Response
Public Draft Chapter 3	Fig. 3-2 Jurisdictions	There may be some areas indicated as BLM, that are not BLM. It's possible that this is the same for some Tribal lands.	7/1/2020	Checking with BLM.
Public Draft Chapter 3		There is significant new irrigated acreage in the basin since 2014.	7/1/2020	David: can you see if there are numbers available from 2015 or 2016?
Public Draft Chapter 3	Table 3-1 Crop Use	The crop of rice should say wild rice - this should be changed wherever referenced	7/1/2020	Change made
Public Draft Chapter 3		Do USFS mangagement plans need to be included in the section on Land Use plans? (Are there USFS lands within the Basin?)	7/1/2020	Being discussed.
Public Draft Chapter 3		Regarding response to question about whether surface water supplies are adequate for irrigation, the answer is "YES." There is significant acreage irrigated with surface water supplies.	7/1/2020	
Public Draft Chapter 3		Ash Creek Wildlife Area: This is a "potentially" managed area.	7/1/2020	New text clarifies that the wildlife area is minimally improved.
Public Draft Chapter 3		In response to the question of: "How should Wildlife Area and riparian be represented?" - Show riparian areas along creeks and Pit River, where wetlands make it too wet to farm. Use the footprint of the Wildlife Area in all maps and add riparian lines along the river. For example; "x" number of feet along Pit River, other creeks. Either map it or put it into text - explaining number of river miles and estimating width of riparian corridor. (e.g. 363 acres for Pit River)	7/1/2020	The category of "riparian areas" is removed from the maps, per discussion at the July 1, 2020 BVAC meeting in Adin.  Table 3-1, Land Use Summary, has been revised to show 12,407 acres of riparian areas (including Ash Creek Wildlife Management area and corridors along waterways.
Public Draft Chapter 3		The document reports the Wildlife Area and/or riparian area as 12,000 acres v. 14,000. There is a discrepancy in the numbers.	7/1/2020	See previous reponse.
Public Draft Chapter 3		Much of the area of Ash Creek Wildlife Area is not riparian. Some areas along Ash Creek are not riparian. Water supplies for the Wildlife Area include a mix of surface water and groundwater supplies.	7/1/2020	See previous reponse.
Public Draft Chapter 3		Water bodies should be on the map, including lower Roberts Reservoir.	7/1/2020	Water bodies are shown on Map
Public Draft Chapter 3		How is mixed source shown on the map? There are areas represented as groundwater only, where landowners also irrigate with surface water.	7/1/2020	Looking at water rights information from the Modoc County watermaster and Water Boards. If information cannot resolve the question, it may need to be listed as a data gap.
Public Draft Chapter 3	line 91	Remove language on LMFLWCD.	7/1/2020	Deleted.
Public Draft Chapter 3		Beneficial uses: reassess categories of municipal, domestic, recreation (both contact and non-contact).	7/1/2020	First paragraph on surface water regulation reivsed (section 3.5.6) and added new section 3.3.3, Beneficial Uses of Groundwater
Public Draft Chapter 3		There are questions about the accuracy of information (data gaps). Be clear about degrees of uncertainty. How will the GSP deal with data gaps - where is it so wrong that additional survey or study must be done? The GSP needs to note inaccuracies. 70% - 80% accuracy is not good enough.	7/1/2020	Be cautious about identifying data gaps - where DWR may require addressing data gaps without providing funding to do so.
Public Draft Chapter 3		It's not the level of importance about certain points of data. The fact is, that it's not right that we have to make decisions based on inaccuracies. That's an imposition. Having to accept inaccuracies is not reasonable. Where there are questions, Big Valley can make estimate and assumptions to our benefit.	7/1/2020	A paragraph of draft text discusses data uncertainties and decision-making. This will be presented at the next BVAC meeting. Currently place in Chapter 4, page 4-1.
Public Draft Chapter 3		It's not clear what's important. The better information that is collected now, perhaps the basin prioritization will be lowered in the futre.	7/1/2020	Other data sets may help increase accuracy - those will need to be looked at.



## Big Valley GSP Comment Matrix Chapters 1-3

Document	Page & Line Number	Comment	Date	Response
Ch. 3 Plan Area		The term managed wetlands should be changed to state wildlife habitat	9/24/2020	Change made in text
Ch.3 Plan Area	page 173, line 399	In reference to Diversions: There are claimants on the river that do their own measurments and recordings separate from Water Master @ 2:30:00-2:35:00 Set aside with the condition that the language is revised.	9/24/2020	Changes made in text
Ch 3 Plan Area	Line 404	Ash Creek divergence is not measure past Modoc county line by water master @ 2:31:00-2:35:00	9/24/2020	Changes made in text
Revised Draft Chapters 1-2 v2	Page #:, Line #:	Currently BV Groundwater District mapping has defined groundwater zones within its boundaries. Will the district consider groundwater use similar to surface water use (CA riparian doctrine) in that beneficial use and waste or unreasonable use is first applied within zones to help alleviate projected over draft of groundwater reserves within zones? Does the SWRCB have guidance regarding this subject under the current groundwater law? Has this been applied in other groundwater management plans in California?	2/17/2021	
BigValleyGSP_Ch3_Revise dDraft_2020_08_19.pdf	Page #: 3-15, Line #: 323	The estimate of 18 well in the town of Adin is too low. I would guesstimate the number of wells to match the number of parcels and homes in town which would come close to 60+ Each home has its own well, and some parcels have two. Many of these wells were put in place long before well drillers appeared in the community. The town sits a the edge of a very large artesian system and many of the homes have wells less than 100 feet deep. For example, my home was built in 1868 with a hand dug well system that reaches down 80 feet	3/15/2021	
BigValleyGSP_Ch3_Revise dDraft_2020_08_19.pdf	Page #: 3-21, Line #: 403	There is a great deal of precipiatation monitoring performed by the US Forest Service Big Valley Ranger Station. they collect both monthly and annual estimates. As a matter of fact, this will be their 78th year of providing this data to NOAA (they received a plaque from NOAA a couple of years ago celebrating their 75th year in providing weather information). Please call Lennie Edgerton who has this information in spreadsheet form at the Forest Service: (530) 299-8444	3/15/2021	
BigValleyGSP_Ch3_Revise dDraft_2020_08_19.pdf	Page #: 3-21, Line #: 407	Using CIMIS data from McArthur CA is incongruous at best. The nearest CIMIS Station that best represents the weather attributes of the Big Valley area is located in Alturas, CA (CIMIS #90). Although located 40 miles to the east, both Alturas and the Big Valley area are located within the Modoc Plateau Physiographic Province, NOT the Fall River Valley. Being over 1000 feet higher in elevation can drive significant differences in precipitation levels and evapotranspiration rates as well as significant differences in soil types. Please reconsider your "source data" ... Even NOAA uses weather information from the Alturas Airport to estimate changes in weather for this area.	3/15/2021	
BigValleyGSP_Ch3_Revise dDraft_2020_08_19.pdf	Page #: 3-21, Line #: 407	Continuation of limited climate information for the Big Valley Basin. There is a Remote Access Weather Station (RAWS) that is located just north of Round Valley on a west facing slope. It has been collecting local weather information for decades. You can find its weather data here: <a href="https://raws.dri.edu/cgi-bin/rawMAIN.pl?caCRUS">https://raws.dri.edu/cgi-bin/rawMAIN.pl?caCRUS</a> It is named "Rush Creek RAWS"	3/15/2021	

### Big Valley GSP Comment Matrix Chapters 1-3

Document	Page & Line Number	Comment	Date	Response
Big Valley GSP All Chapters Public Draft 8/26/21	Chapt 1	Comment was made that the Ash Creek Wildlife Area is a "disaster". Before it was taken on by the state, the local land owner was farming the property and the area was teeming with wildlife. Since taking over, the state has left the property unmanaged and it does not support the wildlife that it used to	9/9/2021	Text was added to Section 1.1 describing this mismanagement.
Big Valley GSP All Chapters Public Draft 8/26/21	Chapt 1	Comment was made that many Big Valley residents participated in a program with the State Board where they put in stockwatering wells off-stream to keep cattle out of the riparian areas to improve water quality. Now those extra wells drilled are being used against the residents due to the prioritization including the number of wells as one of the <u>prioritization criteria</u>	9/9/2021	Text was added to Section 1.1 regarding residents participating in this program to protect water quality. Text added to section 1.3 describing how the inventory of wells has been used against the landowners.
Big Valley GSP All Chapters Public Draft 8/26/21	Line 132	Don't like sentence. Change to Currently there is no evidence to suggest that...	9/9/2021	Sentence changed
Big Valley GSP All Chapters Public Draft 8/26/21	Line 164	Change may to will.. Capitalize Board of Supervisors	9/9/2021	Text changed
Big Valley GSP All Chapters Public Draft 8/26/21	Line 234	Strike contend	9/9/2021	Word stricken
Big Valley GSP All Chapters Public Draft 8/26/21	Line 809	The Goose Lake Basin statement needs further clarification such as "The Goose Lake Basin, with similar land use practices"	9/9/2021	Text changed
BigValleyGSP_Ch1_2_RevisedDraft_2021_03_21_set aside.pdf	Page #:, Line #:	<a href="https://bigvalleygsp.org/service/document/download/281">Letter to BVAC. General comments on chapters 1-6.: https://bigvalleygsp.org/service/document/download/281</a>	9/13/2021	Comment will be reviewed by GSAs and responded in the final GSP
BigValleyGSP_Ch1_2_RevisedDraft_2021_03_21_set aside.pdf	Page #: 1-90, Line #:	<a href="https://bigvalleygsp.org/service/document/download/280">BigValley GSP Chapters 1-3, Comments are both editorial and content. See attached memo. See attached https://bigvalleygsp.org/service/document/download/280</a>	9/13/2021	Comment will be reviewed by GSAs and responded in the final GSP

### Big Valley GSP Comment Matrix Chapters 1-3

Document	Page & Line Number	Comment	Date	Response
BigValleyGSP_Ch3_Revise dDraft_2021_03_21_setaside.pdf	Page #:, Line #:	<a href="https://bigvalleygsp.org/service/document/download/283">comments are editorial and content and are marked as such.Â Doreen SmithPower ParalegalÂ https://bigvalleygsp.org/service/document/download/283</a>	9/13/2021	Comment will be reviewed by GSAs and responded in the final GSP
BigValleyGSP_Ch3_Revise dDraft_2021_03_21_setaside.pdf	Page #: 1-90, Line #:	<a href="https://bigvalleygsp.org/service/document/download/282">Not sure if the last e-mail actually went through.Â The comments are editorial and content.Â There is also a separate letter attached.Â Doreen SmithPower - ParalegalÂ https://bigvalleygsp.org/service/document/download/282</a>	9/13/2021	Comment will be reviewed by GSAs and responded in the final GSP
Big Valley GSP All Chapters Public Draft 8/26/21	Line 230	Add text "of this unfunded mandate"	9/9/2021	Text added
Big Valley GSP All Chapters Public Draft 8/26/21	Lines 243-245	There are local conservation groups such as the FSA that have helped	9/9/2021	Text modified to include NGOs
Big Valley GSP All Chapters Public Draft 8/26/21	Line 251	Wildlife grazes on ag lands and also rear their young and seek protection from predators	9/9/2021	Text modified. Quote from Stadtler (2007), former land owner, added.
Big Valley GSP All Chapters Public Draft 8/26/21	Chapter 1	We installed off-stream stockwatering wells to improve water quality. Now this increase in well inventory is coming back to bite us.	9/9/2021	Text added regarding participation in the EQUIP program. Text added to Table 1-1. Text added to section 3.4.1
Big Valley GSP All Chapters Public Draft 8/26/21	Line 299	BVAC members were appointed, not elected	9/9/2021	Text changed
Big Valley GSP All Chapters Public Draft 8/26/21	Line 302	BVAC and county staff have devoted their hours without compensation	9/9/2021	Text added, stating that time was largely uncompensated.

### Big Valley GSP Comment Matrix Chapters 1-3

Document	Page & Line Number	Comment	Date	Response
Big Valley GSP All Chapters Public Draft 8/26/21	Line 318	DWR needs the better understanding of the Basin	9/9/2021	Text added.
Big Valley GSP All Chapters Public Draft 8/26/21	Line 390	County staff didn't "feel" misled, they "were" misled	9/9/2021	Text changed.
Big Valley GSP All Chapters Public Draft 8/26/21	Line 428-434	Please point out the inadequacy of using a 60 year old map to draw basin boundries	9/9/2021	Text changed.
Big Valley GSP All Chapters Public Draft 8/26/21	Lines 531-532	Last sentence regarding right to pump water should be bold	9/9/2021	Text bolded
Big Valley GSP All Chapters Public Draft 8/26/21	Section 3.2	The Superior Court has jurisdiction over water rights.	9/9/2021	Section added regarding court role. Text will be added
Big Valley GSP All Chapters Public Draft 8/26/21	Section 3.2	Don't like saying that federal and state agencies "own" land.	9/9/2021	Text changed to "has jurisdiction over".
Big Valley GSP All Chapters Public Draft 8/26/21	Line 647	Change "Habitat" to "Area"	9/9/2021	Text changed.
Big Valley GSP All Chapters Public Draft 8/26/21	Figure 3-5	Don't like this map it is grossly inaccurate	9/9/2021	Map replaced with the one used in Chapter 6



### **Big Valley GSP Comment Matrix Chapters 1-3**

Document	Page & Line Number	Comment	Date	Response
Big Valley GSP All Chapters Public Draft 8/26/21	Lines 685- 686	Pumping on ACWA is for growing feed stock, not for creating wetlands	9/9/2021	Text changed to be more general "habitat".

## **Big Valley GSP Comment Matrix Chapter 4**

Document	Page & Line Number	Comment (NOTE: break from 02:19:30-02:28:00)	Date	Response
Public Draft Chapter 4		How much UC Davis information is included in Chapter 4? Is preliminary information available from that Study.		Being looked at
Public Draft Chapter 4		DWR identifies options for defining a basin bottom: bedrock, water quality that precludes use (using resistivity) It's not clear where bedrock occurs, or where water quality decreases. Are using 1,200' as a definable bottom, to capture existing wells.		See conceptual language at the bottom of page 4-10 and at the top of page 4-13.
Public Draft Chapter 4		Data gaps include: basin boundary, confining conditions, definable bottom, faults as barriers to flow, soil permeability, recharge		See conceptual language on page 4-1
Public Draft Chapter 4	Page 1 line 13	Dimensions of basins do not match with Chapter 3.		Being looked at
Public Draft Chapter 4	Page 1 Line 21	Add in 363.63 acres of riparian area (30 miles of Pit River, 50' on each side)		Riparian area is captured in Table 3-1
Public Draft Chapter 4	Sec. 4.4.1	<p>Single principal aquifer is most appropriate for managing groundwater. This should be removed. The BVAC is not interested in managing groundwater. What is the basis for the determination of a single aquifer? To define multiple aquifers, there would need to be evidence of hydrologic separation (such as clay layers). Pumps that have different levels of production could be connected - the differences resulting from the fact that aquifers are not consistent throughout. Also, there is a stream between the upper basin and lower basin. Laura: If there was a bathtub filled with sand, everyone would have the same pumping. However, the bathtub is filled with sand, gravel, clay and silt. There are also layers of lava, faults and streams. Additionally, the basin is thinner at the edges. Better pumping occurs in sand, less production is found where drilling occurred where there is more clay or silt. Wells were drilled to see what the layers of materials are in areas where there aren't many wells. Tiffany: These wells supplement the CASGEM wells.</p> <p>Also: the Wildlife Area looked at adding a monitoring well. However, it is not likely that that the well would have been permitted in time to inform the GSP. (Note:Check into whether this is proceeding?)</p>		<p>Language for section 4.4.1 is that: "a single principal aquifer will be used for this GSP." (will not say "for managing groundwater")</p> <p>Explain that there are potential differences across the basin. There are 21 CASGEM wells. Ranging in depth from 800' to 50'-100'. It's hard to pin down details and distinctions with 21 wells with a wide range in depth. There are three wells in Lookout (or south of Bieber) that provide a clue that something might be different.</p> <p>Somewhere in the report, say that the GSAs are being asked to make decisions with incomplete information and uncertainties.</p>
Public Draft Chapter 4		Regardless of the complexity and cost of monitoring, it is important to accurately describe the aquifer. If there is variation across the basin, that should be described.		
Public Draft Chapter 4	page 26 Line 423	Shows many small towns and reservoirs. There are also small ponds and reservoirs within the basin. Ranchers have to pay dam fees for reservoirs and water rights fees for stock ponds. These are surface supplies. These should be shown on the maps or described in text.		There will be an opportunity to mark up maps and revise presentation of waterbodies. (Map -14)

## Big Valley GSP Comment Matrix Chapter 4

Document	Page & Line Number	Comment (NOTE: break from 02:19:30-02:28:00)	Date	Response
Public Draft Chapter 4	page 26 Line 425	Importing surface water into the basin: Roberts Reservoir and Silver Reservoir has water rights used in this basin, that is stored outside the basin boundaries. Clarify language on imported water. Explain that some water sources used in the basin is stored outside the basin boundaries. Ensure that all incoming supplies are accounted for in water balances.		Imported water refers to surface water supplies that originate from outside the watershed where the supplies are used. This is clarified.
Public Draft Chapter 4	page 27	The issue of definable bottom: What value works to the favor, in the interests of, Big Valley residents? Say that the definable bottom has not been established, there is much variability, and that a bottom is set at "x" for the purposes of the plan.  Helpful to know when things are, or are not, in our interest - and to explain why that is so. If the definable bottom needs to be in the plan, say so. Then heavily caveat the number. Any uncertainties should be evaluated in favor of the Basin.		Annual reports require calculations on change in storage for the basin. Those calculations are multiplied by the number of aquifers. Then definable bottoms must be determined for each aquifer. The change in storage is what is important, not the overall storage. The key is to understand the conditions and the best options for optimizing and using the resource to make sure there are not dire consequences in the future.  NOTE: GEI provides a list of required elements for each chapter.
Public Draft Chapter 4	Page 23 Line 360	Replace the word "poorer." Perhaps lesser - keep looking... The quality of water that is naturally occurring will not be affected by management decisions. Clarify that this is not about good water quality being degraded.		See suggested alternative language
Public Draft Chapter 4		Explain that there is a lot of complexity across the basin, including temperature and water quality. Show the variety in where water levels are maintaining or going down. Want to focus on the goals, for example - wells not drying up, supporting agriculture, springs going dry. Management will focus on the goals rather than absolute numbers.		This will be the central discussion for creating Sustainable Management Criteria - this suggestion will be included when discussions are underway for developing the criteria
Public Draft Chapter 4		How can the GSP use remedial soils, outside of basin boundaries, to help support recharge to the basin?		This suggestion will be carried forward for discussions on developing "Projects and Management Actions."
BigValleyGSP_Ch4_RevisionDraft_2020_08_19.pdf	Page #: 4-16, Line #: 270	Figure 4.5.1 Taxonomic Soil Orders identified for the Basin are oversimplified and are too "Coarse Grain" to be used effectively for any management implications. It certainly simplifies the landscape analysis process, but does not adequately describe in enough detail as to the attributes of soil classification that supports the poor infiltration and problems with groundwater recharge found in throughout this area. Please include more extensive soil classification descriptions. NRCS soil maps provide a more comprehensive backdrop to the soils out here.	3/19/2021	

## Big Valley GSP Comment Matrix Chapter 4

Document	Page & Line Number	Comment (NOTE: break from 02:19:30-02:28:00)	Date	Response
BigValleyGSP_Ch4_Revise dDraft_2020_08_19.pdf	Page #: 4-18, Line #: 303	Table 4.5.2 Hydrologic soil descriptions .... Again, the Hydrologic Soil DescriptionsÂ identified for the Basin are oversimplified and are too "Coarse Grain" to be used effectively for any management implications. They do not adequately describe in enough detail as to the attributes of different hydrologic soil classifications that support this area. Please include more extensive hydrologic soil descriptions. These hydrologic soil descriptions are important for protection of rare habitat types found within the Valley which include northern basalt vernal pools	3/19/2021	
BigValleyGSP_Ch4_Revise dDraft_2020_08_19.pdf	Page #: 4-23, Line #: 400	Figure 4-12 NCCAG Wetland delineation.I am challenging the use of the NCCAG dataset at the principal data source for the delineation of wetland systems in the Big Valley Basin. It appears that wetland acreages are under represented in their data set due to the fact that it is based upon "natural community types", i.e; vegetation.Â The USGS National Wetlands Inventory Wetland Mapper utilizes multiple variables including soil type, soil profile, oxidation within the soil profile, depth to water, vegetation, hydrologic factors and more when delineating and describing wetland types in their mapping data. I would recommend that the information provided by the USGS National Wetland Inventory be compared with the NCCAG dataset. The history of land use in the Valley by ranching and agricultural activity has has a direct effect on the "vegetation community types" one can identify on an aerial photograph. These activities however, do not necessarily change the underlying attributes of wetland characteristics within the soil.Â Â You can access this information via the USGS website:Â <a href="https://fwsprimary.wim.usgs.gov/wetlands/apps/wetlands-mapper/">https://fwsprimary.wim.usgs.gov/wetlands/apps/wetlands-mapper/</a>	3/19/2021	
BigValleyGSP_Ch4_Revise dDraft_2020_08_19.pdf	Page #: 4-26, Line #: 454	Figure 4-14 Recharge, discharge and major surface water bodies.The legend that is presented with this Figure has an item listed as "Lake". As mentioned on page 4-27, line 466, this figure represents the streams, ponds and surface waters within and adjacent to the Basin.Â There are little "lake" effects in the Valley.Â The surface waters present in the Basin are over-represented in this Figure. We have no reservoirs within the Valley basin. We DO have stock ponds, small impoundments and freshwater ponds located on the Ash Creek Wildlife Refuge. More current aerial photographs of the Basin clearly show extant, smaller and more depleted surface waters than what is presented in this Figure. Please review this data	3/19/2021	
BigValleyGSP_Ch4_Revise dDraft_2021_03_21_seta side.pdf	Page #: 1-90, Line #:	<a href="https://bigvalleygsp.org/service/document/download/285">comments on 1-3 both editorial and content.Â Doreen SmithPower ParalegalÂ https://bigvalleygsp.org/service/document/download/285</a>	9/13/2021	
BigValleyGSP_Ch4_Revise dDraft_2021_03_21_seta side.pdf	Page #: 1-90, Line #:	<a href="https://bigvalleygsp.org/service/document/download/284">editorial and content.Â See attached document.Â Â Doreen SmithPower ParalegalÂ https://bigvalleygsp.org/service/document/download/284</a>	9/13/2021	



### **Big Valley GSP Comment Matrix Chapter 4**

Document	Page & Line Number	Comment (NOTE: break from 02:19:30-02:28:00)	Date	Response
Big Valley GSP All Chapters Public Draft 8/26/21	Section 4.2.1	Add more language regarding the inaccuracies in the Basin Boundary, particularly the finger that includes E. Fork Juniper Creek	9/9/2021	Text modified.
Big Valley GSP All Chapters Public Draft 8/26/21	Lines 1274-1275	Delete last sentence	9/9/2021	Sentence deleted
Big Valley GSP All Chapters Public Draft 8/26/21	Section 4.6, Environmental Uses	Don't like map and discussion of NCCAG	9/9/2021	Map and discussion removed.
Big Valley GSP All Chapters Public Draft 8/26/21	Line 1515	Does young water mean we are not in overdraft?	9/9/2021	Young water indicates that the water is being flushed through the system.
Big Valley GSP All Chapters Public Draft 8/26/21	Lines 1555-1558	Flood irrigation doesn't occur just on lower portions of Pit River	9/9/2021	Text changed to state flood irrigation occurs in the Basin generally.
Big Valley GSP All Chapters Public Draft 8/26/21	Figures 4-9 through 4-11	Expand these maps so they include areas outside the Basin	9/9/2021	This will be done before the final GSP is submitted.

## Big Valley GSP Comment Matrix Chapter 5

Document	Page & Line Number	Comment	Date	Notes and Responses
Public Draft Chapter 5	Subsidence, Section 5.5, pages 5-22 to 5-24	<p><b>How do the measurements account for agricultural practices that affect ground level? That should be discussed. Subsidence may not be due to changes in groundwater levels. It could be compaction, grazing land converted to row crops - with soils used to enhance levees. Or earthwork done at Caltrans. Or erosion. There may be other actions affecting ground levels, such as new ground disturbance.</b></p> <p><b>• Consider a footnote on land use, saying that additional on-ground monitoring is needed. Explain that these measurements show where ground is lower or higher.</b></p>	9/24/2020	<p>Subsidence associated with groundwater dynamics and pumping generally result in "bulls-eye" patterns of subsidence. Some of the subsidence in Big Valley is likely due to oxidation of organic materials.</p> <p>There are other options for monitoring subsidence, including the survey markers embedded in the new well monitoring foundations.</p> <p>A key consideration is where groundlevel changes are due to groundwater pumping are undesirable.</p>
Public Draft Chapter 5	Water Quality Section 5.4, pages 5-9 to 5-22.	There are concerns that providing quantitative measurements on water quality will encourage micro-analysis by the state.	9/24/2020	<p>Elevated constituents are naturally occurring (iron, manganese, arsenic). Also good to watch specific conductants. The GSP is required to report on contamination sites (such as gas stations and landfills). The graphs do show that there is better water quality (graphs 5-8, 5-9 and 5-10). It can support a baseline groundwater quality monitoring in the GSP. Additional data on water quality can show that conditions are even better than what was seen with Bieber samples.</p>
Public Draft Chapter 5	Groundwater Levels (and surface water interactions)	<p>Don't groundwater levels necessarily need to be the same across the basin?</p> <p>Explain how it's determined that a stream is gaining or losing. It is not understandable.</p>	9/24/2020	<p>Two reasons why surface water depletions are a critical element: surface water rights and groundwater dependent ecosystems.</p> <p>(Response: as long as the wells are in the same geologic formation, the levels should be very close. If a pump is located in a different formation, the response times may be different - and affect the levels)</p> <p>(Response: Pit River and Ash Creek have different water signatures. Additional monitoring and samples will better inform the patterns of gaining and losing.</p>
Public Draft Chapter 5	GDEs, Sec. 5.7, pages 5-26 to 5-31	<ul style="list-style-type: none"> <li>• The acreage for amount of willows in the basin is overstated. There is not 4,700 acres of willows in the basin.</li> <li>• Ash Creek Refuge uses surface water supplies. There was discussion about groundwater levels in that specific area, which are closer to the surface and contribute to surface water supplies.</li> </ul> <p><u>Table 5.5, page</u></p> <ul style="list-style-type: none"> <li>• <b>Alfalfa is listed as a native species – change this</b></li> <li>• Is aspen found in the basin?</li> <li>• Is elderberry found in the basin?</li> <li>• <b>Change "salix" to "willow"</b></li> </ul>	9/24/2020	<p>Ash Creek Refuge does also use groundwater pumping to irrigate at Ash Creek. This area is known as an ecological preserve and land uses are not likely to change. The consultants were careful to clearly delineate what truly qualifies as a GDE.</p> <p>This current text is about describing likely or potential GDE. The big question is about managing for GDEs, which comes later</p> <p>Species listings are obtained from the Native CalFlora website. The Nature Conservancy website was also reviewed and many of the species listed <del>were deleted for the Big Valley GSP</del></p>
Public Draft Chapter 5	GDEs	<p>Do not say that Ash Creek is "managed"</p> <p>Descriptions of GDEs should be verified by those who are working on the land</p>	9/24/2020	<p>Chapter 5 does not contain the word "managed" or "managed wetlands" - the area is referred to as Ash Creek Wildlife Area</p>
Public Draft Chapter 5	River reaches: Page 5-25 b and c	<ul style="list-style-type: none"> <li>• <b>Reaches 6 and 9 are both labeled Upper Pit River</b></li> <li>• Reach 3 is Willow Creek: water rights and diversions mean that Willow Creek does not exist after a certain point during the summer (Sup. Albaugh spoke to David Fairman about the issue, briefly, before the meeting) -</li> </ul>	9/24/2020	Figure updated
Public Draft Chapter 5		Referring to the Elements checklist guide, there was a question about which items are required.	9/24/2020	Clarification was provided during the presentation.

## Big Valley GSP Comment Matrix Chapter 5

Document	Page & Line Number	Comment	Date	Notes and Responses
BigValleyGSP_Ch5_Revise dDraft_2020_10_22.pdf	Page #: 5-29, Line #: 361	Regarding key "Vegetation Areas" ... "Willow" is described as the second largest habitat comprising 41% of the area. Wrong. If anything, we lack willow as a component within or adjacent to creeks, ditches and ponds in this area. We have no habitat for the Willow Flycatcher here. There are scant distributions of willow species among the Ash trees along the full length of Ash Creek, along the edges of freshwater ponds and water compounds on ranches and within the wildlife refuge as well as along Willow Creek. There is a dearth of willow in the basin... especially enough to cover 41% of your vegetative composition. Please review this classification as a vegetation area. Something is in error here ....	3/19/2021	
BigValleyGSP_Ch5_Revise dDraft_2020_10_22.pdf	Page #: 5-30, Line #: 365	Figure 5-19 NCCAG Wetlands lacks the locations of "riverine" and "seep or spring" on the map ...	3/19/2021	
BigValleyGSP_Ch5_Revise dDraft_2020_10_22.pdf	Page #: 5-31, Line #: 368	Figure 5-20 NCCAG Vegetation. The "willow" component in this figure is in error. The vegetation composition along Ash Creek is not willow at all but Oregon Ash (Fraxinus latifolia). There are a few individual willow shrubs on the ACWR along with a few Black Cottonwood (Populus trichocarpa ssp. trichocarpa) as well as a few other Ash trees distributed here or there. No grand distribution of willow...Has your environmental staff been on the ground here to support your vegetation suppositions? This entire "Willow" vegetation type needs to be reassessed....	3/19/2021	
BigValleyGSP_Ch5_Revise dDraft_2020_10_22.pdf	Page #: 5-32, Line #: 389	Table 5-5 "Big Valley Common Plant Species" Three out of the six plant species listed in this table do not occur in Big Valley. Carex sp., Alfalfa sp., and Salix sp. are the only ones that occur here. Aspen sp., Sambucus sp. (Elderberry) and Distichlis sp. (saltgrass) do not occur very often if at all in the local landscape. i is recommended that Oregon Ash (Fraxinus latifolia) or Black Cottonwood (Populus trichocarpa) be used for tree species that occur in these areas. There is rooting depth data available for both of these species. A Wild rose (Rosa woodsii) is commonly found along Ash Creek and within the ACWR. We KNOW that Idaho fescue (Festuca idahoensis) and Tufted hair grass (Deschampsia cespitosa) are commonly found within wet meadow types, adjacent to ponds and along creekbanks in this area. Develop a more localized species list to use for rooting depth estimates. A A	3/19/2021	
Big Valley GSP All Chapters Public Draft 8/26/21	Line 1929	"It is unknown if the subsidence in these areas has been induced by groundwater extraction." We argue earlier that we don't have any and this is opening the door to saying we do.	9/9/2021	
Big Valley GSP All Chapters Public Draft 8/26/21	Lines 1685-1586	Do we need the sentence describing the declines in water levels	9/9/2021	This is a factual statement and is important to putting changes in water levels in context.
Big Valley GSP All Chapters Public Draft 8/26/21	Line 1874	Delete "including groundwater pumping.	9/9/2021	Text removed.

### **Big Valley GSP Comment Matrix Chapter 5**

Document	Page & Line Number	Comment	Date	Notes and Responses
Big Valley GSP All Chapters Public Draft 8/26/21	Section 5.5	Subsidence is not happening in the Basin, yet we use the word subsidence many times	9/9/2021	Text changed to talk about "lowering of ground" where appropriate.
Big Valley GSP All Chapters Public Draft 8/26/21	Section 5.7	We don't like this section, don't like the maps. This data is inaccurate	9/9/2021	Two maps removed, text changed to emphasize need to field verify GDEs.



## Big Valley GSP Comment Matrix Chapter 6

Document	Page & Line Number	Comment	Date	Notes and Responses
Public Draft Ch 6, Historic Wtr Budget	Figure 6-2, page 6-2	Why is the atmospheric system not incorporated into the water budget	Nov. 4	Inputs from the atmospheric system appear as precipitation, which is about 12' - 15" per year. The water budget accounts for precipitation as either falling onto land or onto water bodies.
Public Draft Ch 6, Historic Wtr Budget	Figure 6-4, page 6-4	If inflow were to equal outflow, that would represent a balanced system. There are some streams that have crazy flows during periods of high precipitation.	Nov. 4	Yes, which is why it's important to recharge groundwater during high flows - so that stored groundwater can be used during dry periods.
Public Draft Ch 6, Historic Wtr Budget	Section 6.2, page 6-4 and elsewhere	<b>There are no naturally occurring lakes in the basin. Any standing bodies of water are reservoirs.</b>	Nov. 4	<b>Change terms in text to "lakes/reservoirs" including bar charts and figures.</b>
Public Draft Ch 6, Historic Wtr Budget	Footnote 1, page 6-6	<b>What is the definition of long-term (e.g. long-term sustainability)?</b>	Nov. 4	By 2042, mechanisms should be in place to manage water from year to year. When it comes to setting thresholds, those levels should provide room so as to stay in compliance during periods of variation or fluctuation. It may be that, during the next 20 years, conditions might get worse before it gets better.
Public Draft Ch 6, Historic Wtr Budget	Figure 6-8, page 6-6; and PPT slide #15	<b>Double-check the lines calculated by excel.</b>	Nov. 4	The results were checked to see if they were reasonable.
Public Draft Ch 6, Historic Wtr Budget	Appendix 6-A, Land System, Line 1	<b>How are inflows from areas outside the basin boundaries represented? [Note: This is paraphrased from a question by Aaron asking if calculations can be provided to support future requests for boundary modifications.]</b>	Nov. 4	[David: Is this stream inflow to the basin?]
Public Draft Ch 6, Historic Wtr Budget	Page 6-3, Line 49	<b>Has the data from the CIMIS station in McArthur been adjusted for Bieber?</b>	Nov. 4	That is being adjusted for. Also, Steve Orloff has a paper on percent application of water, in terms of ET, for alfalfa in Scott Valley - which may be a helpful estimate.
Public Draft Ch 6, Historic Wtr Budget	Appendix 6-B, (multiple locations)	<b>Why is Managed Aquifer Recharge set at zero?</b>	Nov. 4	Managed Aquifer Recharge refers to actions where the primary objective is recharge (e.g., as opposed to reservoir, where surface water storage is the primary objective, with recharge is a secondary result). Projects such as flooding for habitat might quantify as Managed Aquifer Recharge. It would be necessary to state that groundwater recharge is an intended benefit from the flooding.
Public Draft Ch 6, Historic Wtr Budget	Figure 6-4, page 6-4	<b>Question from the public: you mentioned approximately 100K error in stream outflow out of the basin. Also, you said that we know that more water actually flows into the basin than out. (Fig 6-4) Does this explain the approximately 80K difference between the estimated and actual groundwater budget? (not sure of slide #)</b>	Nov. 4	
Public Draft Ch 6, Historic Wtr Budget	Appendix 6A Land System, line 2, assumptions	<b>Ag is not the only user of surface water: surface water is also used by loggers, fire-fighters, Caltrans, illegal marijuana grows, wildlife, etc.</b>	Nov. 4	There is no quantification of other surface water uses.
Public Draft Ch 6, Historic Wtr Budget	Appendix 6A Land System, line 2, data needs	<b>Ash Creek Wildlife Area and Groundwater Pumping: (someone) retired and had maintained a lot of data on groundwater pumping.</b>	Nov. 4	Laura can work to coordinate data transfer.

## Big Valley GSP Comment Matrix Chapter 6

Document	Page & Line Number	Comment	Date	Notes and Responses
Public Draft Ch 6, Historic Wtr Budget	Appendix 6A Land System, line 3, data source	<b>Population source shows Bieber - there are other communities as well.</b>	Nov. 4	Bieber has a municipal system, which is different from domestic extractions. Adin will be added in as a public water supply which is a non-municipal use.
Public Draft Ch 6, Historic Wtr Budget	Appendix 6C Land System chart	<b>Do inflows on the Land System bar chart include surface water sources from outside the basin what provide water for irrigation uses within the basin? (e.g., Roberts Reservoir, Silva Flat, etc.)</b>	Nov. 4	Those reservoirs outside the basin are not per se considered here. The flows out of the reservoir are included in the category of the watershed that are ungaged. While flow out of the reservoir is measured, there is not access to a long-term record of that. It is shown as an inflow coming in as stream flow. The diversion of the stream flow to application to the field or ditch is represented as a surface water delivery. (40% of applied water is from surface water.)
Public Draft Ch 6, Historic Wtr Budget	6-4 and 6-5, Section 6.2	How is it possible that inflow exceeds outflow?	Oct. 30	While inflow and outflow may be more equal during certain seasons, outflow may exceed inflow during other seasons. This data represents the total annual inflow and outflow. <b>*Figure 6-4 through 6-7 will be changed to read "Total Annual Water Budget" for clarity.</b>
Public Draft Ch 6, Historic Wtr Budget	pg. 6-5, Figures 6-5, 6-6, 6-7	A better explanation of "Between Systems" is needed.	Oct. 30	Flow between systems is depicted in Figure 6-2 (pg. 6-2) and will be further explained during 11/4/20 BVAC meeting. <b>*Figure 6-2 can be referenced on page 6-5</b>
Public Draft Ch 6, Historic Wtr Budget	Appendix 6A, Land System, items 2 & 3	Need clarification on where assumption of 40% surface water and 60% groundwater used for irrigation comes from.	Oct. 30	Studies will be completed by December 2021 and information can be incorporated.
Public Draft Ch 6, Historic Wtr Budget	Appendix 6A, Land System, items 7 & 8	Need clarification on percentages under "Assumptions" column; change "grounwater" to "groundwater".	Oct. 30	<b>*Explanation about the 85% irrigation efficiency and the 15% inefficiency, resulting in 7.5% return flow and 7.5% recharge, will be included for clarification; typo will be corrected.</b>
Public Draft Ch 6, Historic Wtr Budget	Appendix 6A, GW System item 27	Is it true that no subsurface inflow occurs in the basin?	Oct. 30	Until it can be shown otherwise, it will be assumed that there are no inflows and no connection to Round Valley.
Public Draft Ch 6, Historic Wtr Budget	Appendix 6C, Total Basin bar chart	Stream inflow and outflow are even during some parts of the year but not others; It would be helpful to see exact number of acre-feet on Appendix 6C bar charts	Oct. 30	<b>*Text will be added to read something like "Stream flow varies throughout the year."; Actual number of acre-feet will be added to some of the years on Appendix 6C bar charts</b>
Public Draft Ch 6, Historic Wtr Budget	Appendix 6C, Surface Water bar chart	Explanation is needed for Surface Water Delivery as an outflow. If a percentage used for irrigation goes to the plants, is the percentage that goes back to the groundwater captured in one of the categories on the inflow side of the chart?	Oct. 30	
Public Draft Ch 6, Historic Wtr Budget	Appendix 6C, Groundwater bar chart	Because the colors are similar, it appears that there is a small amount of subsurface inflow on the bar	Oct. 30	<b>*Subsurface Inflow will be removed from the bar chart key</b>

## Big Valley GSP Comment Matrix Chapter 6

Document	Page & Line Number	Comment	Date	Notes and Responses
Public Draft Ch 6, Current Wtr Budget		<b>The Tables in Chapter 6 should say "ESTIMATED" or "ASSUMED" for Inflow, Outflow.</b>	Dec. 2	Data is used where it's available, rough estimates are made in other areas, and assumptions based on best professional judgement in still other areas. The water budget is balanced by adjusting the estimates and assumptions within generally acceptable ranges until the budget is balanced. As such, the water budget is not necessarily a unique solution, but represents the best professional estimate. Water budget estimates of this type are considered order of magnitude estimates and can be refined as new data becomes available
Public Draft Ch 6, Current Wtr Budget		<b>Some areas are shown on the map as irrigated, when they are actually dry farmed. These areas have only been irrigated on a select few occasions.</b>	Dec. 2	In order to reflect these farming practices, the GSP development team needs data to substantiate it. Input was requested on water source throughout the Basin in previous BVAC meetings. Similar input will be solicited at upcoming meetings and the new information can be incorporated into the Water Budget in future revisions.
Public Draft Ch 6, Current Wtr Budget		<b>Concern that the 14,000 acres of the wetland don't show irrigation. Ash Creek Refuge is white on the map, rather than blue.</b>	Dec. 2	The focus was on calculating irrigated acreage. Wetlands are a water use in the water budget - the assumption is that 98% of the water supply on the refuge is from surface water, and 2% groundwater. <b>The wetlands in the Ash Creek Wildlife area have been added to Figure 6-5.</b>
Public Draft Ch 6, Current Wtr Budget		<b>How were the percentages of 98% surface water and 2% groundwater derived for the wetlands?</b>	Dec. 2	Starting with the area of the wetlands, the evapotranspiration values (more specific to the conditions in Big Valley) are combined with crop co-efficients. A coefficient was used for crops similar to the vegetation of the wetland. The yields an estimate of evapotranspiration associated with the plants in the wetland. If the refuge did not run any groundwater pumps, then the refuge would be supplied 100% by surface water. Because there are three pumps that are occasionally run, there is some source from groundwater. The 2% was estimated based on professional judgement due to knowledge of the locations of the wells, the areas that they irrigate and conversations from the CDFW about how often they use them (typically for a month or two in the fall to bridge the driest part of the year). Consultant staff has reached out to the CDFW to obtain pumping data, but they have indicated that the data does not exist. As such, 2% is currently the best estimate. <b>Text was added to the chapter to document this estimate.</b>
Public Draft Ch 6, Current Wtr Budget		What are the options for determining runoff? Which way is best?		Modeling or calculations using the "Curve Number Method" (CNM) are the two widely accepted options to determine runoff. In the opinion of the consultants, modeling runoff would not produce significantly improved estimates from CNM, but would take additional time and budget.
Public Draft Ch 6, Current Wtr Budget		Is there a way to get a larger map, or better electronic version, to take a closer look at the basin boundary?	Dec. 2	<b>A KMZ file (viewable in Google Earth) of the Basin Boundary has been posted on the website. An email notification was sent to the interested parties notifying them of the file and how to use it.</b>
Public Draft Ch 6, Current Wtr Budget		Using the numbers on this chart, does this mean that a 7-8% reduction in pumping is needed?	Dec. 2	What this means is that there needs to be about 5,000 AF per year on average in compensation to reduce overdraft. It might involve managed aquifer recharge, reduced pumping or combination of the two. Reducing overdraft can be achieved in various ways.

## Big Valley GSP Comment Matrix Chapter 6

Document	Page & Line Number	Comment	Date	Notes and Responses
Public Draft Ch 6, Future Wtr Budget		Is it required to use 50 years of data? Does it specify which years of data need to be used?	Dec. 2	At least 50 years of historical data are required as per the GSP Regulations. Going back further would include data from a time period with higher uncertainty and lower accuracy.
Public Draft Ch 6, Future Wtr Budget		How does an overdraft of about 5-10% compare with other basins? It's surprising that the number is so small, but it would still impact a lot of people.	Dec. 2	Not sure, but there are certainly a lot other basins that are much worse off.
Public Draft Ch 6, Future Wtr Budget		<b>Land System Water Budget Chart, item 2 (inflow between systems): This uses surface water. Ash Creek Wildlife Refuge is here. The assumption is that ag is the only sector that uses surface water. There are other uses and users of surface water.</b>	Dec. 2	The wetlands are also a surface water user and text has been added to describe that. There are also illegal uses, fire uses. There is not a way to measure or quantify those uses. If some reasonable and defensible data or assumptions were provided to the GSP development team, then those uses could be incorporated into the budget.
Public Draft Ch 6, Future Wtr Budget		<b>Land System Water Budget Chart, item 3 (population): This only uses the population from the census of Bieber, there's Adin, New Bieber and Lookout. Those need to be added in.</b>	Dec. 2	The water budget considers the entire population of Big Valley published by DWR. A distinction is made between Bieber and the rest of Big Valley, because Bieber is served by a public water supply system while the rest of domestic use in Big Valley is from individual wells. This is a distinction between "municipal" and "domestic" uses, which SGMA categorizes differently. However, all household use is considered and accounted for in the water budget.
Public Draft Ch 6, Future Wtr Budget		<b>There's a piece of ground that's not on the map that needs to be included (Jimmy Nunn).</b>	Dec. 2	This information can be incorporated once the land is clearly identified. Such information will be solicited at future BVAC and/or public outreach meetings.
Public Draft Ch 6, Future Wtr Budget	Line 38	Ideally <b>In concept</b> , each component could be quantified precisely and accurately, and the budget <b>would could</b>	Jan. 22	Changes will be made to next iteration of chapter.
Public Draft Ch 6, Future Wtr Budget	Line 39	come out balanced. In practice, <b>many most</b> of the components can only be roughly estimated, and in	Jan. 22	Changes will be made to next iteration of chapter.
Public Draft Ch 6, Future Wtr Budget	Line 40	<del>some</del> <b>many</b> cases not at all. Therefore, much of the work to balance the water budget is adjusting <del>some</del> <b>many</b>	Jan. 22	Changes will be made to next iteration of chapter.
Public Draft Ch 6, Future Wtr Budget	Line 44	components estimated through the use of the water budget are order of magnitude. Estimation of <b>Suggested wording change to "order of magnitude" comments were that the content needs to be made clearer to the reader</b>	Jan. 22	Wording will be adjusted in the next iteration to make the concept of "order of magnitude" estimates more clear.
Public Draft Ch 6, Future Wtr Budget	Line 56	because it represents an average set of climatic conditions and <u>adequate water</u> level, land use, <b>"adequate water level" What is adequate? Define adequate water levels</b>	Jan. 22	This refers to the fact that many of the wells with water level measurements started in 1983, so the amount of data was "adequate". We can remove the word "adequate"
Public Draft Ch 6, Future Wtr Budget	Line 73	<b>Add a footnote to Figure 6-4 regarding DWR using inaccurate data. Including in the footnote there should be a mention of better data needed for the water budget and that observational and public input has been received regarding the inaccuracy of the map from DWR. (crop and wetland acreages)</b>	Jan. 22	The land use data used for the water budget is different from the data used for basin prioritization. This part of the GSP is not addressing prioritization. We discuss data gaps in previous chapters, but can re-emphasize here.
Public Draft Ch 6, Future Wtr Budget	Line 87	also has three wells that extract groundwater from the <u>deeper aquifers</u> and is applied in portions	Jan. 22	Not sure what the comment is here. Deeper aquifers emphasizes that the ACWA wells are around 800 feet deep and are not pulling solely from shallow (wetland) portion of the aquifer. In other words, the wells are simply re-distributing groundwater from deep portions of the aquifer to shallow (wetland) portions.



## Big Valley GSP Comment Matrix Chapter 6

Document	Page & Line Number	Comment	Date	Notes and Responses
Public Draft Ch 6, Future Wtr Budget	Line 110-111	<del>Overdraft occurs when the groundwater system change in storage is negative over a long period. (Remove this sentence)</del>	Jan. 22	Change will be made to next iteration of chapter.
Public Draft Ch 6, Future Wtr Budget	Line 115-116	The current water budget is demonstrated by looking at water year 2018, which is the most recent year with reliable data. <b>(Is 2018 the only year with reliable data? Who states what is reliable?)</b>	Jan. 22	We (GEI) have determined that 2018 is more reliable than 2019 because there were several wells without measurements. We can remove the " <del>which is the most recent year with reliable data.</del> " in the next iteration of the Chapter.
Public Draft Ch 6, Future Wtr Budget	Footnote	long-term undesirable results Who determines this? <b>Suggested to add a note to the chapter where information which covers the details of DWR guidelines for establishing long-term undesirable results.</b>	Jan. 22	Undesirable results are locally defined. This will be discussed in Chapter 7
Revised Draft Chapter 6		This chapter is full of estimates and assumptions. It's not fair to have to make decisions based no such inaccurate and incomplete data	2/3/2021	The water budget uses the best, readily available data to develop the estimates. Improvements to the water budget can and should be made over time as more data is gathered and estimates and assumptions are refined <u>with objective information.</u>
Revised Draft Chapter 6		Figure 6-5: Primary Applied Water Sources is inaccurate.	2/3/2021	Some input from local stakeholders has been used in the map. More field-by-field information will continue to be solicited and incorporated as it becomes available. Text was added to the chapter emphasizing the inaccurate nature of the map.
BigValleyGSP_Ch6_RevisedDraft_2021_01_14.pdf	Page #: 6-3, Line #: 62	Please update your precipitation estimates using local precipitation data from the US Forest Service in Adin and local RAWs (Remote Access Weather Station) on Rush Creek. Weather is significantly different between the Fall River Valley out of McArthur and what we experience here in Big Valley. Part of that is due to the orographic effect of Big Valley Mountain...	3/20/2021	
BigValleyGSP_Ch6_RevisedDraft_2021_01_14.pdf	Page #: 6-8, Line #: 132	Land use patterns are changing significantly right now. I have lived in the Valley for 30 years, and have never observed the number of acres under vegetation type conversion and we are seeing now. Hundreds of acres this year alone are being converted from native sagebrush steppe into alfalfa (which demands so much more water). It looks like most of these acreages are being watered using agricultural wells. Land use patterns are not static here ... this variable is currently experiencing a change in what has been known to occur in the past.	3/20/2021	
BigValleyGSP_Ch6_RevisedDraft_2021_01_14.pdf	Page #: 6-9, Line #: 149	I challenge the results of your predictive modeling regarding Climate Change for this area. For the last 30+ years Big Valley has been experiencing a contracted drying spell. Winter precipitation in both the form of snow and rain has significantly reduced over that period of time. I do not believe that the choice of your Climate Change predictive model adequately addresses the reality of what is actually happening in this Basin. What many of the locals have observed here are warming temps, drying climate, higher ET rates and less recharge to surface waters. I am challenging you on your "baseline" weather data utilized in all of your hydrologic and climatic models. Consider this a "fatal flaw" that is consistent in the underpinning of a lot of your generated analyses. Your models are only as good as the original data allows, and you utilize data that IS NOT specific to our area ...	3/20/2021	

## Big Valley GSP Comment Matrix Chapter 6

Document	Page & Line Number	Comment	Date	Notes and Responses
BigValleyGSP_Ch6_RevisedDraft_2021_03_21_setaside.pdf	Page #: 6-9, Line #: 150	Projection with Climate Change.I challenge your projection of the effects of climate change on soil water use and availability in the Big Valley basin. "Wetter and warmer" climate prediction may apply to central California up to its northern boundary at Santa Rosa... but not here.Although the Big Valley area is located within California its floristic, hydrologic and geologic attributes are more similar to the "Great Basin" province of the Intermountain West. The boundaries of the northeastern reach of the Great Basin province are located less than 50 miles east from Big Valley. Future effects of climate change in this area will definitely be seen as reductions in winter snow levels with precipitation coming in the form of rain. Summer temperatures are anticipated to increase as well as the number of days of warm/hot weather. The summer season will become longer and the night time temperatures warmer.Climatic predictions for both Nevada and California were identified in November 2020 in an article presented by the Desert Research Institute. Climate change and a "thirsty atmosphere" will bring more extreme wildfire danger and multi-year droughts to Nevada and California by the end of this century, according to new research from the Desert Research Institute (DRI), the Scripps Institution of Oceanography at the University of California, San Diego, and the University of California, Merced. According to their results, climate change projections show consistent future increases in atmospheric evaporative demand (or the "atmospheric thirst") over California and Nevada. These changes are largely driven by warmer temperatures, and would likely lead to significant on-the-ground environmental impacts. "Higher evaporative demand during summer and autumn means ... faster drying of soil moisture and vegetation" ... explains lead author Dan McEvoy, Ph.D., Assistant Research Professor of Climatology at DRI.With very little recharge coming off of the surrounding mountains due to lack of snow cover, both surface and subsurface water will be affected ... especially with changes in land use patterns. Land use patterns are not static here in Big Valley, and it is unwise to use this variable as a constant for future water use predictions. Vegetation type conversion is changing right now as I write this comment. Hundreds of acres are currently being converted from natural vegetation community types into alfalfa	3/24/2021	
Chap 10 Public Draft 5/26/21	10-3, 91-92	Groundwater extractions should also include water used for fire, wildlife, logging, and construction.	6/2/2021	
Big Valley GSP All Chapters Public Draft 8/26/21	Chapter 6 figures	This budget has many assumptions. The numbers in the tables give the impression that it is highly accurate	9/9/2021	"Estimated" added to all figures. Figures rounded to indicate less accuracy.

## Big Valley GSP Comment Matrix Chapter 7

Document	Page & Line Number	Comment	Date	Notes and Responses
Public Draft Chap 7 (4/1/2021)	5, 113	Deep freezes can occur from September to May	4/7/2021	Text changed
Public Draft Chap 7 (4/1/2021)	6, 125	Environmental regulations include SGMA	4/7/2021	Text added
Public Draft Chap 7 (4/1/2021)	6, 133	Change "may" to "will"	4/7/2021	Text changed
Public Draft Chap 7 (4/1/2021)	6, 135	Change "may" to "is likely to"	4/7/2021	Text changed
Public Draft Chap 7 (4/1/2021)	6,144-146	Ash creek wildlife area is 14,000 acres of unmanaged land	4/7/2021	Text added
Public Draft Chap 7 (4/1/2021)	7, 197-199	The Basin needs the support of Federal management	4/7/2021	Text changed
Public Draft Chap 7 (4/1/2021)	8, 215	Monitoring also helps DWR	4/7/2021	Text added
Public Draft Chap 7 (4/1/2021)	8, 224	Remove slightly	4/7/2021	Text changed
Public Draft Chap 7 (4/1/2021)	9, 261	If there is no Ag there is no community.	4/7/2021	Text added
Public Draft Chap 7 (4/1/2021)	11, 314-321	Paragraph needs clarification, table or example	4/7/2021	Section was re-worded for clarity
Public Draft Chap 7 (4/1/2021)	11, 327	Add "and breeding grounds"	4/7/2021	Text added
Public Draft Chap 7 (4/1/2021)	11, 328	Add "develop" a new water source	4/7/2021	Text added
Public Draft Chap 7 (4/1/2021)	11, 350	Add text clarifying that storage estimates are based on an assumed aquifer depth of 1200 feet	4/7/2021	Text added
Public Draft Chap 7 (4/1/2021)	15, 479	NCWA is a regulatory program	4/7/2021	Text added. Detail on the nature of the program, regulations and fees needed
Public Draft Chap 7 (4/1/2021)	5, 95-98	Add spring-fed streams verbiage	4/7/2021	Text added

## Big Valley GSP Comment Matrix Chapter 7

Document	Page & Line Number	Comment	Date	Notes and Responses
Public Draft Chap 7 (4/1/2021)	6, 127	Add "and roads"	4/7/2021	Text added
Public Draft Chap 7 (4/1/2021)	6, 127	Add "reduction of timber yield tax"	4/7/2021	Text added
Public Draft Chap 7 (4/1/2021)	6, 135	Include effect of low land values, the ongoing cost of monitoring and updates, lower property tax base	4/7/2021	Text added
Public Draft Chap 7 (4/1/2021)	8, 217	Remove "chronic"	4/7/2021	Text removed
Public Draft Chap 7 (4/1/2021)	11, 321	1/3 of representative wells	4/7/2021	Text altered
Public Draft Chap 7 (4/1/2021)	12, 353	decline was less than 16.5 feet in fall, 19.77 in spring	4/7/2021	Text added
Public Draft Chap 7 (4/1/2021)	15, 480	Water quality sample required when home is sold or foster child is placed	4/7/2021	Text added
Public Draft Chap 7 (4/1/2021)	16, 508-510	Remove "Continued... flood risk" sentence	4/7/2021	Text removed
Public Draft Chap 7 (4/1/2021)	16, 519 and 522	Add spring-fed streams verbiage	4/7/2021	Text added
Public Draft Chap 7 (4/1/2021)		Cost of drilling deeper wells needs to be considered	4/7/2021	Right now the GSP only addresses costs of pumping.
Public Draft Chap 7 (4/1/2021)		There is need for domestic users to be considered and need for some domestic users to have to drop their domestic wells and install filters. Calcium is up. Some wells are 20-foot hand-dug wells. Fingers are not being pointed at ag. There are other people coming to the basin for <u>recreation, fishing, and hunting.</u>	4/7/2021	
Public Draft Chap 7 (4/1/2021)		Need better definition of threshold, number of wells by type. How do ditches and canals factor in? Water quality is important.	4/7/2021	The threshold has been defined as 140 feet below the fall 2015 baseline (or lowest water level if there was no 2015 measurement). Chapter 8 details the representative wells, their depths, screen intervals and types. Undesirable results have been defined as when 1/3 of the representative wells are below their MT for 5 years. Recharge from ditches and canals is estimated in the water budget. The guidance from the BVAC has been to not set thresholds for water quality, but to assess at the 5-year updates.
Public Draft Chap 7 (4/1/2021)		What about habitat? Special status? How are we monitoring?	4/7/2021	A set of shallow monitoring wells has been established and will be assessed further at the 5-year update.



## Big Valley GSP Comment Matrix Chapter 7

Document	Page & Line Number	Comment	Date	Notes and Responses
Public Draft Chap 7 (4/1/2021)		Of the GDEs, how much of it is springs?	4/7/2021	A map of GDE's can be found in Chapter 5 (Figure 5-20). A map of springs can be found in Chapter 4 (Figure 4-14).
Public Draft Chap 7 (4/1/2021)	6, 119	This helps to justify reasoning to get boundary modification	4/7/2021	The basin boundary and its limitations are discussed in Chapter 4. SGMA applies to areas within the basin boundary, but projects that benefit the basin can be outside the basin boundary.
Public Draft Chap 7 (4/1/2021)	16, 508-510	We don't know that subsidence will continue	4/7/2021	
Public Draft Chap 7 (4/1/2021)	16	DWR induced additional wells because they required off-stream watering sources to have grazing away from streams due to water quality concerns	4/7/2021	This program is independent of the GSP
Public Draft Chap 7 (4/1/2021)		Are we writing off that the Bieber mill site will be revived for novel wood products uses that require significant water?	4/7/2021	The GSP and water budget consider known uses. The future projection of the water budget assumes negligible industrial groundwater use.
Public Draft Chap 7 (4/1/2021)		Can we calculate and add in the cost per foot of deepening wells?	4/7/2021	Right now the GSP only addresses costs of pumping.
Public Draft Chap 7 (4/1/2021)		Any ideas on how to use monitoring data in innovative ways to solve some of Big Valley's specific data gaps and questions that have arisen... beyond the reasons that DWR wants the data collected.	4/7/2021	The detailed water level data from the new monitoring wells is being evaluated and may provide insights into recharge areas, interconnection of streams, and other questions.
Public Draft Chap 7 (4/22/2021)	7-5, 178	Add "California" Department of Fish and Wildlife	5/4/2021	Added and moved to Chapter 1
Public Draft Chap 7 (4/22/2021)	7-5, 187	Add further clarification: appropriately advertised, not much interest in being on BVAC	5/4/2021	Text added and moved to Chapter 1
Public Draft Chap 7 (4/22/2021)	7-6, 246	Insert "...enacting various projects to improve management during the drought periods <u>and</u> wet periods experienced in the Basin..."	5/4/2021	Text added
Public Draft Chap 7 (4/22/2021)	7-6, 263	Insert "In summary, there have not been wide-spread reports of issues or concerns regarding groundwater levels from the residents of the Basin (whether agriculture producers or domestic users or others). Instead the concern was raised by DWR based on isolated wells that <u>experienced limited decline during a drought.</u> "	5/4/2021	Text changed
Public Draft Chap 7 (4/22/2021)	7-8, 295	re: word "diminished, work on wording (perhaps that it would be a ghost town or similar	5/4/2021	Text added "and the ability of people to live and work in the basin would be largely absent."
Public Draft Chap 7 (4/22/2021)	7-12, 402-406	All of these should be activated when 1/3 of the wells meet the action level.	5/4/2021	Text changed.
Public Draft Chap 7 (4/22/2021)	Appendix: Monitoring Well Construction Report, Page 6	Would like to see more GEI accountability, and that the public and BVAC wanted the wells re-drilled	5/4/2021	Text changed in the well construction report. Report text removed from the appendix. Appendix now only contains the as-built drawings of the wells.
Public Draft Chap 7 (4/22/2021)	7-16, 550	LAMP needs to be added as a water quality regulatory program	5/21/2021	Text added.

## **Big Valley GSP Comment Matrix Chapter 7**

Document	Page & Line Number	Comment	Date	Notes and Responses
Big Valley GSP All Chapters Public Draft 8/26/21	Line 2516	"For all interested parties, there is need for a greater understanding of interconnected surface water that may be present in the Basin" Still opening the door. Recommend scratching the first part of the sentence	9/9/2021	Sentence modified
Big Valley GSP All Chapters Public Draft 8/26/21	Line 2531	"conclusive evidence of stream interconnection is not available." Recommend changing to "there is currently no evidence to support interconnected surface water."	9/9/2021	Text changed.
Big Valley GSP All Chapters Public Draft 8/26/21	Section 7.3	Add "medium ranking" as undesirable result	9/9/2021	Undesirable result is a term defined in SGMA and the ranking is unrelated to undesirable results as defined.
Big Valley GSP All Chapters Public Draft 8/26/21	Lines 2348-2351	Remove last paragraph	9/9/2021	Paragraph removed.
Big Valley GSP All Chapters Public Draft 8/26/21	Section 7.3.6	We need better tracking of surface water allocations	9/9/2021	Text discusses data gap of surface water tracking.
Big Valley GSP All Chapters Public Draft 8/26/21	Section 7.3.6	There is a lot of unpredictability of weather patterns	9/9/2021	Text added

## Big Valley GSP Comment Matrix Chapter 8

Document	Page & Line Number	Comment	Date	Notes and Responses
Chapter 8 Public Draft	Appendix 8B	Don't like the inclusion of well logs	4/27/2021	Well logs removed from appendix and well log number added to Appendix 8A.
Chapter 8 Public Draft	1, 67	Add "The assumed" groundwater contours...	5/24/2021	Text added
Chapter 8 Public Draft	1, 68	Shallow groundwater monitoring to "help" define the potential interconnection of groundwater aquifers with surface water bodies	5/24/2021	Text added
Chapter 8 Public Draft	Table 8-1	Revise table to adjust to 140 feet below 2015 baseline	5/24/2021	Table replaced.
Chapter 8 Public Draft	Figure 8-1	During the summer, Willow Creek is 100% allocated. There is no water. If you were going to argue that there is a surface water/groundwater connection, what is it connected to if there is no water? Same for Ash Creek west of Adin.	5/24/2021	This comment should be addressed in Chapter 5, when it is updated and compiled into the entire draft of the GSP.
Chapter 8 Public Draft	4, 89:97	It is noted that many of the DWR wells are domestic which have pumps all the time. How is this accounted for?	5/24/2021	The end of the paragraph addresses this, where staff that monitor the wells should be noting when the well or a nearby well is pumping.
Chapter 8 Public Draft	4, footnote 2	Monitoring needs to be late october. Needs to be communicated and coordinated with DWR who collects level measurements.	5/24/2021	Text changed to "late-October"
Chapter 8 Public Draft	5, 116	It needs to be noted that the BVAC has done a great job making sure the wells are spatially distributed.	5/24/2021	The factual statement that the wells are distributed throughout the basin should suffice. DWR or other readers can make their own judgment on this.
Chapter 8 Public Draft	5, 8.2.1.2	We would like to understand the contour mapping requirements better. Doesn't make sense.	5/24/2021	Groundwater contours are presented in Chapters 4 and 5
Chapter 8 Public Draft	5, 136:143	Modify text: Chapter 5 discusses the lack of interconnected surface water and describes the perennial streams in the BVGB which may be interconnected to the groundwater aquifer. As described in Chapter 7 there is currently no conclusive evidence for interconnection of perennial streams with the groundwater aquifer, <del>and the volume of depletions (if any) is unknown.</del> Therefore, measurable objectives, minimum thresholds, and a representative <del>monitoring network for depletion of interconnected surface water have not</del>	5/24/2021	Text modified.
Chapter 8 Public Draft	Table 8-2	DWR, 2016a : What is this?	5/24/2021	This is a reference (documented in the references list) to a best management practices paper published by DWR. This is used as guidance on monitoring standards so that data gaps can be assessed.

## **Big Valley GSP Comment Matrix Chapter 8**

Document	Page & Line Number	Comment	Date	Notes and Responses
Chapter 8 Public Draft	Table 8-2	"Data must be sufficient for mapping groundwater depressions, recharge areas, and along margins of basins where groundwater flow is known to enter or leave a basin" Comment: There is no data.	5/24/2021	This table identifies the data gaps
Chapter 8 Revised Draft 5/24/21	8-1, 60	If monitoring from outside agencies change their monitoring, it shouldn't be up to the counties (GSAs) to pick up the slack.	6/2/2021	Text added: "The monitoring networks will generally be adjusted to the availability of data collected and provided by the outside agencies."
Chapter 8 Revised Draft 5/24/21	8-1, 65	What is the "groundwater storage" sustainability indicator?	6/2/2021	Text regarding groundwater storage removed.
Chapter 8 Revised Draft 5/24/21	8-4, 93-94	Measurements need to be taken March 15 or before beginning of pumping season in spring, and taken after Oct 15 in the fall	6/2/2021	This statement refers to historic data. Footnote (3) clarifies when measurements should be taken in the future.
Chapter 8 Revised Draft 5/24/21	8-5, 116	Need to point out that the the distribution of representative wells is excellent and based on a thoughtful, comprehensive review of the wells	6/2/2021	Text changed and added: "Extensive discussion and consideration was performed by the GSAs and local stakeholders to determine an appropriate water level monitoring monitoring network. Based on the comprehensive review of the wells, the network was selected based on:"
Chapter 8 Revised Draft 5/24/21	8-5, 136	Note that water in the basin is 100% allocated.	6/2/2021	Text added: "and all summer flows are 100% allocated based on existing surface water rights."
Chapter 8 Revised Draft 5/24/21	8-5, 137	Delete "which may be interconnected to the groundwater aquifer"	6/2/2021	Text removed
Chapter 8 Revised Draft 5/24/21	8-7, 181	second row, last column. Owner of well 06C1 is very unlikely to agree to monitoring again	6/2/2021	Comment noted. The table states that the absence of that well is a data gap.
Chapter 8 Revised Draft 5/24/21	8-8, 183	Please define "anomalous", perhaps in a footnote	6/2/2021	Footnote added.
Chapter 8 Revised Draft 5/24/21	8-11, 231	We don't want to have the land use data collection fall on the GSAs	6/2/2021	The text is written in a way that states the GSAs will rely on DWR for land use data.
Big Valley GSP All Chapters Public Draft 8/26/21	Section 8.2.3	Subsidence is not happening	9/9/2021	Text changed to emphasize micro-subsidence in section 7.3.5



## Big Valley GSP Comment Matrix Chapter 9

Document	Page & Line Number	Comment	Date	Notes and Responses
Chapter 9 Public Draft 5/24/21	1, 21	change "returning to" to "remaining"	6/2/2021	
Chapter 9 Public Draft 5/24/21	4, 95	What is meant by a "water storage basin"	6/2/2021	
Chapter 9 Public Draft 5/24/21	6, 120-121 7, 180-181	Change "towards sustainability" to "remain sustainable"	6/2/2021	
Chapter 9 Public Draft 5/24/21	7, 160-161	Regarding sentence "Development of additional wells strictly for monitoring is also of interest as they provide unobstructed measurements year round". It's not necessarily desirable. <u>Remove or change wording.</u>	6/2/2021	
Chapter 9 Public Draft 5/24/21	8, 195-196	change "achieve sustainability" to "maintain sustainability"	6/2/2021	
Chapter 9 Public Draft 5/24/21	8, 198	Insert "several" to discussion of reservoirs. Multiple reservoirs could be expanded.	6/2/2021	
Chapter 9 Public Draft 5/24/21	9, 228-235	In discussion of Allen Camp Dam, strengthen language regarding the need for the reservoir	6/2/2021	
Chapter 9 Public Draft 5/24/21	9, 240 et seq	Add controlled burns to potential actions	6/2/2021	
Chapter 9 Public Draft 5/24/21	12, 329	add "as compared to SGMA". to end of sentence	6/2/2021	
Chapter 9 Public Draft 5/24/21	14, 375	Add text about illegal marijuana grows	6/2/2021	
Big Valley GSP All Chapters Public Draft 8/26/21	Line 2776	Table 9-3 - 9.1 and 9.2 "projects will be communicated through the Big Valley Groundwater Advisory Committee." Have we determined if the Advisory Committee will continue to exist after plan adoption?	9/9/2021	Text changed to reflect communication from GSAs rather than BVAC.
Big Valley GSP All Chapters Public Draft 8/26/21	Line 2755	Add "and economically disadvantaged.	9/9/2021	Text added
Big Valley GSP All Chapters Public Draft 8/26/21	Line 3184	Add "and economically disadvantaged.	9/9/2021	Text added

## Big Valley GSP Comment Matrix Chapter 10

Document	Page & Line Number	Comment	Date	Notes and Responses
Chap 10 Public Draft 5/26/21	10-2, 45-56	Why do we have to download, repackage, and send data back to state	6/2/2021	The GSP Regulations require this to be done as per §356 et. seq. Unlike most other basins in California, all Big Valley data is being collected by outside agencies, including DWR taking water level measurements in the Basin. Therefore, the GSAs are downloading the data from the collecting agencies (e.g. DWR) to include in the annual report. The GSAs and their consultants are working to ensure that the data and figures that need to be submitted in the annual reports are able to be generated and submitted as easily as possible with little effort from GSA staff and/or consultants. Text has been added to point out the fact that the GSAs are regurgitating data.
Chap 10 Public Draft 5/26/21	10-3, 91-92	Groundwater extractions should also include water used for fire, wildlife, logging, and construction.	6/2/2021	A note has been made for future updates to Chapter 6 (Water Budget) to include these items. For water budgeting purposes these will fit under the umbrella of industrial uses. A footnote was added to this portion of Chapter 10 referring to these uses
Chap 10 Public Draft 5/26/21	10-3, 93-94	Surface water supply is 100% allocated	6/2/2021	A footnote was added to emphasize this point.
Chap 10 Public Draft 5/26/21	10-3, 95-96	Add industrial uses	6/2/2021	Industrial was added, with a footnote detailing the various users.
Chap 10 Public Draft 5/26/21	10-3, 101	"Progress toward achieving measurable objectives". Change wording to reflect that already sustainable.	6/2/2021	Wording changed
Chap 10 Public Draft 5/26/21	10-7, 138	Why do we need to manage water quality when it is already good.	6/2/2021	The discussion and approach to water quality data was changed to reflect that the GSAs will rely on the SWRCB to store and provide water quality data via their GAMA Groundwater Information System.
Chap 10 Public Draft 5/26/21	10-2, 40	The water year is difficult to apply to Big Valley	6/2/2021	Sentence added, pointing this out. "While the WY as defined by DWR isn't ideal for use in Big Valley, the GSAs will assemble data based on DWR's definition as per SGMA statute and regulationsThe discussion and approach to water quality data was changed to reflect that the GSAs will rely on the SWRCB to store and provide water quality data via their GAMA Groundwater Information System.
Chap 10 Public Draft 5/26/21	10-13, 234	Poor wording	6/2/2021	Wording changed
Chap 10 Public Draft 5/26/21	10-15, 270	Poor wording. Rewrite to emphasize that basin is economically disadvantaged and residents can't afford new taxes or fees	6/2/2021	Wording changed
Chap 10 Public Draft 5/26/21	Appendix 10A	Don't like grant funding	6/2/2021	Wording changed

### **Big Valley GSP Comment Matrix Chapter 11**

Document	Page & Line Number	Comment	Date	Notes and Responses
Big Valley GSP All Chapters Public Draft 8/26/21	Line 2776	Lassen and Modoc County Boards of Supervisors sent letters. Supervisor Byrne testified before both the Senate and Assembly committees in support of this bill citing the constraints of inadequate broadband in the community for meaningful public participation.	9/9/2021	Text added

### **Big Valley GSP Comment Matrix Chapter 12**

Document	Page & Line Number	Comment	Date	Notes and Responses



### Big Valley GSP Comment Matrix General Comments

Document	Page & Line Number	Comment	Date	Notes and Responses
General Comment	Page #., Line #:	<a href="https://bigvalleygsp.org/service/document/download/279">See attached letter.https://bigvalleygsp.org/service/document/download/279</a>	9/11/2021	